



US009801018B2

(12) **United States Patent**
Zimmerman et al.

(10) **Patent No.:** **US 9,801,018 B2**
(45) **Date of Patent:** ***Oct. 24, 2017**

(54) **CONTENT REQUEST BY LOCATION**

(71) Applicant: **Snap Inc.**, Venice, CA (US)

(72) Inventors: **Gadi Zimmerman**, Hod-HaSharon (IL);
Ido Sadeh, Ramat-Gan (IL)

(73) Assignee: **SNAP INC.**, Venice, CA (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

This patent is subject to a terminal disclaimer.

(21) Appl. No.: **15/371,379**

(22) Filed: **Dec. 7, 2016**

(65) **Prior Publication Data**

US 2017/0086021 A1 Mar. 23, 2017

Related U.S. Application Data

(63) Continuation of application No. 14/805,489, filed on Jul. 22, 2015, now Pat. No. 9,521,515.

(60) Provisional application No. 62/107,588, filed on Jan. 26, 2015.

(51) **Int. Cl.**
H04W 4/02 (2009.01)
H04W 4/00 (2009.01)

(52) **U.S. Cl.**
CPC **H04W 4/021** (2013.01); **H04W 4/003** (2013.01)

(58) **Field of Classification Search**
CPC H04W 4/021; H04W 4/003; H04W 4/02;
H04L 29/08657; H04H 2201/11
USPC 455/456.3, 414.3, 3.06
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,883,639	A	3/1999	Walton et al.
6,310,694	B1	10/2001	Okimoto et al.
6,665,531	B1	12/2003	Soderbacka et al.
6,757,713	B1	6/2004	Ogilvie et al.
6,834,195	B2	12/2004	Brandenberg et al.
7,020,494	B2	3/2006	Spiestersbach et al.
7,149,893	B1	12/2006	Leonard et al.
7,356,564	B2	4/2008	Hartselle et al.

(Continued)

FOREIGN PATENT DOCUMENTS

WO	WO-2001029642	A1	4/2001
WO	WO-2013008238		1/2013

OTHER PUBLICATIONS

Notice of Allowance Dated Aug. 10, 2016 From the US Patent and Trademark Office Re. U.S. Appl. No. 14/805,489.

(Continued)


Primary Examiner — Sharad Rampuria

(74) *Attorney, Agent, or Firm* — Schwegman Lundberg & Woessner, P.A.

(57) **ABSTRACT**

A method of obtaining media content of an event, comprising: identifying a real-life event and, a time of said real-life event; identifying a geographic location of the real-life event; identifying a subset of a plurality of client terminals of users located in proximity to the geographic location of the real-life event at said time of said real-life event; sending a message to the subset of client terminals containing a request to acquire media content documenting the real-life event; and receiving at least one media content item documenting the real-life event from at least one client terminal of the subset of client terminals, the at least one media content item acquired by at least one user of the users using the at least one client terminal in response to the message.

20 Claims, 4 Drawing Sheets

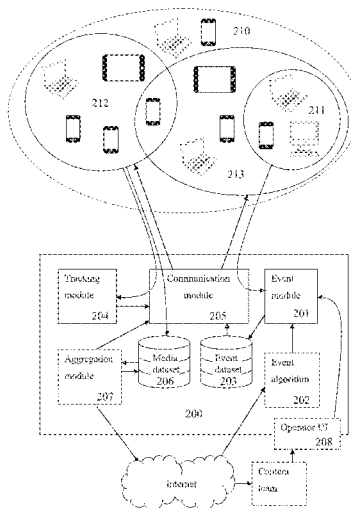

References Cited

2012/0123830	A1	5/2012	Svendsen et al.	
2012/0124126	A1	5/2012	Alcazar et al.	
2012/0124458	A1	5/2012	Cruzada	
2012/0172062	A1	7/2012	Altman et al.	
2012/0184248	A1	7/2012	Speede	
2012/0278692	A1	11/2012	Shi	
2012/0304080	A1	11/2012	Wormald et al.	
2013/0006759	A1	1/2013	Srivastava et al.	
2013/0036364	A1	2/2013	Johnson	
2013/0071093	A1	3/2013	Hanks et al.	
2013/0086072	A1	4/2013	Peng et al.	
2013/0129252	A1	5/2013	Lauper	
2013/0191198	A1	7/2013	Carlson et al.	
2013/0194301	A1	8/2013	Robbins et al.	
2013/0218965	A1	8/2013	Abrol et al.	
2014/0032682	A1	1/2014	Prado et al.	
2014/0045530	A1	2/2014	Gordon et al.	
2014/0096029	A1	4/2014	Schultz	
2014/0114565	A1	4/2014	Aziz et al.	
2014/0122787	A1	5/2014	Shalvi et al.	
2014/0161316	A1 *	6/2014	Golan	G06Q 30/0201 382/103
2014/0173424	A1	6/2014	Hogeg et al.	
2014/0258405	A1	9/2014	Perkin	
2014/0266703	A1 *	9/2014	Dalley, Jr.	G08B 19/00 340/539.13
2014/0279540	A1 *	9/2014	Jackson	G06Q 20/381 705/44
2014/0282096	A1	9/2014	Rubinstein et al.	
2014/0324629	A1	10/2014	Jacobs	
2015/0169827	A1 *	6/2015	LaBorde	G06F 19/322 705/51
2015/0261917	A1 *	9/2015	Smith	G06F 19/322 705/3
2016/0014063	A1 *	1/2016	Hogeg	H04N 21/41407 455/466
2016/0219402	A1	7/2016	Zimmerman et al.	
2017/0006094	A1 *	1/2017	Abou Mahmoud	H04L 67/1095

OTHER PUBLICATIONS

Official Action Dated Feb. 17, 2016 From the US Patent and Trademark Office Re. U.S. Appl. No. 14/805,489.

Official Action Dated Jan. 21, 2016 From the US Patent and Trademark Office Re. U.S. Appl. No. 14/805,489.

Official Action Dated Sep. 25, 2015 From the US Patent and Trademark Office Re. U.S. Appl. No. 14/805,489.

“Adding a watermark to your photos”, eBay, [Online]. Retrieved from the Internet: <URL: <http://pages.ebay.com/help/sell/pictures.html>>, (accessed May 24, 2017), 4 pgs.

“BlogStomp”, [Online]. Retrieved from the Internet: <URL: <http://stompsoftware.com/blogstomp>>, (accessed May 24, 2017), 12 pgs.

“Daily App: InstaPlace (iOS/Android): Give Pictures a Sense of Place”, TechPP, [Online]. Retrieved from the Internet: <URL: <http://techpp.com/2013/02/15/instaplace-app-review>>, (2013), 13 pgs.

Carthy, Roi, “Dear All Photo Apps: Mobli Just Won Filters”, [Online]. Retrieved from the Internet: URL: <<https://techcrunch.com/2011/09/08/mobli-filters>>, (Sep. 8, 2011), 10 pgs.

MacLeod, Duncan, “Macys Believe-o-Magic App”, [Online]. Retrieved from the Internet: <URL: <http://theinspirationroom.com/daily/2011/macys-believe-o-magic-app>>, (Nov. 14, 2011), 10 pgs.

MacLeod, Duncan, “Starbucks Cup Magic—Let’s Merry”, {Online}. Retrieved from the Internet: <URL: <http://theinspirationroom.com/daily/2011/starbucks-cup-magic>>, (Nov. 12, 2011), 8 pgs.

Tripathi, Rohit, “Watermark Images in PHP and Save File on Server”, [Online]. Retrieved from the Internet: <URL: <http://code.rohitink.com/2012/12/28/watermark-images-in-php-and-save-file-on-server/>>, (Dec. 28, 2012), 4 pgs.

* cited by examiner

7,639,943	B1	12/2009	Kalajan	
8,099,109	B2	1/2012	Altman et al.	
8,136,028	B1	3/2012	Loeb et al.	
8,161,417	B1	4/2012	Lee	
8,195,203	B1	6/2012	Tseng	
8,285,199	B2	10/2012	Hsu et al.	
8,326,327	B2	12/2012	Hymel et al.	
8,352,546	B1	1/2013	Dollard	
8,385,950	B1	2/2013	Wagner et al.	
8,510,383	B2 *	8/2013	Hurley	H04W 4/02 709/203
8,660,793	B2	2/2014	Ngo et al.	
8,682,350	B2	3/2014	Altman et al.	
8,761,800	B2	6/2014	Kuwahara	
8,790,187	B2	7/2014	Walker et al.	
8,798,646	B1	8/2014	Wang et al.	
9,152,477	B1	10/2015	Campbell et al.	
9,521,515	B2 *	12/2016	Zimmerman	H04W 4/003
9,628,950	B1	4/2017	Noeth et al.	
2002/0097257	A1	7/2002	Miller et al.	
2003/0001846	A1	1/2003	Davis et al.	
2003/0020623	A1	1/2003	Cao et al.	
2003/0126215	A1	7/2003	Udell et al.	
2003/0148773	A1	8/2003	Spiestersbach et al.	
2003/0229607	A1	12/2003	Zellweger et al.	
2004/0078367	A1	4/2004	Anderson et al.	
2004/0203959	A1	10/2004	Coombes	
2005/0022211	A1	1/2005	Veselov et al.	
2005/0198128	A1	9/2005	Anderson	
2006/0107297	A1	5/2006	Toyama et al.	
2006/0114338	A1	6/2006	Rothschild	
2006/0252438	A1	11/2006	Ansamaa et al.	
2007/0073823	A1	3/2007	Cohen et al.	
2007/0198495	A1	8/2007	Buron et al.	
2007/0208751	A1	9/2007	Cowan et al.	
2007/0255456	A1	11/2007	Funayama	
2007/0281690	A1	12/2007	Altman et al.	
2008/0055269	A1	3/2008	Lemay et al.	
2008/0147730	A1	6/2008	Lee et al.	
2008/0148150	A1	6/2008	Mall	
2008/0168033	A1	7/2008	Ott et al.	
2008/0207176	A1	8/2008	Brackbill et al.	
2008/0214210	A1	9/2008	Rasanen et al.	
2008/0313346	A1	12/2008	Kujawa et al.	
2008/0318616	A1	12/2008	Chipalkatti et al.	
2009/0006191	A1	1/2009	Arankalle et al.	
2009/0030774	A1	1/2009	Rothschild et al.	
2009/0042588	A1	2/2009	Lottin et al.	
2009/0089710	A1	4/2009	Wood et al.	
2009/0132453	A1	5/2009	Hangartner et al.	
2009/0157450	A1	6/2009	Athsani et al.	
2009/0163182	A1	6/2009	Gatti et al.	
2009/0232354	A1	9/2009	Camp, Jr. et al.	
2009/0234815	A1	9/2009	Boerries et al.	
2009/0249244	A1	10/2009	Robinson et al.	
2009/0288022	A1	11/2009	Almstrand et al.	
2010/0185665	A1	7/2010	Horn et al.	
2011/0010205	A1	1/2011	Richards	
2011/0029512	A1	2/2011	Folgnier et al.	
2011/0064388	A1	3/2011	Brown et al.	
2011/0066743	A1	3/2011	Hurley et al.	
2011/0083101	A1	4/2011	Sharon et al.	
2011/0119133	A1	5/2011	Ilgelman et al.	
2011/0137881	A1	6/2011	Cheng et al.	
2011/0159890	A1	6/2011	Fortescue et al.	
2011/0164163	A1	7/2011	Bilbrey et al.	
2011/0213845	A1	9/2011	Logan et al.	
2011/0215966	A1	9/2011	Kim et al.	
2011/0238763	A1	9/2011	Shin et al.	
2011/0282799	A1	11/2011	Huston	
2011/0320373	A1	12/2011	Lee et al.	
2012/0059722	A1	3/2012	Rao	

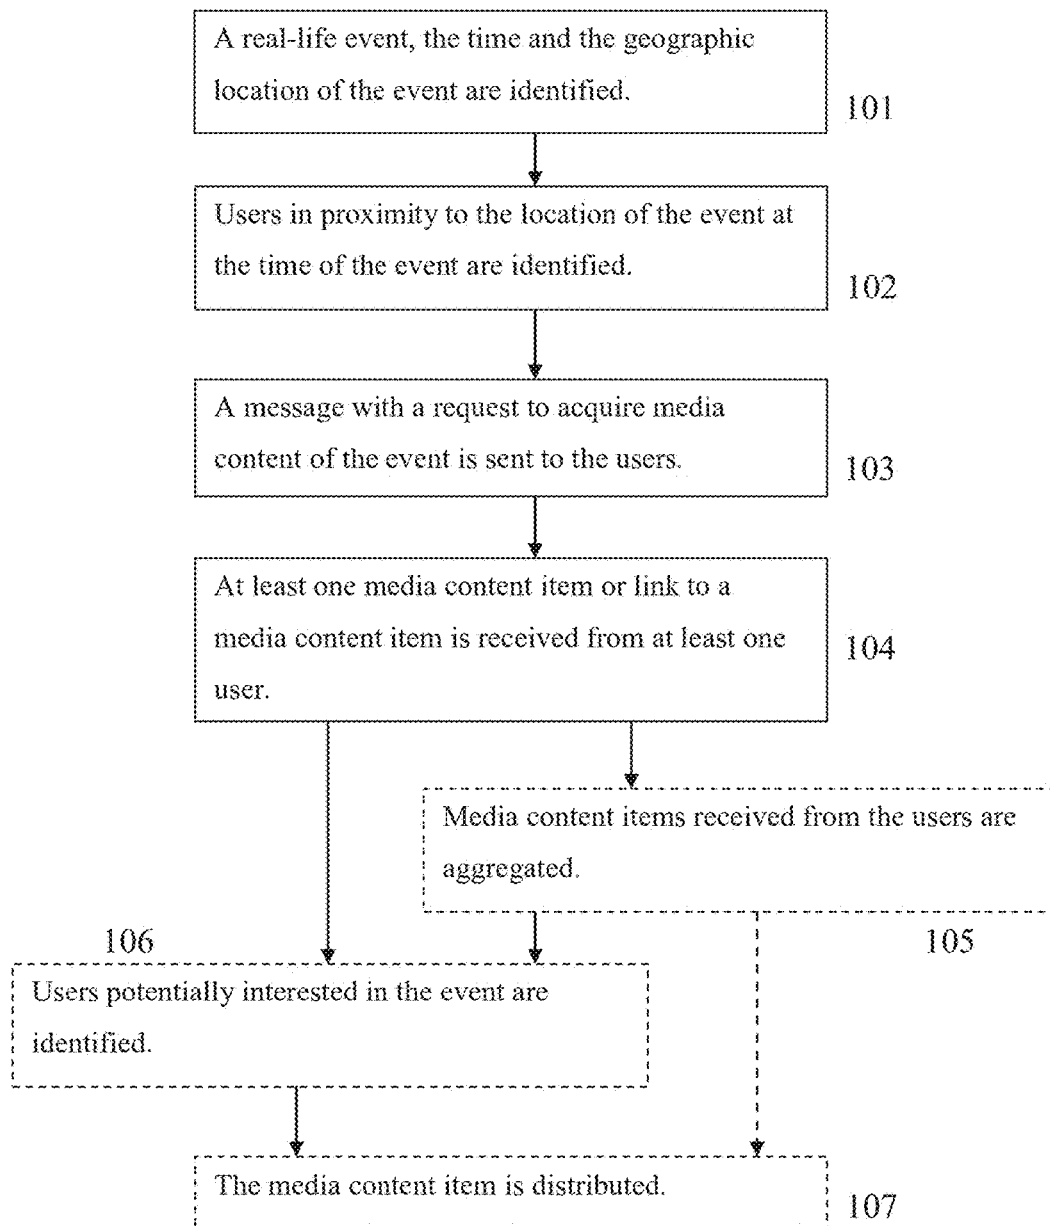


FIG. 1

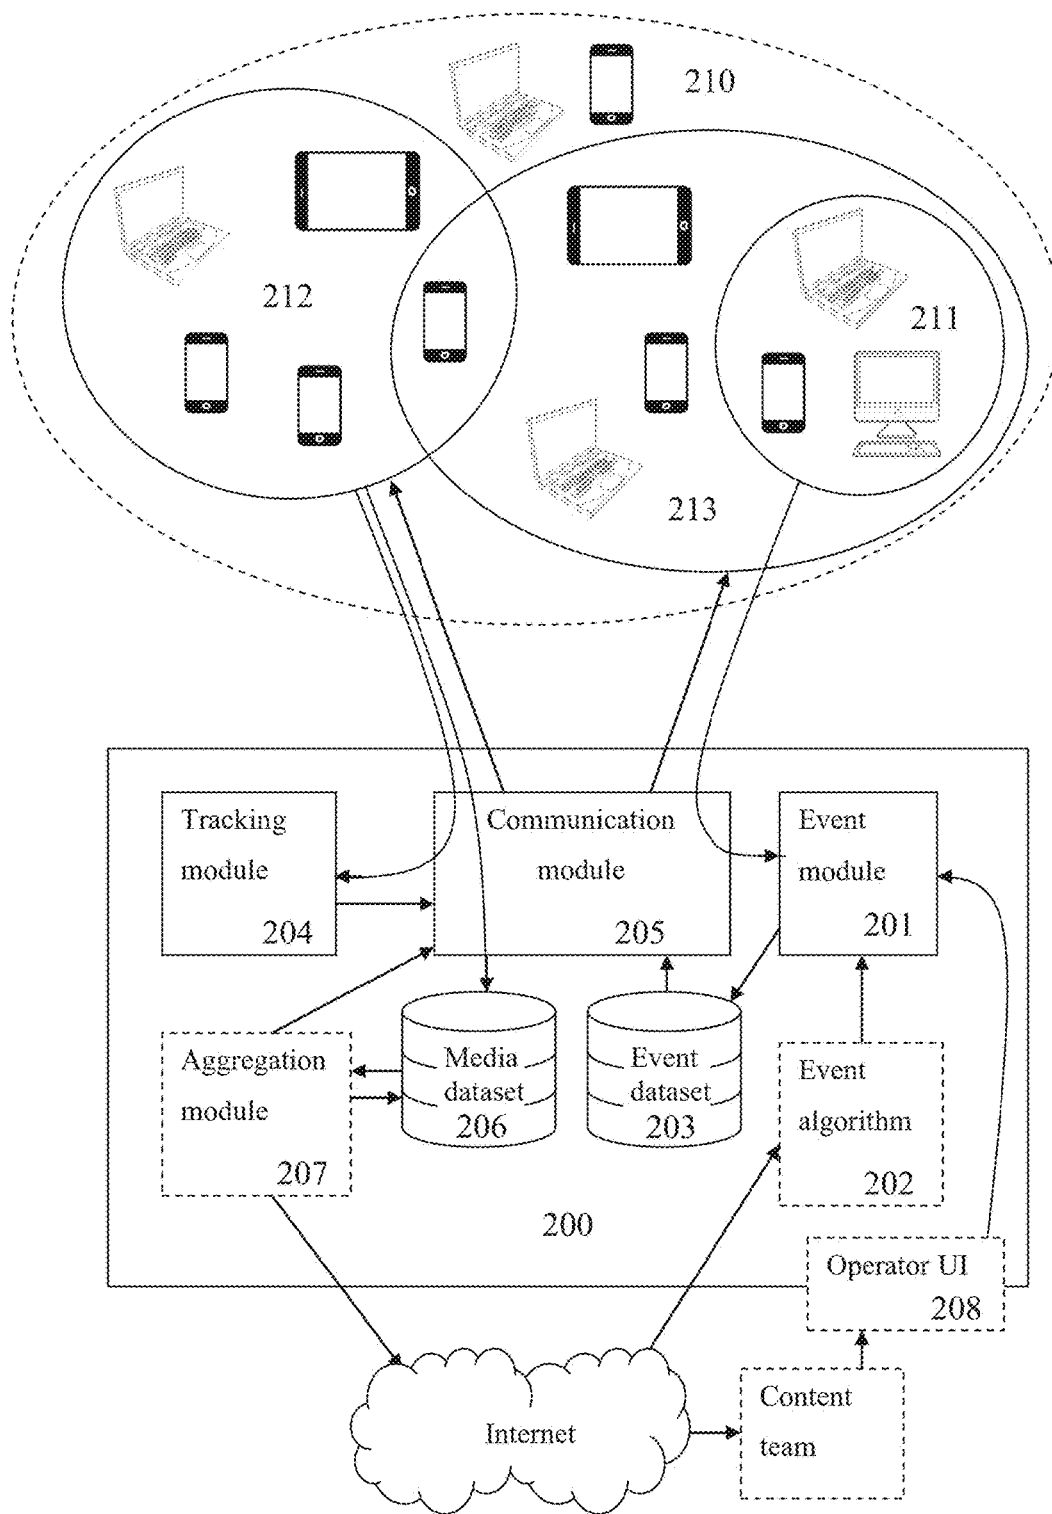


FIG. 2

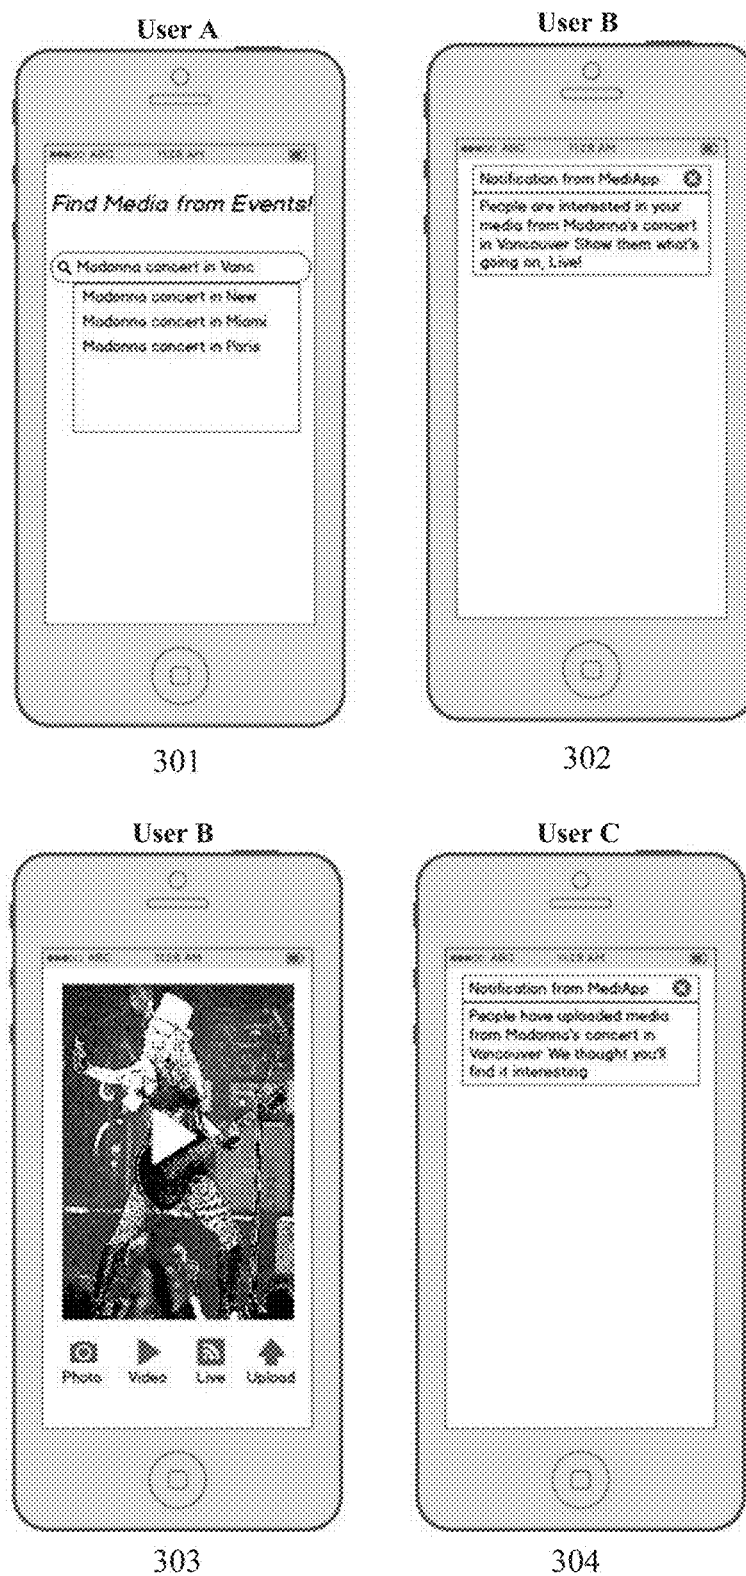


FIG. 3

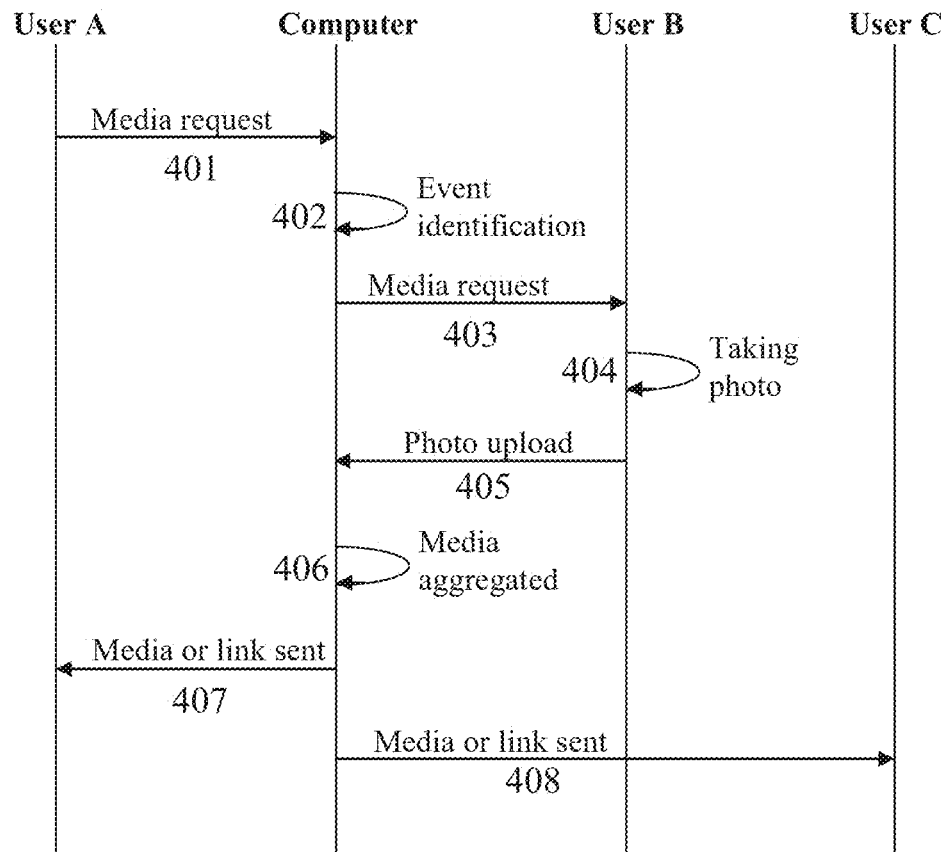


FIG. 4

1

CONTENT REQUEST BY LOCATION**RELATED APPLICATIONS**

This application is a continuation of U.S. patent application Ser. No. 14/805,489 filed on Jul. 22, 2015, which claims the benefit of priority under 35 USC 119(e) of U.S. Provisional Patent Application No. 62/107,588 filed on Jan. 26, 2015, the contents of which are incorporated herein by reference in their entirety.

FIELD AND BACKGROUND OF THE INVENTION

The present invention, in some embodiments thereof, relates to acquiring media content and, more particularly, but not exclusively, to acquiring media content by matching geographic locations of events and users.

People who are interested in media from a real-life event may search this media over the internet, for example in news websites, blogs etc. People may also view media content from an event when such media is posted by others who attended the event, for example in social network platforms. Many of these media content items are created and uploaded by users using mobile devices such as smartphones and/or tablet computers.

SUMMARY OF THE INVENTION

According to an aspect of some embodiments of the present invention, there is provided a method of obtaining media content of an event, comprising: identifying a real-life event, a time of the real-life event and a geographic location of the real-life event; identifying a subset of a plurality of client terminals of users located in proximity to the geographic location of the real-life event at the time of the real-life event; sending a message to the subset of client terminals containing a request to acquire media content documenting the real-life event; and receiving at least one media content item documenting the real-life event from at least one client terminal of the subset of client terminals, the at least one media content item acquired by at least one user of the users using the at least one client terminal in response to the message.

Optionally, the method further comprises: identifying a second subset of the plurality of client terminals of users potentially interested in the real-life event; and automatically providing the at least one media content item to the second subset of client terminals.

More optionally, the providing includes sending a message with a reference to a web document containing the at least one media content item.

Optionally, the method further comprises: providing the at least one media content item to at least one client terminal of the subset of client terminals of users potentially interested in the real-life event.

More optionally, the providing includes sending a message with a reference to a web document containing the at least one media content item.

Optionally, the identifying of the real-life event comprises: receiving a message from a first client terminal of the plurality of client terminals, the message containing a request from a user of the first client terminal to receive a media content documenting the real-life event.

More optionally, the method further comprises: providing the at least one media content item to the first client terminal.

2

Optionally, the identifying of the real-life event includes identifying a search action of the real-life event by a first client terminal of the plurality of client terminals.

More optionally, the method further comprises: providing the at least one media content item to the first client terminal.

Optionally, the identifying of the real-life event includes using an automatic algorithm connected to at least one events source.

Optionally, the identifying of the real-life event is done manually by entering event details into an event dataset.

Optionally, the method further comprises: sending a message with a reference to a web document containing the at least one media content item to at least one client terminal of the plurality of client terminals.

Optionally, the method further comprises: providing the at least one media content item to at least one third party to be presented by the third party in relation to the real-life event.

Optionally, the identifying of the subset of client terminals comprises: monitoring geographic locations of the plurality of client terminals; and automatically identifying when at least one of the plurality of client terminals is located in proximity to the geographic location of the real-life event.

Optionally, the identifying of the subset of client terminals includes accessing at least one calendar stored in a memory of at least one of the plurality of client terminals.

Optionally, the identifying includes ranking of the subset of client terminals according to past media content items received from each of the plurality of client terminals.

Optionally, the message includes instructions for acquiring the media content item.

Optionally, the message includes coordinates of the geographic location of the real-life event to be included in a map that indicates the geographic location and presented on a screen of each of the subset of client terminals.

Optionally, the message includes text instructions to arrive at a geographic location and/or coordinates of the geographic location of the real-life event to be included in a map that indicates the geographic location. The text instructions and the map are presented on a screen of each of the subset of client terminals.

More optionally, the map includes multiple identified geographic locations of real-life events.

Optionally, the message includes instructions for connecting the media content item to the real-life event.

Optionally, the at least one media content item is received by a message with a reference to a web document containing the at least one media content item.

Optionally, the at least one user is credited for acquiring the at least one media content item.

Optionally, the at least one media content item is aggregated with other media content items.

According to some embodiments of the invention, there is provided a computer readable medium comprising computer executable instructions adapted to perform the method.

According to an aspect of some embodiments of the present invention, there is provided a system for obtaining media content of an event, comprising: an event module that identifies a real-life event, a time of the real-life event and a geographic location of the real-life event; a tracking module that identifies a subset of a plurality of client terminals of users located in proximity to the geographic location of the real-life event at the time of the real-life event; and a communication module that: sends a message to the subset of client terminals containing a request to acquire media content documenting the real-life event; and receives at least one media content item documenting the real-life event from at least one client terminal of the subset

3

of client terminals, the at least one media content item acquired by at least one user of the users using the at least one client terminal in response to the message.

Optionally, the method further comprises: an event dataset for storing the real-life event, the time of the real-life event and the geographic location of the real-life event.

Optionally, the method further comprises: a media dataset for storing the at least one media content item.

Optionally, the method further comprises: an aggregation module that aggregates the media content item with other media content items.

Optionally, the event module receives event details from an event algorithm that analyzes information from at least one events source.

Unless otherwise defined, all technical and/or scientific terms used herein have the same meaning as commonly understood by one of ordinary skill in the art to which the invention pertains. Although methods and materials similar or equivalent to those described herein can be used in the practice or testing of embodiments of the invention, exemplary methods and/or materials are described below. In case of conflict, the patent specification, including definitions, will control. In addition, the materials, methods, and examples are illustrative only and are not intended to be necessarily limiting.

Implementation of the method and/or system of embodiments of the invention can involve performing or completing selected tasks manually, automatically, or a combination thereof. Moreover, according to actual instrumentation and equipment of embodiments of the method and/or system of the invention, several selected tasks could be implemented by hardware, by software or by firmware or by a combination thereof using an operating system.

For example, hardware for performing selected tasks according to embodiments of the invention could be implemented as a chip or a circuit. As software, selected tasks according to embodiments of the invention could be implemented as a plurality of software instructions being executed by a computer using any suitable operating system. In an exemplary embodiment of the invention, one or more tasks according to exemplary embodiments of method and/or system as described herein are performed by a data processor, such as a computing platform for executing a plurality of instructions. Optionally, the data processor includes a volatile memory for storing instructions and/or data and/or a non-volatile storage, for example, a magnetic hard-disk and/or removable media, for storing instructions and/or data. Optionally, a network connection is provided as well. A display and/or a user input device such as a keyboard or mouse are optionally provided as well.

BRIEF DESCRIPTION OF THE SEVERAL VIEWS OF THE DRAWINGS

Some embodiments of the invention are herein described, by way of example only, with reference to the accompanying drawings. With specific reference now to the drawings in detail, it is stressed that the particulars shown are by way of example and for purposes of illustrative discussion of embodiments of the invention. In this regard, the description taken with the drawings makes apparent to those skilled in the art how embodiments of the invention may be practiced.

In the drawings:

FIG. 1 is a flowchart schematically representing a method for obtaining media content documenting an event by requesting a user located in proximity to the event at the time

4

of the event to acquire the media, according to some embodiments of the present invention;

FIG. 2 is a schematic illustration of a system for obtaining media content documenting an event by requesting a user located in proximity to the event at the time of the event to acquire the media, according to some embodiments of the present invention;

FIG. 3 is an exemplary application user interface (UI) of an application of obtaining media content documenting an event, according to some embodiments of the present invention; and

FIG. 4 is a sequence chart schematically representing an exemplary scenario of obtaining media content documenting an event, according to some embodiments of the present invention.

DESCRIPTION OF SPECIFIC EMBODIMENTS OF THE INVENTION

The present invention, in some embodiments thereof, relates to acquiring media content and, more particularly, but not exclusively, to acquiring media content by matching geographic locations of events and users.

According to some embodiments of the present invention, there are provided methods and systems for acquiring media content, such as images, videos, voice recordings and/or text, documenting a real-life event such as a concert, a sport game or a demonstration, by requesting users who are in proximity to the event at the time of the event, to acquire the media content.

When the method is applied, a real-life event and geographic location are identified. This is done either by receiving requests from users interested in the event, automatically by an algorithm that scans multiple sources and/or manually. Client terminals of users in proximity to the geographic location of the event at the time of the event are identified, for example by a global positioning system (GPS) device of the client terminals. A message is then sent to the client terminals, containing a request to acquire media content documenting the event. The user may then respond by acquiring a media content item, for example take a photo of the event using the camera of his mobile phone, and upload it to the system. The media content items acquired by the users of the client terminals are then received by the system.

Optionally, the media content is then distributed, for example sent to the users who requested for the media content, sent to other users potentially interested in the event, posted online as part of other content relating to the event and/or provided to third parties.

The method allows users to act as momentary reporters and provide media content from their position, for example current position, knowing that their media content is requested, and may be viewed by multiple people and not just their friends. The method has the advantage of receiving media content in real-time, from events that may be unpredictable, remote and/or too obscure to send a reporter. Also, the method allows users to request media from events they are interested in. The media content documenting an event may be received from multiple users, therefore having the advantages of multi-perspective coverage of the event.

Before explaining at least one embodiment of the invention in detail, it is to be understood that the invention is not necessarily limited in its application to the details of construction and the arrangement of the components and/or methods set forth in the following description and/or illus-

trated in the drawings and/or the Examples. The invention is capable of other embodiments or of being practiced or carried out in various ways.

The present invention may be a system, a method, and/or a computer program product. The computer program product may include a computer readable storage medium (or media) having computer readable program instructions thereon for causing a processor to carry out aspects of the present invention.

The computer readable storage medium can be a tangible device that can retain and store instructions for use by an instruction execution device. The computer readable storage medium may be, for example, but is not limited to, an electronic storage device, a magnetic storage device, an optical storage device, an electromagnetic storage device, a semiconductor storage device, or any suitable combination of the foregoing. A non-exhaustive list of more specific examples of the computer readable storage medium includes the following: a portable computer diskette, a hard disk, a random access memory (RAM), a read-only memory (ROM), an erasable programmable read-only memory (EPROM or Flash memory), a static random access memory (SRAM), a portable compact disc read-only memory (CD-ROM), a digital versatile disk (DVD), a memory stick, a floppy disk, a mechanically encoded device such as punchcards or raised structures in a groove having instructions recorded thereon, and any suitable combination of the foregoing. A computer readable storage medium, as used herein, is not to be construed as being transitory signals per se, such as radio waves or other freely propagating electromagnetic waves, electromagnetic waves propagating through a waveguide or other transmission media (e.g., light pulses passing through a fiber-optic cable), or electrical signals transmitted through a wire.

Computer readable program instructions described herein can be downloaded to respective computing/processing devices from a computer readable storage medium or to an external computer or external storage device via a network, for example, the Internet, a local area network, a wide area network and/or a wireless network. The network may comprise copper transmission cables, optical transmission fibers, wireless transmission, routers, firewalls, switches, gateway computers and/or edge servers. A network adapter card or network interface in each computing/processing device receives computer readable program instructions from the network and forwards the computer readable program instructions for storage in a computer readable storage medium within the respective computing/processing device.

Computer readable program instructions for carrying out operations of the present invention may be assembler instructions, instruction-set-architecture (ISA) instructions, machine instructions, machine dependent instructions, microcode, firmware instructions, state-setting data, or either source code or object code written in any combination of one or more programming languages, including an object oriented programming language such as Smalltalk, C++ or the like, and conventional procedural programming languages, such as the "C" programming language or similar programming languages. The computer readable program instructions may execute entirely on the user's computer, partly on the user's computer, as a stand-alone software package, partly on the user's computer and partly on a remote computer or entirely on the remote computer or server. In the latter scenario, the remote computer may be connected to the user's computer through any type of network, including a local area network (LAN) or a wide area network (WAN), or the connection may be made to an

external computer (for example, through the Internet using an Internet Service Provider). In some embodiments, electronic circuitry including, for example, programmable logic circuitry, field-programmable gate arrays (FPGA), or programmable logic arrays (PLA) may execute the computer readable program instructions by utilizing state information of the computer readable program instructions to personalize the electronic circuitry, in order to perform aspects of the present invention.

Aspects of the present invention are described herein with reference to flowchart illustrations and/or block diagrams of methods, apparatus (systems), and computer program products according to embodiments of the invention. It will be understood that each block of the flowchart illustrations and/or block diagrams, and combinations of blocks in the flowchart illustrations and/or block diagrams, can be implemented by computer readable program instructions.

These computer readable program instructions may be provided to a processor of a general purpose computer, special purpose computer, or other programmable data processing apparatus to produce a machine, such that the instructions, which execute via the processor of the computer or other programmable data processing apparatus, create means for implementing the functions/acts specified in the flowchart and/or block diagram block or blocks. These computer readable program instructions may also be stored in a computer readable storage medium that can direct a computer, a programmable data processing apparatus, and/or other devices to function in a particular manner, such that the computer readable storage medium having instructions stored therein comprises an article of manufacture including instructions which implement aspects of the function/act specified in the flowchart and/or block diagram block or blocks.

The computer readable program instructions may also be loaded onto a computer, other programmable data processing apparatus, or other device to cause a series of operational steps to be performed on the computer, other programmable apparatus or other device to produce a computer implemented process, such that the instructions which execute on the computer, other programmable apparatus, or other device implement the functions/acts specified in the flowchart and/or block diagram block or blocks.

The flowchart and block diagrams in the Figures illustrate the architecture, functionality, and operation of possible implementations of systems, methods and computer program products according to various embodiments of the present invention. In this regard, each block in the flowchart or block diagrams may represent a module, segment, or portion of instructions, which comprises one or more executable instructions for implementing the specified logical function(s). In some alternative implementations, the functions noted in the block may occur out of the order noted in the Figures. For example, two blocks shown in succession may, in fact, be executed substantially concurrently, or the blocks may sometimes be executed in the reverse order, depending upon the functionality involved. It will also be noted that each block of the block diagrams and/or flowchart illustration, and combinations of blocks in the block diagrams and/or flowchart illustration, can be implemented by special purpose hardware-based systems that perform the specified functions or acts or carry out combinations of special purpose hardware and computer instructions.

Referring now to the drawings, FIG. 1 is a flowchart schematically representing a method of obtaining media content documenting an event by requesting a user located in proximity to the event at the time of the event to acquire

the media, according to some embodiments of the present invention. Reference is also made to FIG. 2, which is a schematic illustration of a system of obtaining media content documenting an event by requesting a user located in proximity to the event at the time of the event to acquire the media, according to some embodiments of the present invention.

System **200** may include one or more computing devices, for example, a mainframe computer, an enterprise server, a workstation, multiple connected computers and/or a personal computer.

System **200** is connected via a network to multiple client terminals **210**, each used by a user. The network may include, for example, local area network (WLAN), a wireless network such as mobile network, wireless local area network (WLAN) such as Wireless Fidelity (WiFi™), a wireless personal area network (WPAN) such as Bluetooth™ protocol and/or any other network.

Client terminals **210** may include, for example, a mobile device such as a Smartphone, a tablet, a wearable device such as Google glass, a Smart watch, a laptop computer and/or the like, a personal computer and/or any device that has one or more network communication modules, such as a network card or chip and runs a web-browser.

Each client terminal may include a program such as an App Store application or a Google Play application installed in the client terminal, a native operating system application and/or a browser add-on.

First, as shown in **101**, a real-life event, the time of the event and the geographic location of the event are identified by an event module **201**. The time of the event may be the current time for currently occurring events or may be a future time, for future events.

The real-life event may be, for example, a multi participant event such as a concert, a demonstration, a conference, and/or a sport game, a natural event such as a weather phenomena and/or an eclipse, and/or any other occasion or incident. The real-life event may also be general, for example, a city during a time period of a few months. The real-life event may be scheduled in advance or occurring as an outcome of circumstances, for instance a terror attack and/or a gathering of people induced by a presence of a celebrity, an artist and/or the like. For brevity, a real-life event may be referred to herein as an event.

Optionally, the event identification is done by receiving requests from a subset of client terminals **211** of client terminals **210** of users interested in receiving media content from the event. A user of one of client terminals **211** may perform a search for the event and/or may actively request for media content to be acquired. For example, a user is interested in seeing photos of a concert currently taking place. The request may include specific instruction, locations and/or items in the event. For example: "Please show the crowd roar after a goal in the game in Old Trafford". The request may be for a current event or for a future event. Optionally, the request may be a search action of the event by a user of one of client terminals **210**. The search action may include, for example, the name of the event, the date or time of the event and/or any other detail related to the event.

Optionally, the request is indicative of specific information that should be included in the media content. Optionally, the specific information is of interest to a specific user of one of client terminals **211**, for example to provide an answer to a specific question. For example, a request for an image of a nightclub or a queue to the post office, to indicate whether the place is currently crowded.

Optionally, a user who accesses a web document, such as a webpage displaying an article, an image, or a video (e.g. file or stream) about a held or a currently held event, is presented with a graphical user interface (GUI) that allows him to request for media content relating to the event. Optionally, a request is received from an agent of a third party such as a news agency and/or a media company, for example via an application programming interface (API).

Optionally, the event identification is done by an automatic event algorithm **202**. Automatic event algorithm **202** may use any source of information available on the internet and/or specialized sources, for example, databases of events, rich site summary (RSS), news websites, user-generated content such as social networks, forums and/or blogs, search engines, official websites (such as of bands and/or sport leagues) and/or any other source. Optionally, the event identification is done as described in U.S. Provisional Patent Application No. 62/007,974, filed on Jun. 5, 2014 which is incorporated here by reference.

Optionally, the event identification is done by manually providing events and their geographic location to event module **201**, for example via an operator user interface (UI) **208**. This may be performed, for example, by employees of a content team using operator UI **208**. Content team may use any source of information as described above.

Optionally, an event is identified when potential use of media content documenting the event is identified, for example when the event is mentioned in news articles, event feeds, social media posts, chats and/or any combination thereof.

Optionally, an event is identified only after indication of interest from several sources, for example, multiple requests from client terminals **211**, a request from one of client terminals **211** and also mentions in social networks and/or several mentions in news reports. For example, an event is not identified when media content documenting the event is requested by one user, however, when the event is also mentioned in a news website, the event is identified.

Events identified by event module **201** may be stored in an event dataset **203**.

Event dataset **203** may be any kind of structured data collection that allows access to stored data. Event dataset **203** may be stored, for example, in a digital data storage unit such as a magnetic drive and/or a solid state drive. Optionally, entries of events stored in event dataset **203** may be processed, for example by a merge algorithm that merges entries that were created as separate events but actually indicative of the same event.

Then, as shown in **102**, a subset **212** of client terminals **210**, which are used by users currently located in proximity to the geographic location of the event at the time of the event, is identified by a tracking module **204**.

Optionally, client terminals **212** are identified by monitoring the geographic location of client terminals **210**. The geographic location may be determined, for example, by a positioning system included in each of client terminals **210** such as global positioning system (GPS), triangulation of cellular network, Wireless Fidelity (WiFi™) network and/or any other locating method.

Optionally, users of client terminals **212** are ranked according to past uploads of media content. Optionally, users are identified as having better potential to respond to the request, for example, users who responded to requests in the past and/or uploaded media content to social networks are identified and ranked high. Optionally, users are identified as having better potential to produce quality uploads, for example according to quality of past uploads.

Optionally, users who are expected to be in proximity to the geographic location of the event at the time of the event are identified prior to the event, for example, by connecting to calendars stored on client terminals **210** and identifying future calendar events that are in geographic proximity and time proximity to the event.

Then, as shown in **103**, a message is sent by a communication module **205** to client terminals **212**. The message contains a request to acquire media content documenting the event. The message may be sent prior to the event and/or during the time of the event.

Communication module **205** may be, for example, a hardware element such as a network adapter card and/or a software module such as a computer program.

The media content may include, for example, images, videos, voice recordings, text and/or any other media. The message may be sent, for example, via a messaging service of an application installed on each of client terminals **212**, mobile notification of the application, via short message service (SMS), an instant messaging (IM), an email and/or by any other communication method. The message may include specific instructions for acquiring the media content, for example, as indicated in the requests sent from client terminals **211** and/or according to other existing media content. For example, when most existing videos are taken from one angle, users are asked to take videos from a different angle.

Optionally, a map or textual instructions segment is presented in client terminals **212** to indicate the geographic location of the event. The textual instructions may be calculated automatically from map data, navigation application or API and/or taken from a database. The coordinates of said geographic location may be included in the message. Optionally, the message contains a request that includes instructions for locating the event, for example: "There is a demonstration 400 m north of your location. Please show us what's going on". Optionally, the map includes multiple geographic locations of events for which media content is required.

Optionally, a chat is automatically established between the requestors and the user(s) who accept the request. For example, the chat is established as a group chat of an instant messaging platform and/or as an in application chat that is managed using a chat GUI as known in the art. This allows requestor to personally react to the uploaded content, optionally in real time, for example during a live feed of the content and/or immediately after the content is uploaded.

Then, as shown in **104**, at least one media content item is received from at least one client terminal of client terminals **212** in response to the request message.

The media content item documenting the event and acquired by the user of the client terminal. The media content item may be acquired, for example, by sensors included in client terminals **212** such as built-in camera and/or recorder and/or by any other equipment. Optionally, media content items may be acquired by one device, such as a digital single-lens reflex camera (DSLR) and uploaded by a second device, such as a personal computer. Optionally, the media content item is received as a link to media content item uploaded to the internet, for example posted in a social network and/or personal blog.

Optionally, instructions are sent to users of client terminals **212** on how to connect the media content item to the right event, for example including suggested hash-tag(s) that could be used by a user to tag the media content item.

Optionally, media content items received from client terminals **212** are stored in a media dataset **206**. Media dataset **206** may be any kind of structured data collection, as described above.

Then, optionally, as shown in **105**, media content items received from client terminals **212** are aggregated by aggregation module **207**. For example, a few images from the event are clustered, combined to create a collage, sorted to create a timeline of the event, sorted according to subject documented in the media items (for example artist, crowd, stage etc) and/or processed in any other way.

Then, optionally, as shown in **106**, a subset **213** of client terminals **210**, which are used by users potentially interested in the event, is identified. Client terminals **213** may include client terminals **211** of users that requested media content documenting the event and/or one or more of client terminals **212** which are in proximity to the event at the time of the event and may be interested in watching the event from a different angle or different interpretation. Optionally, client terminals **213** may also include one or more of client terminals **210** that are selected according to use patterns and are identified by an algorithm to identify users that were interested in this type of event in the past, for example according to visited websites, past requests, interests indicated by users for example in a configuration options and/or by any other method.

Then, optionally, as shown in **107**, the media content is distributed by communication module **205**, for example by messages. Optionally, the media content item is provided to client terminals **213** by a message which is sent by communication module **205** to client terminals **213**, containing the media content item. The message may be any kind of message, as described above. Optionally, the media content item is provided by a message which contains a reference to a web document containing the media content. The web document that may be, for example, a webpage, an extensible markup language (XML) page, a hypertext markup language (HTML) page, a portable document format (PDF), an executable, an email, an audio and/or video file, an image and/or any other network accessible content file. The web document may be a webpage or any other network accessible destination. The web document may include, for example, a visual container that allows users to explore all the media content from the event. The reference to the web document may be, for example, a Uniform Resource Locator (URL) or a Universal Resource Identifier (URI). Optionally, the media content is distributed by an algorithm, for example an auto-article enrichment algorithm such as described in U.S. Provisional Patent Application No. 62/007,974. Optionally, a suggestion is sent to users of client terminals **213** to subscribe to media content documenting the event, for example by a hash-tag.

Optionally, the media content is distributed to third parties such as Media companies and/or news agencies. This may be implemented in a revenue share model. Optionally, payment is received from the third parties. Optionally, third parties are provided with access to media dataset **206**, for example via an application programming interface (API).

Optionally, users are credited for uploading media content when requested.

For example, highly credited users are the first to receive media content documenting events and/or get priority when requesting media content. Optionally, users are paid when media content which they uploaded is sold to a third party.

Optionally, users are credited when media content which they uploaded is viewed, acknowledged and/or shared by others. Optionally, users are credited for accurately acquiring

ing media content based on specific requests, for example, a show from a specific angle. Optionally, users requesting media content may initiate bidding for providing the required media content.

Optionally, the frequency of distributing the media content is adjusted, for example based on time, geographic location, other events and/or any other factor. For example, notifications to client terminals 213 may be frequent during the time of the event and less frequent when the event is over.

Optionally, the media content is distributed while new media is uploaded by client terminals 212 and is continuously aggregated by aggregation module 207.

Reference is now made to FIG. 3, which is an exemplary application user interface (UI) of an application of obtaining media content documenting an event, according to some embodiments of the present invention. Reference is also made to FIG. 4, which is a sequence chart schematically representing an exemplary scenario of obtaining media content documenting an event, according to some embodiments of the present invention.

First, as shown in 301 and in 401, a user A of group 211 of the application is searching for media from the Madonna concert which is about to start in Vancouver, the system may suggest other popular searches from Madonna (such as from the last days). Since the concert has not started yet, very few (if any) media items are available.

Then, as shown in 402, the system then identifies that the Madonna concert in Vancouver is an interesting event, as a substantial number of users are querying on it.

The system identifies the time of the concert and which venue holds the concert, for example by using internet sources, and identifies the cellular polygonal perimeter that holds the venue.

Then, as shown in 403, the system sends a notification to users of group 212, which are within the polygonal perimeter, such as shown in 302 which is a screenshot of the application of user B of group 212, which invites people to share what they are viewing right now.

Then, as shown in 404, User B of group 212 takes a photo of Madonna in the concert. As shown in 303, the application allows for a quick upload screen for different type of media.

Then, as shown in 405, user B of group 212 uploads the photo of Madonna to the server of the system. Once the image is uploaded, it is aggregated together with other media uploaded from the Madonna concert in Vancouver, as shown in 406.

Finally, when enough media is gathered from users at the Madonna concert in Vancouver, a notification is send to users who have shown interest in that event (and others), such as user C of group 213 as shown in 304 and 407, and/or such as user A of group 211 who requested for the media, as shown in 408.

The descriptions of the various embodiments of the present invention have been presented for purposes of illustration, but are not intended to be exhaustive or limited to the embodiments disclosed. Many modifications and variations will be apparent to those of ordinary skill in the art without departing from the scope and spirit of the described embodiments. The terminology used herein was chosen to best explain the principles of the embodiments, the practical application or technical improvement over technologies found in the marketplace, or to enable others of ordinary skill in the art to understand the embodiments disclosed herein.

It is expected that during the life of a patent maturing from this application, many relevant methods and systems for

acquiring media content will be developed and the scope of the term media content is intended to include all such new technologies a priori.

The terms “comprises”, “comprising”, “includes”, “including”, “having” and their conjugates mean “including but not limited to”. This term encompasses the terms “consisting of” and “consisting essentially of”.

As used herein, the singular form “a”, “an” and “the” include plural references unless the context clearly dictates otherwise. For example, the term “a compound” or “at least one compound” may include a plurality of compounds, including mixtures thereof.

The word “exemplary” is used herein to mean “serving as an example, instance or illustration”. Any embodiment described as “exemplary” is not necessarily to be construed as preferred or advantageous over other embodiments and/or to exclude the incorporation of features from other embodiments.

The word “optionally” is used herein to mean “is provided in some embodiments and not provided in other embodiments”. Any particular embodiment of the invention may include a plurality of “optional” features unless such features conflict.

Throughout this application, various embodiments of this invention may be presented in a range format. It should be understood that the description in range format is merely for convenience and brevity and should not be construed as an inflexible limitation on the scope of the invention. Accordingly, the description of a range should be considered to have specifically disclosed all the possible subranges as well as individual numerical values within that range. For example, description of a range such as from 1 to 6 should be considered to have specifically disclosed subranges such as from 1 to 3, from 1 to 4, from 1 to 5, from 2 to 4, from 2 to 6, from 3 to 6 etc., as well as individual numbers within that range, for example, 1, 2, 3, 4, 5, and 6. This applies regardless of the breadth of the range.

Whenever a numerical range is indicated herein, it is meant to include any cited numeral (fractional or integral) within the indicated range. The phrases “ranging/ranges between” a first indicate number and a second indicate number and “ranging/ranges from” a first indicate number “to” a second indicate number are used herein interchangeably and are meant to include the first and second indicated numbers and all the fractional and integral numerals therebetween.

It is appreciated that certain features of the invention, which are, for clarity, described in the context of separate embodiments, may also be provided in combination in a single embodiment. Conversely, various features of the invention, which are, for brevity, described in the context of a single embodiment, may also be provided separately or in any suitable subcombination or as suitable in any other described embodiment of the invention. Certain features described in the context of various embodiments are not to be considered essential features of those embodiments, unless the embodiment is inoperative without those elements.

Although the invention has been described in conjunction with specific embodiments thereof, it is evident that many alternatives, modifications and variations will be apparent to those skilled in the art. Accordingly, it is intended to embrace all such alternatives, modifications and variations that fall within the spirit and broad scope of the appended claims.

All publications, patents and patent applications mentioned in this specification are herein incorporated in their

13

entirety by reference into the specification, to the same extent as if each individual publication, patent or patent application was specifically and individually indicated to be incorporated herein by reference. In addition, citation or identification of any reference in this application shall not be construed as an admission that such reference is available as prior art to the present invention. To the extent that section headings are used, they should not be construed as necessarily limiting.

What is claimed is:

1. A method of obtaining media content of an event, comprising:

receiving from a client terminal over a network a message comprising an interest to receive a media content documenting a real-life event;

identifying a subset of a plurality of client terminals of a plurality of users, members of said subset are located in proximity to respective a geographic location of said real-life event at respective time of said first real-life event, said client terminal is not a member of said subset;

sending a message to each member of said subset of said plurality of client terminals containing instructions to present on a respective display on a request to acquire media content documenting said real-life event in said geographic location, said request comprising instructions defined by one of said plurality of users for imaging at least one of a specific location and a specific item in said real-life event; and

receiving at least one media content item sent using at least one member of said subset in response to said message, said at least one media content item is acquired using said at least one member of said subset and documents said real-life event in response to said message;

making said at least one media content item available for access by said client terminal.

2. The method of claim 1, further comprising:

identifying a second subset of said plurality of client terminals of users potentially interested in said real-life event; and

automatically providing said at least one media content item to said second subset of client terminals.

3. The method of claim 2, wherein said providing includes sending a message with a reference to a web document containing said at least one media content item.

4. The method of claim 1, further comprising:

providing said at least one media content item to at least one client terminal of said subset of client terminals of users potentially interested in said real-life event.

5. The method of claim 4, wherein said providing includes sending a message with a reference to a web document containing said at least one media content item.

6. The method of claim 1, wherein said location and said geographic location of said real-life event is identified using a search action held by searching at least one events source which is external to said client terminal.

7. The method of claim 1, wherein said location and said geographic location of said real-life event are manually provided by a user entering event details into an event dataset.

8. The method of claim 1, further comprising:

sending a message with a reference to a web document containing said at least one media content item to at least some of said plurality of client terminals.

14

9. The method of claim 1, further comprising:

providing said at least one media content item to at least one third party to be presented by said third party in relation to said real-life event.

10. The method of claim 1, wherein said identifying of said subset of client terminals comprises:

monitoring geographic locations of said plurality of client terminals; and

automatically identifying when at least one of said plurality of client terminals is located in proximity to said geographic location of said real-life event.

11. The method of claim 1, wherein said identifying of said subset of client terminals includes accessing at least one calendar stored in a memory of at least one of said plurality of client terminals.

12. The method of claim 1, wherein said identifying includes ranking of said subset of client terminals according to past media content items received from each of said plurality of client terminals.

13. The method of claim 1, wherein said instructions includes at least one of text instructions to arrive at said geographic location and coordinates of said geographic location of said real-life event to be included in a map that indicates said geographic location; wherein said of text instruction and said map are presented on a screen of each of said subset of client terminals.

14. The method of claim 13, wherein said map includes multiple identified geographic locations of real-life events.

15. The method of claim 1, wherein said at least one media content item is received by a message with a reference to a web document containing said at least one media content item.

16. The method of claim 1, wherein said at least one media content item is aggregated with other media content items.

17. A system for obtaining media content of an event, comprising:

at least one network interface;

a memory storing a code; and

a processor coupled to the memory and the at least one network interface for executing the stored code, the code comprising:

code instructions for receiving from a client terminal over a network a message comprising an interest to receive a media content documenting a real-life event;

code instructions for identifying a subset of a plurality of client terminals of a plurality of users, members of said subset are located in proximity to respective a geographic location of said real-life event at respective time of said first real-life event, said client terminal is not a member of said subset;

code instructions for sending a message to each member of said subset of said plurality of client terminals containing instructions to present on a respective display on a request to acquire media content documenting said real-life event in said geographic location, said request comprising instructions defined by one of said plurality of users for imaging at least one of a specific location and a specific item in said real-life event;

code instructions for receiving at least one media content item sent using at least one member of said subset in response to said message, said at least one media content item is acquired using said at least one member of said subset and documents said real-life event in response to said message; and

code instructions for making said at least one media content item available for access by said client terminal.

15

18. The system of claim **17**, further comprising:
an event dataset for storing said real-life event, said time
of said real-life event and said geographic location of
said real-life event.

19. The system of claim **17**, further comprising: 5
an aggregation module that aggregates said media content
item with other media content items.

20. The system of claim **17**, wherein said code further
comprising code instructions which are executed by said at
least processor for receiving event details from an event 10
algorithm that analyzes information from at least one events
source.

* * * * *

16