

Design a Movie Ticket Booking System

An online movie ticket booking system facilitates the purchasing of movie tickets to its customers. E-ticketing systems allow customers to browse through movies currently playing and book seats, anywhere and anytime.



Requirements and Goals of the System

Our ticket booking service should meet the following requirements:

1. It should be able to list the cities where affiliate cinemas are located.
2. Each cinema can have multiple halls and each hall can run one movie show at a time.
3. Each Movie will have multiple shows.
4. Customers should be able to search movies by their title, language, genre, release date, and city name.



5 Once the customer selects a movie, the service should display the cinemas running that movie and its available shows.



6. The customer should be able to select a show at a particular cinema and book their tickets.
7. The service should show the customer the seating arrangement of the cinema hall. The customer should be able to select multiple seats according to their preference.
8. The customer should be able to distinguish between available seats and booked ones.
9. The system should send notifications whenever there is a new movie, as well as when a booking is made or canceled.
10. Customers of our system should be able to pay with credit cards or cash.
11. The system should ensure that no two customers can reserve the same seat.
12. Customers should be able to add a discount coupon to their payment.

Use case diagram

We have five main Actors in our system:

- **Admin:** Responsible for adding new movies and their shows, canceling any movie or show, blocking/unblocking customers, etc.
- **FrontDeskOfficer:** Can book/cancel tickets.
- **Customer:** Can view movie schedules, book, and cancel tickets.
- **Guest:** All guests can search movies but to book seats they have to become a registered member.
- **System:** Mainly responsible for sending notifications for new movies, bookings, cancellations, etc.

Here are the top use cases of the Movie Ticket Booking System:


- **Search movies:** To search movies by title, genre, language, release date, and city name.



Create/Modify/View booking: To book a movie show ticket, cancel it or view details about the show.



- **Make payment for booking:** To pay for the booking.
- **Add a coupon to the payment:** To add a discount coupon to the payment.
- **Assign Seat:** Customers will be shown a seat map to let them select seats for their booking.
- **Refund payment:** Upon cancellation, customers will be refunded the payment amount as long as the cancellation occurs within the allowed time frame.

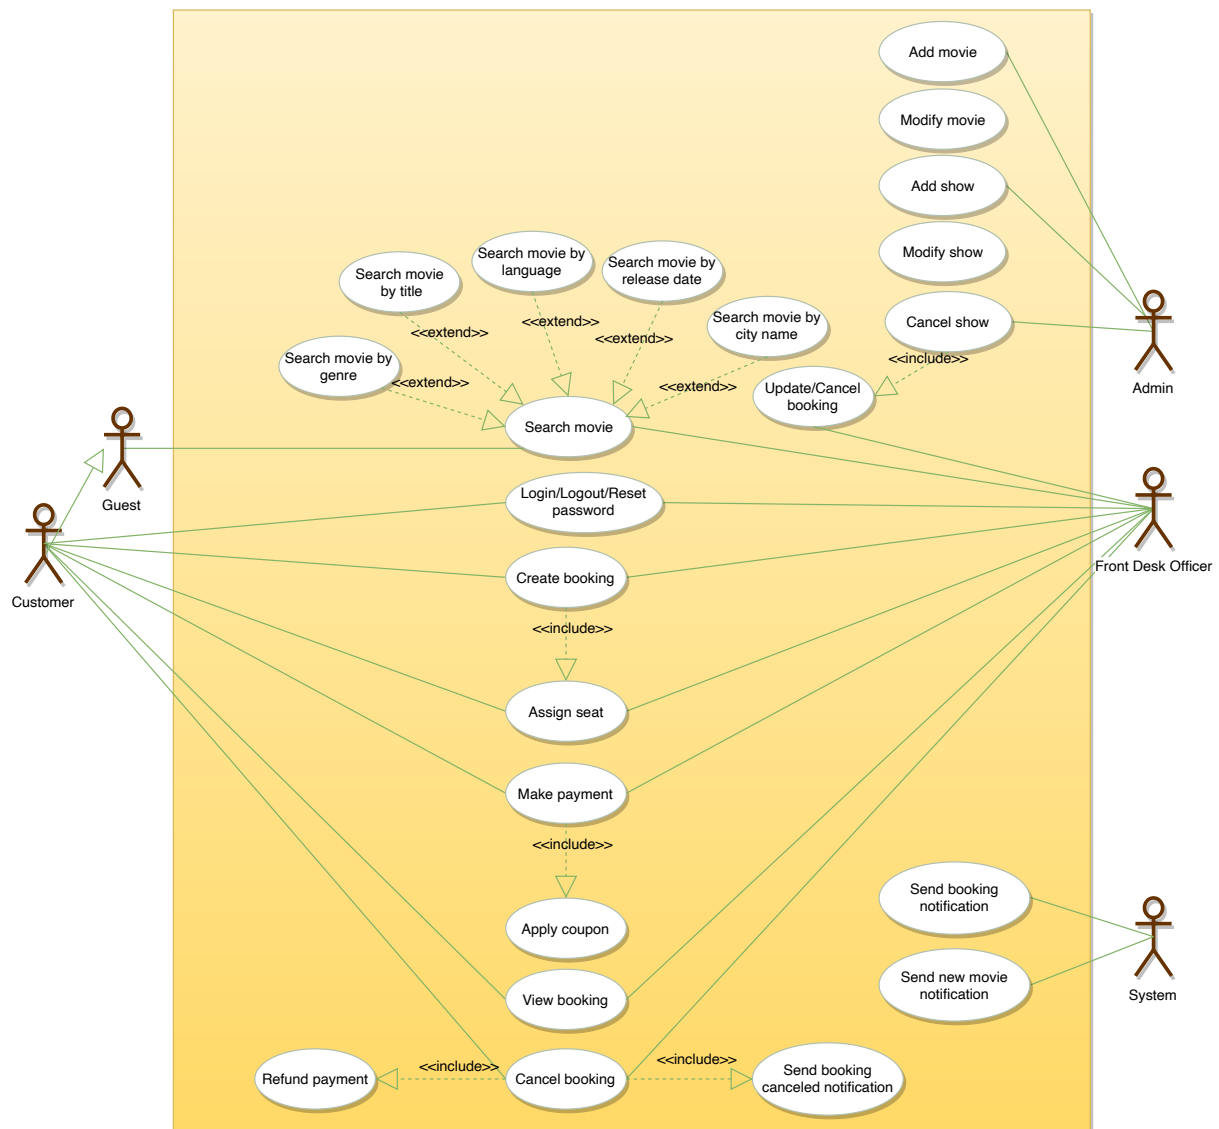


Use case diagram


Class diagram




-
- **Account:** Admin will be able to add/remove movies and shows, as well as block/unblock accounts. Customers can search for movies and make bookings for shows. FrontDeskOffice can book tickets for movie shows.
 - **Guest:** Guests can search and view movies descriptions. To make a booking for a show they have to become a registered member.
 - **Cinema:** The main part of the organization for which this software has been designed. It has attributes like 'name' to distinguish it from other cinemas.
 - **CinemaHall:** Each cinema will have multiple halls containing multiple seats.
 - **City:** Each city can have multiple cinemas.
 - **Movie:** The main entity of the system. Movies have attributes like title, description, language, genre, release date, city name, etc.
 - **Show:** Each movie can have many shows; each show will be played in a cinema hall.
 - **CinemaHallSeat:** Each cinema hall will have many seats.
 - **ShowSeat:** Each ShowSeat will correspond to a movie Show and a CinemaHallSeat. Customers will make a booking against a ShowSeat.
 - **Booking:** A booking is against a movie show and has attributes like a unique booking number, number of seats, and status.
 - **Payment:** Responsible for collecting payments from customers.
 - **Notification:** Will take care of sending notifications to customers.

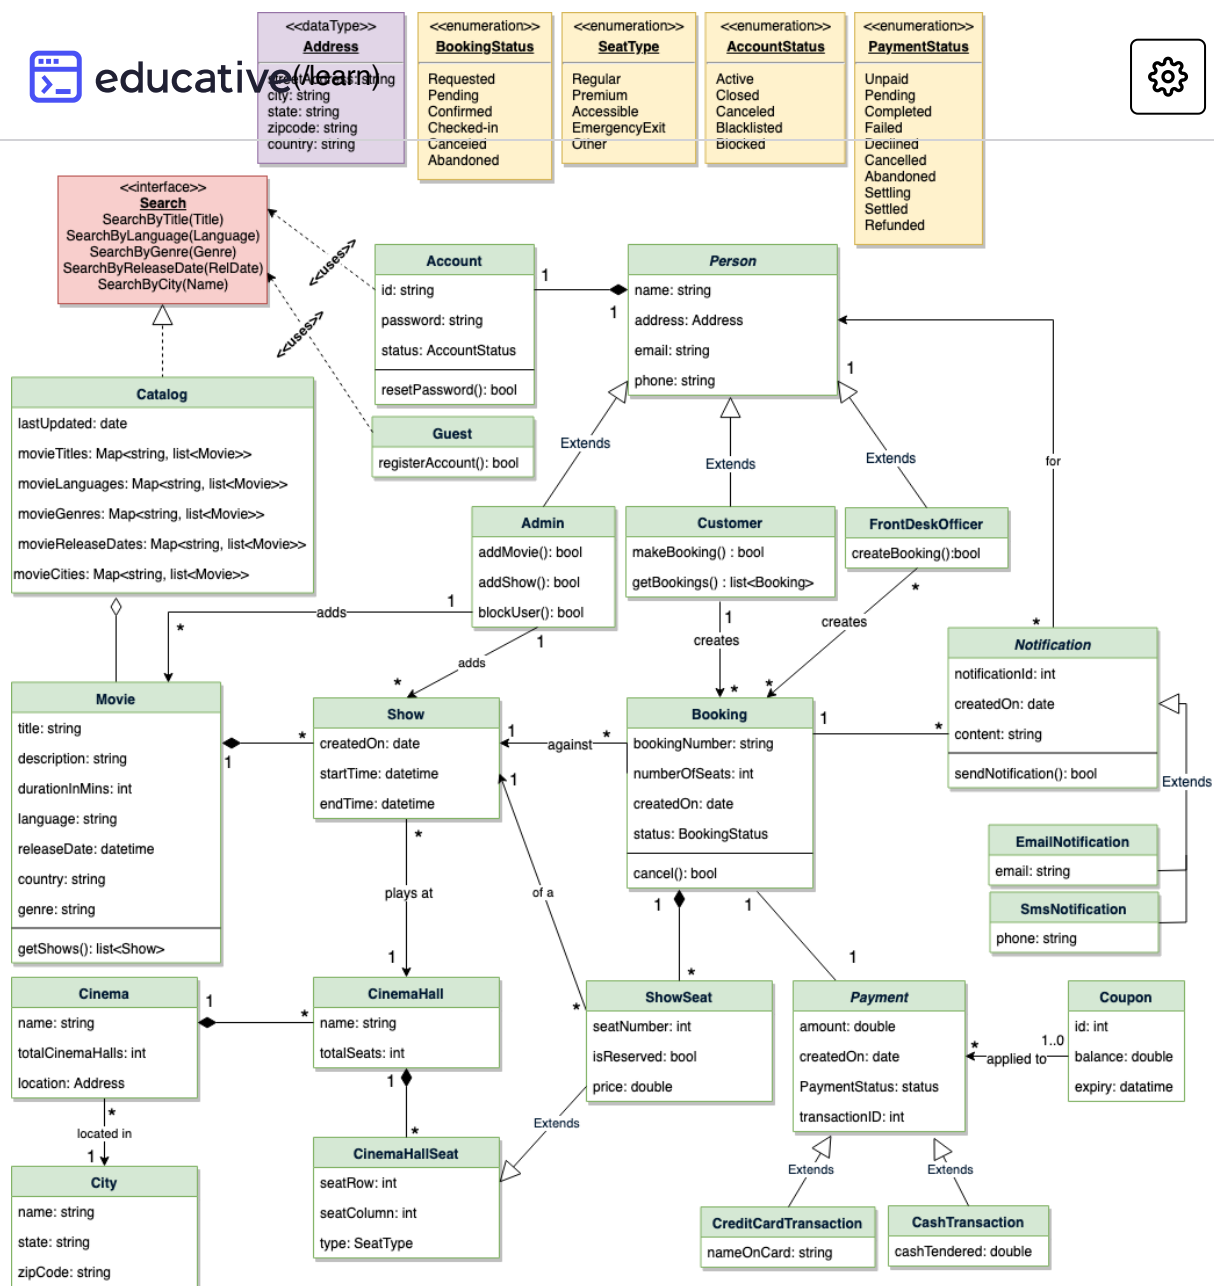


Class diagram

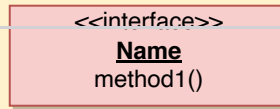


Interface: Classes implement interfaces, denoted by Generalization.

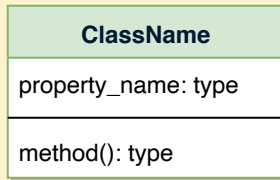


Class: Every class can have properties and methods.
Abstract classes are identified by their *Italic* names.




Generalization: A implements B.




Inheritance: A inherits from B. A "is-a" B.




Use Interface: A uses interface B.



Association: A and B call each other.



Uni-directional Association: A can call B, but not vice versa.




Aggregation: A "has-an" instance of B. B can exist without A.




Composition: A "has-an" instance of B. B cannot exist without A.

Activity Diagram

- **Make a booking:** Any customer can perform this activity. Here are the steps to book a ticket for a show:

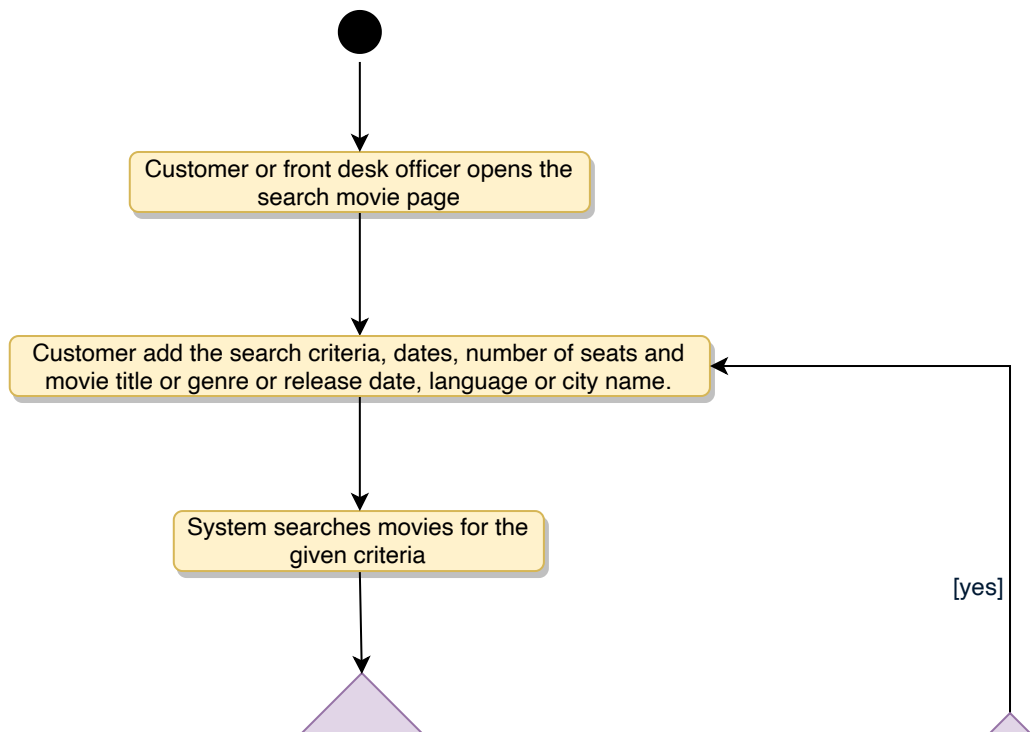



Is movie available?


[no]

Tell customer about the unavailability of movie

Search again?



[yes]



See if it is an existing customer?

[no]

[yes]

Find customer details

Customer chooses seats for the movie show

Ask how customer would like to pay for the booking



Credit card transaction

Cash transaction



Customer adds any coupon

Make booking

Ask how customer would like to have detail of the booking?



Print

Email





[no]

Register new customer



- **Cancel a booking:** Customer can cancel their bookings. Here are the steps to cancel a booking:

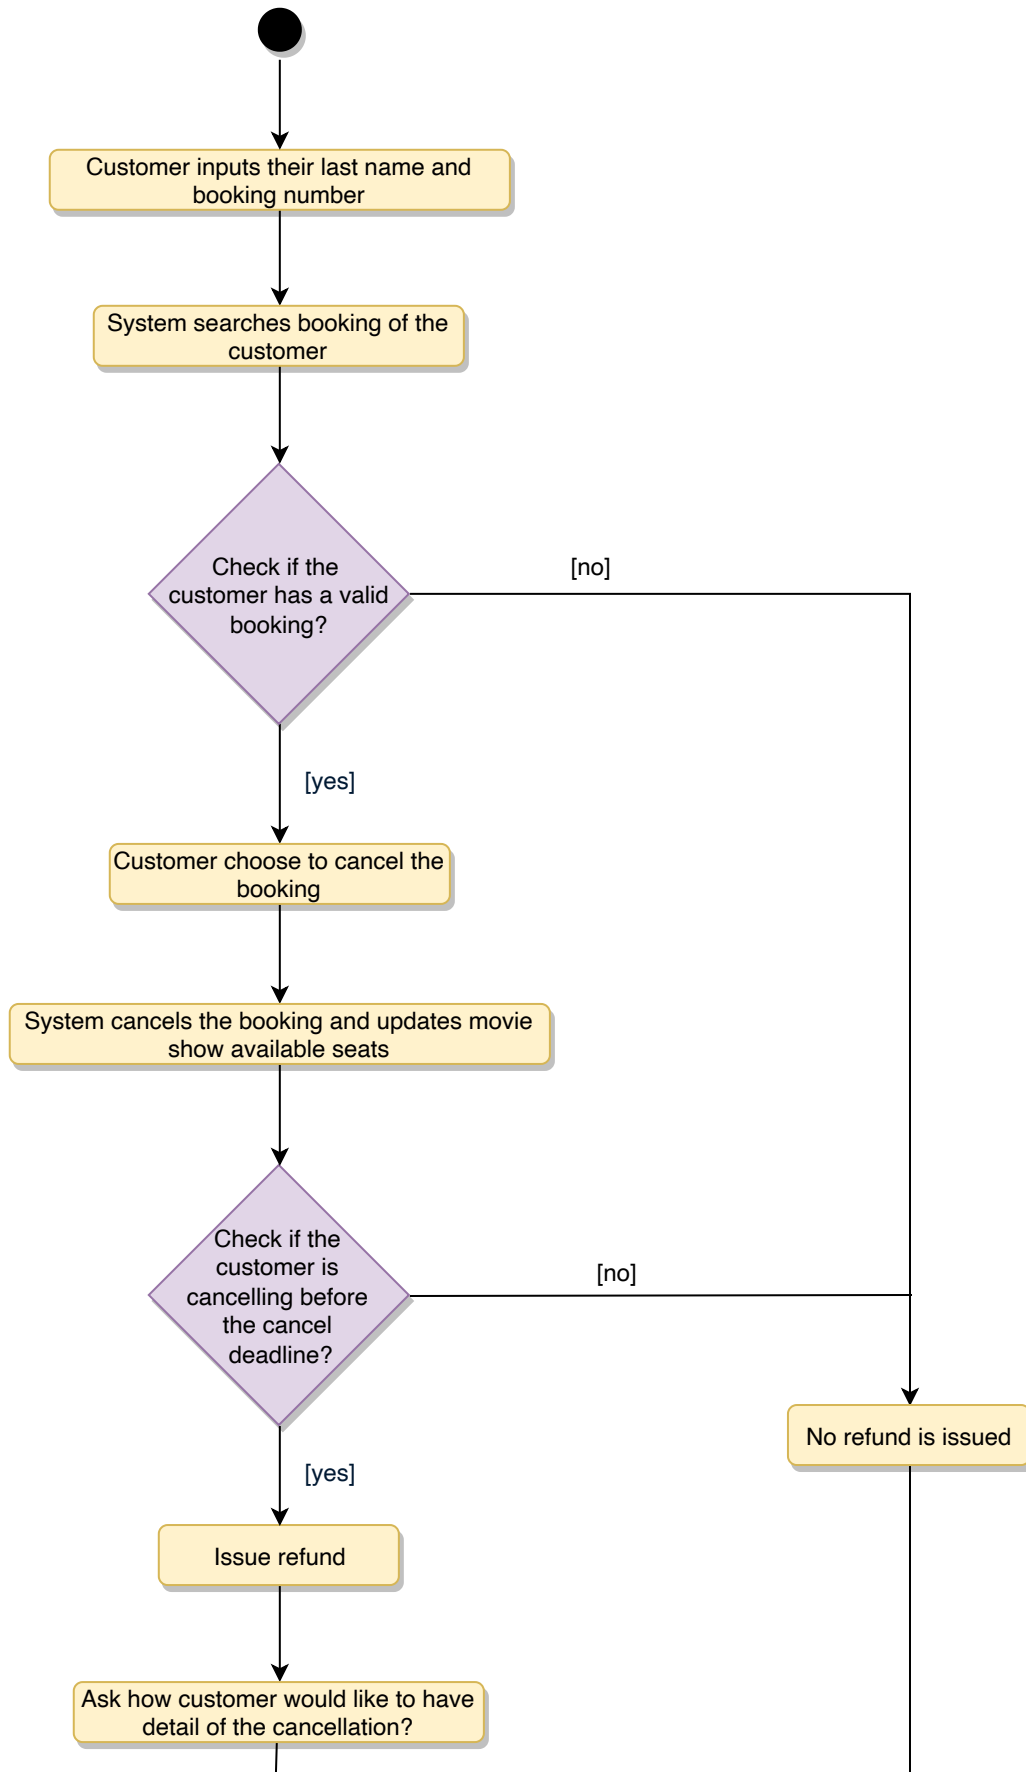

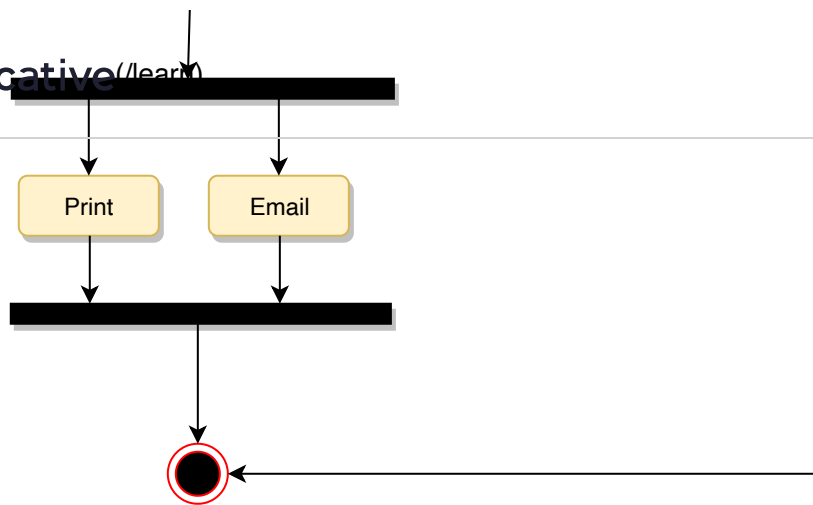

Code

Here are the high-level definitions for the classes described above.

Enums, data types, and constants: Here are the required enums, data types, and constants:



Java



Python

```
public enum BookingStatus {
    REQUESTED, PENDING, CONFIRMED, CHECKED_IN, CANCELED, ABANDONED
}

public enum SeatType {
    REGULAR, PREMIUM, ACCESSIBLE, SHIPPED, EMERGENCY_EXIT, OTHER
}

public enum AccountStatus {
    ACTIVE, BLOCKED, BANNED, COMPROMISED, ARCHIVED, UNKNOWN
}

public enum PaymentStatus {
    UNPAID, PENDING, COMPLETED, FILLED, DECLINED, CANCELLED, ABANDONED, SETTLED
}

public class Address {
    private String streetAddress;
    private String city;
    private String state;
    private String zipCode;
    private String country;
}
```



Account, Customer, Admin, FrontDeskOfficer, and Guest: These



(/learn)

classes represent the different people that interact with our system:



Java



Python

```
// For simplicity, we are not defining getter and setter functions. The rea
// assume that all class attributes are private and accessed through their
// public getter method and modified only through their public setter metho

public class Account {
    private String id;
    private String password;
    private AccountStatus status;

    public boolean resetPassword();
}

public abstract class Person {
    private String name;
    private Address address;
    private String email;
    private String phone;

    private Account account;
}

public class Customer extends Person {
    public boolean makeBooking(Booking booking);
    public List<Booking> getBookings();
}

public class Admin extends Person {
    public boolean addMovie(Movie movie);
    public boolean addShow(Show show);
    public boolean blockUser(Customer customer);
}

public class FrontDeskOfficer extends Person {
    public boolean createBooking(Booking booking);
}

public class Guest {
    public bool registerAccount();
}
```

Show and Movie: A movie will have many shows:



Java



Python



educative.io/learn



```
public class Show {
    private int showId;

    private Date createdOn;
    private Date startTime;
    private Date endTime;
    private CinemaHall playedAt;
    private Movie movie;
}

public class Movie {
    private String title;
    private String description;
    private int durationInMins;
    private String language;
    private Date releaseDate;
    private String country;
    private String genre;
    private Admin movieAddedBy;

    private List<Show> shows;
    public List<Show> getShows();
}
```

Booking, ShowSeat, and Payment: Customers will reserve seats with a booking and make a payment:



Java



Python



educative(learn)



```
public class Booking {
    private String bookingNumber;
    private int numberOfSeats;
    private Date createdOn;
    private BookingStatus status;

    private Show show;
    private List<ShowSeat> seats;
    private Payment payment;

    public boolean makePayment(Payment payment);
    public boolean cancel();
    public boolean assignSeats(List<ShowSeat> seats);
}

public class ShowSeat extends CinemaHallSeat{
    private int showSeatId;
    private boolean isReserved;
    private double price;
}

public class Payment {
    private double amount;
    private Date createdOn;
    private int transactionId;
    private PaymentStatus status;
}
```

City, Cinema, and CinemaHall: Each city can have many cinemas and each cinema can have many cinema halls:



Java



Python



educative



```
public class City {
    private String name;
    private String state;
    private String zipCode;
}

public class Cinema {
    private String name;
    private int totalCinemaHalls;
    private Address location;

    private List<CinemaHall> halls;
}

public class CinemaHall {
    private String name;
    private int totalSeats;

    private List<CinemaHallSeat> seats;
    private List<Show> shows;
}
```

Search interface and Catalog: Catalog will implement Search to facilitate searching of products.



Java



Python



```
public interface Search {
    public List<Movie> searchByTitle(String title);
    public List<Movie> searchByLanguage(String language);
    public List<Movie> searchByGenre(String genre);
    public List<Movie> searchByReleaseDate(Date relDate);
    public List<Movie> searchByCity(String cityName);
}

public class Catalog implements Search {
    HashMap<String, List<Movie>> movieTitles;
    HashMap<String, List<Movie>> movieLanguages;
    HashMap<String, List<Movie>> movieGenres;
    HashMap<Date, List<Movie>> movieReleaseDates;
    HashMap<String, List<Movie>> movieCities;

    public List<Movie> searchByTitle(String title) {
        return movieTitles.get(title);
    }

    public List<Movie> searchByLanguage(String language) {
        return movieLanguages.get(language);
    }

    //...

    public List<Movie> searchByCity(String cityName) {
        return movieCities.get(cityName);
    }
}
```

Concurrency

How to handle concurrency; such that no two users are able to book the same seat? We can use transactions in SQL databases to avoid any clashes. For example, if we are using SQL server we can utilize Transaction Isolation Levels (<https://docs.microsoft.com/en-us/sql/odbc/reference/develop-app/transaction-isolation-levels>) to lock the rows before we update them. Note: within a transaction, if we read rows we get a write-lock on them so that they can't be updated by anyone else. Here is the sample code:



```
BEGIN TRANSACTION;
```

```
-- Suppose we intend to reserve three seats (IDs: 54, 55  
, 56) for ShowID=99
```

```
Select * From ShowSeat where ShowID=99 && ShowSeatID in  
(54, 55, 56) && isReserved=0
```

```
-- if the number of rows returned by the above statemen  
t is NOT three, we can return failure to the user.
```

```
update ShowSeat table...
```

```
update Booking table ...
```

```
COMMIT TRANSACTION;
```

‘Serializable’ is the highest isolation level and guarantees safety from Dirty (https://en.wikipedia.org/wiki/Isolation_(database_systems)#Dirty_reads), Nonrepeatable

(https://en.wikipedia.org/wiki/Isolation_(database_systems)#Non-repeatable_reads), and Phantoms

(https://en.wikipedia.org/wiki/Isolation_(database_systems)#Phantom_reads) reads.

Once the above database transaction is successful, we can safely assume that the reservation has been marked successfully and no two customers will be able to reserve the same seat.

Here is the sample Java code:





```
import java.sql.DriverManager;
import java.sql.Connection;
import java.sql.PreparedStatement;
import java.sql.SQLException;
import java.sql.ResultSet;

public class Customer extends Person {

    public boolean makeBooking(Booking booking) {
        List<ShowSeat> seats = booking.getSeats();
        Integer seatIds[] = new Integer[seats.size()];
        int index = 0;
        for(ShowSeat seat : seats) {
            seatIds[index++] = seat.getShowSeatId();
        }

        Connection dbConnection = null;
        try {
            dbConnection = getDBConnection();
            dbConnection.setAutoCommit(false);
            // 'Serializable' is the highest isolation level and guarantees safety
            // Dirty, Nonrepeatable, and Phantoms reads
            dbConnection.setTransactionIsolation(Connection.TRANSACTION_SERIALIZABLE);

            Statement st = dbConnection.createStatement();
            String selectSQL = "Select * From ShowSeat where ShowID=? && ShowSeatID=?";
            PreparedStatement preparedStatement = dbConnection.prepareStatement(selectSQL);
            preparedStatement.setInt(1, booking.getShow().getShowId());
            preparedStatement.setInt(2, booking.getShowSeatId());
            Array array = dbConnection.createArrayOf("INTEGER", seatIds);
            preparedStatement.setArray(2, array);

            ResultSet rs = preparedStatement.executeQuery();
            // With TRANSACTION_SERIALIZABLE all the read rows will have the write lock
            // safely assume that no one else is modifying them.
            if (rs.next()) {
                rs.last(); // move to the last row, to calculate the row count
                int rowCount = rs.getRow();
                // check if we have expected number of rows, if not, this means another thread
                // trying to process at least one of the same row, if that is the case, the booking
                // should not process this booking.
                if(rowCount == seats.size()) {
                    // update ShowSeat table...
                    // update Booking table ...
                    dbConnection.commit();
                    return true;
                }
            }
        } catch (SQLException e) {
            dbConnection.rollback();
            System.out.println(e.getMessage());
        }
        return false;
    }
}
```




Read JDBC Transaction Isolation Levels (<https://docs.microsoft.com/en-us/sql/connect/jdbc/understanding-isolation-levels?view=sql-server-2017>) for details.



educative.io



← Back

(/courses/grokking-

the-

object-

oriented-

Design Stack Overflow

interview/m2YWoEq06AR)

Next →



Mark as Completed (/courses/grokking-

the-

object-

oriented-

Design Stack Overflow

interview/m22LWKgQ4Wr)

Stuck?

DISCUSS

Get help on design-interview-design-gurus/object-oriented-design-case-studies-design-a-movie-ticket-booking-system)



Send feedback



11 Recommendations