

论文信息

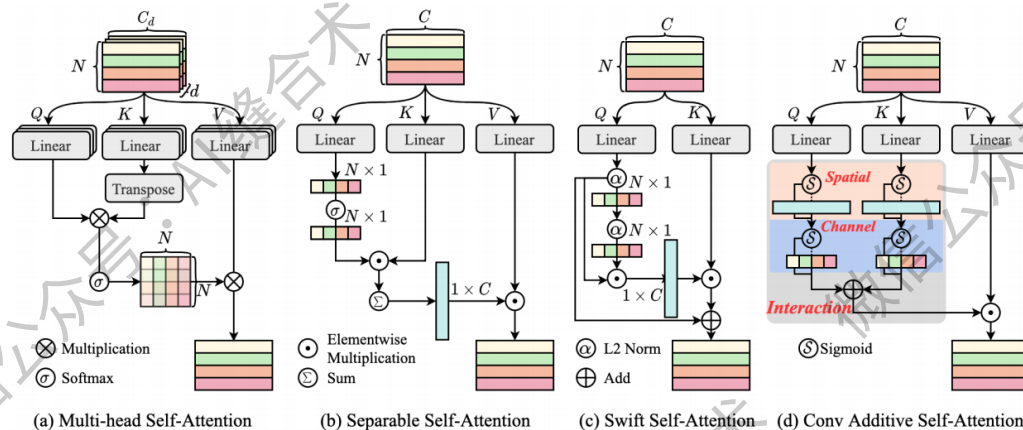


Fig. 2. Comparison of diverse self-attention mechanisms. (a) is the classical multi-head self-attention in ViT [24]. (b) is the separable self-attention in MobileViTv2 [21], which reduces the feature metric of a matrix to a vector. (c) is the swift self-attention in SwiftFormer [20], which achieves efficient feature association only with Q and K . (d) is proposed convolutional additive self-attention.

论文题目： CAS-ViT: Convolutional Additive Self-attention Vision Transformers for Efficient Mobile Applications

中文题目： CAS-ViT: 用于高效移动应用的卷积加法自注意力视觉 Transformer

论文链接： <https://arxiv.org/pdf/2408.03703?>

官方 github： <https://github.com/Tianfang-Zhang/CAS-ViT>

所属机构： 商汤科技研究院，清华大学自动化系，华盛顿大学电气与计算机工程系，哥本哈根大学计算机科学系

核心速览： 本文介绍了一种名为 CAS-ViT（Convolutional Additive Self-attention Vision Transformers）的新型视觉 Transformer，旨在移动应用中实现效率与性能之间的平衡。