

核心速览

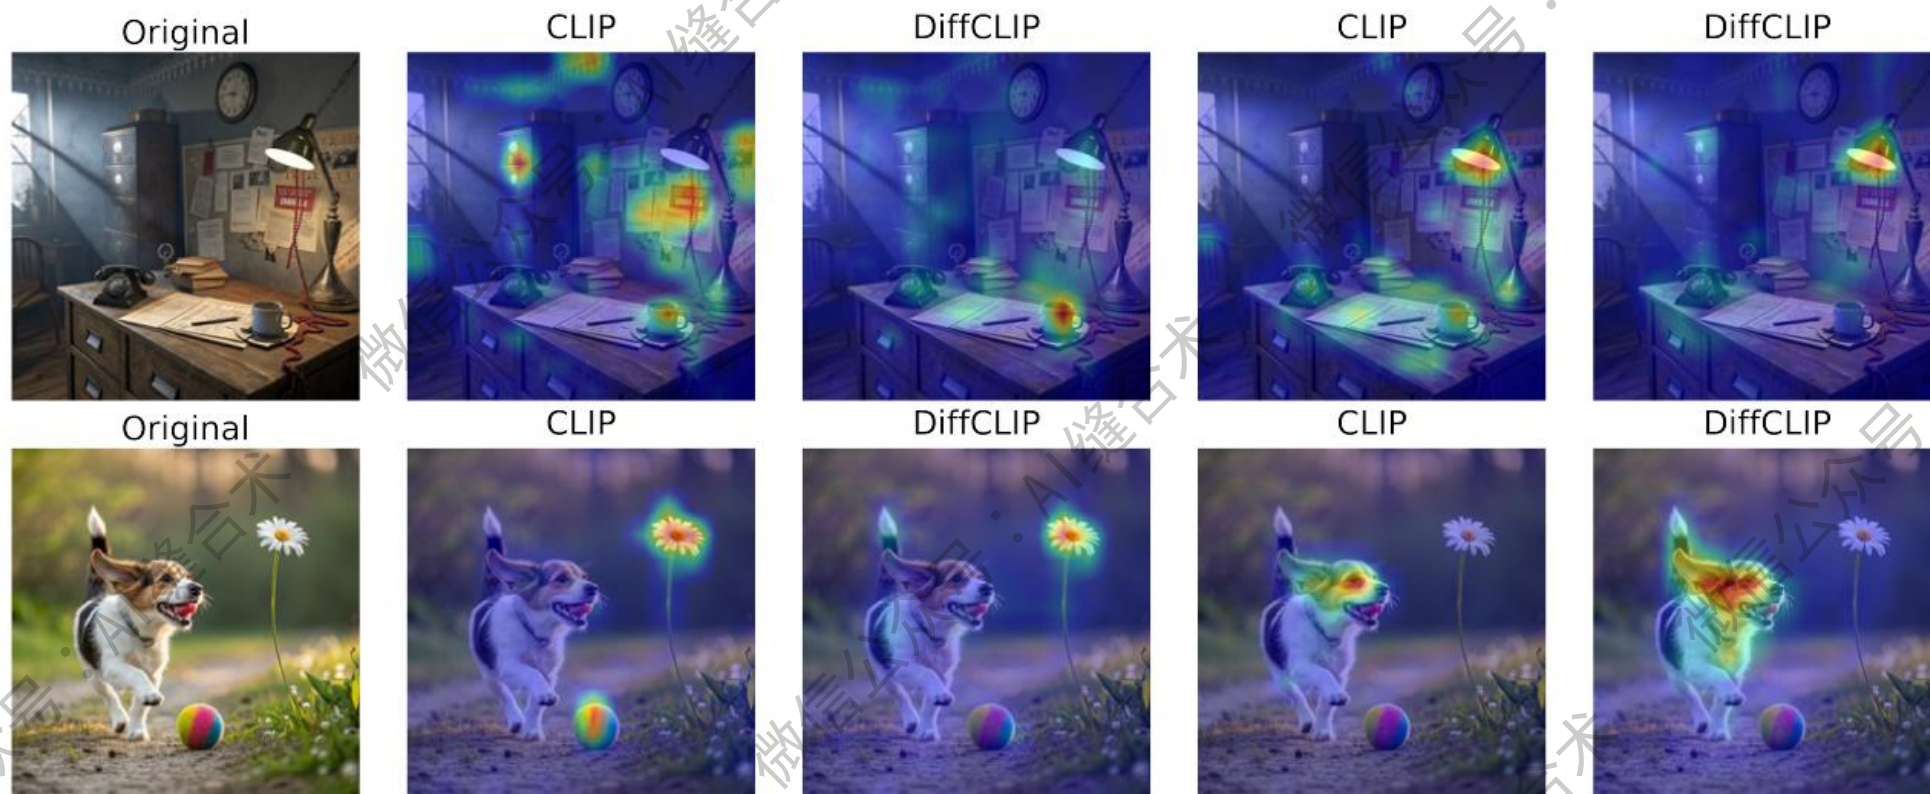


Figure 2. **Comparing CLIP vs. DiffCLIP Attention Maps.** For two images (rows), we visualize where CLIP and DiffCLIP attend when matching each image against two different textual queries. While CLIP allocates attention to irrelevant background regions, DiffCLIP more effectively centers on query-relevant objects, highlighting how differential attention can reduce noise and improve focus.

Queries: First Row: 'Mug', 'Lamp'; Second Row: 'Flower', 'Dog'.

论文题目: DiffCLIP: Differential Attention Meets CLIP

中文题目: DiffCLIP: 差分注意力机制与 CLIP 的融合

论文链接: <https://arxiv.org/pdf/2503.06626?>

代码链接: <https://github.com/hammoudhasan/DiffCLIP>

所属单位: 阿卜杜拉国王科技大学 (KAUST)

核心速览: DiffCLIP 通过将差分注意力机制引入 CLIP 架构, 显著提升了视觉-语言模型在图像-文本理解任务中的性能, 同时保持了极低的计算开销。

论文内容详细解读:

<https://mp.weixin.qq.com/s/kKbbv-JNk8XbxNWEc1i00A>

```
DiffAttention(  
    (q_proj): Linear(in_features=32, out_features=32, bias=True)  
    (k_proj): Linear(in_features=32, out_features=32, bias=True)  
    (v_proj): Linear(in_features=32, out_features=32, bias=True)  
    (out_proj): Linear(in_features=32, out_features=32, bias=True)  
    (attn_drop): Dropout(p=0.1, inplace=False)  
    (proj_drop): Dropout(p=0.1, inplace=False)  
    (diff_norm): RMSNorm(dim=8, eps=1e-05, elementwise_affine=True)  
)
```

微信公众号: AI缝合术

输入形状: torch.Size([1, 256, 32])

输出形状: torch.Size([1, 256, 32])