


```
---
- name: Configure login banners
  hosts: ios
  gather_facts: false
  tasks:
    - name: Configure banner on IOS devices
      cisco.ios.ios_banner:
        banner: login
        text: Managed by Ansible
        state: present
      notify: ios_save_changes
  handlers:
    - name: ios_save_changes
      cisco.ios.ios_config:
        save_when: always
```

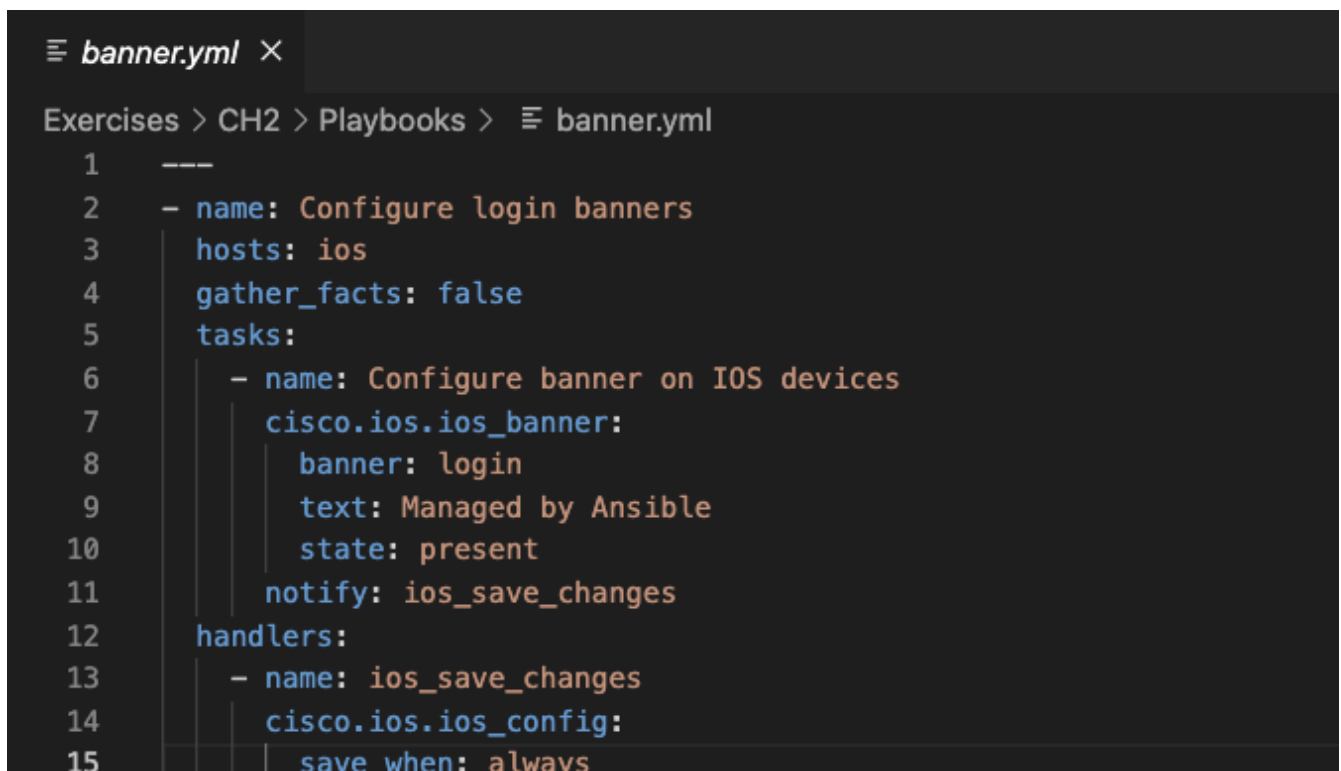

```
Exercises > CH2 > Playbooks > banner.yml
1  ---
2  - name: Configure login banners
3    hosts: ios
4    gather_facts: false
5    tasks:
6      - name: Configure banner on IOS devices
7        cisco.ios.ios_banner:
8          banner: login
9          text: Managed by Ansible
10         state: present
11         notify: ios_save_changes
12     handlers:
13       - name: ios_save_changes
14         cisco.ios.ios_config:
15           save_when: always
```

Figure 1. VSCode Example

Example with Vertical Bars

```
---
- name: Configure login banners
  hosts: ios
  gather_facts: false
  tasks:
    | - name: Configure banner on IOS devices
    | | cisco.ios.ios_banner:
    | | | banner: login
    | | | text: Managed by Ansible
```

```
| | | state: present
| | notify: ios_save_changes
handlers:
| - name: ios_save_changes
| | cisco.ios.ios_config:
| | | save_when: always
```