Statistical Word Segmentation: Emergent Structure in a Next-Character RNN

Toviah Moldwin, Raneem Mahajne, and Idan Segev
Edmond and Lily Safra Center for Brain Sciences, The Hebrew University of Jerusalem

Code & figures on GitHub

Abstract

Eight-month-old infants can segment continuous speech by tracking transitional probabilities (Saffran, Aslin & Newport, 1996). We ask whether a vanilla Elman RNN trained only on next-character prediction develops internal representations aligned with word structure. After learning, the network generates legal vocabulary items, and its hidden states become a continuous embedding of the vocabulary's minimal DFA. On an eight-word *-ate/-at* demo, DFA state explains $\eta^2 \approx 0.88$ of condensed hidden variance; word identity is much weaker ($\eta^2 \approx 0.06$). Fifty mixed-length English vocab runs ($H{=}100$) show that dimensionality, training cost, and readouts track minimized DFA size. Weight matrices become letter-columnar in W_{zh} and locally clumped in W_{hh}, most clearly for small automata.

Fig 1 · Mixed vocabularies & minimal DFAs

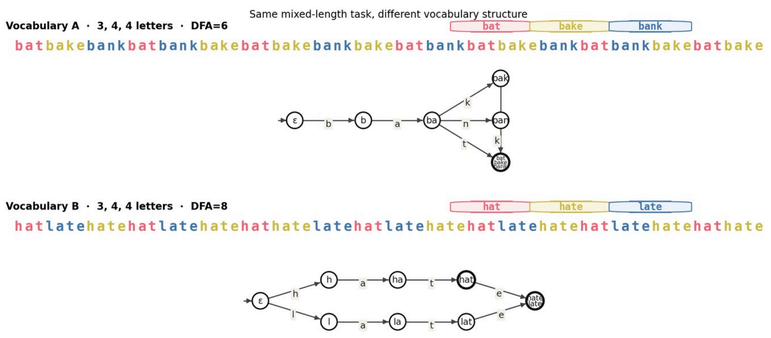

Two ≤3-word conditions. Word chips, one unsegmented stream, then the prefix-labeled minimal DFA (6 vs 8 states), laid out left to right.

Fig 2 · Training the RNN

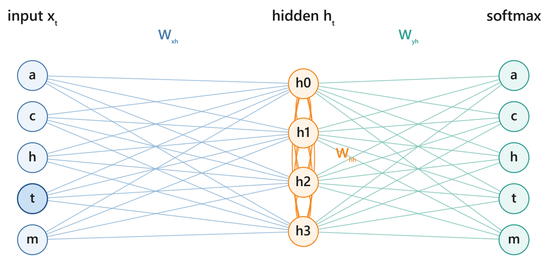

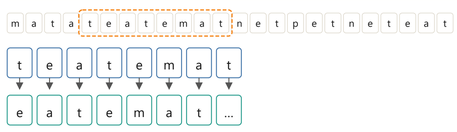

Character-level Elman RNN. Input x_t predicts the next character via $h_t = \tanh(W_{xh}x_t + W_{hh}h_{t-1})$; cross-entropy loss.

Fig 3 · Learning & generation

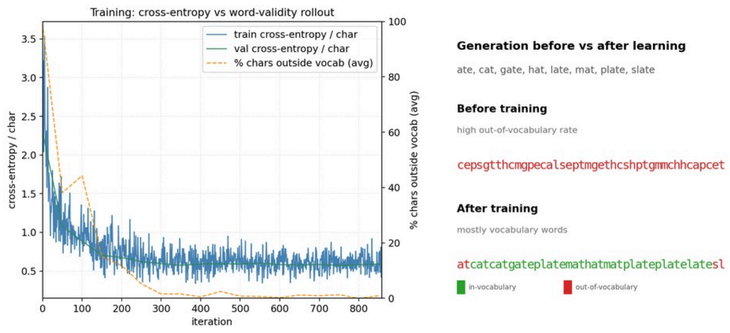

Loss and OOV collapse together; rollouts become legal vocabulary words.

Fig 4 · Next-character probabilities

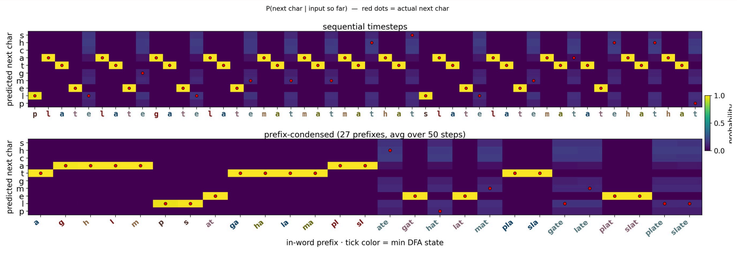

Softmax $P(\text{next char} \mid \text{input so far})$. Red dots = actual next character.

Fig 5 · Activation heatmap

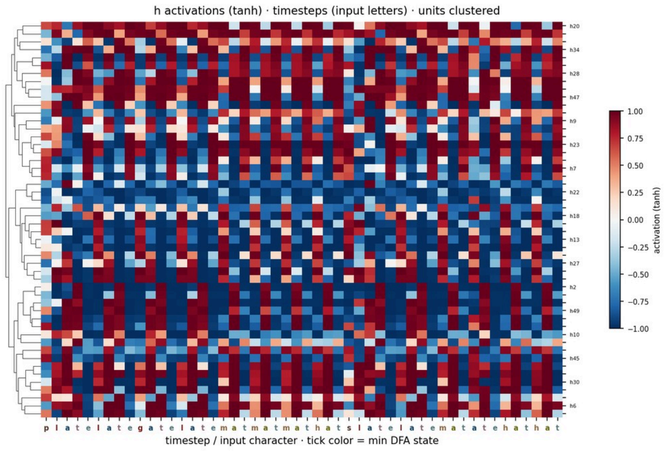

Hidden units over timesteps (input letters; units clustered).

Fig 6 · Activations by prefix

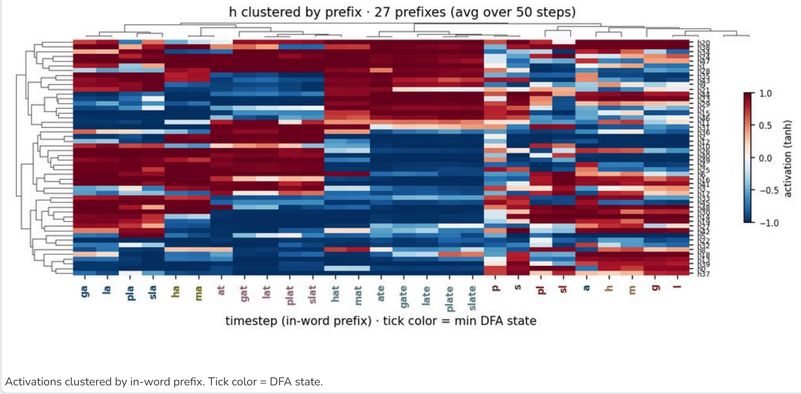

Activations clustered by in-word prefix. Tick color = DFA state.

Fig 7 · Hidden-state correlation

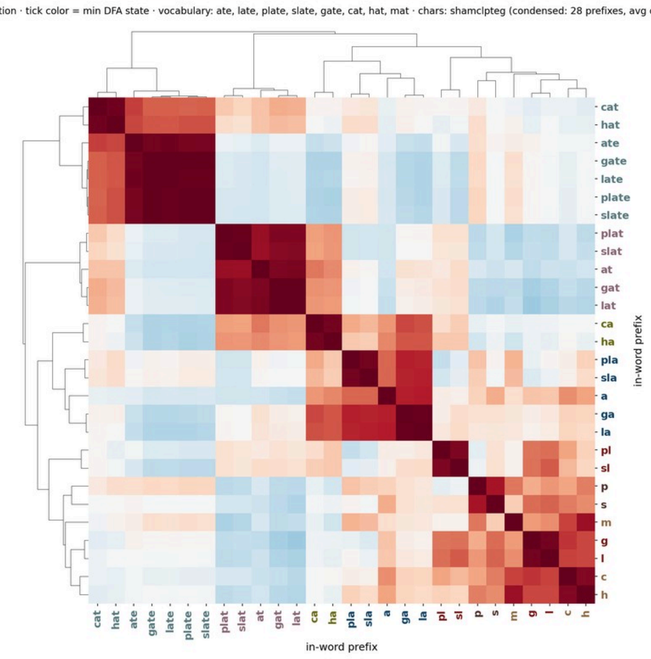

Prefix × prefix correlation. Blocks merge prefixes that share a future.

Fig 8 · DFA geometry & separation

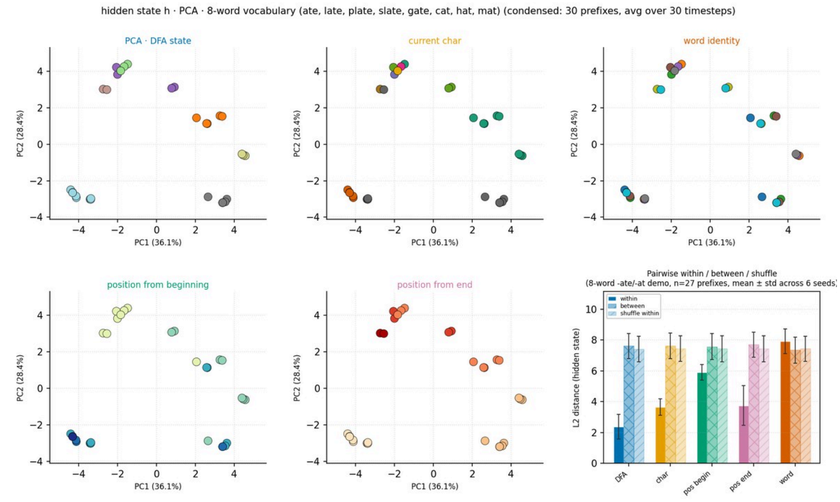

PCA of $\mathbf{h}$ by feature; pairwise within/between/shuffle at end of row. DFA $\eta^2 \approx 0.88$; word identity ≈ 0.06.

Fig 9 · Example selective units

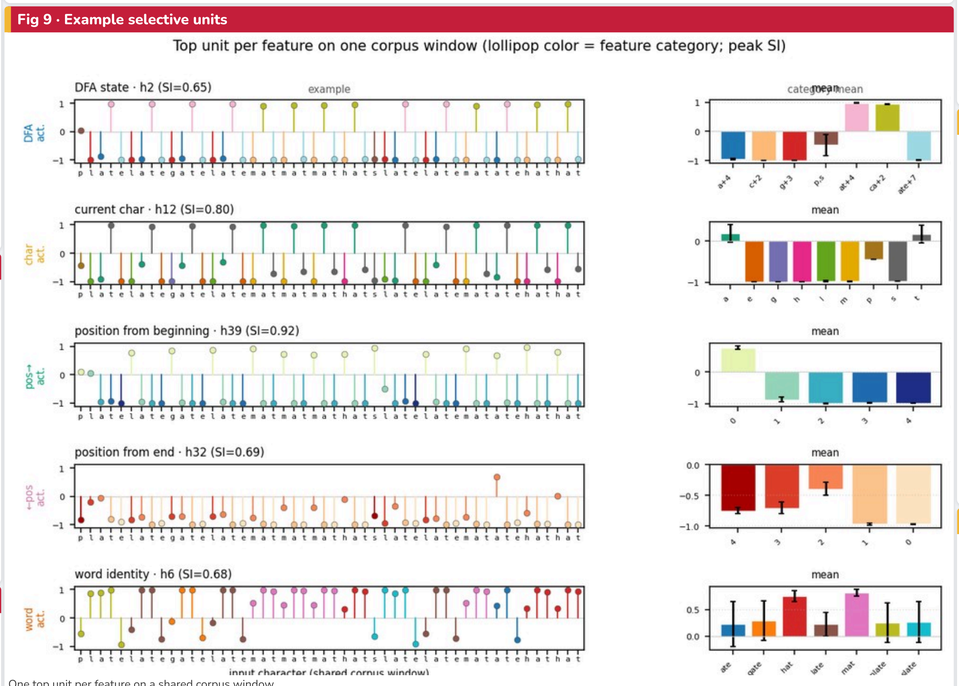

One top unit per feature on a shared corpus window.

Fig 10 · Linear decoding

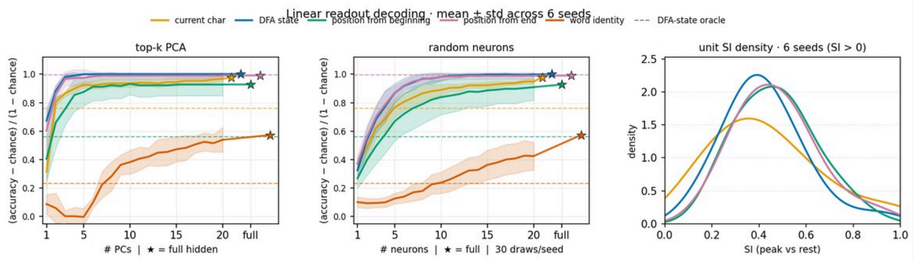

Mean ± std, 6 seeds. DFA/character saturate in a few PCs; word identity needs many more. Right: unit SI density (lines).

Fig 11 · Word trajectories

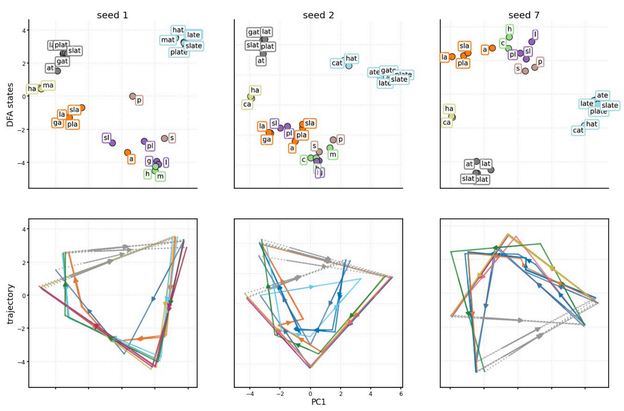

DFA-labeled PCA (top) and closed-loop trajectories (bottom) across three seeds.

Fig 12 · Mixed vocabs track DFA size

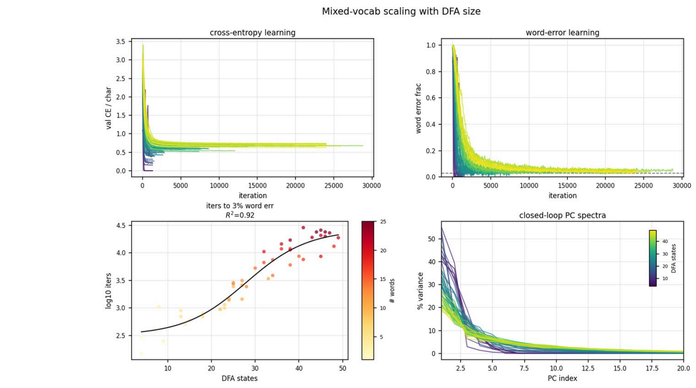

50 mixed vocabs ($H{=}100$). Top: CE and word-error curves by DFA size. Bottom: iters to 3\% WE and closed-loop PC spectra.

Fig 13 · Activations vs DFA size

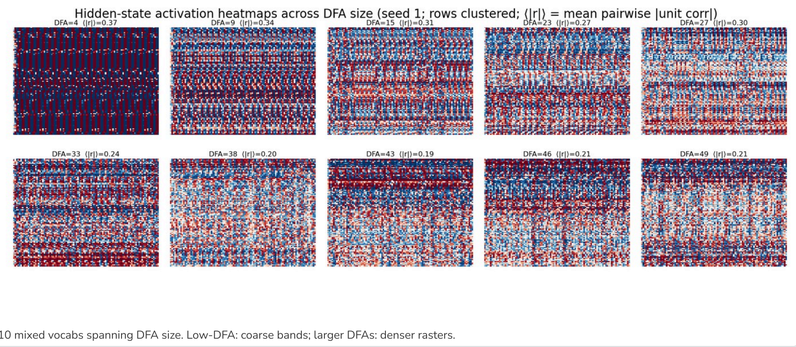

10 mixed vocabs spanning DFA size. Low-DFA: coarse bands; larger DFAs: denser rasters.

Fig 15 · Readouts vs DFA size

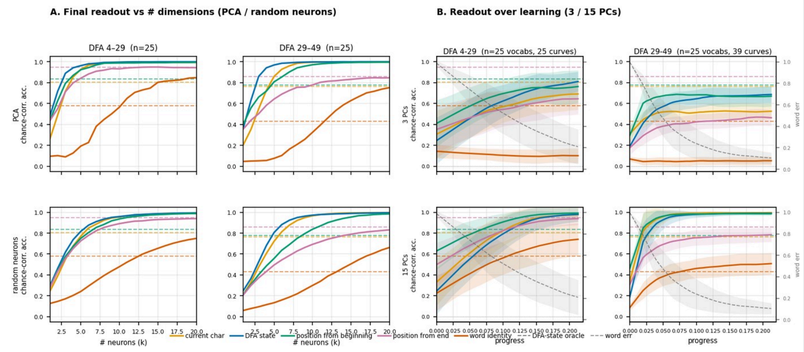

Two DFA bins. Left: final PCA/neuron readout. Right: readout over learning (3/15 PCs). Word identity needs ∼15 PCs.

Fig 16 · Geometry & unit selectivity

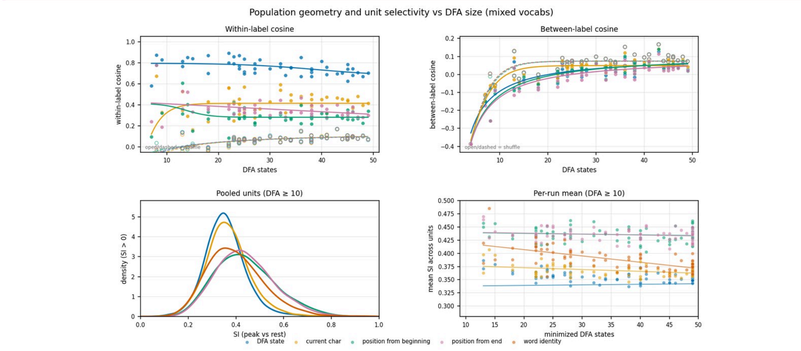

Within/between cosine similarity, plus per-unit SI vs DFA size.

Fig 18 · Weight matrices vs DFA

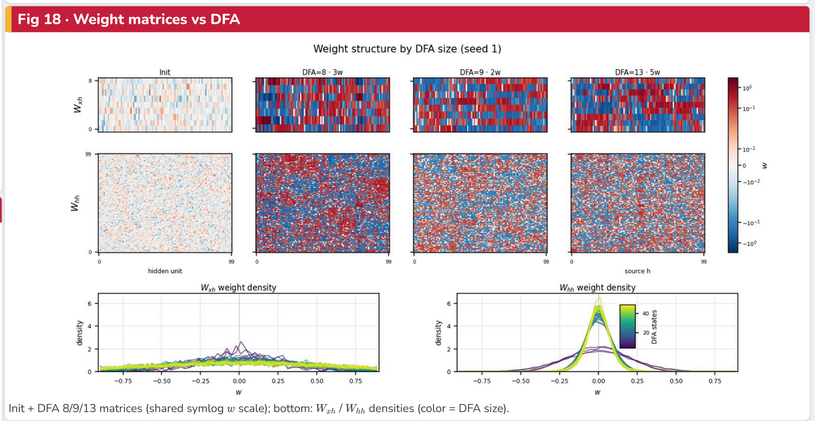

Init + DFA 8/9/13 matrices (shared symlog w scale); bottom: W_{zh} / W_{hh} densities (color = DFA size).

Fig 19 · Weight graph motifs vs DFA

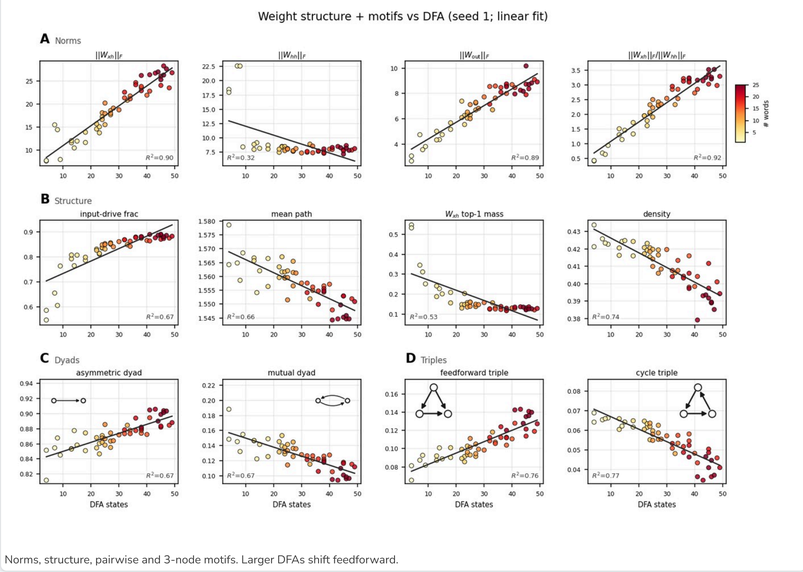

Norms, structure, pairwise and 3-node motifs. Larger DFAs shift feedforward.

Contact: Toviah Moldwin

Key references: Saffran, Aslin & Newport (1996); Elman (1990); Aslin, Saffran & Newport (1998); Goldwater et al. (2009); Perruchet & Vinter (1998).