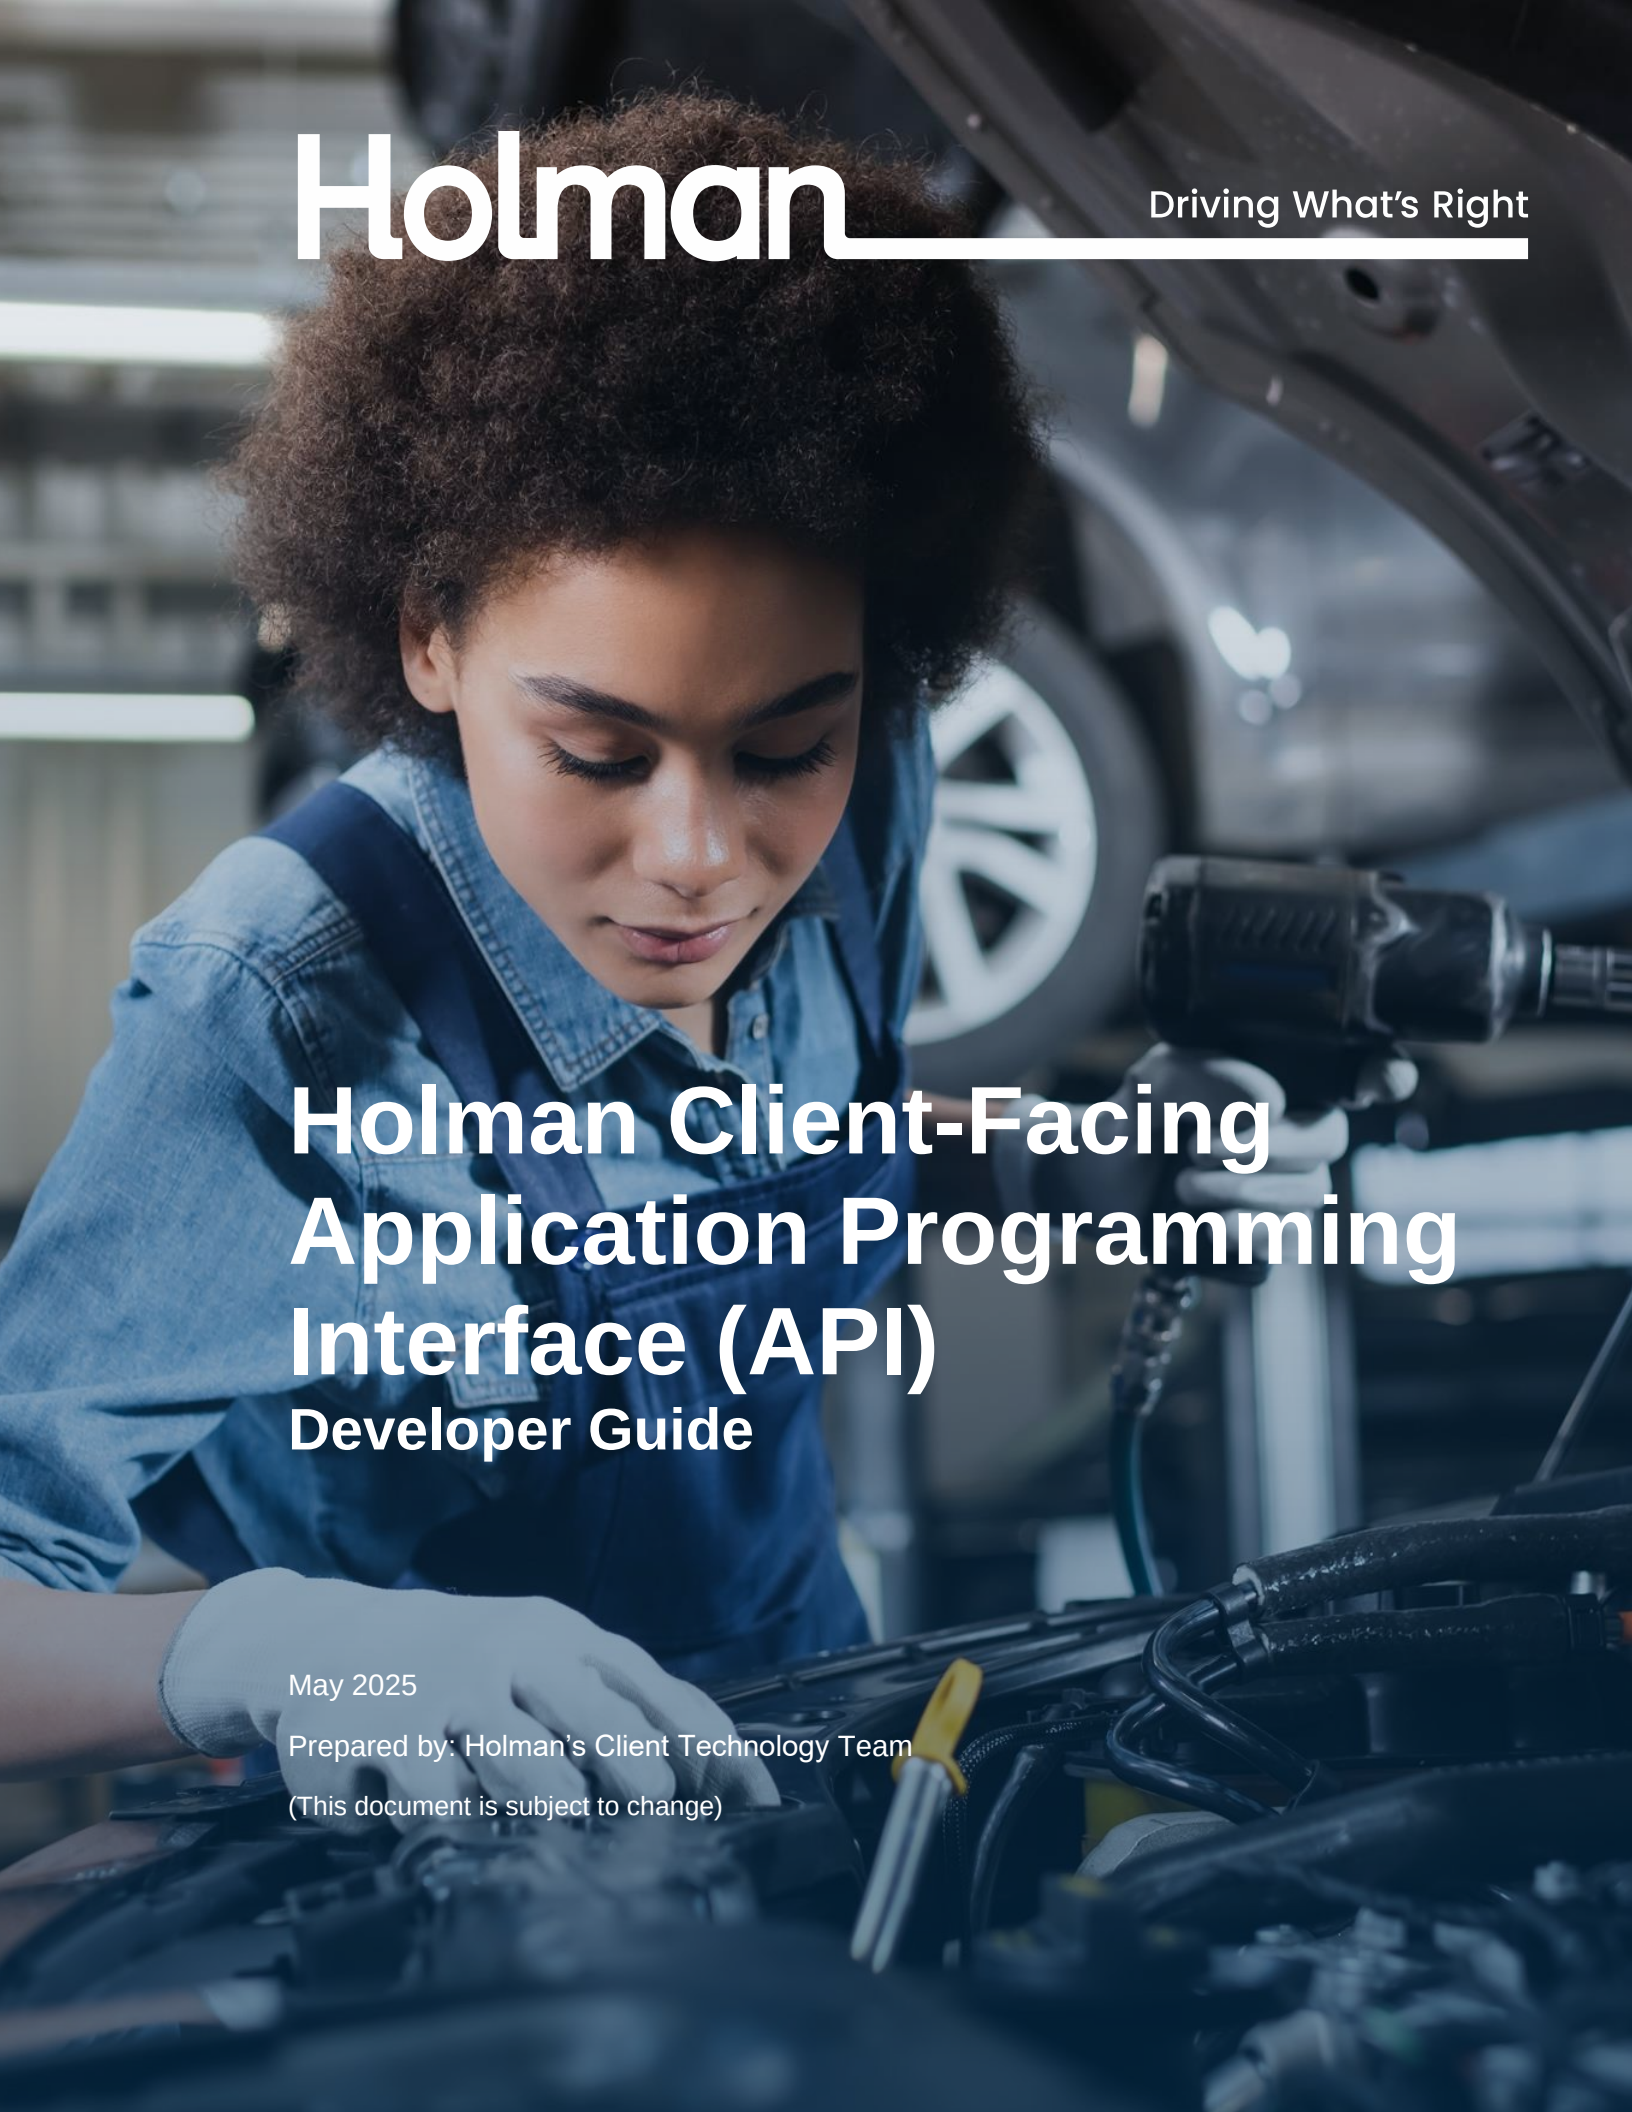

Holman

Driving What's Right

# Holman Client-Facing Application Programming Interface (API)

## Developer Guide

May 2025

Prepared by: Holman's Client Technology Team

(This document is subject to change)

# Table of Contents


INTRODUCTION ..... 3
IMPORTANT CONCEPTS ..... 4
GETTING STARTED ..... 6
CONTACT ..... 8
QUERY CONTACT DATA (BASIC & CUSTOM) ENDPOINTS ..... 8
SUBMIT ADD NEW OR UPDATE EXISTING CONTACTS ENDPOINT ..... 11
MAINTENANCE ..... 17
QUERY MAINTENANCE PURCHASE ORDER DATA (BASIC & CUSTOM) ENDPOINTS ..... 17
SUBMIT ADD NEW OR UPDATE EXISTING MAINTENANCE ENDPOINT ..... 21
ODOMETER ..... 24
QUERY ODOMETER DATA (BASIC & CUSTOM) ENDPOINTS ..... 24
SUBMIT ADD NEW OR UPDATE EXISTING ODOMETER ENDPOINT ..... 26
VEHICLE ..... 28
QUERY VEHICLE DATA (BASIC & CUSTOM) ENDPOINTS ..... 28
SUBMIT ADD NEW OR UPDATE EXISTING VEHICLES ENDPOINT ..... 34

# Introduction

Holman's API Developer Guide provides you with an overview on development procedures to integrate various data endpoints with your in-house platforms. Specifically, it will outline how to connect, retrieve (Basic & Custom Query endpoints), and send (Submit endpoints) data via Holman's API.

Holman's API solution is designed to be flexible and versatile. It allows clients to query and submit raw data, which can then be integrated with any software that supports API interactions. Essentially, our API provides the data, and the integration with specific software would be handled on the client's end, ensuring compatibility with their existing systems.

Holman's Application Programming Interface (API) was designed using principles of RESTful APIs.

Holman's API connection currently offers scalable data for the endpoints listed in the Table of Contents.

Here are some common fleet functions you can automate via our API solution:

- ✓ Add/edit/remove Contacts via the Contacts endpoint directly from your HRIM system.
- ✓ Store contact-based information such as reporting hierarchy, cost centers, hire date, etc.
- ✓ Automatically qualify contacts for Holman's Safety program to issue them relevant safety modules, training, motor vehicle record checks, etc.
- ✓ Grant contacts immediate access to the Holman's Insights Mobile App where they can report mileage, request roadside assistance, find nearby vendors, etc.
    - For more information about our Holman Insights Mobile App:
      Fleet Manager & Driver Canada
      Fleet Manager & Driver US
- ✓ Add/edit/remove vehicles from your inventory via the Vehicles endpoint.
- ✓ Assign contacts to vehicles and maintain inventory with other vehicle-based elements such as project GL codes, location, usage identifiers, etc.
- ✓ Generate WEX fuel PINs (US clients only).
- ✓ Automatically qualify drivers for Holman's Fringe/Taxable Benefits program so that they can begin reporting their mileage.
- ✓ Load fuel, maintenance and accident transaction history that occurred outside of Holman's programs to Holman Insights so that it is available for vehicle-level history and comprehensive TCO fleet reporting.
- ✓ Provide odometer and engine hour readings to be incorporated into Holman's algorithms where they are validated and used for analytics such as preventive maintenance reminders.
- ✓ Create user IDs for fleet administrators who should have access to Holman Insights and the Fleet Manager App.
- ✓ Ability to add/edit/delete maintenance and ordering approvers.
- ✓ Extract data on a variety of endpoints for your own internal reporting and analytics.

Here are some features we are actively working on to serve you better:

- ✓ A user registration process that will give clients greater control over their API users.
- ✓ Greater historic data reporting periods.
- ✓ Third party access so that your other fleet partners can exchange data with us easily on your behalf.
- ✓ New endpoints for:
    - Holman Safety program and Driver Scorecard information to monitor driver risk and compliance.
    - EV data to help you work towards your sustainability goals.
    - Licensing and Remarketing to be able to monitor statuses and get more in-depth reporting.
- ✓ Data connectors to PowerBI, Excel, Business Objects and Tableau.
- ✓ API Runners to help you manage errors and exceptions more easily.
- ✓ API code library that will make it easier for a clients' development team to integrate with Holman.

If you have any **feedback** about our API offering we would love to hear it here as we are always looking for ways to improve this experience for you!

# Important Concepts

Please familiarize yourself with the below universal concepts which you will encounter throughout the documentation as it will impact how you make your calls and interpret the results.

### QUERY and SUBMIT Actions

As per standard REST API conventions:

- **Basic-query** endpoints use **GET** method to return information.
- **Custom-query** endpoints (because they require a body in the API call) use **POST** method to return information.
  - We allow for selecting properties, filtering, pagination and delta data retrieval.
  - Examples of how to structure the custom requests are provided with each of the endpoints.
- **Submit** endpoints use **POST** method to send information.

### ENDPOINT URL

URLs are provided within this document for each endpoint. The URL is to be entered into your User Interface of choice that you will use to make the API calls, not your web browser.

### HEADER

x-correlation-id

Holman can use this to trace your request through our system. If you get an error with a call and need Holman to help troubleshoot, please engage Holman's Client Technology team for support via this form Request for Technical API Support (2.0). A member of Holman's Client Technology team will contact you to help resolve your issue. This form will require you to supply at minimum the environment you are working in (QA/Prod) and this x-correlation-id.

### RESPONSE BODY

For Basic and Custom query endpoints, you will return the following:

totalCount – total number of records from the call

pageInfo – the node that contains the following

- pageNumber – current page number
- pageSize – number of records on the current page
- totalPages – total number of pages
- lastChangeRecordId – if you want delta data, you need to specify this in the request

### lesseeCode

A 4-character alphanumeric code that identifies the client in Holman's system. Clients can have more than one lesseeCode for their fleet. LesseeCode is a critical component to each endpoint as it is used to help validate your calls. Your Holman Representative can provide this information to you.

### VEHICLE IDENTIFIERS

Each asset in Holman's database is identified by a holmanVehicleNumber. Some clients also utilize a clientVehicleNumber for their own unique numbering sequence.

holmanVehicleNumber and clientVehicleNumber are unique **within** a lesseeCode but not **across** lesseeCode. A vehicle's vin number is also unique **within** a lesseeCode but not **across** lesseeCode. Together with the lesseeCode, these identifiers are unique to the asset. This is why on vehicle-based endpoints, we require a combination of any of the below to identify the record:

1. lesseeCode & holmanVehicleNumber
2. lesseeCode & clientVehicleNumber
3. lesseeCode & vin

If you do not know the lesseeCode, holmanVehicleNumber, clientVehicleNumber or vin, you can use the 'QUERY Vehicle Data (Basic & Custom) Endpoints' to retrieve this information and return it in any SUBMIT calls where it is required.

You can only submit one of the three identifying combinations for a given record. For example if you submit lesseeCode &

holmanVehicleNumber, then if lesseeCode & clientVehicleNumber or lesseeCode & vin are also provided, the call will fail because we will not know exactly which identifier you would like us to use to verify the record. Specifically, you will see error: *"Vehicle identifiers are mutually exclusive. Only one field may be populated: `holmanVehicleNumber`, `clientVehicleNumber`, or `vin`."*

## CLIENT-DEFINED CUSTOM FIELDS

Holman offers clients a variety of client-defined fields they can use to store information unique to their fleet and contacts. Information may include cost centers, reporting managers, business units, etc. Each client's use of these fields is unique. Your Holman Representative can provide you information on how the client's terminology maps to Holman's fields and how that data is maintained. On the 'SUBMIT Add new or update existing Vehicles Endpoint' for example, if the data passed exceeds the allowed character limit, an error will be generated in the Status endpoint.

# Getting Started

To begin leveraging Holman's API solution:

1. Your organization's IT Contact must complete the API User Setup (2.0) form to obtain credentials
   - Tell us which endpoints (Basic/Custom and/or Submit) you need access to as endpoints are issued upon request.
   - Note: We do not offer third party access at this time (we are actively working on a solution). If this is a roadblock for you, please engage your Holman Account Representative and we can explore alternate solutions.

2. Holman's Client Technology team will issue you credentials
   - You will receive an email with a link to a secure SFTP where you can access a file with your API Client ID (aka User ID/Key) and Secret (aka Password).
   - The link will expire after 14 calendar days.
   - For Basic/Custom Query endpoints, you will be given production credentials immediately.
   - For Submit endpoints, we will send you QA credentials first followed by production credentials once you have completed your testing.

3. To make API requests, you must begin by **authenticating** your account.

   **Postman**

   1. POST Request to:
      **QA**: https://api.stg.holman.solutions/sso/sts/connect/token
      **PROD:** https://api.holman.solutions/sso/sts/connect/token

   2. Select Body request format **x-www-form-urlencoded**

   3. In Body properties, enter the following
      grant_type: client_credentials
      client_id: <as provided in your credential email>
      client_secret: <as provided in your credential email>

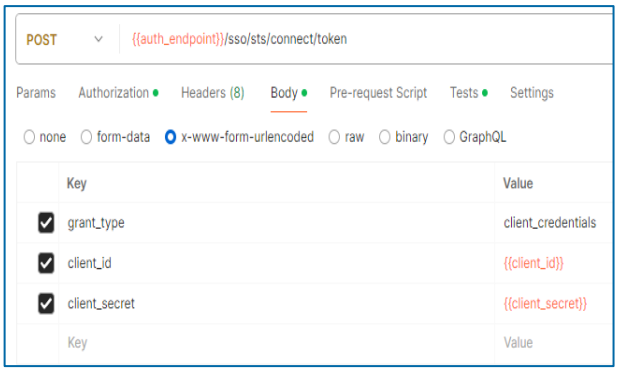


   4. Successful authentication will return an Access token. Unsuccessful authentication will return an error (i.e. invalid client). Access token will need to be used as Bearer Token authentication for all other endpoints.

Holman

5. Use this Postman collection to help you authenticate.
    a. Go to Import and select this file.
    b. Go to the Auth endpoint and enter your Client ID and Secret into the respective variables.
    c. Click Send.
    d. There is a post response script that takes the value from Access Token and sets a token variable to the collection.
    e. Authentication will then expire every hour; you will need to refresh your Token accordingly. The response body will tell you the expiration time; **expires_in** is in seconds.
    f. Note: this collection is built on our QA (stg) environment. In order to use the collection for PROD:
        i. Go to collection variables.
        ii. Under the **auth_endpoint** and **api_endpoint** variables, enter the PROD URL https://api.holman.solutions/sso/sts/connect/token (which removes the .stg).
        iii. Enter your PROD Client Id and Secret.
        iv. Click Save.
    g. The collection contains example objects that you can customize. For example:
        i. In the Basic query endpoint there is a URL parameter for lesseeCodes
        ii. In Custom query, in the body of the request, there is an array of strings for lesseeCodes
        iii. In Submit endpoints there is a property in the request body called lesseeCode

6. Begin making calls
    - You can make as many calls to any endpoints as needed while the token is active. You may need to send multiple calls to an endpoint depending on the amount of data being requested or pushed into the system.

    **Postman**
    a. For the Basic query endpoints, go to Params in Postman
    b. For Custom query and Submit endpoints, use the samples in our documentation to help get you started.

7. For Submit calls, please retrieve submission results in the **Status** endpoint. Submission calls may not return immediate results. You should ping the **Status** endpoint until **result_text** in response object reflects Complete. If any errors occurred, you will see it in this response.

**QA URL:** https://api.stg.holman.solutions/CustomerDataAPI/submission/status
**PROD URL:** https://api.holman.solutions/CustomerDataAPI/submission/status

8. For Submit endpoints, once you have made at least 3 successful calls in QA and validated that the data you are posting conforms to the existing data structure for your fleet, you can request production credentials, via this form: Request Production Credentials - API Submit Endpoints (2.0).

**API TECHNICAL SUPPORT**
If you need technical support, please engage Holman's Client Technology team for support via this form and a member of our Client Technology team will contact you to help resolve your issue: Request for Technical API Support (2.0).

**API FEEDBACK**
If there are any features, data points or endpoints that we currently do not offer, please submit that feedback here: API Feedback.

# CONTACT

## QUERY Contact Data (Basic & Custom) Endpoints

Both the basic and custom query endpoints are used to return information about your contact database. These endpoints are commonly used for contact information (i.e. contactLastName, contactAddressLine1), employment dates (i.e. contactHireDate), and client-defined fields (i.e. contactClientData1, contactAuxData1).

**Basic Query Endpoint URLs:**
QA: https://api.stg.holman.solutions/CustomerDataAPI/contacts/basic-query
PROD: https://api.holman.solutions/CustomerDataAPI/contacts/basic-query

**Custom Query Endpoint URLs:**
QA: https://api.stg.holman.solutions/CustomerDataAPI/contacts/custom-query
PROD: https://api.holman.solutions/CustomerDataAPI/contacts/custom-query

*Input Parameters*

| PARAMETER | DATA TYPE | CUSTOM FILTER | DEFINITION | NOTES |
|---|---|---|---|---|
| lesseeCode | string(4) | Y | A 4-character alphanumeric code that identifies the client in Holman's system. | User can filter on specific lesseeCode(s) within their user restrictions.<br>Multiple inputs separated by comma ',' |
| terminationDateCode | integer(1) | Y | Termination date of employee. | (Blank) – Null<br>1 – Previous day<br>2 – Previous week<br>3 – Previous month<br>4 – Previous three months |
| deactivationDateCode | integer(1) | Y | Deactivation date of employee. | |
| activactionDateCode | integer(1) | Y | Activation date of employee. | |
| pageNumber | integer | | Page of return Json. | |
| lastChangeRecordId | integer | | A unique ID for each record. | This input parameter allows you to pull any proceeding records from the lastChangeRecordId entered. This property can be used to order a data set by change history. If omitted, you will not receive delta records only. |
| lastChangeDate | string (mm/dd/yyyy hh:mm:ss AM/PM) | | Enables delta API feature to return records based on last change date | This input parameter allows you to pull any proceeding records from the lastChangeDate entered. This property can be used to order a data set by change history. If omitted, you will not receive delta records only. |
| pageSize | integer | | The number of records to be returned per page. | Default page limit set to 200. Max 1000. When a page is first retrieved it will contain total number of pages that are included. |

*Available Parameters*

| PARAMETER | DATA TYPE | CUSTOM FILTER | DEFINITION |
|---|---|---|---|
| contactActivationDate | string (mm/dd/yyyy) | Y | Date contact is activated within the Holman Contact database and can access driver features including the mobile app. |
| contactTerminationDate | string (mm/dd/yyyy) | Y | Date contact is terminated within Holman Contact database and will no longer be able to access driver features including the mobile app. |
| contactDeactivationDate | string (mm/dd/yyyy) | Y | Date contact is deactivated within the Holman Contact database and will no longer be able to access driver features including the mobile app. This is used when an employee is on temporary leave with the company and does not need access to Holman systems but is not fully terminated. |
| contactHireDate | string (mm/dd/yyyy) | Y | Date contact is hired with their company. |
| contactFirstName | string(20) | Y | Contact first name. |
| contactMiddleName | string(30) | | Contact middle name. |
| contactLastName | string(30) | Y | Contact last name. |
| contactEmployeeId | string(9) | Y | Contact employee ID. Used as a unique identifier for employee. |
| contactEmail | string(50) | Y | Contact email address. Email must be unique per contact. |
| contactCellPhone | string(10) Format: #### | Y | Contact cell phone number. |
| contactCellAcceptsText | string(1) | | Y/N indicator. Indicates whether the contact will be able to receive text messages through cell phone. This supports SMS messaging from the Holman mobile app. |
| contactWorkPhone | string(10) Format: #### | | Contact work phone. |
| contactWorkPhoneExtension | string(6) | | Contact work phone extension. |
| contactHomePhone | string(10) Format: #### | | Contact home phone. |
| contactAddress1 | string(40) | | Contact address line 1. |
| contactAddress2 | string(40) | | Contact address line 2. |
| contactAddress3 | string(40) | | Contact address line 3. |
| city | string(40) | | Contact city. |
| stateProvince | string(2) | | Contact state/province. |
| zipPostalCode | string(10) | | Contact zip/postal code. |
| country | string(2) | | Contact country of residence. |
| languagePreference | string(10) | | Language preference for the Holman mobile app. |
| contactData1 | string(100) | | A client-defined custom field. |
| contactData2 | string(100) | | A client-defined custom field. |
| contactData3 | string(100) | | A client-defined custom field. |
| contactData4 | string(100) | | A client-defined custom field. |
| contactData5 | string(100) | | A client-defined custom field. |
| contactData6 | string(100) | | A client-defined custom field. |
| contactData7 | string(100) | | A client-defined custom field. |
| contactAuxData1 | string(100) | | A client-defined custom field. |
| contactAuxData2 | string(100) | | A client-defined custom field. |
| contactAuxData3 | string(100) | | A client-defined custom field. |
| contactAuxData4 | string(100) | | A client-defined custom field. |
| contactAuxData5 | string(100) | | A client-defined custom field. |
| contactAuxData6 | string(100) | | A client-defined custom field. |
| contactAuxData7 | string(100) | | A client-defined custom field. |
| contactAuxData8 | string(100) | | A client-defined custom field. |
| contactAuxData9 | string(100) | | A client-defined custom field. |
| contactAuxData10 | string(100) | | A client-defined custom field. |

| | | | |
|---|---|---|---|
| contactAuxData11 | string(100) | | A client-defined custom field. |
| contactAuxData12 | string(100) | | A client-defined custom field. |
| contactAuxData13 | string(100) | | A client-defined custom field. |
| contactAuxData14 | string(100) | | A client-defined custom field. |
| contactAuxDate1 | string(mm/dd/yyyy) | | A client-defined custom field. |
| contactAuxDate2 | string(mm/dd/yyyy) | | A client-defined custom field. |
| contactAuxDate3 | string(mm/dd/yyyy) | | A client-defined custom field. |
| contactAuxDate4 | string(mm/dd/yyyy) | | A client-defined custom field. |

*JSON Sample*


```
{
  "pageNumber": "1",
  "totalPages": "7",
  "person": [
    {
      "contactActivationDate": "8/16/2021 12:00:00 AM",
      "contactTerminationDate": "",
      "contactDeactivationDate": "",
      "contactHireDate": "",
      "contactFirstName": "JOHN",
      "contactMiddleName": "",
      "contactLastName": "SMITH",
      "contactEmployeeId": "0240066",
      "contactEmail": "TRPZYY@COMPANYABC.COM",
      "contactCellPhone": "",
      "contactCellAcceptsText": "Y",
      "contactWorkPhone": "",
      "contactWorkPhoneExtension": "",
      "contactHomePhone": "",
      "contactAddress1": "123 AVENUE",
      "contactAddress2": "",
      "contactAddress3": "",
      "city": "MOUNT LAUREL",
      "stateProvince": "NJ",
      "zipPostalCode": "08054",
      "country": "US",
      "languagePreference": "en-US"
     "contactData1": "",
     "contactData3": "",
     "contactData4": "",
     "contactData5": "",
     "contactData6": "",
     "contactData7": "",
     "contactAuxData1": "",
     "contactAuxData14": "",
     "contactAuxDate1": "",
     "contactAuxDate2": "",
     "contactAuxDate3": "",
     "contactAuxDate4": ""
    },
}
```


*Custom Query Body Sample:*


```
{
  "additionalFilters": [
    {
      "name": "terminationDateCode",
      "values": [
        "1"
      ]
    },
    {
      "name": "deactivationDateCode",
      "values": [
        "1"
      ]
    },
    {
      "name": "activationDateCode",
      "values": [
        "1"
      ]
    },
  ]
  "paging": {
    "pageNumber": 1,
    "pageSize": 1
  },
  "lesseeCodes": ["9010"]
}
```

# SUBMIT Add new or update existing Contacts Endpoint

This endpoint uses **POST** method to add and update your fleet contact details into Holman systems. These endpoints are commonly used for contact information (i.e. contactLastName, contactAddressLine1), employment dates (i.e. contactHireDate), and client-defined fields (i.e. contactClientData1, contactAuxData1).

There are different required fields depending on if you are adding a new contact to the database or updating an existing contact.

Please consult your Holman Representative to understand how this data needs to be maintained, especially for the client-defined fields.  The data entered via this endpoint can affect reporting and program qualifications.

Field Requirement "**Add**" refers to adding a new contact to Holman's system.

Field Requirement "**Update**" refers to updating the data for an existing contact in Holman's system.

Field Requirement **"Safety"** refers to when you are enrolling/terminating the contact from the Holman Safety program.

Field Requirement **"Asset Assign"** refers to when you are assigning a contact to an asset in the inventory. In this scenario, you must identify the asset record with one of the following combinations of unique identifiers. If you don't have this information in your database, you can retrieve it from the VEHICLE – BASIC or CUSTOM QUERRY endpoint.

1. lesseeCode & holmanVehicleNumber
2. lesseeCode & clientVehicleNumber
3. lesseeCode & vin
4. lesseeCode & licensePlate

**Submit Endpoint URLs:**

QA: https://api.stg.holman.solutions/CustomerDataAPI/contacts/submit
PROD: https://api.holman.solutions/CustomerDataAPI/contacts/submit

**Status Result Endpoint URLs:**
QA: https://api.stg.holman.solutions/CustomerDataAPI/submission/status
PROD: https://api.holman.solutions/CustomerDataAPI/submission/status

*Available Fields*

| PARAMETER | DATA TYPE | DEFINITION | FIELD REQUIREMENT |
|---|---|---|---|
| contactActivationDate | string(mm/dd/yyyy) | Date in which contact is activated within the Holman Contact database and can access driver features including the mobile app. | **Add: REQUIRED**<br>If not provided, it will default to sysdate. |
| contactTerminationDate | string(mm/dd/yyyy) | Date in which contact is terminated within the Holman Contact database and will no longer be able to access driver features including the mobile app.<br><br>Must be <= Today.<br>Cannot accept future dates. | |
| contactDeactivationDate | string(mm/dd/yyyy) | This date parameter is used when an employee is on temporary leave with the company and does not need access to Holman systems but is not fully terminated. The contact is deactivated within the Holman Contact database and will no longer be able to access driver features including the mobile app.<br><br>Must be <= Today.<br>Cannot accept future dates. | |
| contactHireDate | string(mm/dd/yyyy) | Date in which contact is hired with their company.<br><br>Must be <= Today.<br>Cannot accept future dates. | |
| contactFirstName | string(20) | Contact first name. | **Add: REQUIRED**<br>**Update: REQUIRED** |
| contactMiddleName | string(20) | Contact middle name. | |
| contactLastName | string(30) | Contact last name. | **Add: REQUIRED**<br>**Update: REQUIRED** |
| contactEmployeeId | string(9) | Contact employee ID. Used as a unique identifier for employee. Include leading zeros if applicable. | **Add: REQUIRED**<br>**Update: REQUIRED** |
| contactEmail | string(50) | Contact email address. Email must be unique per contact. Company email address is preferred over personal email address. | **Add: REQUIRED**<br>**Update: REQUIRED** |
| contactCellPhone | string(10)<br>Format: ######### | Contact cell phone number. Contact cell phone number must be unique per contact. | **Add: REQUIRED**<br>**Update: REQUIRED** |
| contactCellAcceptsText | integer(1) | Will the contact be able to receive text messages through cell phone? This supports SMS messaging from Holman mobile app.<br>Y/N indicator | |
| contactWorkPhone | string(10)<br>Format: ######### | Contact work phone. | |
| contactWorkPhoneExtension | string(6) | Contact work phone extension. | |
| contactHomePhone | string(10)<br>Format: ######### | Contact home phone. | |
| contactAddress1 | string(40) | Contact address line 1. | |
| contactAddress2 | string(40) | Contact address line 2. | |
| contactAddress3 | string(40) | Contact address line 3. | |
| city | string(40) | Contact city. | |
| stateProvince | string(2) | Contact state/province. | |
| zipPostalCode | string(10) | Contact zip/postal code. | |
| country | string(2) | Contact country of residence. | |

| | | | |
|---|---|---|---|
| | | Allowable values are US, CA. | |
| languagePreference | string(10) | Language preference for the Holman mobile app. Allowable values are ENGLISH, FRENCH, SPANISH. | |
| supervisorEmail | string(50) | Contact's supervisor's email. | |
| contactData1 | String(100) | A client-defined custom field. | |
| contactData2 | string(100) | A client-defined custom field. | |
| contactData3 | string(100) | A client-defined custom field. | |
| contactData4 | string(100) | A client-defined custom field. | |
| contactData5 | string(100) | A client-defined custom field. | |
| contactData6 | string(100) | A client-defined custom field. | |
| contactData7 | string(100) | A client-defined custom field. | |
| contactAuxData1 | string(50) | A client-defined custom field. | |
| contactAuxData2 | string(50) | A client-defined custom field. | |
| contactAuxData3 | string(50) | A client-defined custom field. | |
| contactAuxData4 | string(50) | A client-defined custom field. | |
| contactAuxData5 | string(50) | A client-defined custom field. | |
| contactAuxData6 | string(50) | A client-defined custom field. | |
| contactAuxData7 | string(50) | A client-defined custom field. | |
| contactAuxData8 | string(50) | A client-defined custom field. | |
| contactAuxData9 | string(50) | A client-defined custom field. | |
| contactAuxData10 | string(50) | A client-defined custom field. | |
| contactAuxData11 | string(50) | A client-defined custom field. | |
| contactAuxData12 | string(50) | A client-defined custom field. | |
| contactAuxData13 | string(50) | A client-defined custom field. | |
| contactAuxData14 | string(50) | A client-defined custom field. | |
| contactAuxDate1 | string(mm/dd/yyyy) | A client-defined custom field. | |
| contactAuxDate2 | string(mm/dd/yyyy) | A client-defined custom field. | |
| contactAuxDate3 | string(mm/dd/yyyy) | A client-defined custom field. | |
| contactAuxDate4 | string(mm/dd/yyyy) | A client-defined custom field. | |
| Safety Object | | | |
| lesseeCode | string(4) | A 4-character alphanumeric code that identifies the client in Holman's system. | **Safety: REQUIRED** |
| division | string(2) | A client-defined custom field. | **Safety: REQUIRED** |
| prefix | string(4) | A client-defined custom field. | **Safety: REQUIRED** |
| excludeFromSafety | string(1) | Allows record to be excluded from Safety. Defaults to "N" for "no." | **Safety: REQUIRED** |
| safetyTermDate | string(mm/dd/yyyy) | Date of employee's termination for Holman's Safety program. | **Safety: REQUIRED** (only for terminations from program). Is nullable. |
| updateLegalName | string(30) | Designate the Contact's name as their legal name. Used by Safety in the MVR license verification process. Y = Yes, N= No. | |
| clientData1 | string(12) | A client-defined custom field in Safety system. | |
| clientData2 | string(9) | A client-defined custom field in Safety system. | |
| clientData3 | string(12) | A client-defined custom field in Safety system. | |
| clientData4 | string(12) | A client-defined custom field in Safety system. | |
| clientData5 | string(12) | A client-defined custom field in Safety system. | |
| clientData6 | string(12) | A client-defined custom field in Safety system. | |
| clientData7 | string(12) | A client-defined custom field in Safety system. | |

| | | | |
|---|---|---|---|
| auxData1 | string(50) | A client-defined custom field in Safety system. | |
| auxData2 | string(50) | A client-defined custom field in Safety system. | |
| auxData3 | string(50) | A client-defined custom field in Safety system. | |
| auxData4 | string(50) | A client-defined custom field in Safety system. | |
| auxData5 | string(50) | A client-defined custom field in Safety system. | |
| auxData6 | string(50) | A client-defined custom field in Safety system. | |
| auxData7 | string(50) | A client-defined custom field in Safety system. | |
| auxData8 | string(50) | A client-defined custom field in Safety system. | |
| auxData9 | string(50) | A client-defined custom field in Safety system. | |
| auxData10 | string(50) | A client-defined custom field in Safety system. | |
| auxData11 | string(50) | A client-defined custom field in Safety system. | |
| auxData12 | string(50) | A client-defined custom field in Safety system. | |
| auxData13 | string(50) | A client-defined custom field in Safety system. | |
| auxData14 | string(50) | A client-defined custom field in Safety system. | |
| Inventory Object | | | |
| lesseeCode | integer(4) | A 4-character alphanumeric code that identifies the client in Holman's system. | **Asset Assign: REQUIRED** Must be passed with one of the following in order to uniquely identify the record:<br>1. holmanVehicleNumber<br>2. clientVehicleNumber<br>3. vin<br>4. licensePlate |
| holmanVehicleNumber | string(6) | A unique number assigned by Holman to each vehicle. | **Asset Assign: REQUIRED** depending on which identifier you choose to use along with lesseeCode. |
| clientVehicleNumber | string(12) | A unique number assigned by the client to each vehicle. | **Asset Assign: REQUIRED** depending on which identifier you choose to use along with lesseeCode. |
| vin | string(17) | Vehicle serial number as determined by the vehicle manufacturer. | **Asset Assign: REQUIRED** depending on which identifier you choose to use along with lesseeCode. |
| licensePlate | string(10) | Vehicle license plate number. | **Asset Assign: REQUIRED** depending on which identifier you choose to use along with lesseeCode. |
| syncDrvNameAndEmpId | string(1) | Allows contacts name and employee id to be assigned to an asset. "Y" to assign, "N" to unassign. | |
| syncDrvAddress | string(1) | Allows contacts address to be assigned to an asset. "Y" to assign, "N" to unassign. | |
| syncDrvPhoneAndEmail | string(1) | Allows contacts phone and email to be assigned to an asset. "Y" to assign, "N" to unassign. | |
| grantDrvAppAccess | string(1) | Grants contact access to view asset in the mobile app. "Y" to grant access, "N" to remove access. | |

*JSON Sample*


```
[
  {
    "contactFirstName": "string",
    "contactMiddleName": "string",
    "contactLastName": "string",
    "contactEmployeeId": "string",
    "contactActivationDate": "string",
    "contactTerminationDate": "string",
    "contactDeactivationDate": "string",
    "contactHireDate": "string",
    "contactEmail": "string",
    "contactCellPhone": "5125651301",
    "contactCellAcceptsText": "string",
    "contactWorkPhone": "900)294.4774",
    "contactWorkPhoneExtension": "string",
    "contactHomePhone": "(939) 3554084",
    "contactAddress1": "string",
    "contactAddress2": "string",
    "contactAddress3": "string",
    "city": "string",
    "stateProvince": "string",
    "zipPostalCode": "79019",
    "country": "string",
    "languagePreference": "string",
    "supervisorEmail": "string",
    "contactData1": "string",
    "contactData3": "string",
    "contactData4": "string",
    "contactData5": "string",
    "contactData6": "string",
    "contactData7": "string",
    "contactAuxData1": "string",
    "contactAuxData2": "string",
    "contactAuxData3": "string",
    "contactAuxData4": "string",
    "contactAuxData5": "string",
    "contactAuxData6": "string",
    "contactAuxData7": "string",
    "contactAuxData8": "string",
    "contactAuxData9": "string",
    "contactAuxData10": "string",
    "contactAuxData11": "string",
    "contactAuxData12": "string",
    "contactAuxData13": "string",
    "contactAuxData14": "string",
    "contactAuxDate1": "string",
    "contactAuxDate2": "string",
    "contactAuxDate3": "string",
    "contactAuxDate4": "string",
    "safety": {
      "lesseeCode": "string",
      "division": "string",
      "prefix": "string",
      "clientData1": "string",
      "clientData2": "string",
```

```
      "clientData3": "string",
      "clientData4": "string",
      "clientData5": "string",
      "clientData6": "string",
      "clientData7": "string",
      "auxData1": "string",
      "auxData2": "string",
      "auxData3": "string",
      "auxData4": "string",
      "auxData5": "string",
      "auxData6": "string",
      "auxData7": "string",
      "auxData8": "string",
      "auxData9": "string",
      "auxData10": "string",
      "auxData11": "string",
      "auxData12": "string",
      "auxData13": "string",
      "auxData14": "string",
      "excludeFromSafety": "string",
      "safetyTermDate": "string",
      "updateLegalName": "string"
    },
    "inventory": {
      "lesseeCode": "string",
      "holmanVehicleNumber": "string",
      "clientVehicleNumber": "string",
      "vin": "string",
      "licensePlate": "string",
      "grantDrvAppAccess": "string",
      "syncDrvNameAndEmpId": "string",
      "syncDrvPhoneAndEmail": "string",
      "syncDrvAddress": "string"
    }
  }
]
```

# MAINTENANCE

## QUERY Maintenance Purchase Order Data (Basic & Custom) Endpoints

This Maintenance endpoint uses **GET** method to return information about your vehicle maintenance purchase orders. This method is commonly used for attributes like purchase order numbers, vendor information, repair dates, and repair information. Only closed POs with a status of “Approved” or “Paid” are accessible via this endpoint.

**Basic Query Endpoint URLs:**
QA: https://api.stg.holman.solutions/CustomerDataAPI/maintenance/purchase-orders/basic-query
PROD: https://api.holman.solutions/CustomerDataAPI/maintenance/purchase-orders/basic-query

**Custom Query Endpoint URLs:**
QA: https://api.stg.holman.solutions/CustomerDataAPI/maintenance/purchase-orders/custom-query
PROD: https://api.holman.solutions/CustomerDataAPI/maintenance/purchase-orders/custom-query

**Input Parameters**

| INPUT PARAMETER | DATA TYPE | CUSTOM FILTER | DEFINITION | NOTES |
|---|---|---|---|---|
| lesseeCode | string(4) | Y | A 4-character alphanumeric code that identifies the client in Holman's system. | User can filter on specific lesseeCode within their user restrictions.<br>Multiple inputs separated by comma ‘,’ |
| billPaidDateCode | integer(1) | Y | Date the PO was paid and closed. | 1 – Previous day<br>2 – Previous month<br>3 – Previous 3 months<br>4 – Previous 6 months<br>5 – Previous 12 months |
| lastChangeRecordID | string | | A unique ID for each record. | This input parameter allows you to pull any records starting from the lastChangeRecordID entered. This property can be used to order a data set by change history. If used, you will receive delta records only. |
| lastChangeDate | String (mm/dd/yyyy) | | Enables delta API feature to return records based on last change date | This input parameter allows you to pull any records starting from the lastChangeDate entered. This property can be used to order a data set by change history. If used, you will receive delta records only. |
| poDateCode | integer(1) | Y | Date the PO was created. | 1 – Previous day<br>2 – Previous month<br>3 – Previous 3 months<br>4 – Previous 6 months<br>5 – Previous 12 months |

| | | | | |
|---|---|---|---|---|
| pageSize | integer | | The number of records to be returned per page. | Default page limit set to 200. Max 1000. When a page is first retrieved it will contain total number of pages that are included. |
| pageNumber | integer(1) | | Page number of return json. | |

| PARAMETER | DATA TYPE | CUSTOM FILTER | DEFINITION |
|---|---|---|---|
| lesseeCode | string(4) | Y | A 4-character alphanumeric code that identifies the client in Holman's system. |
| holmanVehicleNumber | string(6) | Y | A unique number assigned by Holman to each vehicle. Unique within lesseeCode but not across lesseeCode. |
| clientVehicleNumber | string(12) | Y | A unique number assigned by the client to each vehicle. Unique within lesseeCode but not across lesseeCode. |
| vin | string(17) | Y | Vehicle serial number as determined by the vehicle manufacturer. |
| odometer | number(10) | | Odometer reading (miles or kilometers depending on vehicle country). |
| hourMeter | string(6) | | Engine hours. |
| poNumber | integer | | A unique purchase order number assigned by Holman. |
| vendorId | string(10) | | Unique ID assigned to each vendor. |
| vendorName | string(40) | | Vendor who performed the repair. |
| vendorAddressLine1 | string(40) | | Address of vendor who performed the repair. |
| vendorAddressLine2 | string(40) | | Address of vendor who performed the repair. |
| vendorCity | string(20) | | Address of vendor who performed the repair. |
| vendorStateProvince | string(2) | | Address of vendor who performed the repair. |
| vendorZipPostalCode | string(10) | | Address of vendor who performed the repair. |
| customerPoNumber | string(20) | | The client's work order number. |
| invoiceNumber | string(25) | Y | Invoice number as submitted by the vendor. |
| invoiceDate | string (mm/dd/yyyy) | Y | Invoice date as submitted by the vendor. |
| repairDate | string (mm/dd/yyyy) | Y | Actual date the repair was done. |
| poDate | string (mm/dd/yyyy hh:mm:ss) | | Date the PO was created. |
| billPaidDate | string (mm/dd/yyyy hh:mm:ss) | | Date the PO was paid and closed. |
| poDetailsId | integer | | A unique number per PO line item. |
| poTotalLineCost | number(8,2) | | The sum of the entire PO as it will appear in Holman Insights. Will be in USD/CAD depending on vehicle location. |
| quantity | string(6,2) | | The quantity of Parts or Labor hours. |
| cost | string(8,2) | | The cost of the individual line item. |
| type | string(2) | | Describes the PO line item (i.e. parts, labor, taxes). Please refer to the “Maintenance PO Types” sheet in the Reference Lists workbook. |
| complaint | string(30) | | Reason why the vehicle was brought in for service. |
| cause | string(30) | | Issue as identified by the vendor. |
| ataCode | string(10) | | ATA code associated with ataDescription. A detailed repair breakdown. |
| ataDescription | string(100) | | Description associated with ataCode. |
| vendorType | string(2) | | Vendor type. |
| division | string(2) | Y | A client-defined custom field. |
| prefix | string(4) | Y | A client-defined custom field. |
| clientData1 | string(12) | | A client-defined custom field. |
| clientData2 | string(9) | | A client-defined custom field. |
| clientData3 | string(12) | | A client-defined custom field. |

| | | | |
|---|---|---|---|
| clientData4 | string(12) | | A client-defined custom field. |
| clientData5 | string(12) | | A client-defined custom field. |
| clientData6 | string(12) | | A client-defined custom field. |
| clientData7 | string(12) | | A client-defined custom field. |
| driverClass | string(1) | | A client-defined custom field. |
| exec | string(1) | | A client-defined custom field. |
| auxData1 | string(50) | | A client-defined custom field. |
| auxData2 | string(50) | | A client-defined custom field. |
| auxData3 | string(50) | | A client-defined custom field. |
| auxData4 | string(50) | | A client-defined custom field. |
| auxData5 | string(50) | | A client-defined custom field. |
| auxData6 | string(50) | | A client-defined custom field. |
| auxData7 | string(50) | | A client-defined custom field. |
| auxData8 | string(50) | | A client-defined custom field. |
| auxData9 | string(50) | | A client-defined custom field. |
| auxData10 | string(50) | | A client-defined custom field. |
| auxData11 | string(50) | | A client-defined custom field. |
| auxData12 | string(50) | | A client-defined custom field. |
| auxData13 | string(50) | | A client-defined custom field. |
| auxData14 | string(50) | | A client-defined custom field. |
| auxDate1 | string (mm/dd/yyyy) | | A client-defined custom field. |
| auxDate2 | string (mm/dd/yyyy) | | A client-defined custom field. |
| auxDate3 | string (mm/dd/yyyy) | | A client-defined custom field. |
| auxDate4 | string (mm/dd/yyyy) | | A client-defined custom field. |
| firstName | string(20) | | Vehicle contact. |
| lastName | string(30) | | Vehicle contact. |
| recordID | string | | A unique record ID for each paid maintenance record. |

JSON Sample


```
{
"totalCount": 0,
"pageInfo": {
  "pageNumber": 0,
  "pageSize": 0,
  "totalPages": 0,
  "lastChangeRecordId": 0
},
"items": [
  {
    "lastChangeDate": “string",
    "lastChangeRecordId": 0,
    "lesseeCode": "string",
    "holmanVehicleNumber": "string",
    "clientVehicleNumber": "string",
    "vin": "string",
    "odometer": 0,
    "hourMeter": 0,
    "poNumber": 0,
```


**Custom Query Sample:**


```
{
  "additionalFilters": [
    {
      "name": "invoiceNumber",
      "values": [
        "657567"
      ]
    }
  ],
  "paging": {
    "pageNumber": 1,
    "pageSize": 1
  },
  "lesseeCodes": [
    "9010"
  ]
}
```

```
    "poLineNumber": 0,
    "vendorId": "string",
    "vendorName": "string",
    "vendorAddressLine1": "string",
    "vendorAddressLine2": "string",
    "vendorCity": "string",
    "vendorStateProvince": "string",
    "vendorZipPostalCode": "string",
    "customerPoNumber": "string",
    "invoiceNumber": "string",
    "invoiceDate": "mm/dd/yyyy",
    "repairDate": "mm/dd/yyyy",
    "poDate": "mm/dd/yyyy",
    "billPaidDate": "mm/dd/yyyy",
    "poDetailsId": 0,
    "poTotalLineCost": 0,
    "quantity": 0,
    "cost": 0,
    "type": "string",
    "complaint": "string",
    "cause": "string",
    "ataCode": "string",
    "ataDescription": "string",
    "vendorType": "string",
    "division": "string",
    "prefix": "string",
    "clientData1": "string",
    "clientData2": "string",
    "clientData3": "string",
    "clientData4": "string",
    "clientData5": "string",
    "clientData6": "string",
    "clientData7": "string",
    "driverClass": "string",
    "exec": "string",
    "auxData1": "string",
    "auxData2": "string",
    "auxData12": "string",
    "auxData13": "string",
    "auxData14": "string",
    "auxDate1": "mm/dd/yyyy",
    "auxDate2": "mm/dd/yyyy",
    "auxDate3": "mm/dd/yyyy",
    "auxDate4": "mm/dd/yyyy",
    "firstName": "string",
    "lastName": "string",
    "lastMaintenanceConformedChangeDate":
      "mm/dd/yyyy",
    "lastMaintenanceConformedChangeRecordId": 0,
  }
 ]
}
```

# SUBMIT Add new or update existing Maintenance Endpoint

This Maintenance endpoint uses the **POST** method to add Purchase Order history. This method is commonly used for attributes like purchase order numbers, vendor information, repair dates, and invoice information. Only closed/paid POs are available for this endpoint.

This endpoint is structured by objects; please refer to the sample json for the required structure.

**Submit Endpoint URLs:**
QA: https://api.stg.holman.solutions/CustomerDataAPI/maintenance/purchase-orders/custom-query
PROD: https://api.holman.solutions/CustomerDataAPI/maintenance/purchase-orders/custom-query

**Status Result Endpoint URLs:**
QA: https://api.stg.holman.solutions/CustomerDataAPI/submission/status
PROD: https://api.holman.solutions/CustomerDataAPI/submission/status

**Available Parameters**

| PARAMETER | DATA TYPE | DEFINITION | NOTES | FIELD REQUIREMENT |
|---|---|---|---|---|
| lesseeCode | string(4) | A 4-character alphanumeric code that identifies the client in Holman's system. | User can filter on specific lesseeCode within their user restrictions.<br>Multiple inputs separated by comma ','<br>Length must = 4 | **Required** Must be passed with one of the following in order to uniquely identify the record:<br>1. holmanVehicleNumber<br>2. clientVehicleNumber<br>3. vin |
| holmanVehicleNumber | string(6) | A unique number assigned by ARI to each vehicle. | Unique within Lessee Code but not across Lessee Code. | **Required** depending on which identifier you choose to use. Unique identifier must be either:<br>1. lesseeCode & holmanVehicleNumber<br>2. lesseeCode & clientVehicleNumber<br>3. lesseeCode & vin |
| clientVehicleNumber | string(12) | A unique number assigned by the client to each vehicle. | Unique within Lessee Code but not across Lessee Code. | **Required** depending on which identifier you choose to use. Unique identifier must be either:<br>1. lesseeCode & holmanVehicleNumber<br>2. lesseeCode & clientVehicleNumber<br>3. lesseeCode & vin |
| vin | string(17) | Vehicle serial number as determined by the vehicle manufacturer. | | **Required** depending on which identifier you choose to use. Unique identifier must be either: |

| | | | | |
|---|---|---|---|---|
| | | | | 1. lesseeCode & holmanVehicleNumber<br>2. lesseeCode & clientVehicleNumber<br>3. lesseeCode & vin |
| odometer | string(10) | Odometer reading (miles or kilometers depending on vehicle country). | | |
| vendorName | string(40) | Vendor who performed the repair. | | |
| vendorAddressLine1 | string(40) | Address of vendor who performed the repair. | | |
| vendorAddressLine2 | string(40) | Address of vendor who performed the repair. | | |
| vendorCity | string(20) | Address of vendor who performed the repair. | | |
| vendorStateProvince | string(2) | Address of vendor who performed the repair. Length must = 2 | | |
| vendorZipPostalCode | string(10) | Address of vendor who performed the repair. | | |
| customerPoNumber | string(20) | The client's work order number. | | |
| invoiceNumber | string(25) | Invoice number as submitted by the vendor. | | |
| invoiceDate | String (mm/dd/yyyy) | Invoice date as submitted by the vendor. | Date must be sys date or past date. Cannot accept future dates. | |
| repairDate | String (mm/dd/yyyy) | The actual date the repair was done. | Date must be sys date or past date. Cannot accept future dates. | |
| quantity | number(6,2) | Quantity of Parts or Labor hours. | | |
| cost | number(8,2) | Cost of the individual line item | Will be in USD/CAD depending on vehicle location.<br>The sum of all line items (cost*quantity) will be the sum of the entire PO as it will appear in Holman Insights. | |
| type | string(2) | Describes the PO line (i.e., parts, labor, taxes) | Please refer to the "Maintenance PO Types" sheet in the Reference Lists workbook. | |
| ataCode | string(10) | ATA code associated with ataDescription. A detailed repair breakdown. | | |
| ataDescription | string(100) | Description associated with ataCode. | | **REQUIRED**; no set values. |
| poNotes | string(1000) | Written repair details. | | |

JSON Sample


```
[
  {
    "customerPoNumber": "string",
    "invoiceDate": "string",
    "invoiceNumber": "string",
    "poNotes": "string",
    "repairDate": "string",
    "po_details": [
      {
        "ataCode": "string",
        "ataDescription": "string",
        "cost": "string",
        "quantity": "string",
        "type": "string"
      }
    ],
    "vehicle_details": {
      "clientVehicleNumber": "string",
      "holmanVehicleNumber": "string",
      "lesseeCode": "string",
      "odometer": "string",
      "vin": "string"
    },
    "vendor_details": {
      "vendorAddressLine1": "string",
      "vendorAddressLine2": "string",
      "vendorCity": "string",
      "vendorName": "string",
      "vendorStateProvince": "string",
      "vendorZipPostalCode": "string"
    }
  }
]
```

# ODOMETER

## QUERY Odometer Data (Basic & Custom) Endpoints

Both the basic and custom query endpoints are used to return information about your vehicle odometers.

**Basic Query Endpoint URLs**
QA: https://api.stg.holman.solutions/CustomerDataAPI/odometer/basic-query
PROD: https://api.holman.solutions/CustomerDataAPI/odometer/basic-query

**Custom Query Endpoint URLs**
QA: https://api.stg.holman.solutions/CustomerDataAPI/odometer/custom-query
PROD: https://api.holman.solutions/CustomerDataAPI/odometer/custom-query

Input Parameters

| INPUT PARAMETER | DATA TYPE | Custom Filter | DEFINITION | NOTES |
|---|---|---|---|---|
| lesseeCode | string(4) | Y | A 4-character alphanumeric code that identifies the client in Holman's system. | User can filter on specific lesseeCode within their user restrictions.<br>Multiple inputs separated by comma ',' |
| odometerHistoryDateCode | integer(1) | Y | A parameter that determines the number of months back to pull odometer history for. | 1 – Previous day odometer readings (default)<br>2 – Previous week readings<br>3 – Previous month readings<br>4 – Previous three months readings<br>5 – Previous six months readings |
| lastChangeRecordId | string() | | A unique ID for each record. | This input parameter allows you to pull any records starting from the lastChangeRecordID entered. This property can be used to order a data set by change history. If used, you will receive delta records only.<br><br>Note: either use odometerHistoryDateCode or lastChangeRecordId. |
| lastChangeDate | String (mm/dd/yyyy) | | Enables delta API feature to return records based on last change date | This input parameter allows you to pull any records starting from the lastChangeDate entered. This property can be used to order a data set by change history. If used, you will receive delta records only. |
| pageNumber | integer(1) | | Page number of return Json. | Default page limit set to 200. When a page is first retrieved, it will contain total number of pages that are included. |

Available Parameters

| PARAMETER | DATA TYPE | Custom Filter | DEFINITION |
|---|---|---|---|
| lesseeCode | string(4) | Y | A 4-character alphanumeric code that identifies the client in Holman's system. |
| holmanVehicleNumber | string(6) | Y | A unique number assigned by Holman to each vehicle. Unique within lesseeCode, but not across lesseeCode. |
| clientVehicleNumber | string(12) | Y | A unique number assigned by Holman to each vehicle. Unique within lesseeCode, but not across lesseeCode. |
| vin | string(17) | Y | Vehicle serial number. |
| division | string(2) | Y | A client-defined custom field. |
| prefix | string(4) | Y | A client-defined custom field. |
| odometer | string(10) | | Vehicle odometer reading. |
| odometerDate | string (mm/dd/yyyy HH:MM:SS AM/PM) | | Date of vehicle odometer reading. |
| odometerSource | string(5) | | Source of vehicle's odometer reading. |
| odometerQuality | string(20) | | Quality rating of vehicle's odometer reading. Expected values: Good, Insufficient Data, Out of Range, Excluded, Invalid |

JSON Sample


```
{
  "totalCount": 0,
  "pageInfo": {
    "pageNumber": 0,
    "pageSize": 0,
    "totalPages": 0,
    "lastChangeRecordId": 0
  },
  "items": [
    {
      "lastChangeDate": "2025-04-21T20:31:26.558Z",
      "lastChangeRecordId": 0,
      "odometerHistoryId": 0,
      "lesseeCode": "string",
      "holmanVehicleNumber": "string",
      "clientVehicleNumber": "string",
      "division": "string",
      "prefix": "string",
      "vin": "string",
      "odometer": 0,
      "odometerDate": "2025-04-21T20:31:26.558Z",
      "odometerSource": "string",
      "odometerQuality": "string"
    }
  ]
}
```


Custom Query Sample


```
{
  "additionalFilters": [
    {
      "name": "odometerHistoryDateCode",
      "values": [
        5
      ]
    }
  ],
  "paging": {
    "pageNumber": 1,
    "pageSize": 1
  },
  "lesseeCodes": [
    "9010"
  ]
}
```

# SUBMIT Add new or update existing Odometer Endpoint

This Odometer endpoint uses the **POST** method to add odometer records for your vehicles into Holman system.

**Submit Endpoint URLs**

QA: https://api.stg.holman.solutions/CustomerDataAPI/odometer/submit
PROD: https://api.holman.solutions/CustomerDataAPI/odometer/submit

**Status Result Endpoint URLs:**

QA: https://api.stg.holman.solutions/CustomerDataAPI/submission/status
PROD: https://api.holman.solutions/CustomerDataAPI/submission/status
Note: If you use QUERY Odometer Data (Basic & Custom) Endpoints to verify, posted records will only be available next day.

**Available Fields**

| PARAMETER | DATA TYPE | DEFINITION | FIELD REQUIREMENT |
|---|---|---|---|
| lesseeCode | string(4) | A 4-character alphanumeric code that identifies the client in Holman's system. | User can filter on specific lesseeCode within their user restrictions.<br>Multiple inputs separated by comma ','<br>Must be passed with one of the following in order to uniquely identify the record:<br>1. holmanVehicleNumber<br>2. clientVehicleNumber<br>3. vin |
| holmanVehicleNumber | string(6) | A unique number assigned by Holman to each vehicle. | **Required** depending on which identifier you choose to use. Unique identifier must be either:<br>1. lesseeCode & holmanVehicleNumber<br>2. lesseeCode & clientVehicleNumber<br>3. lesseeCode & vin |
| clientVehicleNumber | string(12) | A unique number assigned by the client to each vehicle. | **Required** depending on which identifier you choose to use. Unique identifier must be either:<br>1. lesseeCode & holmanVehicleNumber<br>2. lesseeCode & clientVehicleNumber<br>3. lesseeCode & vin |
| vin | string(17) | Vehicle serial number as determined by the vehicle manufacturer. | **Required** depending on which identifier you choose to use. Unique identifier must be either:<br>1. lesseeCode & holmanVehicleNumber<br>2. lesseeCode & clientVehicleNumber<br>3. lesseeCode & vin |
| odometer | string(7) | Current odometer reading for vehicle. | **Required** when providing odometerDate. |
| odometerDate | String (mm/dd/yyyy) | Current odometer reading date. | **Required** when providing odometer. |
| datasource | string(5) | Source of input for odometer. Source definition as "API". | **REQUIRED** |

JSON Sample


```
[
{
  "clientVehicleNumber": "string",
  "datasource": "string",
  "holmanVehicleNumber": "string",
  "lesseeCode": "string",
  "odometer": "string",
  "odometerDate": "string",
  "vin": "string"
}
]
```

# VEHICLE

## QUERY Vehicle Data (Basic & Custom) Endpoints

Both the basic and custom query endpoints are used to return information about your fleet inventory. These endpoints are commonly used for vehicle attributes (i.e. vin, makeVin, modelVin, odometer), assigned contact information (i.e. lastName, addressLine1), supply chain dates (i.e. deliveryDate), and client-defined fields (i.e. division, clientData1, auxData1).

**Basic Query Endpoint URLs**
QA: https://api.stg.holman.solutions/CustomerDataAPI/vehicles/basic-query
PROD: https://api.holman.solutions/CustomerDataAPI/vehicles/basic-query

**Custom Query Endpoint URLs**
QA: https://api.stg.holman.solutions/CustomerDataAPI/vehicles/custom-query
PROD: https://api.holman.solutions/CustomerDataAPI/vehicles/custom-query

*Input Parameters*

| PARAMETER | DATA TYPE | DEFINITION | CUSTOM FILTER | NOTES |
|---|---|---|---|---|
| lesseeCode | string(4) | A 4-character alphanumeric code that identifies the client in Holman's system. | Y | User can filter on specific lesseeCode(s) within their user restrictions.<br>Multiple inputs separated by comma ‘,’ |
| statusCode | integer(1) | The current state of the vehicle’s use. | Y | 0 – New; vehicle is on order and not yet been delivered<br>1 – Active; vehicle is on the road<br>2 – Out of Service; vehicle was taken off road for maintenance, preparation for sale, etc.<br>3 – Sold (can be used in conjunction with soldDateCode)<br>Only non-purged vehicles are available.<br>Multiple inputs separated by comma ‘,’ |
| soldDateCode | integer(1) | Date the vehicle was sold. | Y | Can be defined in conjunction with statusCode = 3<br>1 – Previous Month<br>2 – Previous Three months<br>3 – Previous Six months<br>4 – Previous 12 months<br>5 - Will return all sold assets regardless of saleDate. |
| lastChangeRecordID | integer | A unique ID for each record. | | This input parameter allows you to pull any proceeding records from the lastChangeRecordID entered. This property can be used to order a data set by change history. If omitted, you will not receive delta records only. |
| lastChangeDate | string (mm/dd/yyyy hh:mm:ss AM/PM) | Enables delta API feature to return records based on last change date | | This input parameter allows you to pull any proceeding records from the lastChangeDate entered. This property can be used to order a data set by change history. If omitted, you will not receive delta records only. |

| | | | | |
|---|---|---|---|---|
| pageNumber | integer | Page number of return Json. | | |
| pageSize | integer | The number of records to be returned per page. | | Default page limit set to 200. Max 1000. When a page is first retrieved it will contain total number of pages that are included. |

*Available Parameters*

| PARAMETER | DATA TYPE | CUSTOM FILTER | DEFINITION |
|---|---|---|---|
| lesseeCode | string(4) | Y | A 4-character alphanumeric code that identifies the client in Holman's system. |
| holmanVehicleNumber | string(6) | Y | A unique number assigned by Holman to each vehicle. Unique within lesseeCode but not across lesseeCode. |
| clientVehicleNumber | string(12) | Y | A unique number assigned by the client to each vehicle. Unique within lesseeCode but not across lesseeCode. |
| vin | string(17) | Y | Vehicle serial number as determined by the vehicle manufacturer. Unique within lesseeCode but not across lesseeCode. |
| status | string(40) | | The current state of the vehicle's use.<br>Please refer to the "Vehicle Status" sheet in the Reference Lists workbook. |
| assignedStatus | string(20) | Y | Additional optional classification of how the vehicle is currently being used. Please refer to the "Assigned Status" sheet in the Reference Lists workbook. |
| division | string(2) | Y | A client-defined custom field. |
| prefix | string(4) | Y | A client-defined custom field. |
| clientData1 | string(12) | Y | A client-defined custom field. |
| clientData2 | string(9) | Y | A client-defined custom field. |
| clientData3 | string(12) | Y | A client-defined custom field. |
| clientData4 | string(12) | Y | A client-defined custom field. |
| clientData5 | string(12) | Y | A client-defined custom field. |
| clientData6 | string(12) | Y | A client-defined custom field. |
| clientData7 | string(12) | Y | A client-defined custom field. |
| driverClass | string(1) | | A client-defined custom field. |
| exec | string(1) | | A client-defined custom field. |
| auxData1 | string(50) | Y | A client-defined custom field. |
| auxData2 | string(50) | Y | A client-defined custom field. |
| auxData3 | string(50) | Y | A client-defined custom field. |
| auxData4 | string(50) | Y | A client-defined custom field. |
| auxData5 | string(50) | Y | A client-defined custom field. |
| auxData6 | string(50) | Y | A client-defined custom field. |
| auxData7 | string(50) | Y | A client-defined custom field. |
| auxData8 | string(50) | Y | A client-defined custom field. |
| auxData9 | string(50) | Y | A client-defined custom field. |
| auxData10 | string(50) | Y | A client-defined custom field. |
| auxData11 | string(50) | Y | A client-defined custom field. |
| auxData12 | string(50) | Y | A client-defined custom field. |
| auxData13 | string(50) | Y | A client-defined custom field. |
| auxData14 | string(50) | Y | A client-defined custom field. |
| auxDate1 | string (mm/dd/yyyy) | | A client-defined custom field. |
| auxDate2 | string (mm/dd/yyyy) | | A client-defined custom field. |
| auxDate3 | string (mm/dd/yyyy) | | A client-defined custom field. |

| | | | |
|---|---|---|---|
| auxDate4 | string (mm/dd/yyyy) | | A client-defined custom field. |
| firstName | string(20) | Y | Vehicle contact. |
| lastName | string(30) | Y | Vehicle contact. |
| email | string(50) | Y | Vehicle contact email. |
| cellPhone | string(10)<br>Format: ####### | Y | Vehicle contact phone number. |
| workPhone | string(10)<br>Format: ####### | | Vehicle contact phone number. |
| workPhoneExtension | string(6)<br>Format: ###### | | Vehicle contact phone number. |
| homePhone | string(10)<br>Format: ####### | | Vehicle contact phone number. |
| addressLine1 | string(40) | | Physical address where the vehicle is domiciled. |
| addressLine2 | string(40) | | Physical address where the vehicle is domiciled. |
| addressLine3 | string(40) | | Physical address where the vehicle is domiciled. |
| city | string(40) | | Physical address where the vehicle is domiciled. |
| stateProvince | string(2) | | Physical address where the vehicle is domiciled. |
| zipPostalCode | string(10) | | Physical address where the vehicle is domiciled. |
| modelYear | string(4) | | Vehicle Model Year based on VIN Decode. |
| makeVin | string(50) | | Vehicle Make based on VIN Decode. |
| makeClient | string(20) | | Vehicle Make as defined by the client. |
| modelVin | string(100) | | Vehicle Model based on VIN Decode. |
| modelClient | string(20) | | Vehicle Model Name as defined by the client. |
| engineType | string(4000) | | Engine details as defined by the VIN. Includes engine size and cylinders. |
| driveline | string(100) | | Drivetrain based on VIN Decode (i.e., 4x2, 4x4) |
| series | string(100) | | i.e., 1500, 2500HD |
| fuelType | string(50) | | Type of fuel vehicle operates on based on VIN Decode. |
| fuelTypeDescription | string(25) | | Fuel Type as defined by the client. |
| fuelTypeCode | string(2) | | Fuel Type of the vehicle as defined by the client. |
| fuelCapacity | number(6,1) | | Fuel tank capacity. Measured in gallons for US assets and litres for Canadian assets. |
| fuelMeasureType | string(1) | | Fuel unit of measure. Liters = L, Gallons = G. |
| odometer | number(7) | | Current odometer reading for the vehicle. |
| odometerDate | string (mm/dd/yyyy) | | Current odometer reading date. |
| hourMeter | string(6) | | Current hour meter on the vehicle. |
| hourMeterDate | string (mm/dd/yyyy) | | Current hour meter date. |
| licensePlate | string(10) | Y | Vehicle license plate number. |
| tagStateProvince | string(2) | | State/province where the vehicle is registered for licensing purposes. |
| plateType | string(3) | | License plate classification.<br>Please refer to the “Plate Type” sheet in the Reference Lists workbook. |
| renewalDate | string (mm/dd/yyyy) | | Renewal date for the license plate. |
| assetType | string(10) | | Vehicle classification.<br>Please refer to the “Asset Type and Asset Sub-Type” sheet in the Reference Lists workbook. |
| assetSubtype | string(25) | | Secondary vehicle classification that is dependent on the chosen assetType.<br>Please refer to the “Asset Type and Asset Sub-Type” sheet in the Reference Lists workbook. |
| orderType | string(7) | | How the vehicle order was placed.<br>Please refer to the “Order Type” sheet in the Reference Lists workbook. |

| | | | |
|---|---|---|---|
| deliveryDate | string (mm/dd/yyyy) | | Date the vehicle was delivered to the contact. This date drives the calculated monthsInService. |
| onRoadDate | string (mm/dd/yyyy) | | Date the vehicle was put in use. |
| outOfServiceDate | string (mm/dd/yyyy) | | Date the vehicle was taken out of use. |
| soldDate | string (mm/dd/yyyy) | | Date the vehicle was sold. |
| soldAmount | number(9,2) | | Final sale amount for the vehicle. |
| saleOdometer | integer(6) | | Odometer reading for the vehicle at the time it was sold. |
| capCost | number(9,2) | | Vehicle's full purchase price. Will be 0 for vehicles not leased through Holman. |
| gvwr | integer(6) | | Gross Vehicle Weight. Maximum amount specified by the vehicle manufacturer for the total weight of the vehicle and any cargo including people. |
| curbWeight | string(6) | | Curb weight. The current total vehicle weight with all fluids and normal operating gear without passengers or cargo. |
| registeredVehicleWeight | string(6) | | Registered Vehicle Weight. The weight of the vehicle's Motor Vehicle registration. |
| vendor | string(30) | | Vehicle owner.<br>Please refer to the "Vendor" sheet in the Reference Lists workbook. |
| leaseTerm | integer(3) | | The number of months for the vehicle's lease. |
| monthsBilled | integer(3) | | Months that the vehicle has been billed. |
| monthsInService | integer | | Months in Service (MIS) calculated as of the deliveryDate. |
| remainingBookValue | number(9,2) | | Current book value remaining on the vehicle. |
| telematicsDeviceId | string(30) | | A unique number assigned to each telematics device by the vendor. |
| telematicsDeviceModel | string(30) | | i.e., GoPro |
| telematicsDeviceVendor | string(50) | | i.e., Geotab |
| titleOwnerLessor | string(100) | | Vehicle's owners name printed on title. |

*JSON Sample*


```
{
  "totalCount": 0,
  "pageInfo": {
    "pageNumber": 0,
    "pageSize": 0,
    "totalPages": 0,
    "lastChangeRecordId": 0
  },
  "items": [
    {
      "addressLine1": "string",
      "addressLine2": "string",
      "addressLine3": "string",
      "assetSubtype": "string",
      "assetType": "string",
      "assignedStatus": "string",
      "auxData1": "string",
      "auxData10": "string",
      "auxData11": "string",
      "auxData12": "string",
      "auxData13": "string",
      "auxData14": "string",
      "auxData2": "string",
      "auxData3": "string",
      "auxData4": "string",
      "auxData5": "string",
      "auxData6": "string",
      "auxData7": "string",
      "auxData8": "string",
      "auxData9": "string",
      "auxDate1": "mm/dd/yyyy",
      "auxDate2": "mm/dd/yyyy",
      "auxDate3": "mm/dd/yyyy",
      "auxDate4": "mm/dd/yyyy",
      "capCost": "string",
      "cellPhone": "string",
      "city": "string",
      "clientData1": "string",
      "clientData2": "string",
      "clientData3": "string",
      "clientData4": "string",
      "clientData5": "string",
      "clientData6": "string",
      "clientData7": "string",
      "clientVehicleNumber": "string",
      "curbWeight": "string",
      "deliveryDate": "mm/dd/yyyy",
      "division": "string",
      "driveline": "string",
      "driverClass": "string",
      "email": "string",
      "engineType": "string",
      "exec": "string",
      "firstName": "string",
      "fuelCapacity": 0,
      "fuelMeasureType": "string",
      "fuelType": "string",
      "fuelTypeCode": "string",
      "fuelTypeDescription": "string",
      "gvwr": 0,
      "holmanVehicleNumber": "string",
      "homePhone": "string",
      "hourMeter": 0,
```


*Custom Query Body Example:*


```
{
  "additionalFilters": [
    {
      "name": "statusCode",
      "values": ["1"]
    }
  ],
  "paging": {
    "pageNumber": 1,
    "pageSize": 1
  },

  "lesseeCodes": ["9010"]
}
```

```
    "hourMeterDate": "mm/dd/yyyy",
    "lastChangeDate": "2025-04-15T18:37:17.401Z",
    "lastChangeRecordId": 0,
    "lastName": "string",
    "leaseTerm": "string",
    "lesseeCode": "string",
    "licensePlate": "string",
    "makeClient": "string",
    "makeVin": "string",
    "modelClient": "string",
    "modelVin": "string",
    "modelYear": "string",
    "monthsBilled": 0,
    "monthsInService": 0,
    "odometer": "string",
    "odometerDate": "mm/dd/yyyy”,
    "onRoadDate": "mm/dd/yyyy",
    "orderType": "string",
    "outOfServiceDate": "mm/dd/yyyy",
    "plateType": "string",
    "prefix": "string",
    "registeredVehicleWeight": "string",
    "remainingBookValue": 0,
    "renewalDate": "mm/dd/yyyy",
    "saleOdometer": 0,
    "series": "string",
    "soldAmount": 0,
    "soldDate": "mm/dd/yyyy",
    "stateProvince": "string",
    "status": "string",
    "statusCode": 0,
    "tagStateProvince": "string",
    "telematicsDeviceId": "string",
    "telematicsDeviceModel": "string",
    "telematicsDeviceVendor": "string",
    "titleOwnerLessor": "string",
    "vendor": "string",
    "vin": "string",
    "workPhone": "string",
    "workPhoneExtension": "string",
    "zipPostalCode": "string"
  }
 ]
}
```

# SUBMIT Add new or update existing Vehicles Endpoint

This endpoint uses **POST** method to add and update information to your fleet inventory.
There are different required fields depending on if you are adding a new non-Holman asset to inventory or updating an existing asset.
Depending on the lease type (when vendorCode = ARI), certain fields may be restricted (for example, you cannot update the capCost on a Holman-owned vehicle as this is controlled by our programs).
Please consult your Holman Representative to understand how this data needs to be maintained, especially for the client-defined fields. The data entered via this endpoint can affect reporting and program qualifications.

Field Requirement "**Add**" refers to adding a new vehicle to Holman's system. The vehicle will be added as a non-Holman lease type. Please check that the identifier you are using (i.e. holmanVehicleNumber) doesn't already exist in inventory otherwise your record will be treated as an **Update**.

Field Requirement "**Update**" refers to updating the data for an existing vehicle in Holman's system.

**Submit Endpoint URLs**
QA: https://api.stg.holman.solutions/CustomerDataAPI/vehicles/submit
PROD: https://api.holman.solutions/CustomerDataAPI/vehicles/submit

**Status Results Endpoint URLs**
QA: https://api.stg.holman.solutions/CustomerDataAPI/submission/status
PROD: https://api.holman.solutions/CustomerDataAPI/submission/status

*Available Parameters*

| PARAMETER | DATA TYPE | DEFINITION / NOTES | FIELD REQUIREMENT |
|---|---|---|---|
| lesseeCode | string(4) | A 4-character alphanumeric code that identifies the client in Holman's system.<br>User can filter on specific lesseeCode within their user restrictions.<br>Multiple inputs separated by comma ',' | **Add: REQUIRED**<br><br>**Update: REQUIRED**<br>Must be passed with one of the following in order to uniquely identify the record:<br>1. holmanVehicleNumber<br>2. clientVehicleNumber<br>3. vin |
| holmanVehicleNumber | string(6) | A unique number assigned by Holman to each vehicle.<br>Unique within lesseeCode but not across lesseeCode. | **Add: REQUIRED**—Must submit a unique vehicle number. Please ensure you are following your sequence structure (if applicable) and checking that the holmanVehicleNumber does not already exist in inventory.<br><br>**Update: REQUIRED** depending on which identifier you choose to use. Unique identifier must be either:<br>1. lesseeCode & holmanVehicleNumber |

| | | | |
|---|---|---|---|
| | | | 2. lesseeCode & clientVehicleNumber<br>3. lesseeCode & vin |
| clientVehicleNumber | string(12) | A unique number assigned by the client to each vehicle.<br>Unique within lesseeCode but not across lesseeCode. | **Add: REQUIRED** (if the client is setup for this). Please ensure you are following your sequence structure (if applicable) and checking that the clientVehicleNumber does not already exist in inventory.<br><br>**Update: REQUIRED** depending on which identifier you choose to use. Unique identifier must be either:<br>1. lesseeCode & holmanVehicleNumber<br>2. lesseeCode & clientVehicleNumber<br>3. lesseeCode & vin |
| vin | string(17) | Vehicle serial number as determined by the vehicle manufacturer.<br>Cannot be updated on Holman owned vehicle (where vendorCode = ARI). | **Add: REQUIRED** - Must submit a unique value. Please check that the vin does not already exist in inventory.<br><br>**Update: REQUIRED** depending on which identifier you choose to use. Unique identifier must be either:<br>1. lesseeCode & holmanVehicleNumber<br>2. lesseeCode & clientVehicleNumber<br>3. lesseeCode & vin |
| assignedStatusCode | string(1) | Additional optional classification how vehicle is currently being used.<br>Please refer to the "Assigned Status" sheet in the Reference Lists workbook. | |
| division | string(2) | A client-defined custom field.<br>Length must = 2 | **Add: REQUIRED**<br><br>**Update:** Not required but may be needed to satisfy fleet program qualification or dependency. |
| prefix | string(4) | A client-defined custom field.<br>Length must = 4 | Not required but may be needed to satisfy fleet program qualification or dependency. |
| clientData1 | string(12) | A client-defined custom field. | Not required but may be needed to satisfy fleet program qualification or dependency. |
| clientData2 | string(9) | A client-defined custom field. | Not required but may be needed to satisfy fleet program qualification or dependency. |
| clientData3 | string(12) | A client-defined custom field. | Not required but may be needed to satisfy fleet program qualification or dependency. |
| clientData4 | string(12) | A client-defined custom field. | Not required but may be needed to satisfy fleet program qualification or dependency. |

| | | | |
|---|---|---|---|
| clientData5 | string(12) | A client-defined custom field. | Not required but may be needed to satisfy fleet program qualification or dependency. |
| clientData6 | string(12) | A client-defined custom field. | Not required but may be needed to satisfy fleet program qualification or dependency. |
| clientData7 | string(12) | A client-defined custom field. | Not required but may be needed to satisfy fleet program qualification or dependency. |
| driverClass | string(1) | A client-defined custom field. | Not required but may be needed to satisfy fleet program qualification or dependency. |
| exec | string(1) | A client-defined custom field. | Not required but may be needed to satisfy fleet program qualification or dependency. |
| auxData1 | string(50) | A client-defined custom field. | Not required but may be needed to satisfy fleet program qualification or dependency. |
| auxData2 | string(50) | A client-defined custom field. | Not required but may be needed to satisfy fleet program qualification or dependency. |
| auxData3 | string(50) | A client-defined custom field. | Not required but may be needed to satisfy fleet program qualification or dependency. |
| auxData4 | string(50) | A client-defined custom field. | Not required but may be needed to satisfy fleet program qualification or dependency. |
| auxData5 | string(50) | A client-defined custom field. | Not required but may be needed to satisfy fleet program qualification or dependency. |
| auxData6 | string(50) | A client-defined custom field. | Not required but may be needed to satisfy fleet program qualification or dependency. |
| auxData7 | string(50) | A client-defined custom field. | Not required but may be needed to satisfy fleet program qualification or dependency. |
| auxData8 | string(50) | A client-defined custom field. | Not required but may be needed to satisfy fleet program qualification or dependency. |
| auxData9 | string(50) | A client-defined custom field. | Not required but may be needed to satisfy fleet program qualification or dependency. |
| auxData10 | string(50) | A client-defined custom field. | Not required but may be needed to satisfy fleet program qualification or dependency. |
| auxData11 | string(50) | A client-defined custom field. | Not required but may be needed to satisfy fleet program qualification or dependency. |
| auxData12 | string(50) | A client-defined custom field. | Not required but may be needed to satisfy fleet program qualification or dependency. |
| auxData13 | string(50) | A client-defined custom field. | Not required but may be needed to satisfy fleet program qualification or dependency. |

| | | | |
|---|---|---|---|
| auxData14 | string(50) | A client-defined custom field. | Not required but may be needed to satisfy fleet program qualification or dependency. |
| auxDate1 | string(mm/dd/yyyy) | A client-defined custom field. | Not required but may be needed to satisfy fleet program qualification or dependency. |
| auxDate2 | string(mm/dd/yyyy) | A client-defined custom field. | Not required but may be needed to satisfy fleet program qualification or dependency. |
| auxDate3 | string(mm/dd/yyyy) | A client-defined custom field. | Not required but may be needed to satisfy fleet program qualification or dependency. |
| auxDate4 | string(mm/dd/yyyy) | A client-defined custom field. | Not required but may be needed to satisfy fleet program qualification or dependency. |
| firstName | string(20) | Vehicle contact. | **Add: REQUIRED** |
| lastName | string(30) | Vehicle contact. | **Add: REQUIRED** |
| email | string(50) | Vehicle contact email. | Not required but may be needed to satisfy fleet program qualification or dependency. |
| cellPhone | string(10)<br>Format: ########## | Vehicle contact phone number. | Not required but may be needed to satisfy fleet program qualification or dependency. |
| workPhone | string(10)<br>Format: ########## | Vehicle contact phone number. | |
| workPhoneExtension | string(6)<br>Format: ########## | Vehicle contact phone number. | |
| homePhone | string(10)<br>Format: ########## | Vehicle contact phone number. | |
| addressLine1 | string(40) | Physical address where the vehicle is domiciled. | **Add: REQUIRED**<br><br>**Update:** Only **required** with change to city, stateProvince or zipPostalCode. |
| addressLine2 | string(40) | Physical address where the vehicle is domiciled. | |
| addressLine3 | string(40) | Physical address where the vehicle is domiciled. | |
| city | string(40) | Physical address where the vehicle is domiciled.<br>Validation will check whether the city, stateProvince and zipPostalCode combination is valid. | **Add: REQUIRED**<br><br>**Update:** Only **required** with change to addressLine1, stateProvince or zipPostalCode. |
| stateProvince | string(2) | Physical address where the vehicle is domiciled.<br>Validation will check whether the city, stateProvince and zipPostalCode combination is valid.<br>Length must = 2 | **Add: REQUIRED**<br>**Update:** Only **required** with change to addressLine1, city or zipPostalCode. |
| zipPostalCode | string(10) | Physical address where the vehicle is domiciled.<br>Validation will check whether the city, stateProvince and zipPostalCode combination is valid. | **Add: REQUIRED**<br>**Update:** Only **required** with change to addressLine1, city or stateProvince. |

| | | | |
|---|---|---|---|
| county | string(45) | Physical address where the vehicle is located (applicable to US vehicles only).<br>Used to validate address (where zipPostalCode exists in more than one city).<br>If not provided Holman will assume an applicable default. | |
| modelYear | string(4) | Vehicle Model Year as defined by the client. There is no limit to how old a vehicle can be for maintaining inventory.<br>Length must = 4<br><br>For vehicles where assetType in ('CAR', 'SUV', 'VAN', 'TRUCK LD') Holman will overwrite this information with the VIN Decoded value to help ensure data integrity. | **Add: REQUIRED** |
| makeClient | string(20) | Vehicle Make as defined by the client. Please refer to the "Make Description" sheet in the Reference Lists workbook.<br>For vehicles where assetType in ('CAR', 'SUV', 'VAN', 'TRUCK LD') Holman will overwrite this information with the VIN Decoded value to help ensure data integrity. | **Add: REQUIRED** |
| modelClient | string(20) | Vehicle Model Name as defined by the client.<br>For vehicles where assetType in ('CAR', 'SUV', 'VAN', 'TRUCK LD') Holman will overwrite this information with the VIN Decoded value to help ensure data integrity. | **Add: REQUIRED** |
| driveline | string(100) | i.e., 4x2, 4x4 | |
| series | string(100) | i.e., 1500, 2500HD | |
| fuelTypeCode | string(2) | Fuel Type of the vehicle as defined by the client.<br>Must provide valid Holman code. Please refer to the "Fuel Type Code" sheet in the Reference Lists workbook.<br>Length must = 2 | **Required** if providing fuelMeasureType and fuelCapacity. |
| fuelCapacity | number(6,1) | Fuel tank capacity. Measured in gallons for US assets and litres for Canadian assets. | **Required** if providing fuelTypeCode and fuelMeasureType. |
| fuelMeasureType | string(1) | Fuel unit of measure.<br>Liters = L Gallons = G | **Required** if providing fuelTypeCode and fuelCapacity. |
| odometer | string(7) | Current odometer reading for vehicle. | **Required** when providing odometerDate. |
| odometerDate | string(mm/dd/yyyy) | Current odometer reading date. | **Required** when providing odometer. |
| hourMeter | string(6) | Current hour meter on the vehicle. | **Required** when providing hourMeterDate. |
| hourMeterDate | string(mm/dd/yyyy) | Current hour meter date. | **Required** when providing hourMeter. |
| licensePlate | string(10) | License plate<br>This field will not be accepted if vehicle is on Holman's Licensing program. | |
| tagStateProvince | string(2) | State/province where the vehicle is registered for licensing purposes.<br>This field will not be accepted if vehicle is on Holman's Licensing program.<br>Length must = 2 | |

| | | | |
|---|---|---|---|
| plateType | string(3) | License plate classification.<br>Please refer to the "Plate Type" sheet in the Reference Lists workbook.<br><br>This field will not be accepted if vehicle is on Holman's Licensing program.<br>Length must = 3 | |
| renewalDate | string(mm/dd/yyyy) | Renewal date for the license plate.<br>This field will not be accepted if vehicle is on Holman's Licensing program.<br><br>Must be > Today & < Today +5 Years | |
| assetType | string(10) | Vehicle classification.<br>Please refer to the "Asset Type and Asset Sub-Type" sheet in the Reference Lists workbook. | **Add: REQUIRED** |
| assetSubtype | string(25) | Secondary vehicle classification that is dependent on the chosen assetType.<br>Please refer to the "Asset Type and Asset Sub-Type" sheet in the Reference Lists workbook. | |
| deliveryDate | string(mm/dd/yyyy) | Date the vehicle was delivered to the contact.<br>Must be <= Today.<br>Cannot accept future dates.<br><br>Cannot be updated on Holman owned vehicle (vendorCode = ARI). | **Add: REQUIRED**<br>This will put the vehicle into Active status. |
| onRoadDate | string(mm/dd/yyyy) | Date the vehicle is put on the road.<br>Must be <= Today.<br>Cannot accept future dates. | |
| outOfServiceDate | string(mm/dd/yyyy) | Date the vehicle was taken out of use.<br>Must be <= Today.<br>Cannot accept future dates. | This will put the vehicle into Out of Service status. |
| soldDate | string(mm/dd/yyyy) | Date the vehicle was sold.<br><br>Must be <= Today.<br>Cannot accept future dates.<br><br>Cannot be updated on a Holman owned asset (vendorCode = ARI).<br><br>Can only be updated for a vehicle in active or out of service status. | This will put the vehicle into Sold status. |
| soldAmount | number(9,2) | Final sale amount for the vehicle.<br>Cannot be updated on a Holman owned asset (vendorCode = ARI). | |
| saleOdometer | string(6) | Odometer reading for the vehicle at the time it was sold.<br>Cannot be updated on a Holman owned asset (vendorCode = ARI). | |
| capCost | number(9,2) | Vehicle's full purchase price.<br><br>Cannot be updated on Holman owned vehicle (vendorCode = ARI). | |
| gvw | integer(6) | Gross Vehicle Weight. | |

| | | | |
|---|---|---|---|
| | | Maximum amount specified by the vehicle manufacturer for the total weight of the vehicle and any cargo including people. | |
| gcwr | integer(6) | Gross Combined Vehicle Weight. Maximum total weight of the vehicle and trailer attached. | |
| curbWeight | string(6) | Curb weight. The current total vehicle weight with all fluids and normal operating gear without passengers or cargo.<br>Cannot be greater than 100,000 | |
| registeredVehicleWeight | string(6) | Registered Vehicle Weight. The weight of the vehicle's Motor Vehicle registration.<br>Cannot be greater than 120,000 | |
| vendorCode | string(30) | Vehicle owner<br>Please refer to the "Vendor" sheet in the Reference Lists workbook. | **Add: REQUIRED** |
| leaseTerm | integer(3) | The number of months for the vehicle's lease.<br>Cannot be updated on Holman owned vehicle (vendorCode = ARI). | |
| remainingBookValue | number(9,2) | Current book value remaining on the vehicle.<br>Cannot be updated on Holman owned vehicle (vendorCode = ARI). | |
| telematicsDeviceId | string(30) | A unique number assigned to each telematics device by the vendor.<br>Cannot be updated on vehicles in sold status. | **Required** when submitting telematicsDeviceModel and telematicsDeviceVendor. |
| telematicsDeviceModel | string(30) | i.e., GoPro<br>Cannot be updated on vehicles in sold status. | **Required** when submitting telematicsDeviceId and telematicsDeviceVendor. |
| telematicsDeviceVendor | string(50) | i.e., Geotab<br><br>Cannot be updated on vehicles in sold status. | **Required** when submitting telematicsDeviceId and telematicsDeviceModel. |
| Fringe Program Object | | | |
| fringeHireDate | string(mm/dd/yyyy) | Used if adding a vehicle to Fringe program. | **Required** for Fringe program additions when excludeFromFringe = 'N' |
| fringeTermDate | string(mm/dd/yyyy) | Used if terminating vehicle from Fringe program. | **Required** for Fringe vehicle terminations |
| excludeFromFringe | string(1) | Allows records to be excluded from Fringe; defaults to "N" for no. | Required for Fringe |

*JSON Sample*


```
[
  {
    "lesseeCode": "9010",
    "holmanVehicleNumber": "123456",
    "clientVehicleNumber": "A201201",
    "vin": "11111111111111111",
    "prefix": "1234",
    "division": "01",
    "firstName": "Jane",
    "lastName": "Doe",
    "addressLine1": "4001 Leadenhall Rd",
    "addressLine2": "SUITE 100",
    "city": "MOUNT LAUREL",
    "stateProvince": "NJ",
    "zipPostalCode": "08054",
    "assetType": "TRUCK LD",
    "assetSubType": "1/2 TON",
    "vendorCode": "OTH",
    "clientData1": "WESTERN",
    "clientData2": "",
    "clientData3": "TEST",
    "clientData4": "",
    "clientData5": "",
    "clientData6": "",
    "clientData7": "",
    "auxData3": "TEST",
    "auxData4": "NAME@COMPANYABC.COM",
    "auxData5": "",
    "auxData8": "",
    "auxData9": "",
    "modelYear": "2024",
    "makeClient": "FORD",
    "modelClient": "F150",
    "deliveryDate": "01/15/2025",
    "soldAmount": 0.0,
    "gvw": 0,
    "fuelTypeCode": "31",
    "fuelCapacity": 0.0,
    "fuelMeasureType": "G"
  }
]
```