Introduction to Flask

Class Objectives

By the end of today's class you will be able to:
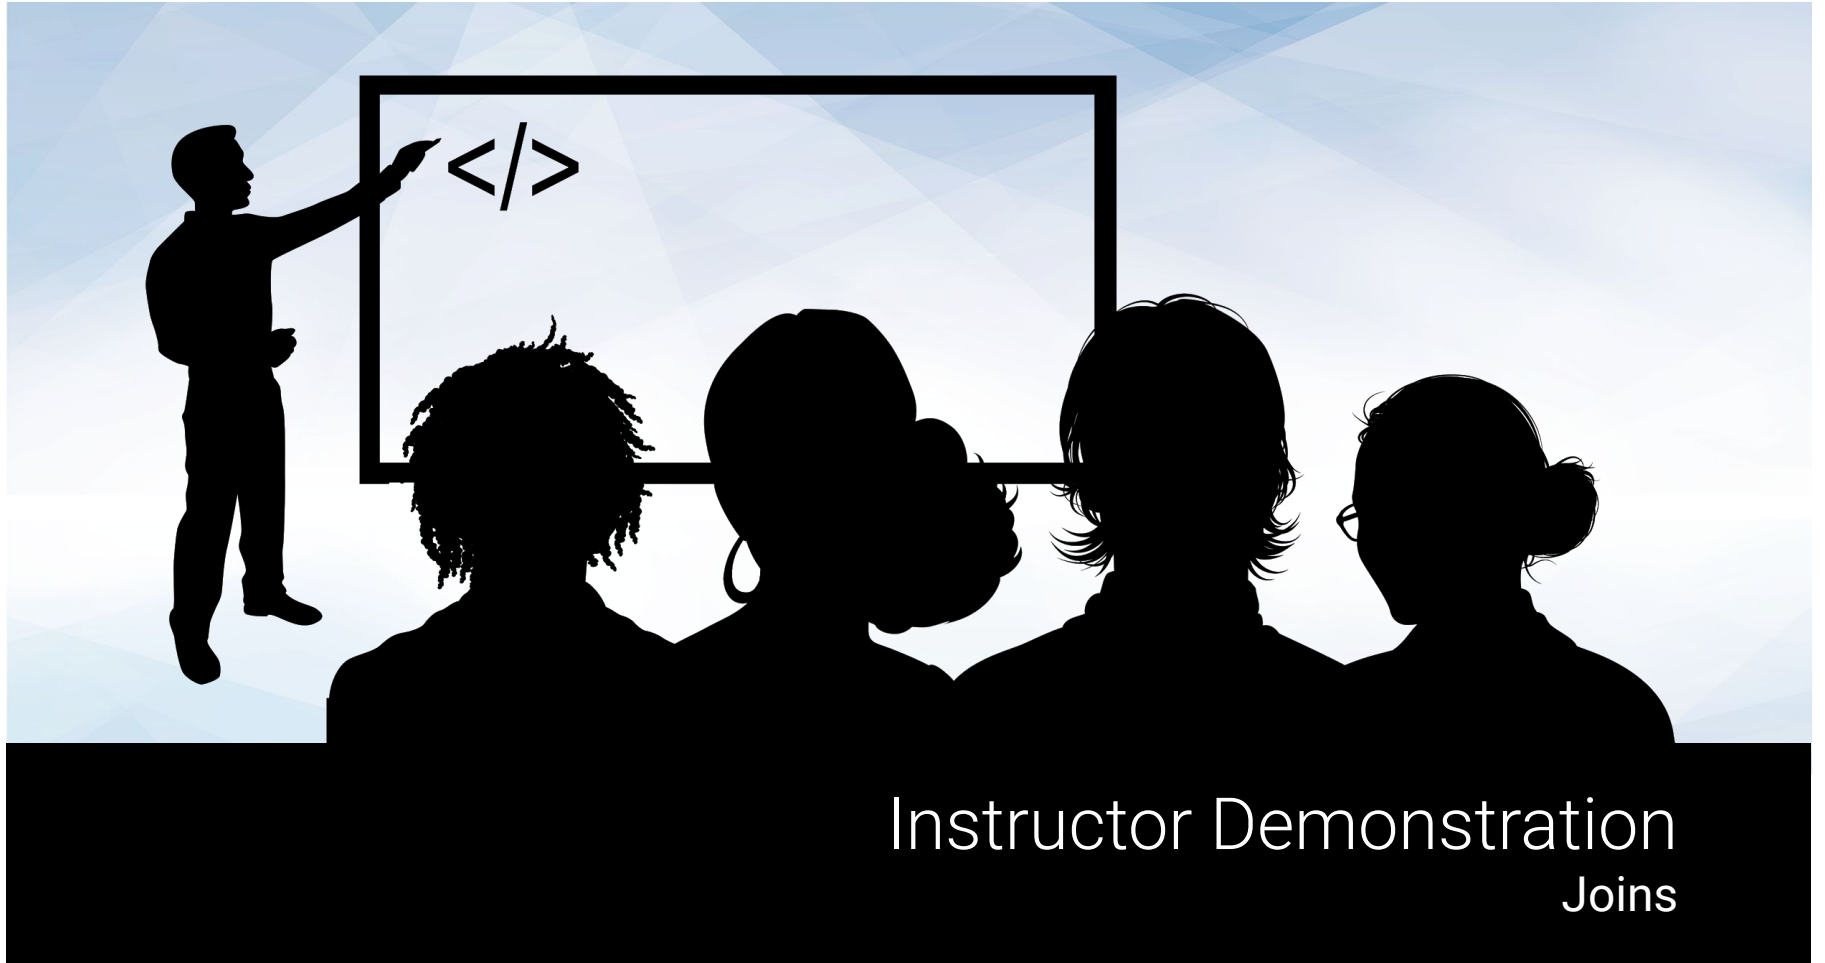
Create and run a Flask server.

Create static query endpoints in Flask.

Execute dynamic database queries with Flask.

Return API query results in JSON.

Instructor Demonstration
Joins

Joins in **SQLAlchemy** are very similar to joins in **Pandas**!

SQLAlchemy Joining Tables Step-By-Step

01   Use inspect(engine).get_table_names() to find table names in the database

02   Use inspect(engine).get_columns(table) to get the column names

03   Create a list of all table columns you wish to keep

04   Use .filter() to describe what columns to join on

<Time to Code>

Instructor Demonstration
Dates

Times and dates are bit trickier than integers or decimals

- Throughout all programming
- In some cases we may need to do conversions
  to add or subtract time
    - Days, months, years to seconds
    - Then convert everything back!
- Many ways to annotate a date
    - 10/21/2020
    - 21/10/2020
    - 21Oct2020
    - October 21, 2020
- Python libraries like `datetime` makes things easier!

Datetime and SQLAlchemy work well together!

- Dates and times can be stored in many ways
  - Datetime objects
  - Strings
  - Integers (number of seconds)
- It could be difficult to compare, or query for a specific date/time
- Python's `datetime` library helps make dates and times easier

```python
# Query for the Dow closing price for `CSCO`
# 1 week before `2011-04-08` using the datetime library
query_date = dt.date(2011, 4, 8) - dt.timedelta(days=7)
print("Query Date: ", query_date)
```

```
Query Date:  2011-04-01
```

```python
session.query(Dow.date, Dow.close_price).\
    filter(Dow.stock == 'CSCO').\
    filter(Dow.date == query_date).all()
```

```
[('2011-04-01', 17.04)]
```

<Time to Code>

Activity: Dates

In this activity, you will practice working with dates, both in SQLAlchemy and with the `datetime` library.

Suggested Time:
15 Minutes

Dates Instructions

- Use the dow.sqlite dataset provided to analyze the average stock prices (average open, average high, average low, average close) for all stocks in the Month of May

- Plot the results as a Pandas or Matplotlib Bar Chart

Bonus:

- Calculate the high-low peak-to-peak (PTP) values for IBM stock after 2011-05-31.
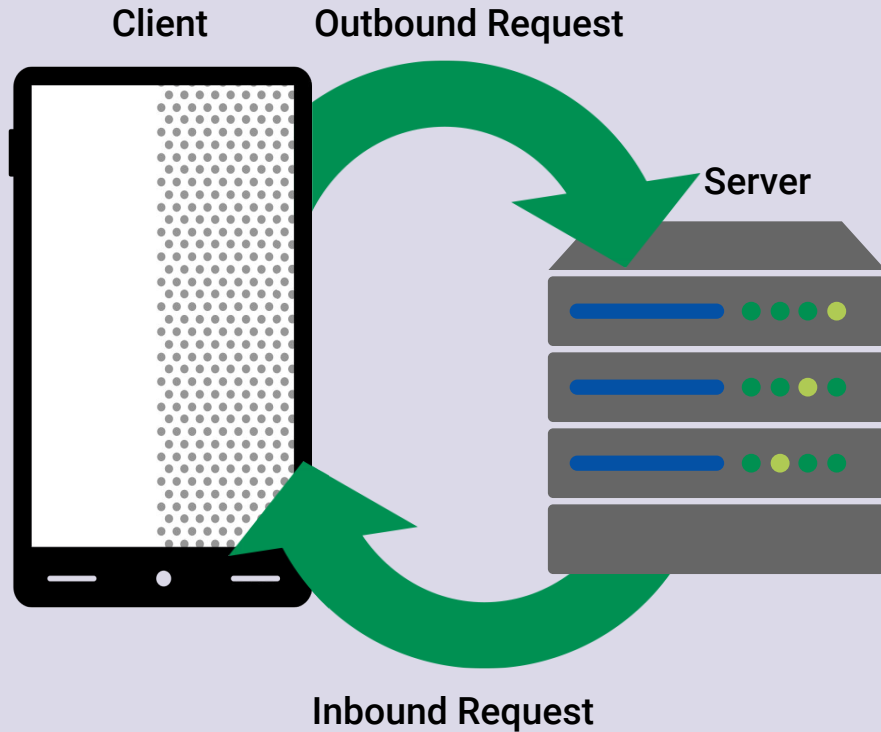
Time's Up! Let's Review.

Instructor Demonstration
Introduction to Flask

# Internet is Built from Clients and Servers

Client   **Outbound Request**
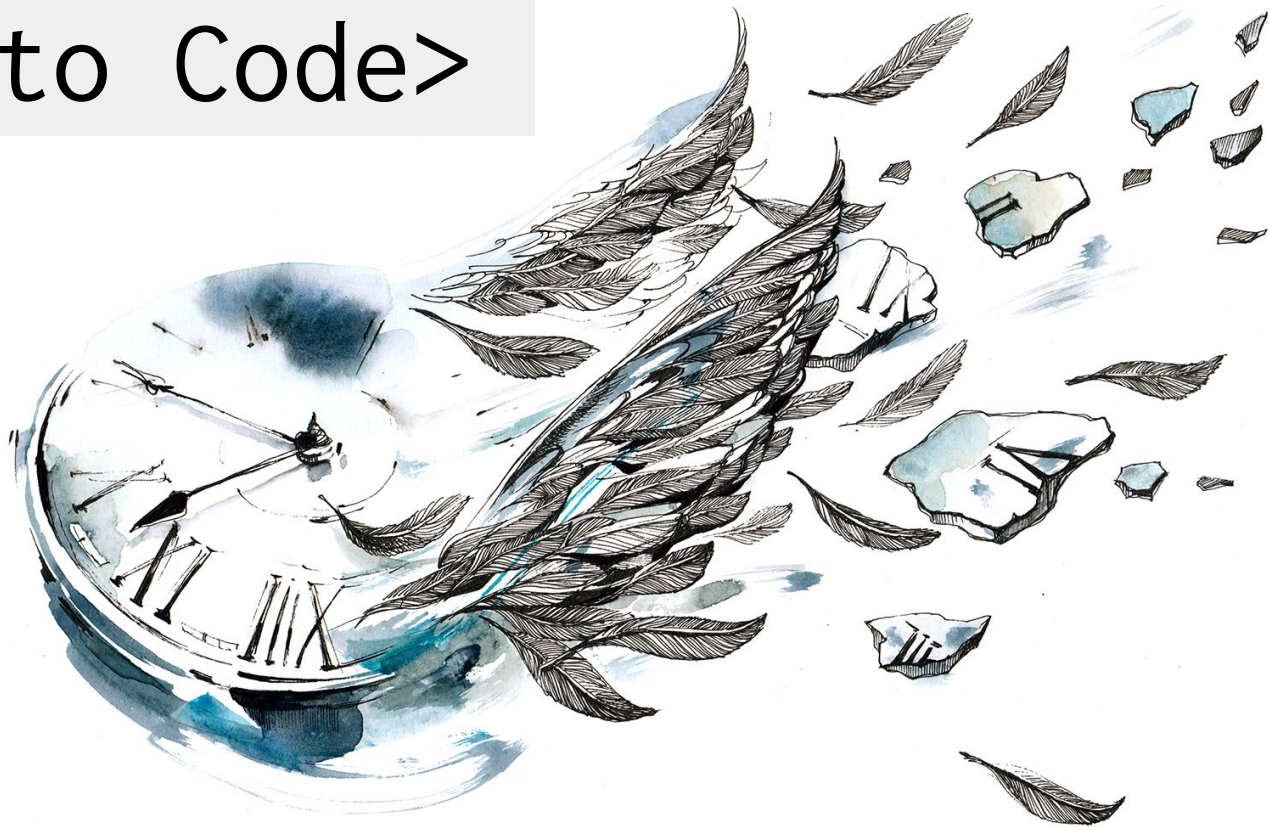
Server

Inbound Request

- Whatever application or device that is asking for information is called a "client"
  - A browser makes request on behalf of a user
- A "server" is a process running on a remote machine listening for requests
  - A server is essentially a *program*
- We can write the code that runs a server
  - We can determine what data is displayed
  - We can determine what data is shared

Flask is a micro web framework...
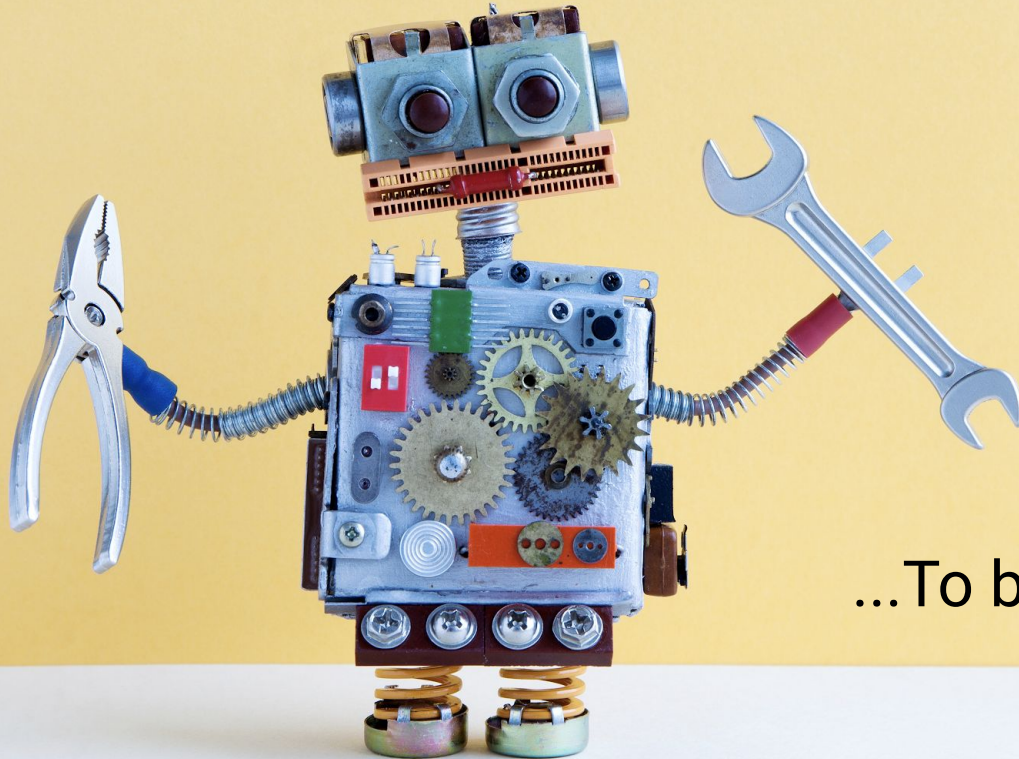
...To build **your** own APIs!

<Time to Code>

Activity: Hello, Web

In this activity, you will create your first Flask server with a few endpoints.

Hello, Web Instructions

- Create an `app.py`, and make the necessary imports.

- Use Flask to create an `app` instance.

- Use route decorators to define the endpoints described in the `README.md`

- Finally, add code at the bottom of the file that allows you to run the server from the command line with: `python app.py`.
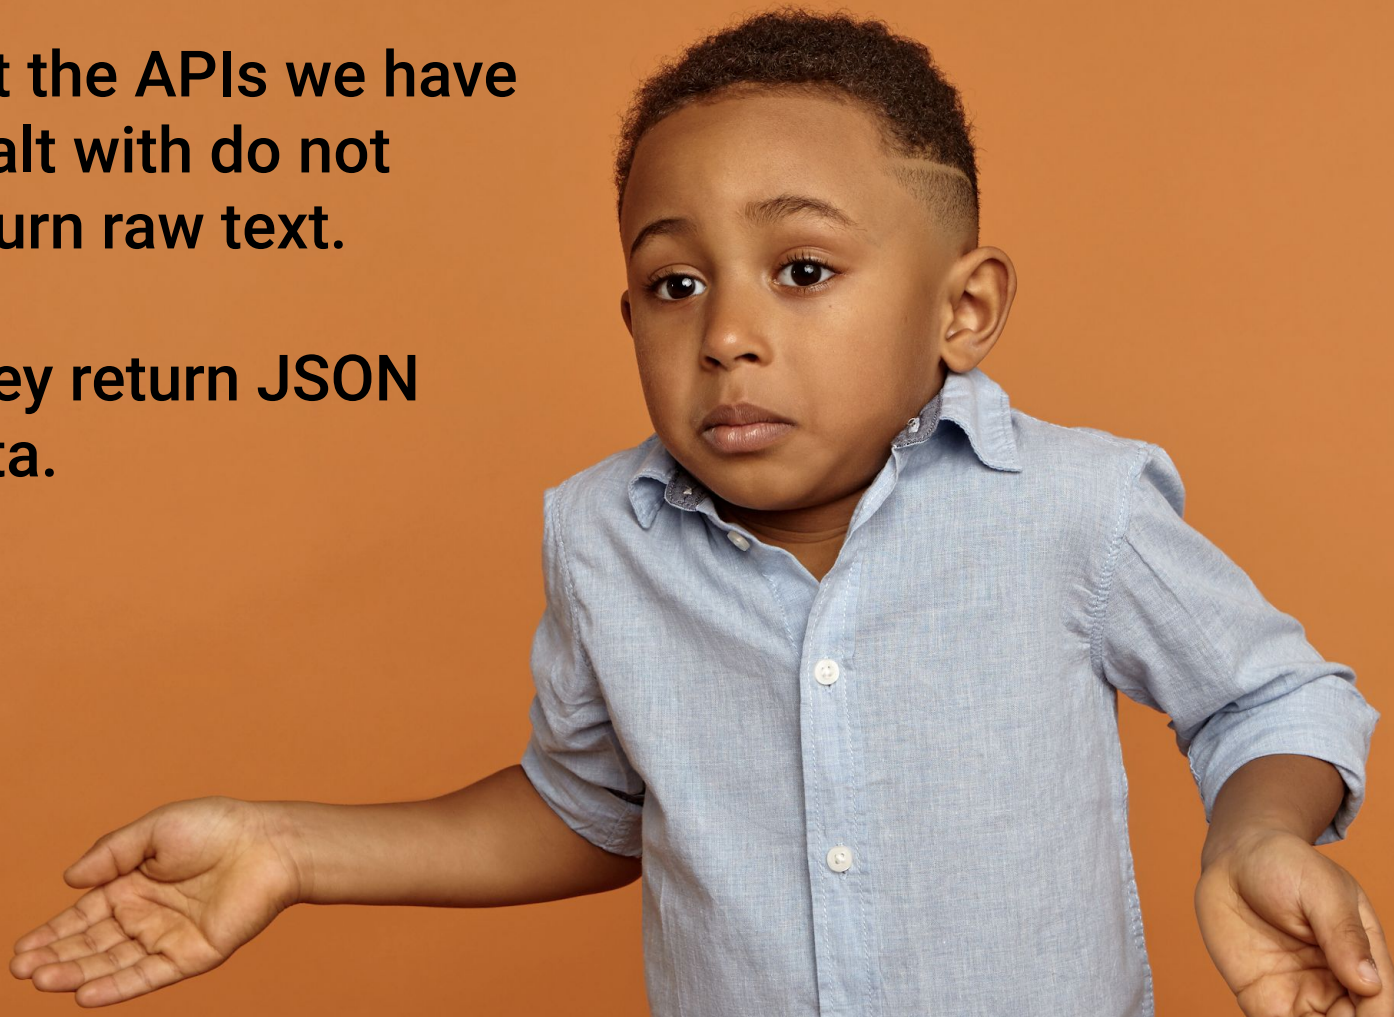
Time's Up! Let's Review.

Instructor Demonstration

JSON APIs with jsonify

All routes so far have returned *string* responses.

But the APIs we have dealt with do not return raw text.

They return JSON data.

Flask has a function to create JSON responses

- We cannot simply return a dictionary response directly through Python
  - Routes must return HTTP responses
- jsonify automatically converts Python dictionaries into JSON responses
  - The converted JSON responses are wrapped in HTTP to send back to the client

```python
from flask import Flask, jsonify


app = Flask(__name__)

hello_dict = {"Hello": "World!"}


@app.route("/")
def home():
    return "Hi"


@app.route("/normal")
def normal():
    return hello_dict


@app.route("/jsonified")
def jsonified():
    return jsonify(hello_dict)
```

<Time to Code>

Activity: Justice League

In this activity, you will create a server that sends welcome text at one endpoint, and JSON data at another endpoint.

Suggested Time:
20 Minutes

Justice League Instructions

- Create a file called app.py for your Flask app.

- Define a Python dictionary containing the superhero name and real name for each member of the DC Comics Justice League

- Create a **GET** route called /api/v1.0/justice-league.

- Define a root route / that will return the usage statement for your API.

Time's Up! Let's Review.

Instructor Demonstration
Routes with Variable Paths

Our current API is one-dimensional

- Our current API can only return the *entire* Justice League dataset
- Ideally clients can send a request for a character and expect
    - A JSON response with only specific character information
    - A detailed error response

<Time to Code>

Activity: Routes with Variable Rules

In this activity, you will add an additional API route that returns a JSON containing an individual superheroes information.

Routes with Variable Rules

- Using the last activity as a starting point, add code to allow for getting a specific hero's information based on their superhero name.

Time's Up! Let's Review.

Instructor Demonstration
Flask with ORM

It is time to put all of the pieces together!

Flask and SQLAlchemy

- A useful API will enable the client to make requests and queries on *massive* datasets

    - Potentially too large to load into memory

- SQLAlchemy can be used to perform queries based on a flask route

- Convert the query into a dictionary, then into a JSON with `jsonify`

- Return the JSON query to the endpoint

<Time to Code>

Activity: Chinook Database Analysis

In this activity, you will practice analyzing databases using the SQLAlchemy ORM.

Suggested Time:
20 Minutes

Chinook Database Analysis Instructions

- Create a SQLAlchemy engine to the database chinook.sqlite.

- Design a query that lists all of the billing countries found in the invoices table.

- Design a query that lists the invoices totals for each billing country and sort the output in descending order.

- Design a query that lists all of the Billing Postal Codes for the USA.

- Calculate the invoice items totals sum(UnitPrice * Quantity) for each Billing Postal Code for the USA.

Time's Up! Let's Review.