

Data 621 Homework 3: Insurance

Tommy Jenkins, Violeta Stoyanova, Todd Weigel, Peter Kowalchuk, Eleanor R-Secoquian, Anthony Pagan

November 6, 2019

OVERVIEW

In this homework assignment, you will explore, analyze and model a data set containing approximately 8000 records representing a customer at an auto insurance company. Each record has two response variables. The first response variable, TARGET_FLAG, is a 1 or a 0. A “1” means that the person was in a car crash. A zero means that the person was not in a car crash. The second response variable is TARGET_AMT. This value is zero if the person did not crash their car. But if they did crash their car, this number will be a value greater than zero representing the cost of the crash.

Objective:

Your objective is to build multiple linear regression and binary logistic regression models on the training data to predict the probability that a person will crash their car and also the amount of money it will cost if the person does crash their car.

DATA EXPLORATION

Data Summary

The dataset consists of two data files: training and evaluation. The training dataset contains 26 columns, while the evaluation dataset contains 24. The evaluation dataset is missing columns TARGET_FLAG, TARGET_AMT which represent our response variables, respectively whether the person was in a car crash and the cost of the car crash if the person was in an accident. We will start by exploring the training data set since it will be the one used to generate the models.

The columns in the data set are:

VARIABLE NAME	DEFINITION	THEORETICAL EFFECT
INDEX	Identification Variable (do not use)	None
TARGET_FLAG	Was Car in a crash? 1=YES 0=NO	None
TARGET_AMT	If car was in a crash, what was the cost	None
AGE	Age of Driver	Very young people tend to be risky. Maybe very old people also.
BLUEBOOK	Value of Vehicle	Unknown effect on probability of collision, but probably effect the payout if there is a crash
CAR_AGE	Vehicle Age	Unknown effect on probability of collision, but probably effect the payout if there is a crash
CAR_TYPE	Type of Car	Unknown effect on probability of collision, but probably effect the payout if there is a crash
CAR_USE	Vehicle Use	Commercial vehicles are driven more, so might increase probability of collision
CLM_FREQ	# Claims (Past 5 Years)	The more claims you filed in the past, the more you are likely to file in the future
EDUCATION	Max Education Level	Unknown effect, but in theory more educated people tend to drive more safely
HOMEKIDS	# Children at Home	Unknown effect
HOME_VAL	Home Value	In theory, home owners tend to drive more responsibly
INCOME	Income	In theory, rich people tend to get into fewer crashes
JOB	Job Category	In theory, white collar jobs tend to be safer
KIDSDRV	# Driving Children	When teenagers drive your car, you are more likely to get into crashes
MSTATUS	Marital Status	In theory, married people drive more safely
MVR PTS	Motor Vehicle Record Points	If you get lots of traffic tickets, you tend to get into more crashes
OLDCLAIM	Total Claims (Past 5 Years)	If your total payout over the past five years was high, this suggests future payouts will be high
PARENT1	Single Parent	Unknown effect
RED_CAR	A Red Car	Urban legend says that red cars (especially red sports cars) are more risky. Is that true?
REVOKE	License Revoked (Past 7 Years)	If your license was revoked in the past 7 years, you probably are a more risky driver.
SEX	Gender	Urban legend says that women have less crashes than men. Is that true?
TIF	Time in Force	People who have been customers for a long time are usually more safe.
TRAVTIME	Distance to Work	Long drives to work usually suggest greater risk
URBANICITY	Home/Work Area	Unknown
YOJ	Years on Job	People who stay at a job for a long time are usually more safe

Missing Data

An important aspect of any dataset is to determine how much, if any, data is missing. We look at all the variables to see which if any have missing data. We look at the basic descriptive statistics as well as the missing data and percentages.


We start by looking at the dataset as a whole and determine how many complete rows, that is rows with data for all predictors, do we have.

```
##      Mode    FALSE     TRUE
## logical    2116    6045
```


With these results, if we remove all rows with incomplete rows, there will be a total of 6045 rows out of 8161 .If we eliminate all non-complete rows and keep only rows with data for all the predictors in the dataset, our new dataset will results in 74% of the total dataset. We create a subset of data with complete cases only to use later in our analysis.

```
## Observations: 6,045
## Variables: 26
## $ INDEX      <int> 1, 2, 4, 7, 12, 13, 14, 15, 16, 19, 20, 22, 23, 24...
## $ TARGET_FLAG <int> 0, 0, 0, 1, 1, 0, 1, 0, 0, 1, 0, 0, 0, 0, 1, 0, 0, ...
## $ TARGET_AMT  <dbl> 0.000, 0.000, 0.000, 2946.000, 2501.000, 0.000, 60...
## $ KIDSDRV     <int> 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, ...
## $ AGE          <int> 60, 43, 35, 34, 34, 50, 53, 43, 55, 45, 39, 42, 34...
## $ HOMEKIDS    <int> 0, 0, 1, 1, 0, 0, 0, 0, 0, 3, 0, 3, 2, 1, 0, 0, ...
## $ YOJ          <int> 11, 11, 10, 12, 10, 7, 14, 5, 11, 0, 12, 11, 13, 1...
## $ INCOME        <fct> "$67,349", "$91,449", "$16,039", "$125,301", "$62,...
## $ PARENT1      <fct> No, No, No, Yes, No, No, No, No, No, Yes, No, ...
## $ HOME_VAL     <fct> "$0", "$257,252", "$124,191", "$0", "$0", "$...
## $ MSTATUS       <fct> z_No, z_No, Yes, z_No, z_No, z_No, Yes, Yes, ...
## $ SEX           <fct> M, M, z_F, z_F, z_F, M, z_F, z_F, M, z_F, ...
## $ EDUCATION     <fct> PhD, z_High School, z_High School, Bachelors, Bach...
## $ JOB           <fct> Professional, z_Blue Collar, Clerical, z_Blue Coll...
## $ TRAVTIME      <int> 14, 22, 5, 46, 34, 48, 15, 36, 25, 48, 43, 42, 27, ...
## $ CAR_USE        <fct> Private, Commercial, Private, Commercial, Private, ...
## $ BLUEBOOK      <fct> "$14,230", "$14,940", "$4,010", "$17,430", "$11,20...
## $ TIF           <int> 11, 1, 4, 1, 1, 7, 1, 7, 7, 1, 6, 6, 7, 4, 6, 6, 1...
## $ CAR_TYPE       <fct> Minivan, Minivan, z_SUV, Sports Car, z_SUV, Van, S...
## $ RED_CAR        <fct> yes, yes, no, no, no, no, yes, no, no, no, ...
## $ OLDCLAIM      <fct> "$4,461", "$0", "$38,690", "$0", "$0", "$0", ...
## $ CLM_FREQ       <int> 2, 0, 2, 0, 0, 0, 0, 2, 0, 0, 0, 0, 0, 2, 1, 0, ...
## $ REVOKED        <fct> No, No, No, No, No, No, Yes, No, No, No, N...
## $ MVR_PTS        <int> 3, 0, 3, 0, 0, 1, 0, 0, 3, 3, 0, 0, 0, 0, 5, 1, ...
## $ CAR_AGE        <int> 18, 1, 10, 7, 1, 17, 11, 1, 9, 5, 13, 16, 20, 7, 1...
## $ URBANICITY    <fct> Highly Urban/ Urban, Highly Urban/ Urban, Highly U...
```

But we can also look at what specific predictors are missing in our dataset. If we do this we can see how there is much more data available, as we find only 5 predictors with missing data. Data missing for these predictors also only accounts for less than 7% of the respective predictors total.

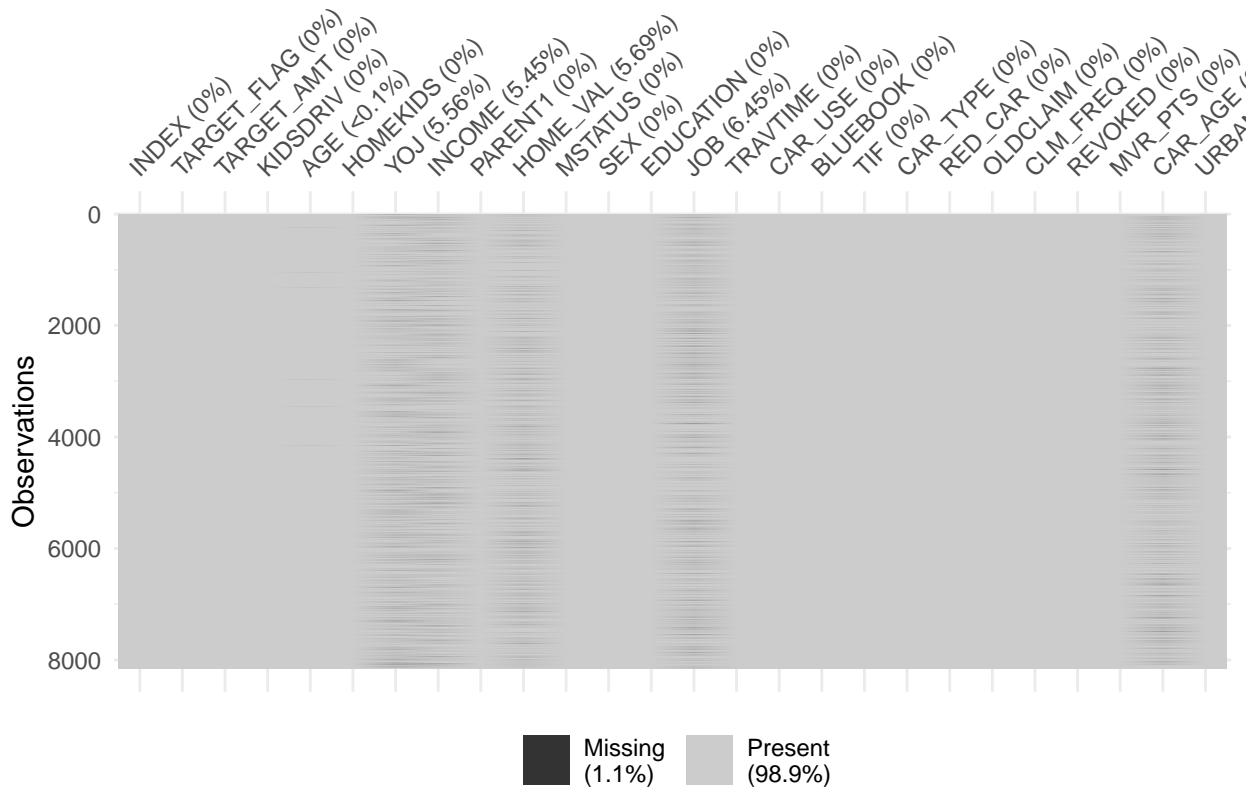

We look closer at the missing data and look at the intersection of predictors with missing data. We find that the bulk of the missing data is for predictors with no intersection with other missing predictor data.

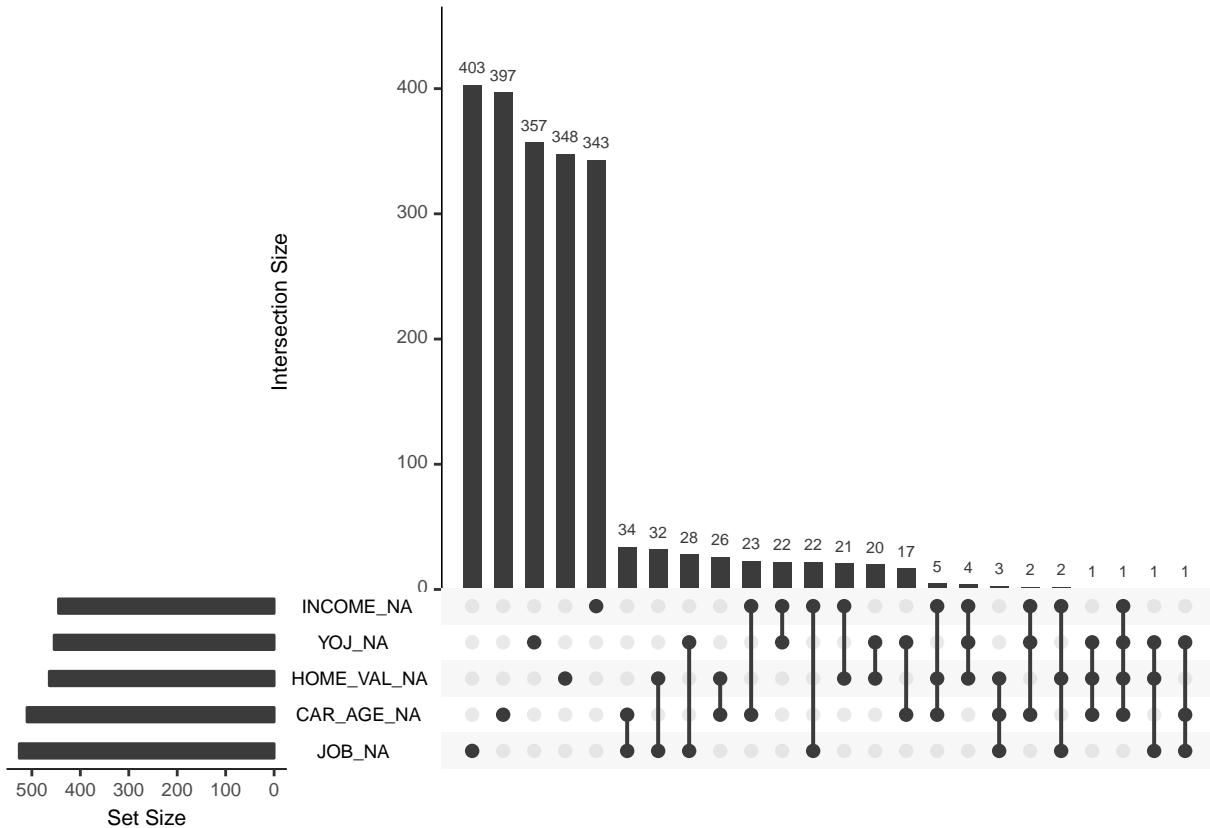

Having this detail in missing data might be of importance when looking at models. In the next Data Preparation section we will handle these missing cases and build a data set with data for all predictors in all rows.

Data Exploration

Using TARGET_FLAG as response variables we confirm when TARGET_FLAG is 1 TARGET_AMOUNT >0 and when TARGET_FLAG is 0 when TARGET_AMOUNT = 0

```
nrow(subset(InsTrain,TARGET_FLAG == 0))
```

```
## [1] 6008
```

```
nrow(subset(InsTrain,TARGET_AMT == 0))
```

```
## [1] 6008
```

```
nrow(subset(InsTrain,TARGET_FLAG > 0))
```

```
## [1] 2153
```

```
nrow(subset(InsTrain,TARGET_AMT > 0))
```

```
## [1] 2153
```

A glimpse of the data shows that the following columns should be integers and not Factors:

- INCOME
- HOME_VAL
- BLUEBOOK
- OLDCLAIM
- JOB

We display and view data with all cases and only complete cases

```
## Observations: 8,161
## Variables: 26
## $ INDEX      <int> 1, 2, 4, 5, 6, 7, 8, 11, 12, 13, 14, 15, 16, 17, 1...
## $ TARGET_FLAG <int> 0, 0, 0, 0, 1, 0, 1, 1, 0, 1, 0, 1, 1, 0, 0, ...
## $ TARGET_AMT  <dbl> 0.000, 0.000, 0.000, 0.000, 0.000, 2946.000, 0.000...
## $ KIDSDRV    <int> 0, 0, 0, 0, 0, 0, 1, 0, 0, 0, 0, 0, 0, 0, 0, 0, ...
## $ AGE         <int> 60, 43, 35, 51, 50, 34, 54, 37, 34, 50, 53, 43, 55...
## $ HOMEKIDS   <int> 0, 0, 1, 0, 0, 1, 0, 2, 0, 0, 0, 0, 0, 0, 0, 3, 0, ...
## $ YOJ         <int> 11, 11, 10, 14, NA, 12, NA, NA, 10, 7, 14, 5, 11, ...
## $ INCOME      <fct> "$67,349", "$91,449", "$16,039", NA, "$114,986", ...
## $ PARENT1     <fct> No, No, No, No, No, Yes, No, No, No, No, No, ...
## $ HOME_VAL    <fct> "$0", "$257,252", "$124,191", "$306,251", "$243,92...
## $ MSTATUS     <fct> z_No, z_No, Yes, Yes, Yes, z_No, Yes, Yes, z_No, z...
## $ SEX          <fct> M, M, z_F, M, z_F, z_F, z_F, M, z_F, M, z_F, ...
## $ EDUCATION   <fct> PhD, z_High School, z_High School, <High School, P...
## $ JOB          <fct> Professional, z_Blue Collar, Clerical, z_Blue Coll...
## $ TRAVTIME    <int> 14, 22, 5, 32, 36, 46, 33, 44, 34, 48, 15, 36, 25, ...
## $ CAR_USE     <fct> Private, Commercial, Private, Private, Private, Co...
## $ BLUEBOOK    <fct> "$14,230", "$14,940", "$4,010", "$15,440", "$18,00...
## $ TIF          <int> 11, 1, 4, 7, 1, 1, 1, 1, 7, 1, 7, 7, 6, 1, 6, 6...
## $ CAR_TYPE    <fct> Minivan, Minivan, z_SUV, Minivan, z_SUV, Sports Ca...
## $ RED_CAR     <fct> yes, yes, no, yes, no, no, yes, no, no, no, ...
## $ OLDCLAIM    <fct> "$4,461", "$0", "$38,690", "$0", "$19,217", "$0", ...
## $ CLM_FREQ    <int> 2, 0, 2, 0, 2, 0, 0, 1, 0, 0, 0, 0, 2, 0, 0, 0, 0, ...
```

```

## $ REVOKED      <fct> No, No, No, No, Yes, No, Yes, No, No, No, ...
## $ MVR_PTS      <int> 3, 0, 3, 0, 3, 0, 0, 10, 0, 1, 0, 0, 3, 3, 3, 0, 0...
## $ CAR_AGE      <int> 18, 1, 10, 6, 17, 7, 1, 7, 1, 17, 11, 1, 9, 10, 5, ...
## $ URBANICITY   <fct> Highly Urban/ Urban, Highly Urban/ Urban, Highly U...

```

We use Sapply function to review which columns have NA Values. It display columns and percent of values that are missing.

```

##      INDEX TARGET_FLAG TARGET_AMT KIDSDRIV AGE HOMEKIDS
##      0.0      0.0      0.0      0.0      0.1      0.0
##      YOJ      INCOME   PARENT1  HOME_VAL  MSTATUS  SEX
##      5.6      5.5      0.0      5.7      0.0      0.0
##      EDUCATION  JOB    TRAVTIME  CAR_USE  BLUEBOOK  TIF
##      0.0      6.4      0.0      0.0      0.0      0.0
##      CAR_TYPE  RED_CAR OLDCLAIM  CLM_FREQ  REVOKED  MVR_PTS
##      0.0      0.0      0.0      0.0      0.0      0.0
##      CAR_AGE  URBANICITY
##      6.2      0.0

```

Data Preparation


As revealed earlier there were a list of columns that we factors that should be integers. We start by converting the columns to numeric.

```

## Observations: 8,161
## Variables: 5
## $ INCOME      <fct> "$67,349", "$91,449", "$16,039", NA, "$114,986", "$12...
## $ HOME_VAL    <fct> "$0", "$257,252", "$124,191", "$306,251", "$243,925",...
## $ JOB         <fct> Professional, z_Blue Collar, Clerical, z_Blue Collar, ...
## $ BLUEBOOK    <fct> "$14,230", "$14,940", "$4,010", "$15,440", "$18,000", ...
## $ OLDCLAIM    <fct> "$4,461", "$0", "$38,690", "$0", "$19,217", "$0", "$0...
## Observations: 8,161
## Variables: 5
## $ INCOME      <dbl> 5032, 6291, 1249, NA, 508, 745, 1487, 314, 4764, 281, ...
## $ HOME_VAL    <dbl> 1, 3258, 347, 3916, 3033, 1, NA, 4166, 1, 1, 1, 2261, ...
## $ JOB         <dbl> 6, 8, 1, 8, 2, 8, 8, 1, 6, 4, 6, 5, NA, 3, 1, 4, 4...
## $ BLUEBOOK    <dbl> 434, 503, 2212, 553, 802, 746, 2672, 701, 135, 852, 8...
## $ OLDCLAIM    <dbl> 1449, 1, 1311, 1, 432, 1, 1, 510, 1, 1, 1, 1727, 1...

```

Both boxplot and summary stats with the square root transform of Home_val and Income to confirm we can use median or mean values to replace NA values if we chose.

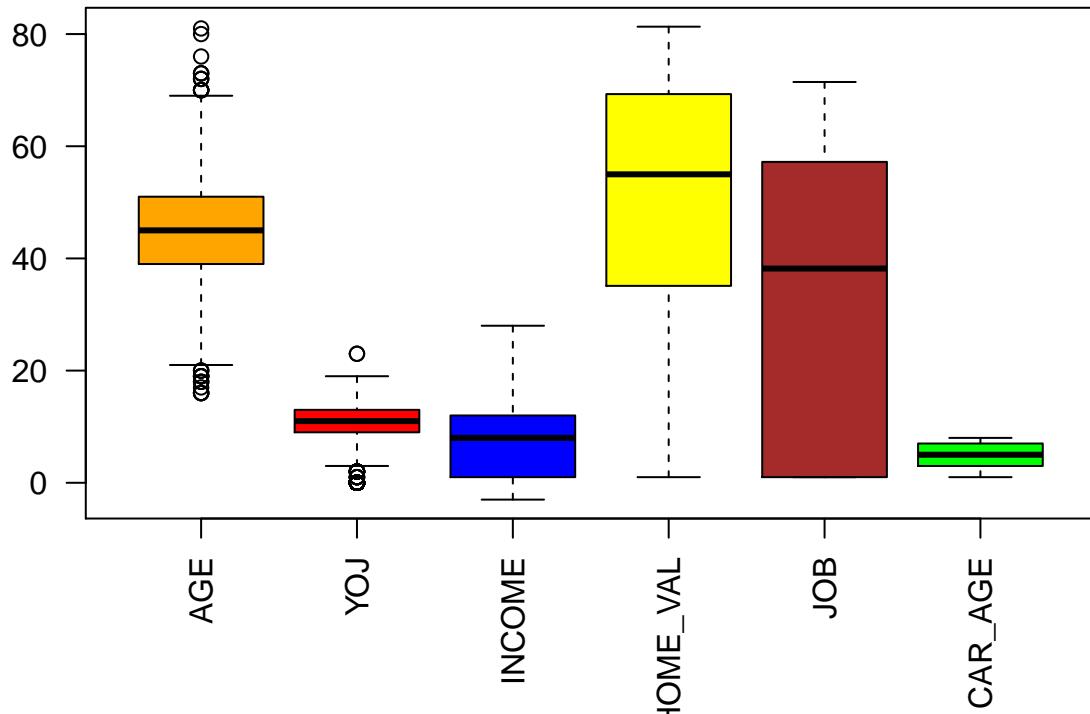

```

##          vars     n    mean      sd median trimmed      mad min  max range
##  AGE      1 8155 44.79  8.63  45.0  44.83  8.90 16  81  65
##  YOJ      2 7707 10.50  4.09  11.0  11.07  2.97  0  23  23
##  INCOME    3 7716 3040.33 2029.52 3024.5 3018.56 2647.18  1 6612 6611
##  HOME_VAL  4 7697 1785.40 1695.15 1459.0 1639.68 2161.63  1 5106 5105
##  JOB      5 7635  5.01   2.46   5.0   5.14   2.97  1   8   7
##  CAR_AGE   6 7651  8.33   5.70   8.0   7.96   7.41 -3  28  31
##          skew kurtosis    se
##  AGE     -0.03  -0.06  0.10
##  YOJ     -1.20   1.18  0.05
##  INCOME    0.04  -1.24 23.10
##  HOME_VAL  0.43  -1.24 19.32
##  JOB     -0.34  -1.16  0.03
##  CAR_AGE   0.28  -0.75  0.07


```

We next replace all NA values with mean values for cases that are missing values and rerun sapply function to confirm there are no longer any missing values.

```

##      INDEX TARGET_FLAG TARGET_AMT KIDSDRV AGE HOMEKIDS
##      0          0        0        0      0        0
##      YOJ        INCOME PARENT1 HOME_VAL MSTATUS SEX
##      0          0        0        0      0        0
##      EDUCATION   JOB    TRAVTIME CAR_USE BLUEBOOK TIF
##      0          0        0        0      0        0
##      CAR_TYPE   RED_CAR OLDCLAIM CLM_FREQ REVOKED MVR_PTS
##      0          0        0        0      0        0
##      CAR_AGE  URBANICITY
##      0          0

```

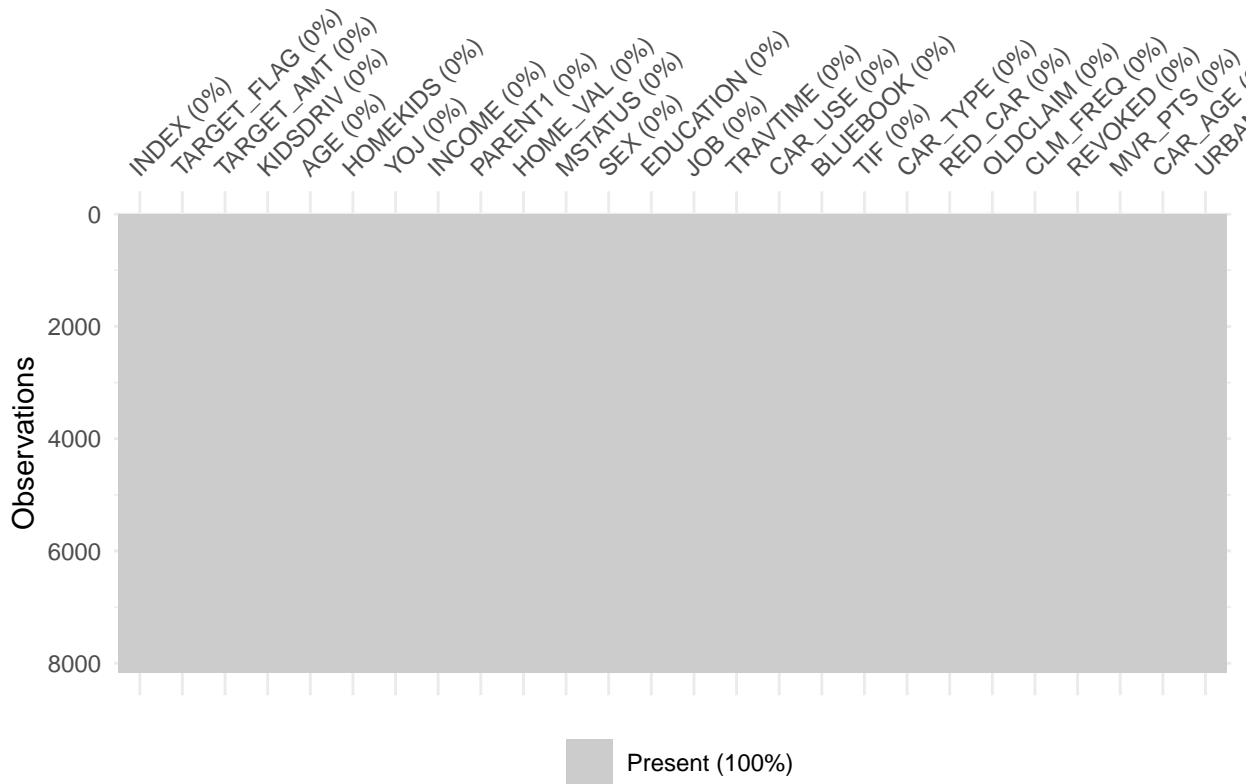

##	vars	n	mean	sd	median	trimmed	mad	min	max	range	
##	AGE	1	8161	44.79	8.62	45.00	44.83	8.90	16	81	65
##	YOJ	2	8161	10.50	3.98	11.00	11.05	2.97	0	23	23
##	INCOME	3	8161	3040.33	1973.41	3040.33	3020.15	2492.74	1	6612	6611
##	HOME_VAL	4	8161	1785.40	1646.25	1680.00	1642.31	2489.29	1	5106	5105
##	JOB	5	8161	5.01	2.38	5.01	5.14	2.95	1	8	7
##	CAR_AGE	6	8161	8.33	5.52	8.33	7.98	5.44	-3	28	31
##				skew	kurtosis	se					
##	AGE	-0.03	-0.06	0.10							
##	YOJ	-1.24	1.42	0.04							
##	INCOME	0.05	-1.14	21.84							
##	HOME_VAL	0.44	-1.14	18.22							
##	JOB	-0.36	-1.03	0.03							
##	CAR_AGE	0.29	-0.60	0.06							

We have this way derived a dataset with no missing values. We can use this set of data for our modeling design. We chose to work with this data as opposed to the first “complete” set in which rows with missing data were eliminated.

Build Model

Modeling design will be divided in two phases. First we will design a model to predict if the person is in a car crash, that is predict TARGET_FLAG. In a second phase, we will predict TARGET_AMT, the cost of the crash.

TARGET_FLAG Modeling

This response variable being binary, 0 or 1, we will be looking at logistic regression models to find a good fit. We will start with a naive model with all the predictors included as a baseline. First approach will be to

simply the model by reducing the predictors used. We will look at several model metrics such as AIC, BIC. We will also include confusion tables and ROC plot to better understand each model.

Model 1: all predictors

We start out with a straightforward logit logistical regression with all predictors included. As a note, we need to make sure we do not include the TARGET_AMT response variable in our model as a predictor.

```
##
## Call:
## glm(formula = TARGET_FLAG ~ . - INDEX - TARGET_AMT, family = binomial(link = "logit"),
##      data = InsTrain)
##
## Deviance Residuals:
##      Min      1Q  Median      3Q      Max
## -2.5922 -0.7276 -0.4209  0.6419  3.1555
##
## Coefficients:
##                               Estimate Std. Error z value Pr(>|z|)
## (Intercept)                -4.709e-01  2.687e-01 -1.753 0.079675 .
## KIDSDRV                     3.641e-01  6.053e-02  6.014 1.81e-09 ***
## AGE                        -4.635e-03  3.910e-03 -1.185 0.235876
## HOMEKIDS                   7.217e-02  3.651e-02  1.977 0.048085 *
## YOJ                        -2.674e-02  7.937e-03 -3.369 0.000755 ***
## INCOME                      -2.314e-05 1.662e-05 -1.392 0.163862
## PARENT1Yes                  3.497e-01  1.082e-01  3.232 0.001229 **
## HOME_VAL                     -9.899e-05 2.047e-05 -4.836 1.33e-06 ***
## MSTATUSz_No                  4.804e-01  7.717e-02  6.226 4.80e-10 ***
## SEXz_F                       -2.579e-01  1.021e-01 -2.526 0.011524 *
## EDUCATIONBachelors           -6.887e-01  1.043e-01 -6.603 4.03e-11 ***
## EDUCATIONMasters              -7.923e-01  1.291e-01 -6.136 8.47e-10 ***
## EDUCATIONPhD                  -1.026e+00 1.545e-01 -6.644 3.06e-11 ***
## EDUCATIONz_High School        -1.118e-01  9.212e-02 -1.214 0.224900
## JOB                          -2.270e-02  1.406e-02 -1.615 0.106418
## TRAVTIME                     1.517e-02  1.868e-03  8.121 4.62e-16 ***
## CAR_USEPrivate                -8.701e-01  8.207e-02 -10.602 < 2e-16 ***
## BLUEBOOK                      2.106e-05  3.344e-05  0.630 0.528975
## TIF                          -5.453e-02  7.276e-03 -7.495 6.63e-14 ***
## CAR_TYPEPanel Truck            6.109e-02  1.364e-01  0.448 0.654173
## CAR_TYPEPickup                 5.281e-01  1.006e-01  5.249 1.53e-07 ***
## CAR_TYPESports Car             1.209e+00  1.217e-01  9.934 < 2e-16 ***
## CAR_TYPEVan                   3.726e-01  1.195e-01  3.119 0.001815 **
## CAR_TYPEz_SUV                  9.618e-01  1.024e-01  9.392 < 2e-16 ***
## RED_CARYes                    1.440e-03  8.558e-02  0.017 0.986572
## OLDCLAIM                      8.744e-05  4.214e-05  2.075 0.037989 *
## CLM_FREQ                      1.161e-01  3.190e-02  3.639 0.000274 ***
## REVOKEDYes                    7.483e-01  7.965e-02  9.395 < 2e-16 ***
## MVR_PTS                       1.101e-01  1.360e-02  8.092 5.86e-16 ***
## CAR_AGE                        -6.893e-04  7.459e-03 -0.092 0.926369
## URBANICITYz_Highly Rural/ Rural -2.281e+00  1.122e-01 -20.331 < 2e-16 ***
##
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## (Dispersion parameter for binomial family taken to be 1)
##
```

```

##      Null deviance: 9418.0  on 8160  degrees of freedom
## Residual deviance: 7422.7  on 8130  degrees of freedom
## AIC: 7484.7
##
## Number of Fisher Scoring iterations: 5

```

From the model's summary itself we see that there are several predictors which are not statistically relevant, which suggests a simpler model should be possible. We build a second model without these the non-significant predictors.

Model 2: reduced predictors

```

##
## Call:
## glm(formula = TARGET_FLAG ~ . - INDEX - TARGET_AMT - AGE - INCOME -
##      JOB - BLUEBOOK - CAR_AGE - RED_CAR, family = binomial(link = "logit"),
##      data = InsTrain)
##
## Deviance Residuals:
##      Min        1Q     Median        3Q       Max
## -2.5683  -0.7296  -0.4221   0.6443   3.1248
##
## Coefficients:
##                               Estimate Std. Error z value Pr(>|z|)
## (Intercept)                -8.370e-01  1.689e-01 -4.956 7.21e-07 ***
## KIDSDRV                    3.478e-01  5.947e-02  5.848 4.98e-09 ***
## HOMEKIDS                   9.384e-02  3.368e-02  2.786 0.005337 **
## YOJ                         -3.225e-02  7.337e-03 -4.395 1.11e-05 ***
## PARENT1Yes                  3.612e-01  1.076e-01  3.356 0.000792 ***
## HOME_VAL                     -1.010e-04  2.051e-05 -4.922 8.55e-07 ***
## MSTATUSz_No                  4.791e-01  7.706e-02  6.217 5.07e-10 ***
## SEXz_F                      -2.465e-01  8.784e-02 -2.806 0.005013 **
## EDUCATIONBachelors          -7.326e-01  9.501e-02 -7.711 1.25e-14 ***
## EDUCATIONMasters              -8.212e-01  1.032e-01 -7.959 1.74e-15 ***
## EDUCATIONPhD                  -1.017e+00  1.336e-01 -7.617 2.61e-14 ***
## EDUCATIONz_High School       -1.251e-01  9.110e-02 -1.373 0.169855
## TRAVTIME                      1.509e-02  1.866e-03  8.088 6.06e-16 ***
## CAR_USEPrivate                -8.044e-01  7.261e-02 -11.077 < 2e-16 ***
## TIF                           -5.426e-02  7.266e-03 -7.469 8.11e-14 ***
## CAR_TYPEPanel Truck           1.241e-01  1.315e-01  0.943 0.345453
## CAR_TYPEPickup                5.717e-01  9.696e-02  5.897 3.71e-09 ***
## CAR_TYPESports Car            1.213e+00  1.201e-01 10.097 < 2e-16 ***
## CAR_TYPEVan                   4.018e-01  1.185e-01  3.390 0.000698 ***
## CAR_TYPEz_SUV                  9.653e-01  1.017e-01  9.495 < 2e-16 ***
## OLDCLAIM                      8.853e-05  4.209e-05  2.103 0.035443 *
## CLM_FREQ                      1.149e-01  3.186e-02  3.606 0.000311 ***
## REVOKEDYes                     7.510e-01  7.960e-02  9.435 < 2e-16 ***
## MVR PTS                      1.104e-01  1.358e-02  8.135 4.12e-16 ***
## URBANICITYz_Highly Rural/ Rural -2.268e+00  1.120e-01 -20.259 < 2e-16 ***
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## (Dispersion parameter for binomial family taken to be 1)
##
## Null deviance: 9418  on 8160  degrees of freedom

```

```

## Residual deviance: 7430 on 8136 degrees of freedom
## AIC: 7480
##
## Number of Fisher Scoring iterations: 5

```

The new model has a slightly higher AIC which would tell us the first model is slightly less complex.

AIC Step Method Model 3

Another way of selecting which predictors to use in the model is by calculating the AIC of the model. This metric is similar to the adjusted R-square of a model in that it penalizes models with more predictors over simpler model with few predictors. We use Stepwise function in r to find the lowest AIC with different predictors.

```

## Start:  AIC=7484.66
## TARGET_FLAG ~ (INDEX + TARGET_AMT + KIDSDRIV + AGE + HOMEKIDS +
##                 YOJ + INCOME + PARENT1 + HOME_VAL + MSTATUS + SEX + EDUCATION +
##                 JOB + TRAVTIME + CAR_USE + BLUEBOOK + TIF + CAR_TYPE + RED_CAR +
##                 OLDCLAIM + CLM_FREQ + REVOKED + MVR_PTS + CAR_AGE + URBANICITY) -
##                 INDEX - TARGET_AMT
##
##              Df Deviance    AIC
## - RED_CAR     1  7422.7 7482.7
## - CAR_AGE     1  7422.7 7482.7
## - BLUEBOOK    1  7423.1 7483.1
## - AGE         1  7424.1 7484.1
## - INCOME      1  7424.6 7484.6
## <none>        7422.7 7484.7
## - JOB         1  7425.3 7485.3
## - HOMEKIDS    1  7426.5 7486.5
## - OLDCLAIM    1  7427.0 7487.0
## - SEX          1  7429.1 7489.1
## - PARENT1     1  7433.1 7493.1
## - YOJ          1  7434.0 7494.0
## - CLM_FREQ    1  7435.8 7495.8
## - HOME_VAL    1  7446.3 7506.3
## - KIDSDRIV    1  7458.9 7518.9
## - MSTATUS      1  7461.3 7521.3
## - TIF          1  7480.9 7540.9
## - MVR_PTS      1  7488.6 7548.6
## - TRAVTIME     1  7488.9 7548.9
## - EDUCATION    4  7502.1 7556.1
## - REVOKED      1  7509.3 7569.3
## - CAR_USE      1  7537.4 7597.4
## - CAR_TYPE     5  7551.9 7603.9
## - URBANICITY   1  8013.3 8073.3
##
## Step:  AIC=7482.66
## TARGET_FLAG ~ KIDSDRIV + AGE + HOMEKIDS + YOJ + INCOME + PARENT1 +
##                 HOME_VAL + MSTATUS + SEX + EDUCATION + JOB + TRAVTIME + CAR_USE +
##                 BLUEBOOK + TIF + CAR_TYPE + OLDCLAIM + CLM_FREQ + REVOKED +
##                 MVR_PTS + CAR_AGE + URBANICITY
##
##              Df Deviance    AIC
## - CAR_AGE     1  7422.7 7480.7

```

```

## - BLUEBOOK      1  7423.1 7481.1
## - AGE           1  7424.1 7482.1
## - INCOME        1  7424.6 7482.6
## <none>          7422.7 7482.7
## - JOB           1  7425.3 7483.3
## - HOMEKIDS      1  7426.5 7484.5
## - OLDCLAIM      1  7427.0 7485.0
## - SEX            1  7431.4 7489.4
## - PARENT1       1  7433.1 7491.1
## - YOJ           1  7434.0 7492.0
## - CLM_FREQ       1  7435.8 7493.8
## - HOME_VAL       1  7446.3 7504.3
## - KIDSDRV        1  7458.9 7516.9
## - MSTATUS        1  7461.3 7519.3
## - TIF            1  7480.9 7538.9
## - MVR_PTS        1  7488.6 7546.6
## - TRAVTIME       1  7488.9 7546.9
## - EDUCATION      4  7502.1 7554.1
## - REVOKED        1  7509.3 7567.3
## - CAR_USE         1  7537.4 7595.4
## - CAR_TYPE        5  7551.9 7601.9
## - URBANICITY     1  8013.3 8071.3
##
## Step: AIC=7480.67
## TARGET_FLAG ~ KIDSDRV + AGE + HOMEKIDS + YOJ + INCOME + PARENT1 +
##           HOME_VAL + MSTATUS + SEX + EDUCATION + JOB + TRAVTIME + CAR_USE +
##           BLUEBOOK + TIF + CAR_TYPE + OLDCLAIM + CLM_FREQ + REVOKED +
##           MVR_PTS + URBANICITY
##
##              Df Deviance    AIC
## - BLUEBOOK      1  7423.1 7479.1
## - AGE           1  7424.1 7480.1
## - INCOME        1  7424.6 7480.6
## <none>          7422.7 7480.7
## - JOB           1  7425.3 7481.3
## - HOMEKIDS      1  7426.6 7482.6
## - OLDCLAIM      1  7427.0 7483.0
## - SEX            1  7431.4 7487.4
## - PARENT1       1  7433.1 7489.1
## - YOJ           1  7434.0 7490.0
## - CLM_FREQ       1  7435.8 7491.8
## - HOME_VAL       1  7446.3 7502.3
## - KIDSDRV        1  7458.9 7514.9
## - MSTATUS        1  7461.3 7517.3
## - TIF            1  7480.9 7536.9
## - MVR_PTS        1  7488.6 7544.6
## - TRAVTIME       1  7488.9 7544.9
## - REVOKED        1  7509.3 7565.3
## - CAR_USE         1  7537.4 7593.4
## - CAR_TYPE        5  7552.0 7600.0
## - EDUCATION      4  7553.4 7603.4
## - URBANICITY     1  8013.3 8069.3
##
## Step: AIC=7479.07

```

```

## TARGET_FLAG ~ KIDSDRV + AGE + HOMEKIDS + YOJ + INCOME + PARENT1 +
##      HOME_VAL + MSTATUS + SEX + EDUCATION + JOB + TRAVTIME + CAR_USE +
##      TIF + CAR_TYPE + OLDCLAIM + CLM_FREQ + REVOKED + MVR PTS +
##      URBANICITY
##
##          Df Deviance    AIC
## - AGE      1  7424.5 7478.5
## <none>      7423.1 7479.1
## - INCOME    1  7425.2 7479.2
## - JOB       1  7425.7 7479.7
## - HOMEKIDS  1  7427.0 7481.0
## - OLDCLAIM  1  7427.4 7481.4
## - SEX        1  7431.7 7485.7
## - PARENT1   1  7433.4 7487.4
## - YOJ        1  7434.5 7488.5
## - CLM_FREQ   1  7436.1 7490.1
## - HOME_VAL   1  7446.7 7500.7
## - KIDSDRV   1  7459.2 7513.2
## - MSTATUS    1  7461.9 7515.9
## - TIF        1  7481.3 7535.3
## - MVR PTS   1  7488.9 7542.9
## - TRAVTIME   1  7489.3 7543.3
## - REVOKED   1  7509.6 7563.6
## - CAR_USE    1  7537.8 7591.8
## - CAR_TYPE   5  7555.5 7601.5
## - EDUCATION  4  7554.7 7602.7
## - URBANICITY 1  8014.0 8068.0
##
## Step: AIC=7478.53
## TARGET_FLAG ~ KIDSDRV + HOMEKIDS + YOJ + INCOME + PARENT1 +
##      HOME_VAL + MSTATUS + SEX + EDUCATION + JOB + TRAVTIME + CAR_USE +
##      TIF + CAR_TYPE + OLDCLAIM + CLM_FREQ + REVOKED + MVR PTS +
##      URBANICITY
##
##          Df Deviance    AIC
## - INCOME    1  7426.5 7478.5
## <none>      7424.5 7478.5
## - JOB       1  7427.3 7479.3
## - OLDCLAIM  1  7428.9 7480.9
## - HOMEKIDS  1  7431.5 7483.5
## - SEX        1  7432.8 7484.8
## - PARENT1   1  7435.7 7487.7
## - CLM_FREQ   1  7437.5 7489.5
## - YOJ        1  7437.7 7489.7
## - HOME_VAL   1  7448.5 7500.5
## - KIDSDRV   1  7459.2 7511.2
## - MSTATUS    1  7463.8 7515.8
## - TIF        1  7482.5 7534.5
## - TRAVTIME   1  7490.5 7542.5
## - MVR PTS   1  7491.2 7543.2
## - REVOKED   1  7511.4 7563.4
## - CAR_USE    1  7539.7 7591.7
## - CAR_TYPE   5  7555.8 7599.8
## - EDUCATION  4  7562.4 7608.4

```

```

## - URBANICITY 1 8016.9 8068.9
##
## Step: AIC=7478.51
## TARGET_FLAG ~ KIDSDRV + HOMEKIDS + YOJ + PARENT1 + HOME_VAL +
##      MSTATUS + SEX + EDUCATION + JOB + TRAVTIME + CAR_USE + TIF +
##      CAR_TYPE + OLDCLAIM + CLM_FREQ + REVOKED + MVR PTS + URBANICITY
##
##          Df Deviance AIC
## <none>      7426.5 7478.5
## - JOB       1 7430.0 7480.0
## - OLDCLAIM  1 7430.9 7480.9
## - HOMEKIDS  1 7434.0 7484.0
## - SEX        1 7434.8 7484.8
## - PARENT1   1 7437.7 7487.7
## - CLM_FREQ   1 7439.3 7489.3
## - YOJ        1 7445.7 7495.7
## - HOME_VAL   1 7450.6 7500.6
## - KIDSDRV   1 7461.4 7511.4
## - MSTATUS   1 7465.3 7515.3
## - TIF        1 7485.0 7535.0
## - TRAVTIME  1 7492.5 7542.5
## - MVR PTS   1 7492.9 7542.9
## - REVOKED   1 7513.7 7563.7
## - CAR_USE    1 7542.8 7592.8
## - CAR_TYPE   5 7558.6 7600.6
## - EDUCATION  4 7567.3 7611.3
## - URBANICITY 1 8017.6 8067.6

##
## Call:
## glm(formula = TARGET_FLAG ~ KIDSDRV + HOMEKIDS + YOJ + PARENT1 +
##      HOME_VAL + MSTATUS + SEX + EDUCATION + JOB + TRAVTIME + CAR_USE +
##      TIF + CAR_TYPE + OLDCLAIM + CLM_FREQ + REVOKED + MVR PTS +
##      URBANICITY, family = binomial(link = "logit"), data = InsTrain)
##
## Deviance Residuals:
##      Min      1Q      Median      3Q      Max
## -2.6052 -0.7277 -0.4212  0.6451  3.1351
##
## Coefficients:
##                               Estimate Std. Error z value Pr(>|z|)
## (Intercept)           -6.416e-01  1.984e-01 -3.234 0.001219 ***
## KIDSDRV                3.513e-01  5.952e-02  5.902 3.59e-09 ***
## HOMEKIDS               9.289e-02  3.368e-02  2.758 0.005818 **
## YOJ                   -3.225e-02  7.336e-03 -4.397 1.10e-05 ***
## PARENT1Yes             3.593e-01  1.077e-01  3.337 0.000846 ***
## HOME_VAL                -1.000e-04  2.051e-05 -4.877 1.08e-06 ***
## MSTATUSz_No             4.810e-01  7.708e-02  6.240 4.37e-10 ***
## SEXz_F                 -2.517e-01  8.794e-02 -2.862 0.004208 **
## EDUCATIONBachelors     -7.253e-01  9.511e-02 -7.626 2.42e-14 ***
## EDUCATIONMasters        -8.325e-01  1.034e-01 -8.052 8.17e-16 ***
## EDUCATIONPhD            -1.051e+00  1.347e-01 -7.798 6.28e-15 ***
## EDUCATIONz_High School  -1.310e-01  9.115e-02 -1.438 0.150549
## JOB                   -2.608e-02  1.392e-02 -1.874 0.060941 .

```

```

## TRAVTIME           1.513e-02  1.867e-03  8.108 5.16e-16 ***
## CAR_USEPrivate    -8.748e-01 8.199e-02 -10.669 < 2e-16 ***
## TIF                -5.459e-02 7.271e-03 -7.508 6.02e-14 ***
## CAR_TYPEPanel Truck 7.944e-02 1.337e-01  0.594 0.552376
## CAR_TYPEPickup    5.445e-01 9.818e-02  5.546 2.92e-08 ***
## CAR_TYPESports Car 1.210e+00 1.201e-01  10.073 < 2e-16 ***
## CAR_TYPEVan        3.766e-01 1.194e-01  3.154 0.001609 **
## CAR_TYPEz_SUV     9.629e-01 1.017e-01  9.469 < 2e-16 ***
## OLDCLAIM           8.789e-05 4.210e-05  2.088 0.036833 *
## CLM_FREQ            1.144e-01 3.186e-02  3.591 0.000329 ***
## REVOKEDYes         7.503e-01 7.963e-02  9.422 < 2e-16 ***
## MVR PTS            1.102e-01 1.358e-02  8.117 4.77e-16 ***
## URBANICITYz_Highly Rural/ Rural -2.280e+00 1.122e-01 -20.332 < 2e-16 ***
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## (Dispersion parameter for binomial family taken to be 1)
##
## Null deviance: 9418.0 on 8160 degrees of freedom
## Residual deviance: 7426.5 on 8135 degrees of freedom
## AIC: 7478.5
##
## Number of Fisher Scoring iterations: 5

```


This reduces the predictors used to 25 from 30. The AIC improves from 7482.66 (our original general model) to 7478.5, and we also benefit by having a simpler model less prone to overfitting.

Also, the predictors in the model now are all significant (under 0.05 pr level) and all but one under .02 or very significant. Which is much improved over the first model.


BIC Method Model 4

To determine the number of predictors and which predictors to be used we will use the Bayesian Information Criterion (BIC).

Subset Selection Using BIC

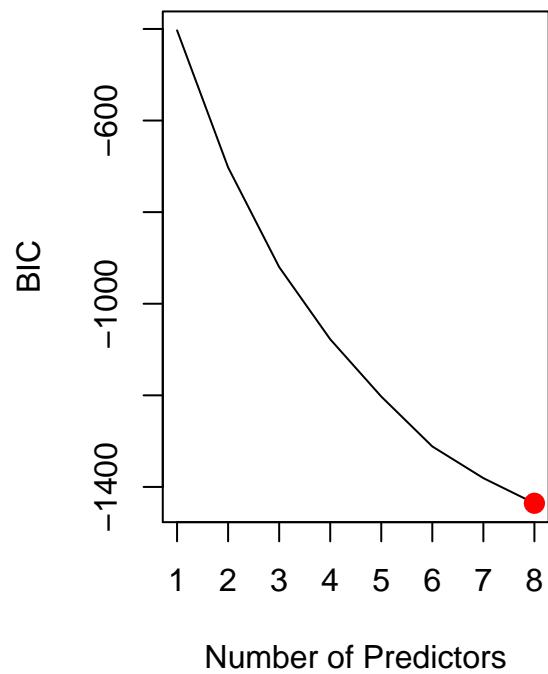

Predictors vs. BIC

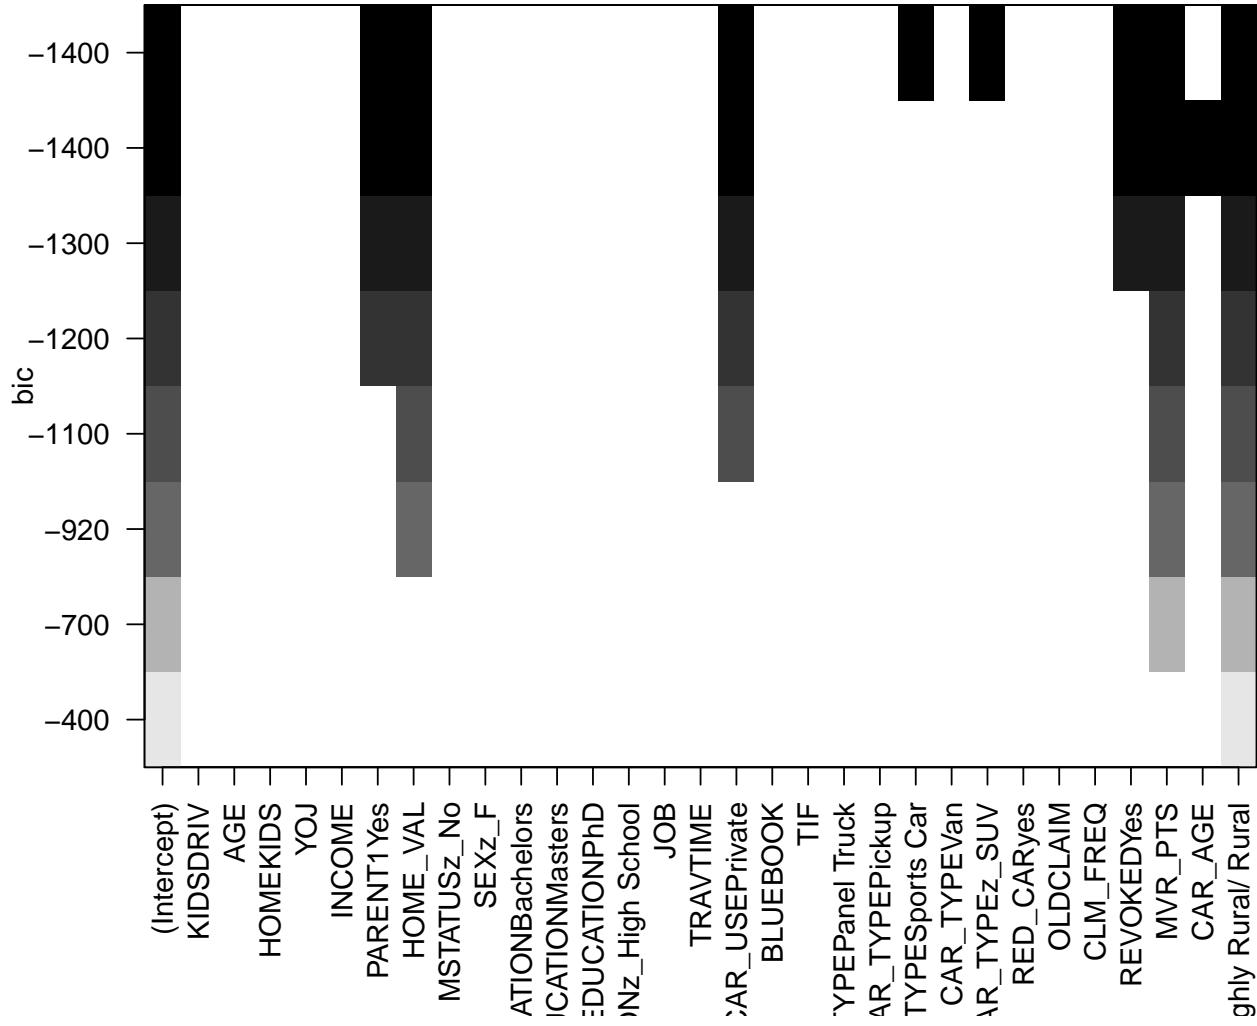

The plot on the right shows that the number of predictors with the lowest BIC are PARENT1Yes, HOME_VAL, CAR_USE, CAR_TYPE, REVOKEDEYes, MVR_PTS, CAR_AGE and URBANICITYz_Highly Rural/ Rural

	Estimate	Std. Error	z value	Pr(> z)
(Intercept)	-0.6695	0.09709	-6.895	5.373e-12
PARENT1Yes	0.7941	0.07813	10.16	2.883e-24
HOME_VAL	-0.0001861	1.849e-05	-10.07	7.577e-24
CAR_USEPrivate	-0.8287	0.06752	-12.27	1.252e-34
CAR_TYPEPanel Truck	0.1298	0.1237	1.05	0.2939
CAR_TYPEPickup	0.5601	0.09361	5.984	2.176e-09
CAR_TYPESSports Car	1.069	0.1016	10.52	6.737e-26
CAR_TYPEVan	0.3593	0.1136	3.164	0.001554
CAR_TYPEz_SUV	0.8252	0.08122	10.16	2.977e-24
REVOKEDEYes	0.7601	0.07686	9.89	4.623e-23
MVR_PTS	0.1564	0.01228	12.74	3.556e-37
URBANICITYz_Highly Rural/ Rural	-2.047	0.1061	-19.3	5.001e-83

	Estimate	Std. Error	z value	Pr(> z)
CAR_AGE	-0.04014	0.005289	-7.59	3.21e-14

(Dispersion parameter for binomial family taken to be 1)

Null deviance:	9418 on 8160 degrees of freedom
Residual deviance:	7795 on 8148 degrees of freedom


Select Model

Compare Model Statistics

Model 1 - General Model

ROC Curve

The ROC Curve helps measure true positives and true negative. A high AUC or area under the curve tells us the model is predicting well.

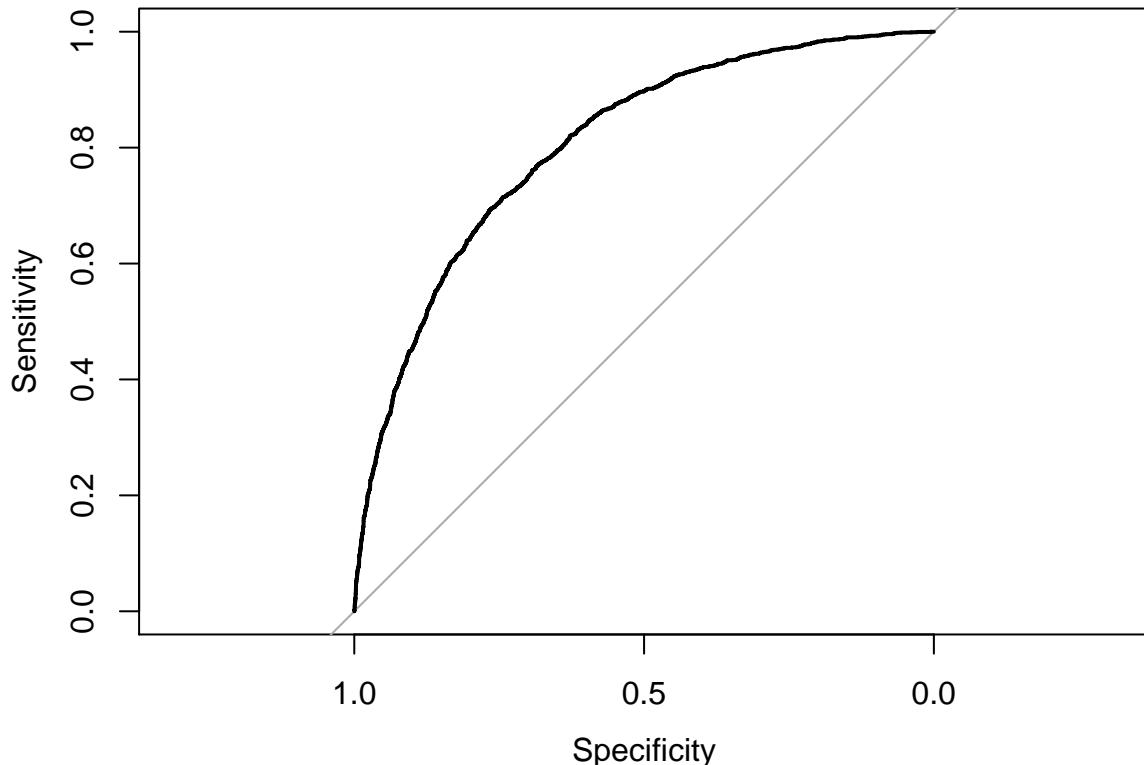


The AUC value of 0.8, tells us this model predicted values are accurate.


Confusion Matrix

```
##
## targetat    0    1
##          0 5546 1301
##          1  462  852
```

Create a binned diagnostic plot of residuals vs prediction There are definite patterns here, which bear investigating.

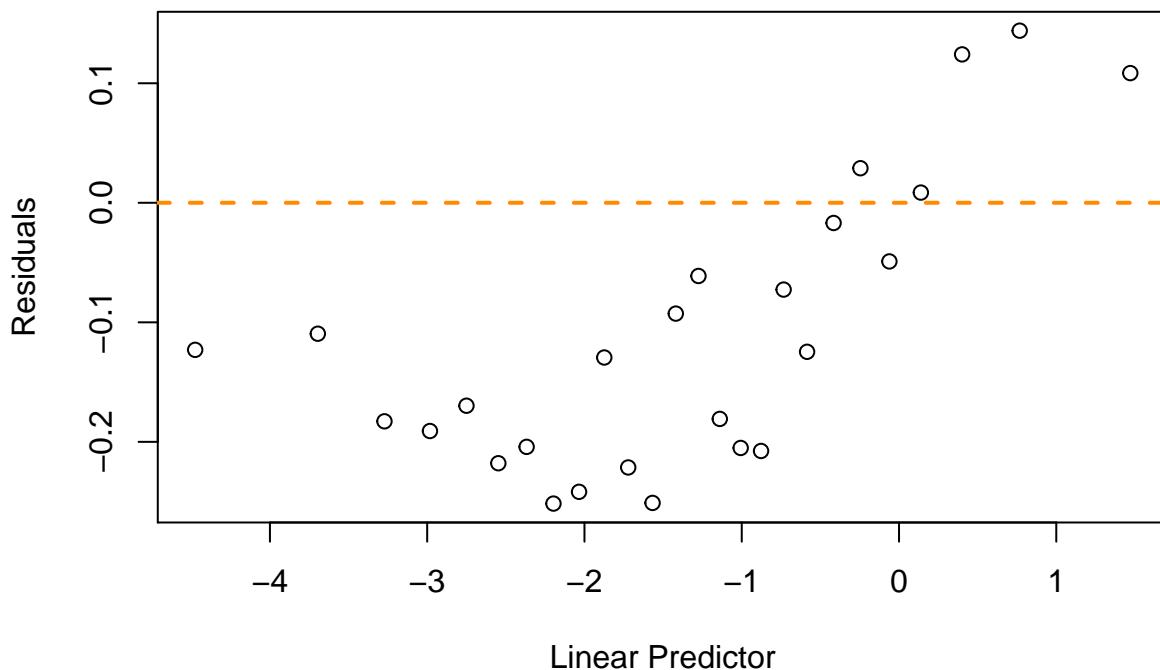


Plot leverages.

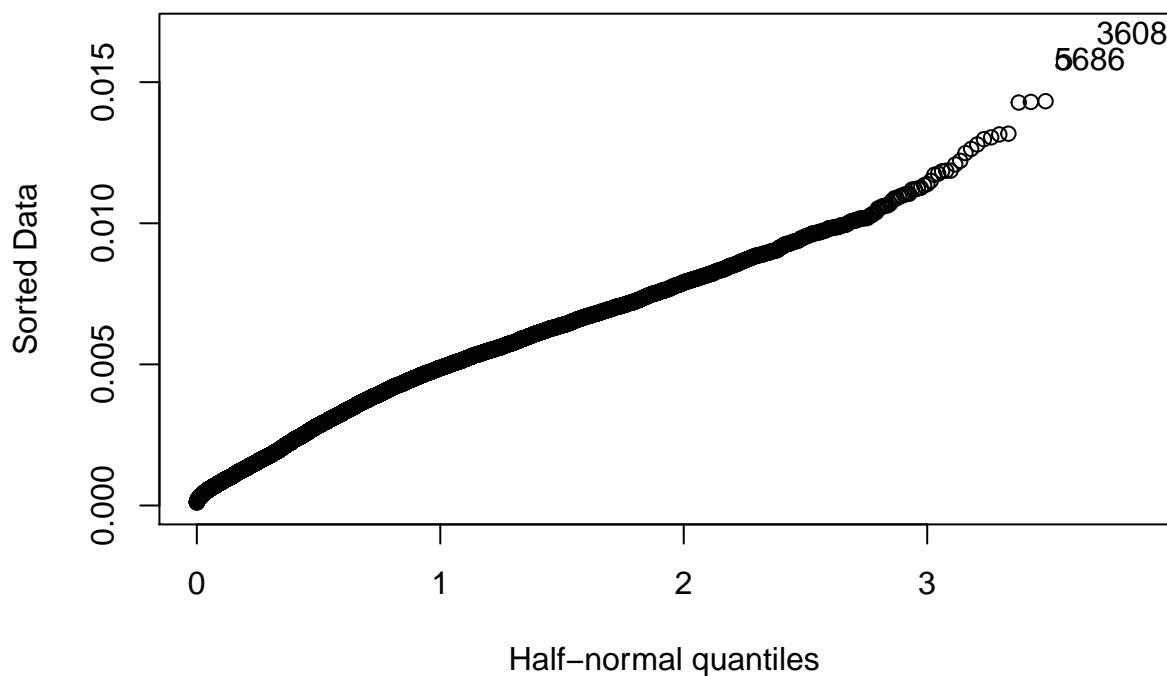

We don't see any strong outliers with the leverage plot. The points identified (3608,5686) are essentially in the plot of the line formed, so they are not likely pulling our model in any direction.

Plot Goodness of fit

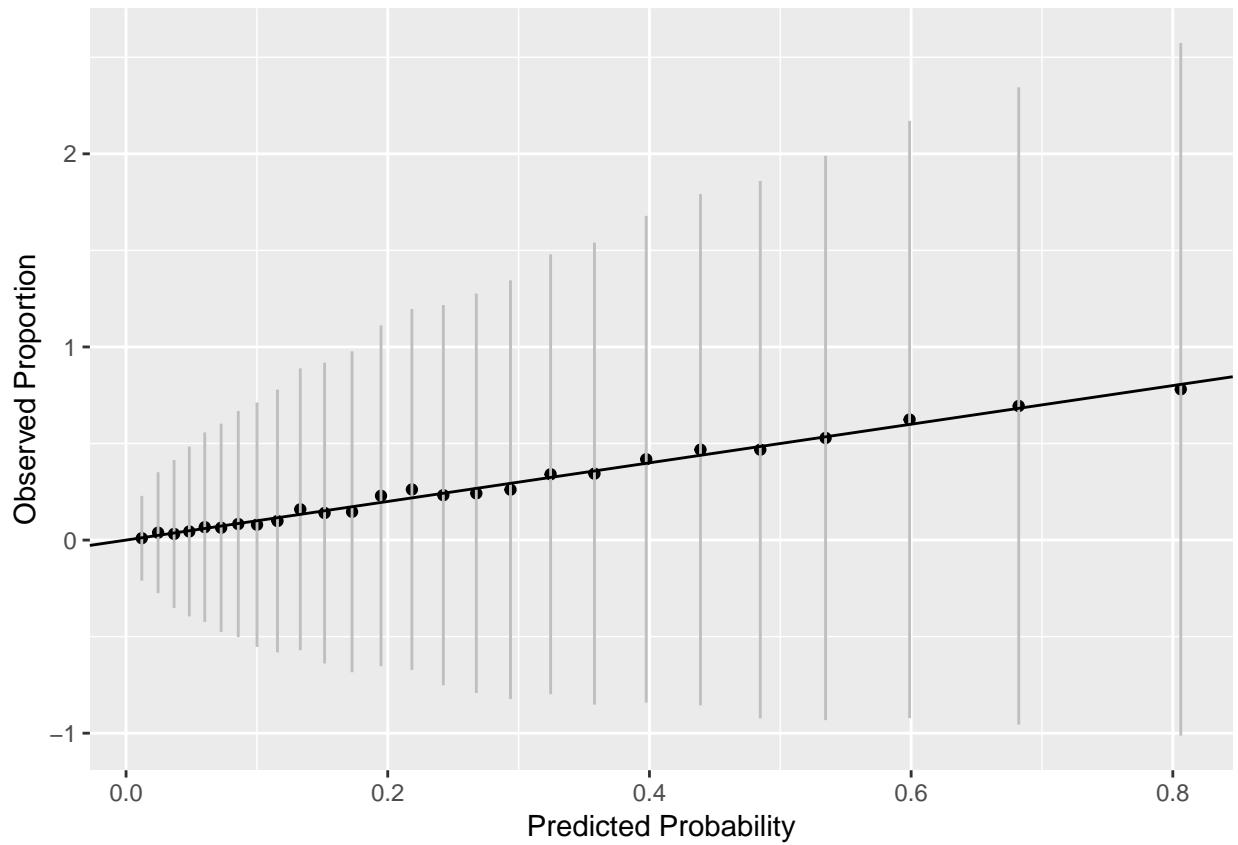


We see that our predictors fall close to the line.

Model 2 - Reduced General Model

ROC Curve

The ROC Curve helps measure true positives and true negative. A high AUC or area under the curve tells us the model is predicting well.

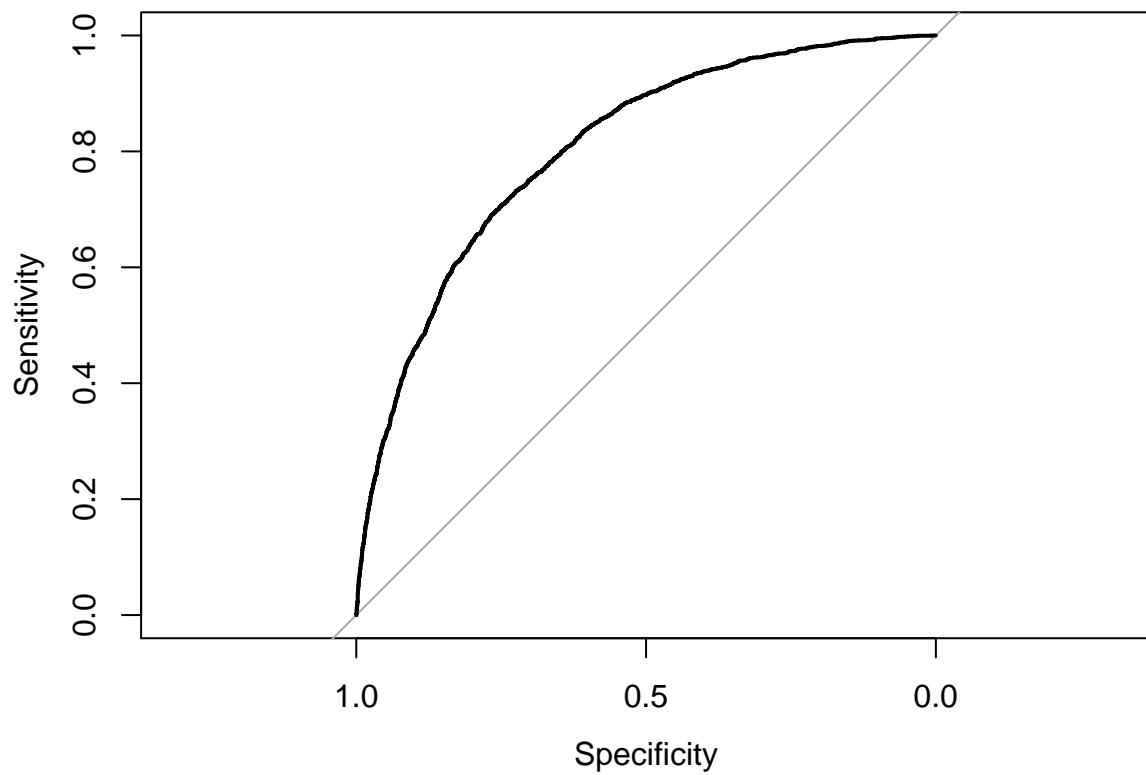


The AUC value of 0.8, tells us this model predicted values are accurate.


Confusion Matrix

```
##  
## targethat      0      1  
##            0 5551 1296  
##            1  457  857
```

Create a binned diagnostic plot of residuals vs prediction There are definite patterns here, which bear investigating.

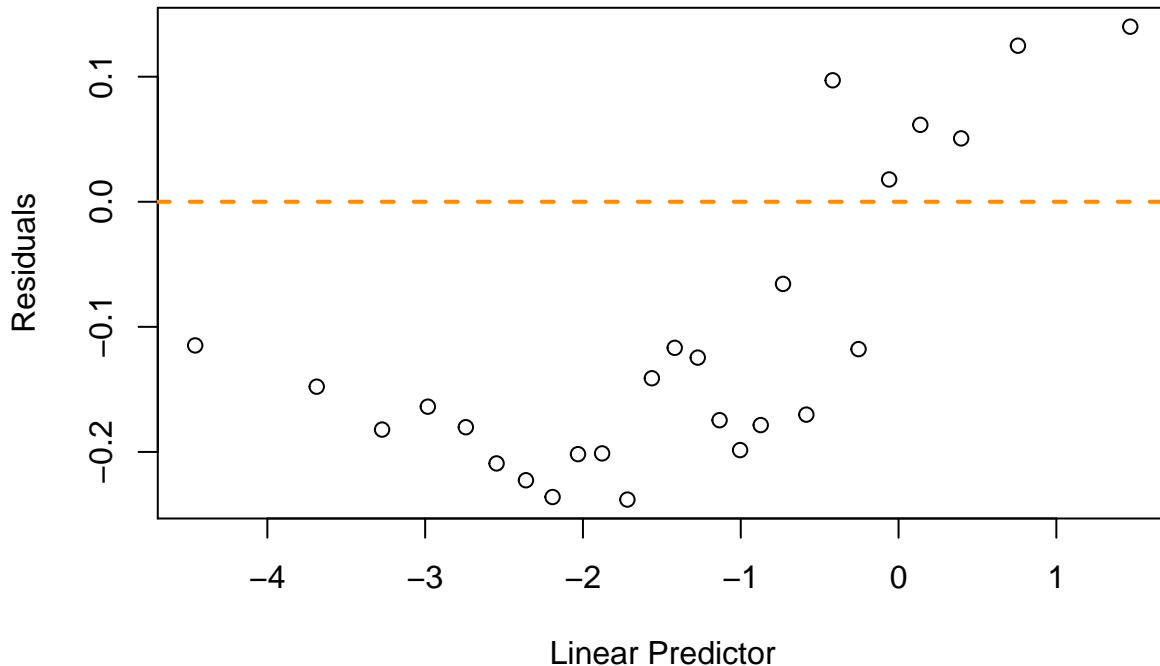


Plot leverages.

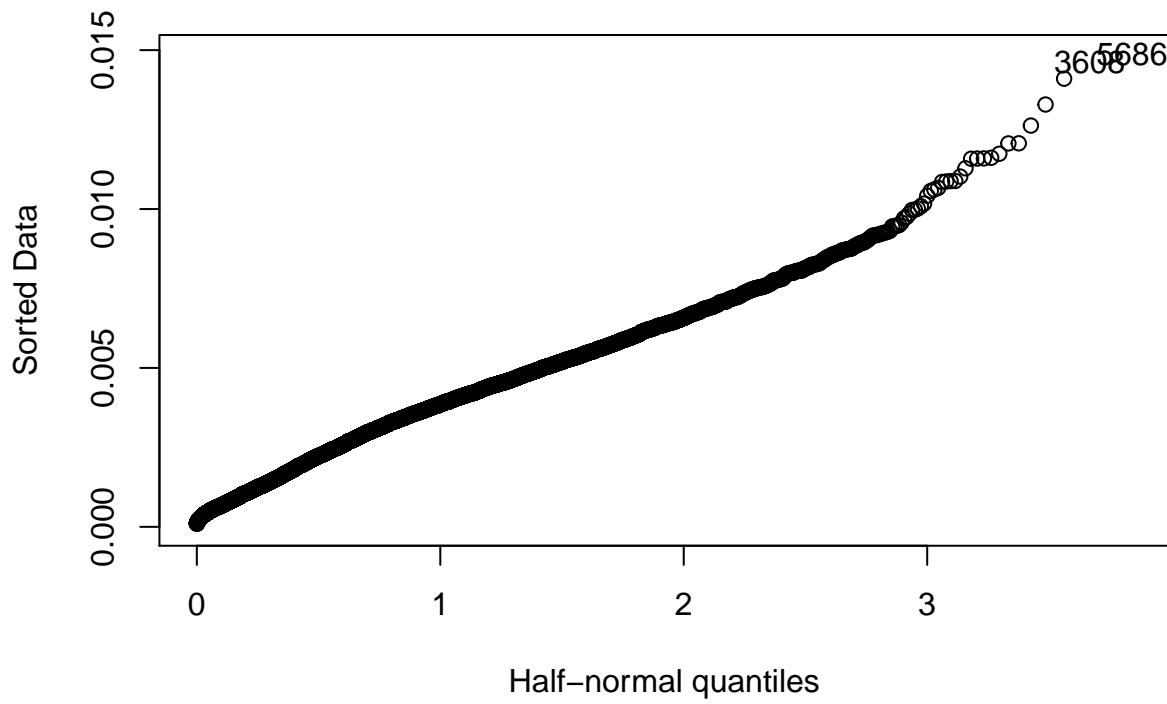

We don't see any strong outliers with the leverage plot. The points identified (3608,5686) are essentially in the plot of the line formed, so they are not likely pulling our model in any direction.

Plot Goodness of fit

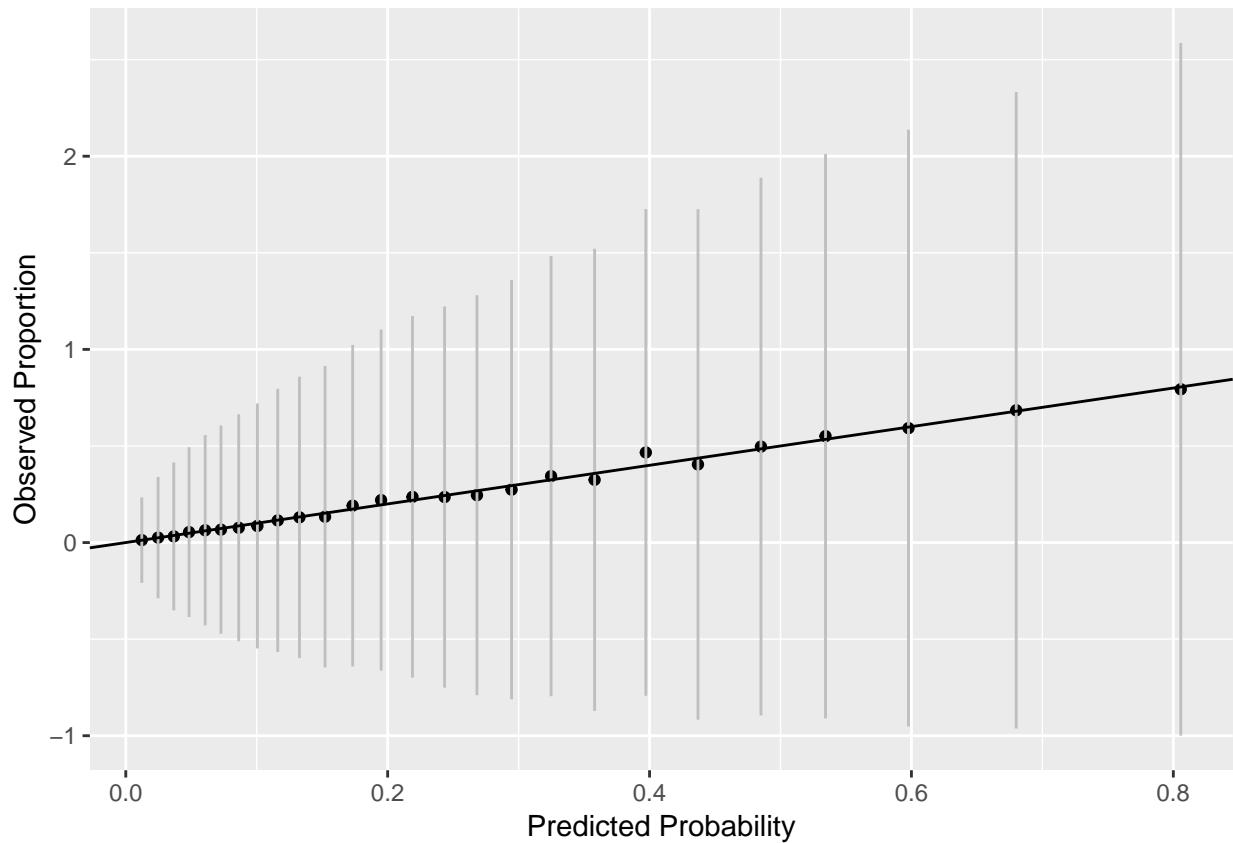


We see that our predictors fall close to the line.

Model 3 - Srep AIC Model

ROC Curve

The ROC Curve helps measure true positives and true negative. A high AUC or area under the curve tells us the model is predicting well.

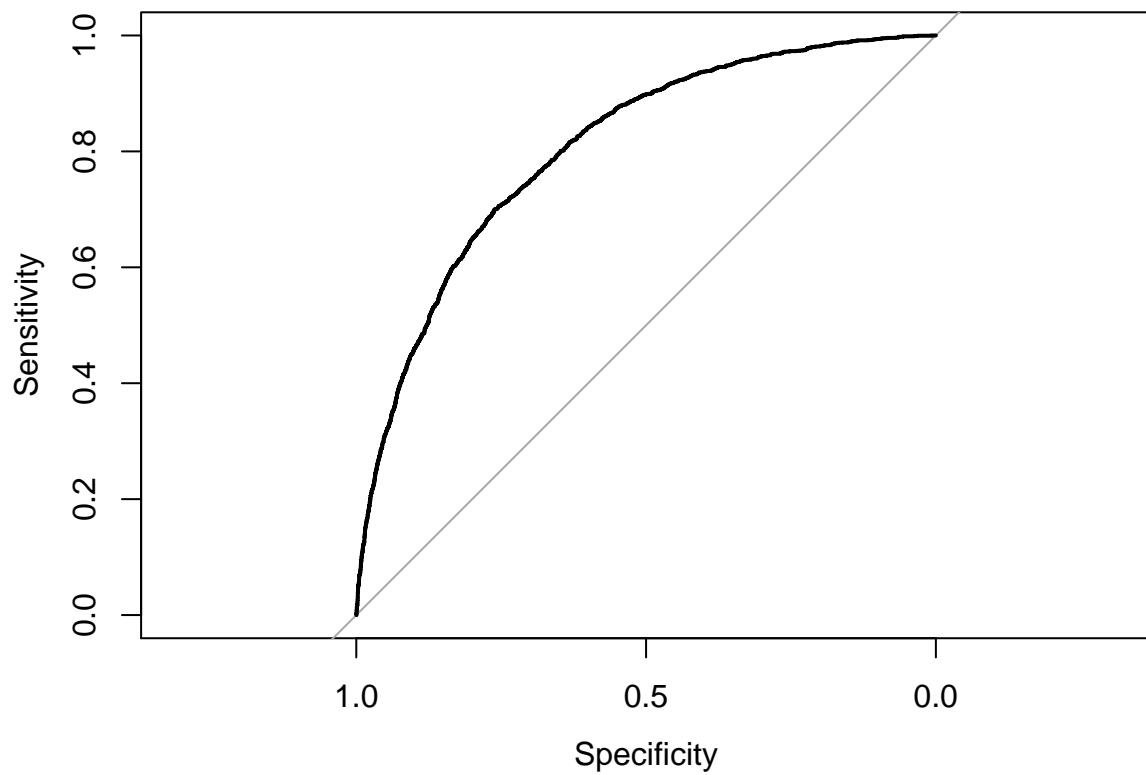


The AUC value of 0.8, tells us this model predicted values are accurate.


Confusion Matrix

```
##  
## targethat      0      1  
##            0 5556 1298  
##            1  452  855
```

Create a binned diagnostic plot of residuals vs prediction There are definite patterns here, which bear investigating.

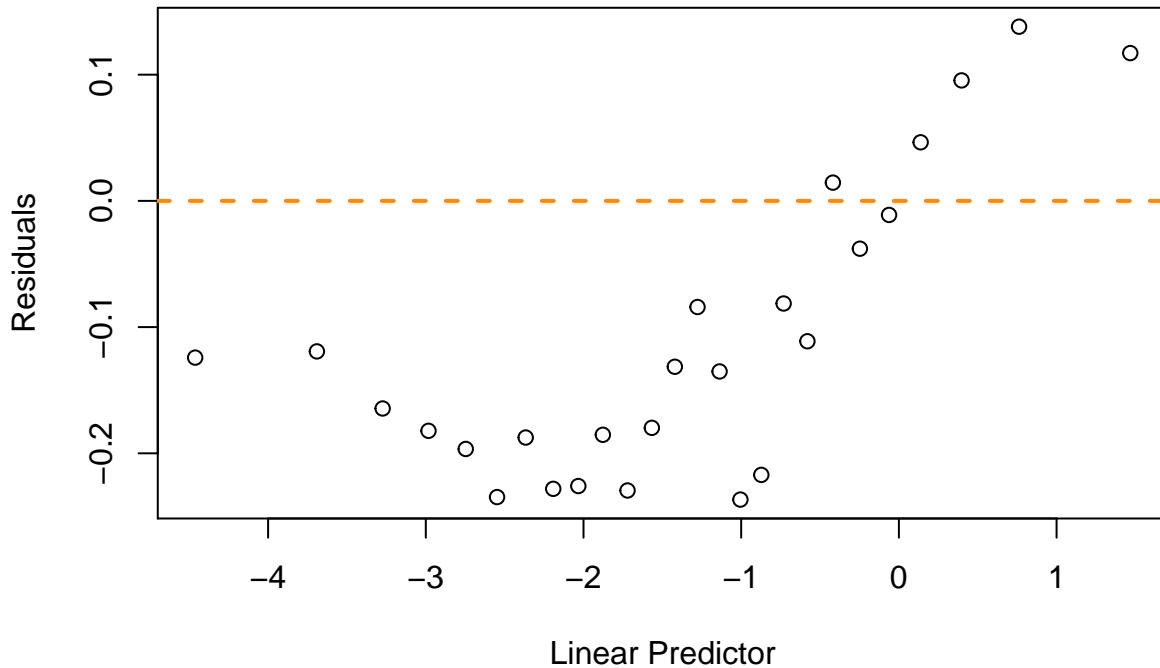


Plot leverages.

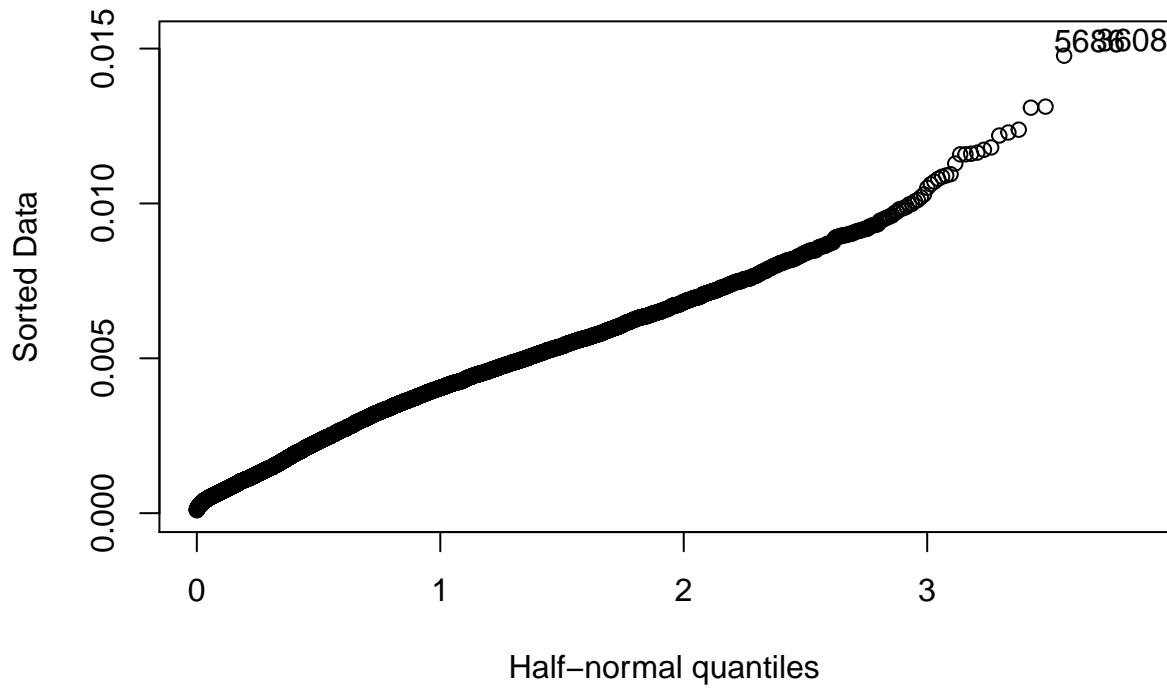

We don't see any strong outliers with the leverage plot. The points identified (3608,5686) are essentially in the plot of the line formed, so they are not likely pulling our model in any direction.

Plot Goodness of fit

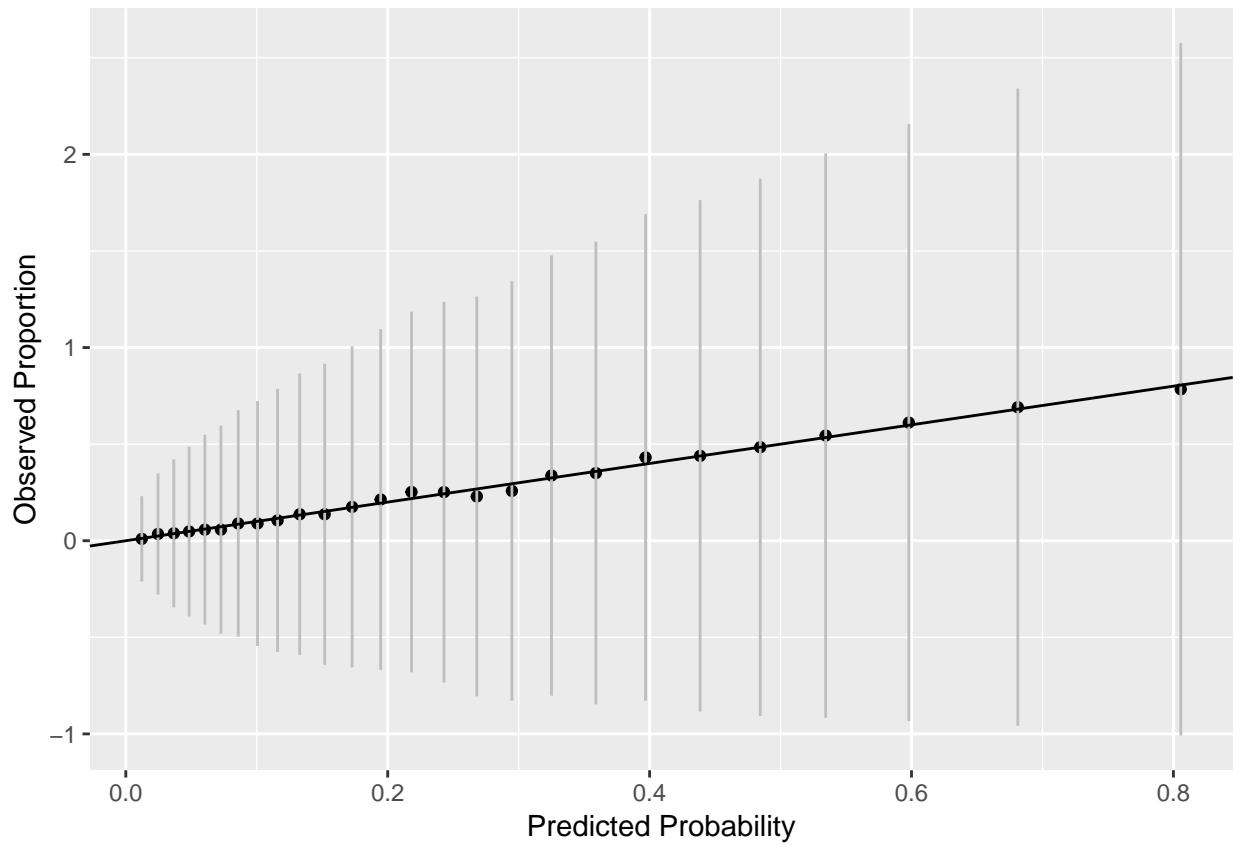


We see that our predictors fall close to the line.

Model 4 - Srep BIC Model

ROC Curve

The ROC Curve helps measure true positives and true negative. A high AUC or area under the curve tells us the model is predicting well.

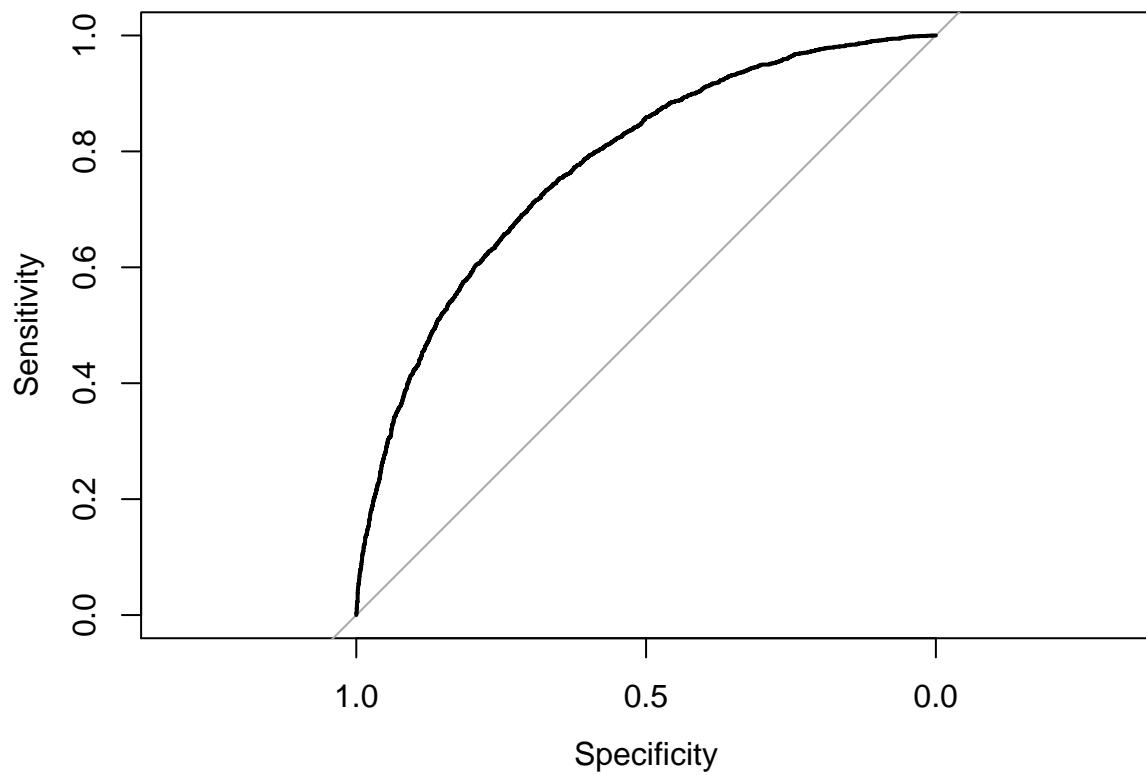


The AUC value of 0.78, tells us this model predicted values are accurate.


Confusion Matrix

```
##  
## targethat      0      1  
##            0 5621 1437  
##            1  387  716
```

Create a binned diagnostic plot of residuals vs prediction There are definite patterns here, which bear investigating.

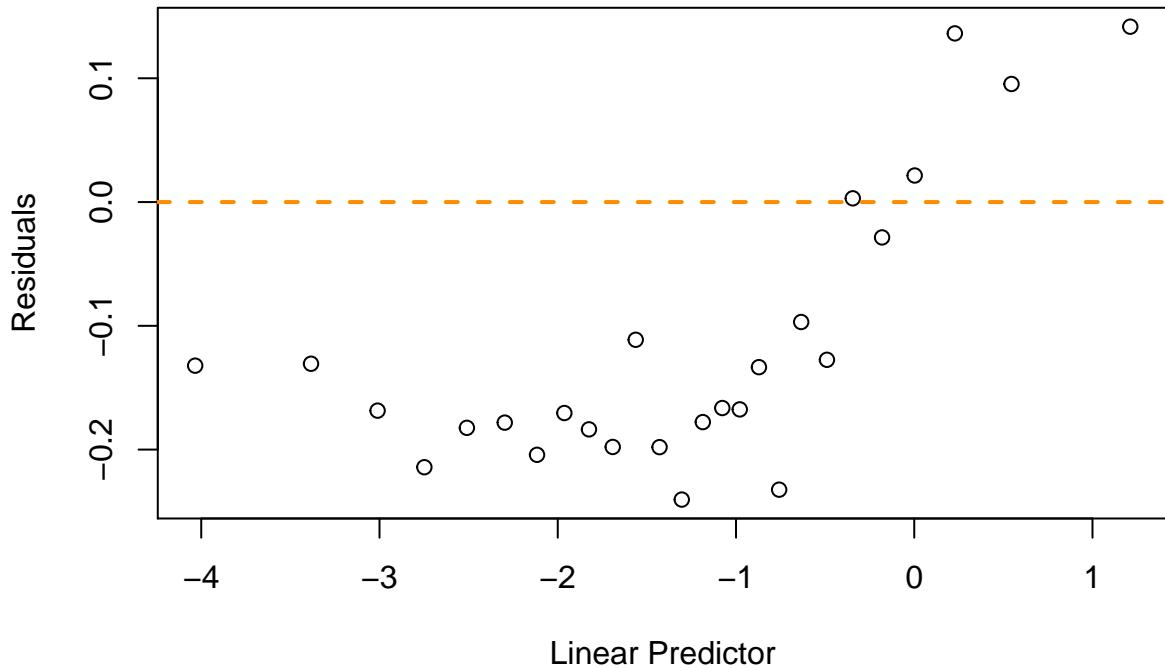


Plot leverages.

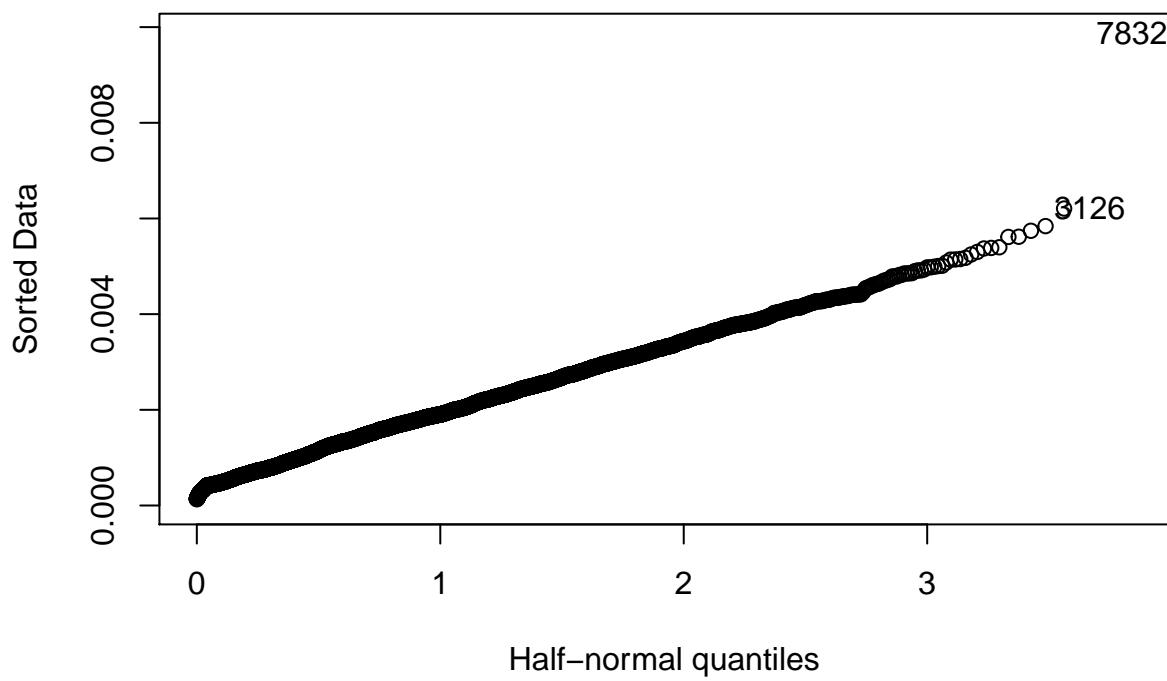

We don't see any strong outliers with the leverage plot. The points identified (3608,5686) are essentially in the plot of the line formed, so they are not likely pulling our model in any direction.

Plot Goodness of fit

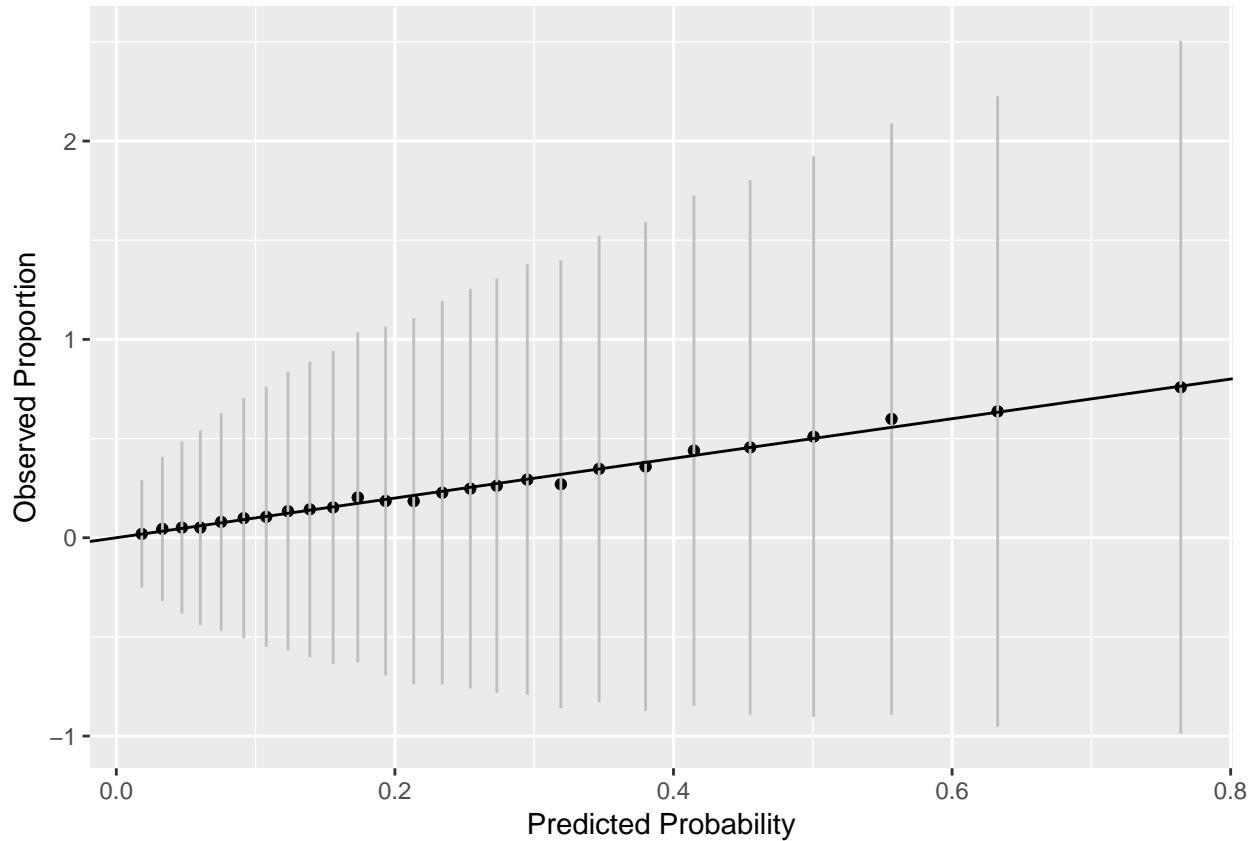

We see that our predictors fall close to the line.

Pick the best regression model

Metric	Model 1	Model 2	Model 3	Model 4
AIC	7484.6620734	7480.0205367	7478.510393	7820.9624062
BIC	7701.8828551	7655.1985864	7660.6955648	7912.054992

TARGET_AMT Modeling

Model 1: all predictors


Same as with the logistic model before, we start with a model that includes all predictors.

```
##
## Call:
## lm(formula = TARGET_AMT ~ . - TARGET_FLAG, data = InsTrain)
##
## Residuals:
##   Min     1Q Median     3Q    Max
## -5809  -1662   -781    296 103948
##
## Coefficients:
##                               Estimate Std. Error t value Pr(>|t|)    
## (Intercept)            1.777e+03  4.839e+02   3.673 0.000241 ***
## INDEX                  -1.581e-03  1.697e-02  -0.093 0.925810
##
```

```

## KIDSDRV          3.044e+02  1.132e+02  2.688 0.007201 **
## AGE              5.634e+00  6.958e+00  0.810 0.418131
## HOMEKIDS        9.026e+01  6.492e+01  1.390 0.164488
## YOJ              -1.199e+01 1.402e+01 -0.855 0.392318
## INCOME           -8.282e-03 2.839e-02 -0.292 0.770509
## PARENT1Yes       5.811e+02  2.020e+02  2.877 0.004025 **
## HOME_VAL          -7.783e-02 3.570e-02 -2.180 0.029259 *
## MSTATUSz_No      5.135e+02  1.346e+02  3.816 0.000137 ***
## SEXz_F            -2.613e+02 1.706e+02 -1.532 0.125672
## EDUCATIONBachelors -5.119e+02 1.851e+02 -2.765 0.005700 **
## EDUCATIONMasters  -4.457e+02 2.260e+02 -1.972 0.048592 *
## EDUCATIONPhD      -6.146e+02 2.643e+02 -2.325 0.020079 *
## EDUCATIONz_High School -1.957e+02 1.680e+02 -1.165 0.244213
## JOB               -1.112e+01 2.502e+01 -0.444 0.656738
## TRAVTIME          1.276e+01  3.225e+00  3.958 7.64e-05 ***
## CAR_USEPrivate    -8.923e+02 1.472e+02 -6.063 1.39e-09 ***
## BLUEBOOK           -1.963e-04 5.966e-02 -0.003 0.997375
## TIF                -4.812e+01 1.219e+01 -3.947 7.98e-05 ***
## CAR_TYPEPanel Truck 2.857e+02 2.422e+02  1.179 0.238341
## CAR_TYPEPickup    2.981e+02 1.714e+02  1.739 0.082153 .
## CAR_TYPESports Car 9.157e+02 2.061e+02  4.444 8.95e-06 ***
## CAR_TYPEVan        5.132e+02 2.052e+02  2.501 0.012400 *
## CAR_TYPEz_SUV     6.612e+02 1.657e+02  3.989 6.68e-05 ***
## RED_CARyes        -6.133e+01 1.492e+02 -0.411 0.681045
## OLDCLAIM           -2.423e-02 8.379e-02 -0.289 0.772493
## CLM_FREQ           1.247e+02 6.312e+01  1.976 0.048206 *
## REVOKEDYes         4.524e+02 1.559e+02  2.902 0.003715 **
## MVR PTS            1.820e+02 2.614e+01  6.963 3.60e-12 ***
## CAR AGE             -2.729e+01 1.282e+01 -2.129 0.033290 *
## URBANICITYz_Highly Rural/ Rural -1.523e+03 1.373e+02 -11.096 < 2e-16 ***
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 4555 on 8129 degrees of freedom
## Multiple R-squared:  0.0661, Adjusted R-squared:  0.06253
## F-statistic: 18.56 on 31 and 8129 DF,  p-value: < 2.2e-16

```

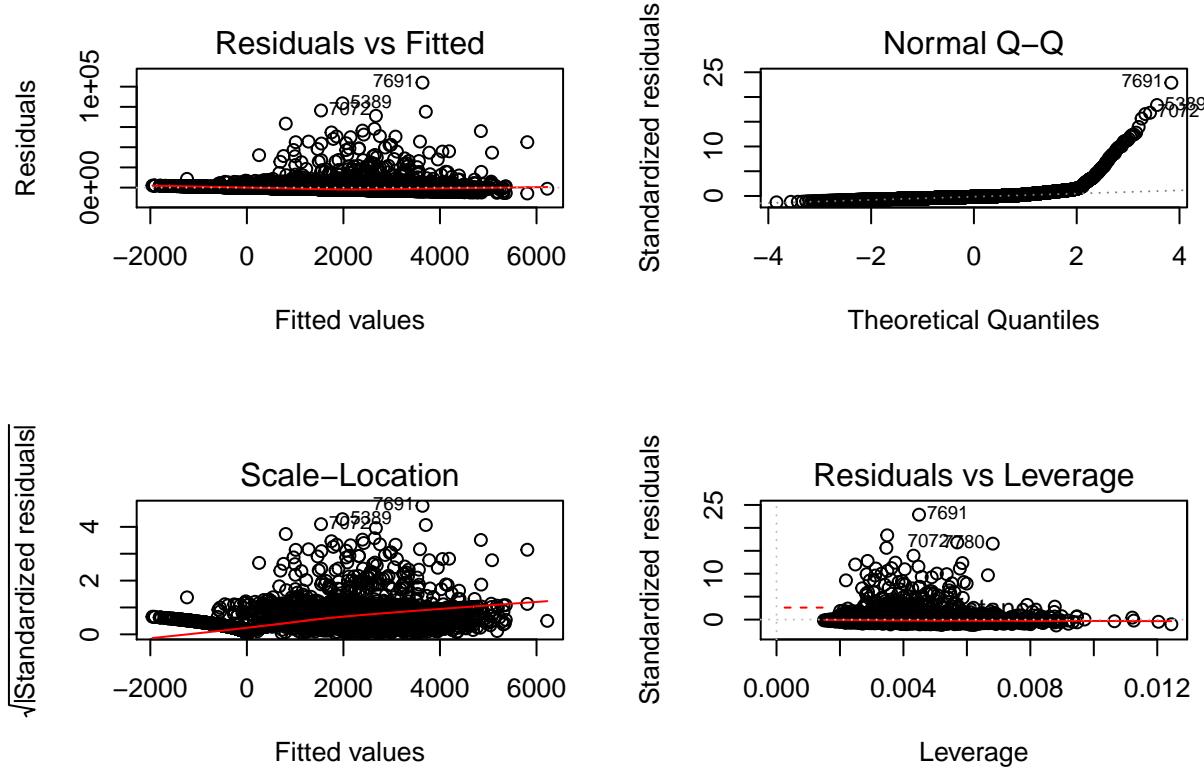

The result is not a very good model showing a very low R^2 . We also observe several parameters which are not very significant. We try a second model without these parameters, although we do not expect it so be much better than this first model.


Model 2: significant predictors

```
##
## Call:
## lm(formula = TARGET_AMT ~ KIDSDRV + PARENT1 + HOME_VAL + MSTATUS +
##     EDUCATION + TRAVTIME + CAR_USE + TIF + CAR_TYPE + CLM_FREQ +
##     REVOKED + MVR PTS + CAR_AGE + URBANICITY, data = InsTrain)
##
## Residuals:
##     Min      1Q  Median      3Q     Max
## -5874 -1665   -779    279 103965
##
## Coefficients:
## (Intercept)          1.741e+03  2.627e+02   6.628 3.63e-11 ***
## KIDSDRV              3.660e+02  1.022e+02   3.582 0.000343 ***
## PARENT1Yes            6.651e+02  1.765e+02   3.769 0.000165 ***
## HOME_VAL              -8.109e-02 3.557e-02  -2.280 0.022653 *
## MSTATUSz_No            4.783e+02  1.287e+02   3.717 0.000203 ***
## EDUCATIONBachelors   -5.467e+02 1.810e+02  -3.021 0.002527 **
## EDUCATIONMasters      -4.733e+02 2.222e+02  -2.130 0.033195 *
## EDUCATIONPhD           -6.253e+02 2.588e+02  -2.417 0.015691 *
## EDUCATIONz_High School -2.096e+02 1.666e+02  -1.259 0.208219
## TRAVTIME                1.274e+01 3.222e+00   3.955 7.71e-05 ***
## CAR_USEPrivate         -8.607e+02 1.307e+02  -6.583 4.89e-11 ***
## TIF                     -4.785e+01 1.218e+01  -3.928 8.64e-05 ***
##
```

```

## CAR_TYPEPanel Truck      3.716e+02  2.296e+02  1.619 0.105578
## CAR_TYPEPickup        3.181e+02  1.658e+02  1.918 0.055100 .
## CAR_TYPESports Car    8.032e+02  1.814e+02  4.428 9.63e-06 ***
## CAR_TYPEVan           5.702e+02  2.012e+02  2.834 0.004615 **
## CAR_TYPEz_SUV         5.426e+02  1.376e+02  3.943 8.11e-05 ***
## CLM_FREQ              1.169e+02  4.882e+01  2.394 0.016705 *
## REVOKEDYes            4.628e+02  1.551e+02  2.983 0.002860 **
## MVR PTS               1.810e+02  2.579e+01  7.019 2.42e-12 ***
## CAR AGE               -2.760e+01  1.281e+01 -2.154 0.031234 *
## URBANICITYz_Highly Rural/ Rural -1.504e+03  1.360e+02 -11.057 < 2e-16 ***
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 4553 on 8139 degrees of freedom
## Multiple R-squared:  0.06546,   Adjusted R-squared:  0.06305
## F-statistic: 27.15 on 21 and 8139 DF,  p-value: < 2.2e-16

```

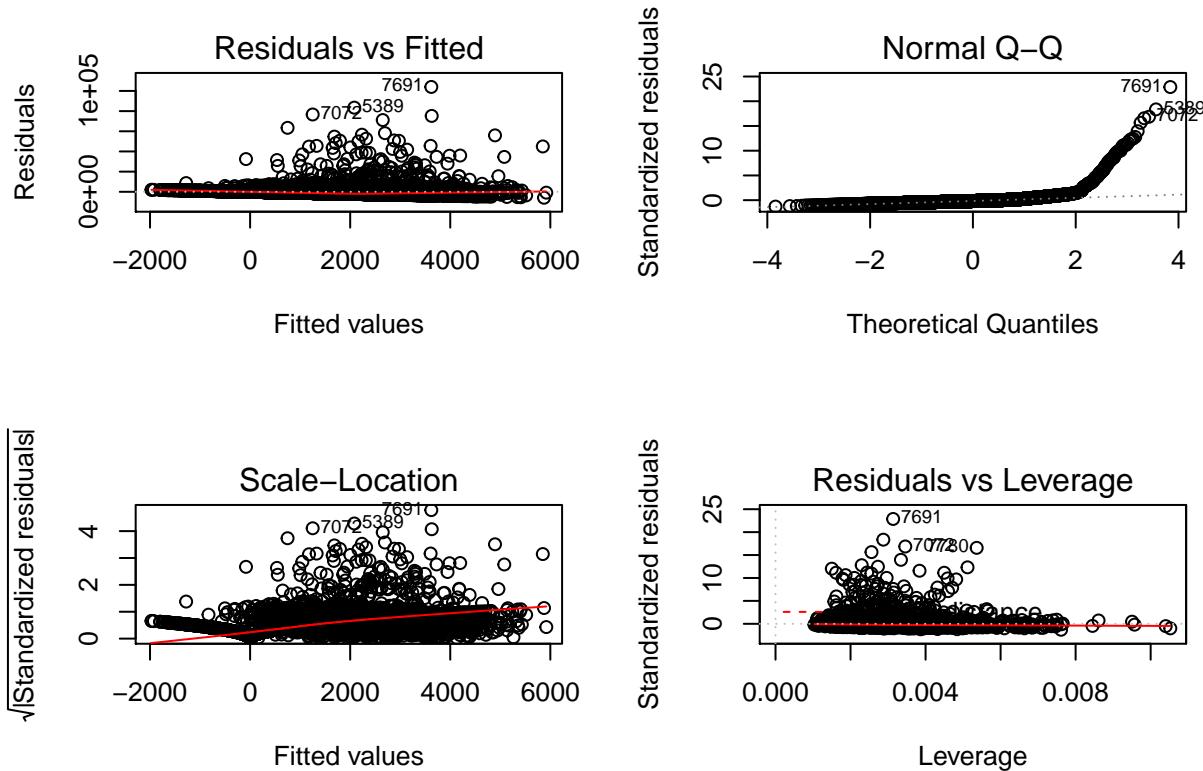

As expected this model isn't any better than the first one. It is simpler, but its performance is basically the same. What we do notice, and very visible in the Q-Q plot, is that these seem to be a high number of data points distance from the normal. This suggest a different kind of model.

Model 3: weighted coefficients

```

##
## Call: rlm(formula = TARGET_AMT ~ . - TARGET_FLAG, data = InsTrain)
## Residuals:
##      Min      1Q      Median      3Q      Max
## -1942.0   -467.1   -131.9    505.2 106677.9
##
## Coefficients:
##               Value      Std. Error t value
##
```

```

## (Intercept) 696.6170 89.9264 7.7465
## INDEX -0.0011 0.0032 -0.3547
## KIDSDRV 137.9814 21.0429 6.5571
## AGE -0.8758 1.2930 -0.6773
## HOMEKIDS 10.7890 12.0656 0.8942
## YOJ -10.4282 2.6055 -4.0023
## INCOME -0.0088 0.0053 -1.6656
## PARENT1Yes 264.2809 37.5390 7.0402
## HOME_VAL -0.0300 0.0066 -4.5208
## MSTATUSz_No 114.9108 25.0086 4.5948
## SEXz_F -59.0154 31.7097 -1.8611
## EDUCATIONBachelors -211.5397 34.4022 -6.1490
## EDUCATIONMasters -223.7746 41.9967 -5.3284
## EDUCATIONPhD -296.4118 49.1173 -6.0348
## EDUCATIONz_High School -7.5435 31.2224 -0.2416
## JOB -7.2980 4.6502 -1.5694
## TRAVTIME 4.0060 0.5994 6.6837
## CAR_USEPrivate -310.7514 27.3487 -11.3626
## BLUEBOOK 0.0062 0.0111 0.5554
## TIF -15.0404 2.2660 -6.6374
## CAR_TYPEPanel Truck -69.6787 45.0201 -1.5477
## CAR_TYPEPickup 125.5152 31.8624 3.9393
## CAR_TYPESports Car 312.6670 38.2951 8.1647
## CAR_TYPEVan 51.0035 38.1332 1.3375
## CAR_TYPEz_SUV 232.8620 30.8009 7.5602
## RED_CARyes -1.6338 27.7297 -0.0589
## OLDCLAIM 0.0154 0.0156 0.9898
## CLM_FREQ 33.0209 11.7313 2.8148
## REVOKEDYes 343.8303 28.9674 11.8695
## MVR PTS 61.2276 4.8589 12.6012
## CAR AGE -0.2856 2.3825 -0.1199
## URBANICITYz_Highly Rural/ Rural -484.8778 25.5175 -19.0018
##
## Residual standard error: 700.3 on 8129 degrees of freedom

```

Select Model

Compare Model Statistics

Conclusion

APPENDIX