



ServiceDispatch – Integration Guide

SPD Servicer Interface

18 April 2025

Offices:

1650 8180 Greensboro Drive, Suite 600, McLean, VA 22102
2961 W. MacArthur Blvd., Suite 212, Santa Ana, CA 92704
Suites 35-38 Regent House, Heaton Lane, Stockport, SK4 1BS

servicepower.com

© 2024 ServicePower All rights reserved

1 INFORMATION

1.1. DOCUMENT INFORMATION

Product	ServiceDispatch
Subject	Integration Guide - SPD Servicer Interface
Version Number	2.8
Version Date	18-Apr-25
Next Review Date	18-Nov-25

1.2. VERSION HISTORY

Number	Date	Description
2.1	21-Jun-21	Added tech APIs
2.2	01-Dec-21	Updated URLs
2.3	01-Feb-22	Updated Request Parameter
2.4	02-May-22	Updated Field Lengths
2.5	15-May-24	Addition of getCallAddresses
2.5	17-May-24	Formatting and Clarity
2.8	18-April-25	Updated callsubstatus in updatecallinfo

2 CONTENTS

1.	INFORMATION.....	2
1.1.	DOCUMENT INFORMATION.....	2
1.2.	VERSION HISTORY	2
2.	CONTENTS.....	2
3.	OVERVIEW.....	4
4.	ACCESSING SERVICEDISPATCH	4
4.1.	INVITATION EMAIL.....	4
4.2.	ENVIRONMENTS AND URLS	7
5.	GENERAL INFORMATION.....	7
5.1.	AUTHENTICATION.....	7
5.2.	ELEMENT INFORMATION.....	8
5.3.	ERRORS	8
6.	WEB SERVICE.....	8
6.1.	APIS.....	8
6.2.	STANDARD JOB PROCESS FLOW.....	10
6.3.	WSDL INFORMATION.....	10
7.	GET CALL INFO.....	12
7.1.	SCHEMA DIAGRAM FOR THE GETCALLINFO REQUEST	13
7.2.	REQUEST PARAMETERS FOR GETCALLINFO	14



7.3.	SCHEMA DIAGRAM FOR THE GETCALLINFO RESPONSE	15
7.4.	RESPONSE PARAMETERS FOR GETCALLINFO	17
8.	GET CALL ATTRIBUTES	19
8.1.	SCHEMA DIAGRAM FOR THE GETCALLATTRIBUTES REQUEST	19
8.2.	REQUEST PARAMETERS FOR GETCALLATTRIBUTES.....	20
8.3.	SCHEMA DIAGRAM FOR THE GETCALLATTRIBUTES RESPONSE.....	21
8.4.	RESPONSE PARAMETERS FOR GETCALLATTRIBUTES.....	22
9.	GET PRODUCT COVERAGE.....	23
9.1.	SCHEMA DIAGRAM FOR THE GETPRODUCTCOVERAGE REQUEST	23
9.2.	REQUEST PARAMETERS FOR GETPRODUCTCOVERAGE	24
9.3.	SCHEMA DIAGRAM FOR THE GETPRODUCTCOVERAGE RESPONSE	25
9.4.	RESPONSE PARAMETERS FOR GET PRODUCT COVERAGE.....	26
10.	GET CALL ADDRESSES	27
10.1.	REQUEST PARAMETERS FOR GET CALL ADDRESS	28
10.2.	RESPONSE PARAMETERS FOR GET CALL ADDRESS.....	28
11.	UPDATE CALL INFO	29
11.1.	SCHEMA DIAGRAM FOR THE UPDATECALLINFO OBJECT REQUEST	29
11.2.	REQUEST PARAMETERS FOR UPDATECALLINFO	32
11.3.	SCHEMA DIAGRAM FOR THE UPDATECALLINFO OBJECT RESPONSE	36
11.4.	RESPONSE PARAMETERS FOR UPDATECALLINFO	37
12.	UPDATE TECH INFO	38
12.1.	SCHEMA DIAGRAM FOR THE UPDATETECHINFO REQUEST	38
12.2.	REQUEST PARAMETERS FOR UPDATETECHINFO.....	39
12.3.	SCHEMA DIAGRAM FOR THE UPDATETECHINFO RESPONSE.....	40
12.4.	RESPONSE PARAMETERS FOR UPDATETECHINFO.....	41
13.	UPDATE TECH CAPACITY	42
13.1.	SCHEMA DIAGRAM FOR THE UPDATETECHCAPACITY REQUEST.....	42
13.2.	REQUEST PARAMETERS FOR UPDATETECHCAPACITY	43
13.3.	SCHEMA DIAGRAM FOR THE UPDATETECHCAPACITY RESPONSE	44
13.4.	RESPONSE PARAMETERS FOR UPDATETECHCAPACITY	45
14.	DATA.....	45
14.1.	ERROR CODES	45
14.2.	TIME BANDS	46
14.3.	CALL STATUSES	46
14.4.	CALL SUBSTATUSES.....	47



3 OVERVIEW

ServiceDispatch, a component of the ServicePower Contracted Workforce platform, is an application designed for manufacturers and distributors. It facilitates the management of an external field force of third-party service providers who perform services such as installations, repairs, and preventative maintenance.

The platform facilitates the management and coordination of field service operations. It enables service providers to efficiently schedule, dispatch, and track service personnel and resources and contains features such as job management, real-time tracking, reporting, and customer communication tools to enhance operational efficiency and improve customer service.

As a provider offering these services to a customer of ServicePower, you are invited to integrate your existing systems with ServiceDispatch for the purpose of querying and updating information from within the application. This document explains how to connect your existing line of business applications using an industry standard web-service.

The primary audience of this document are technical resources working on behalf of an authorised service provider, providing services to a ServicePower client. It is expected that anyone attempting to integrate an external system with ServiceDispatch has access to, and is familiar with, the user interface and the concepts of managing jobs and user profiles.

4 ACCESSING SERVICEDISPATCH

4.1. INVITATION EMAIL

Your Servicer Profile will be created by the ServicePower customer as part of their business-as-usual activities. Once created within the system you will receive an email providing your unique login ID.



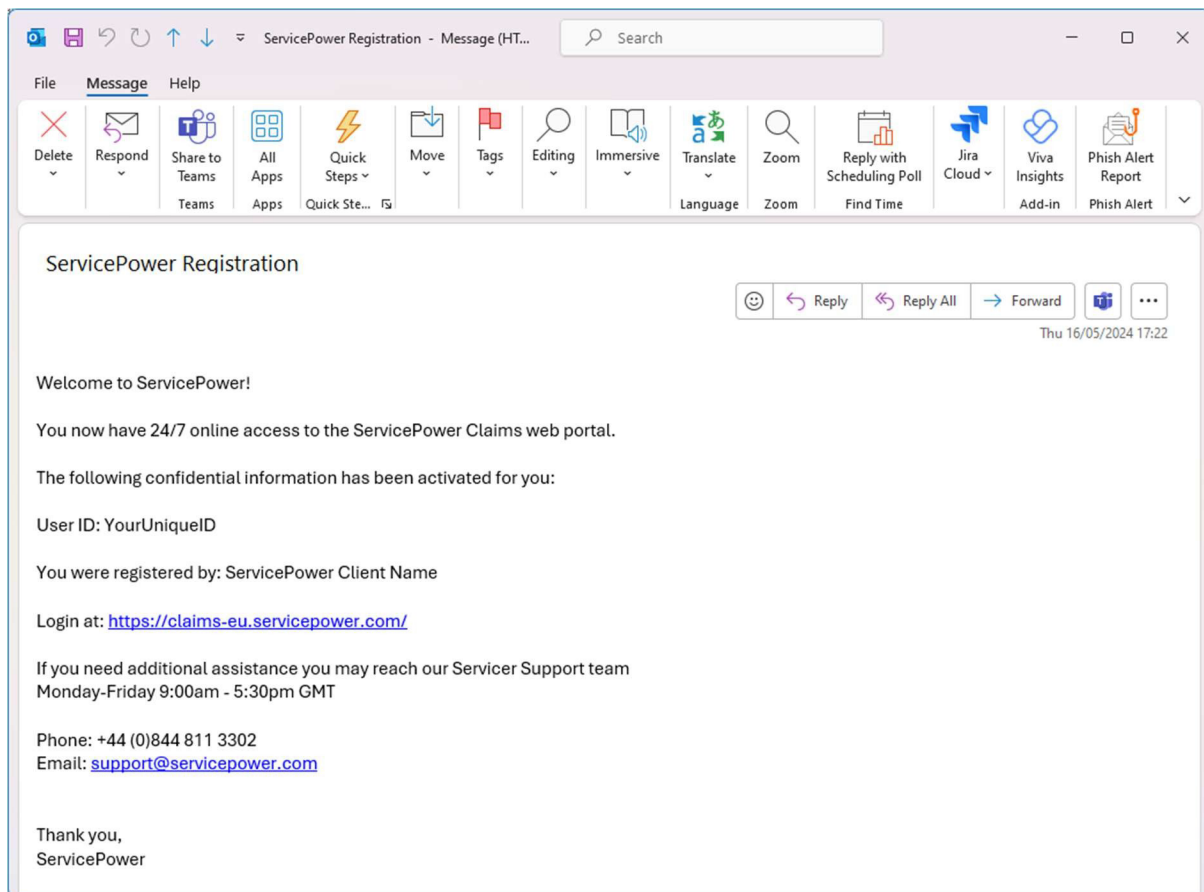


Figure 1 - The welcome email.

Your temporary password, which arrives shortly after the welcome email, contains a link to your new password.



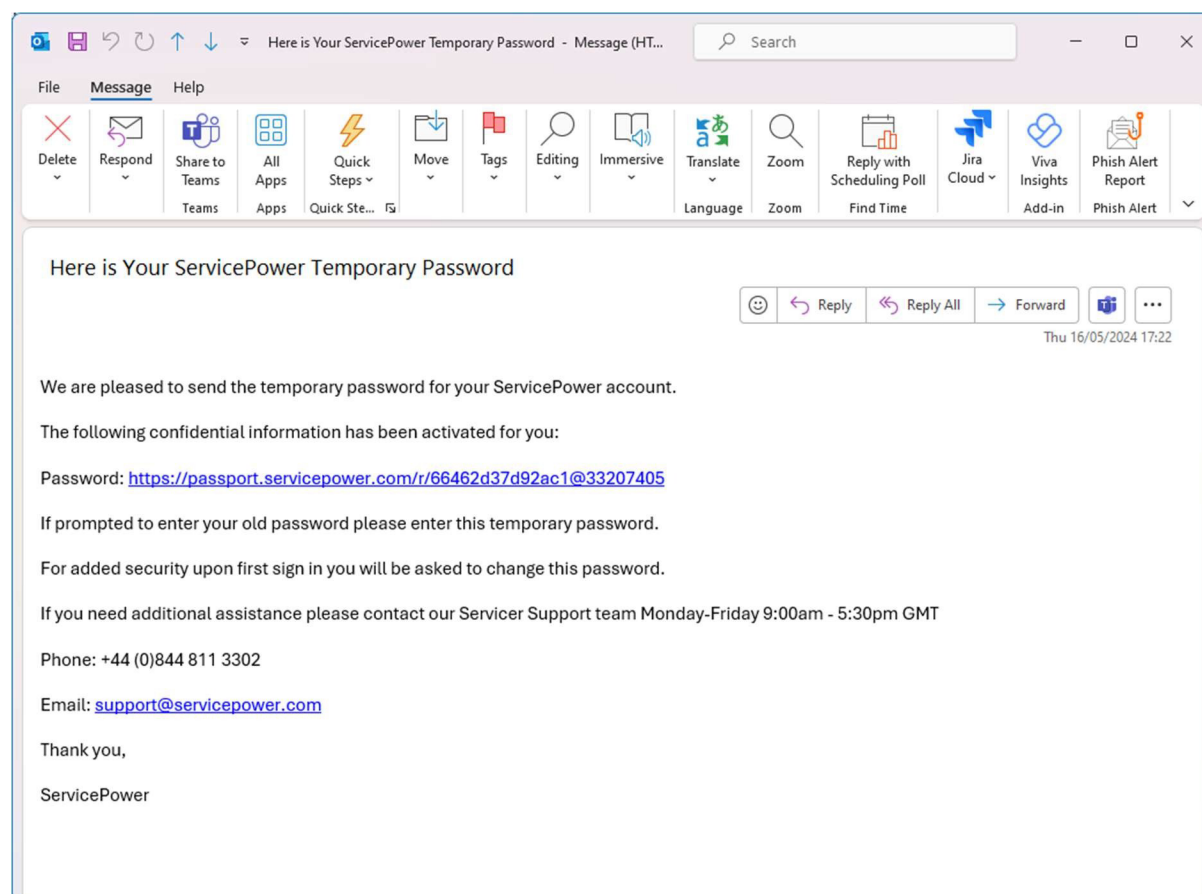


Figure 2 - The second email which contains a link to your temporary password.

For security reasons you will need to click on the link contained within the email. You will then be able to open the message and retrieve your password. Note that this link automatically expires after 4 days.

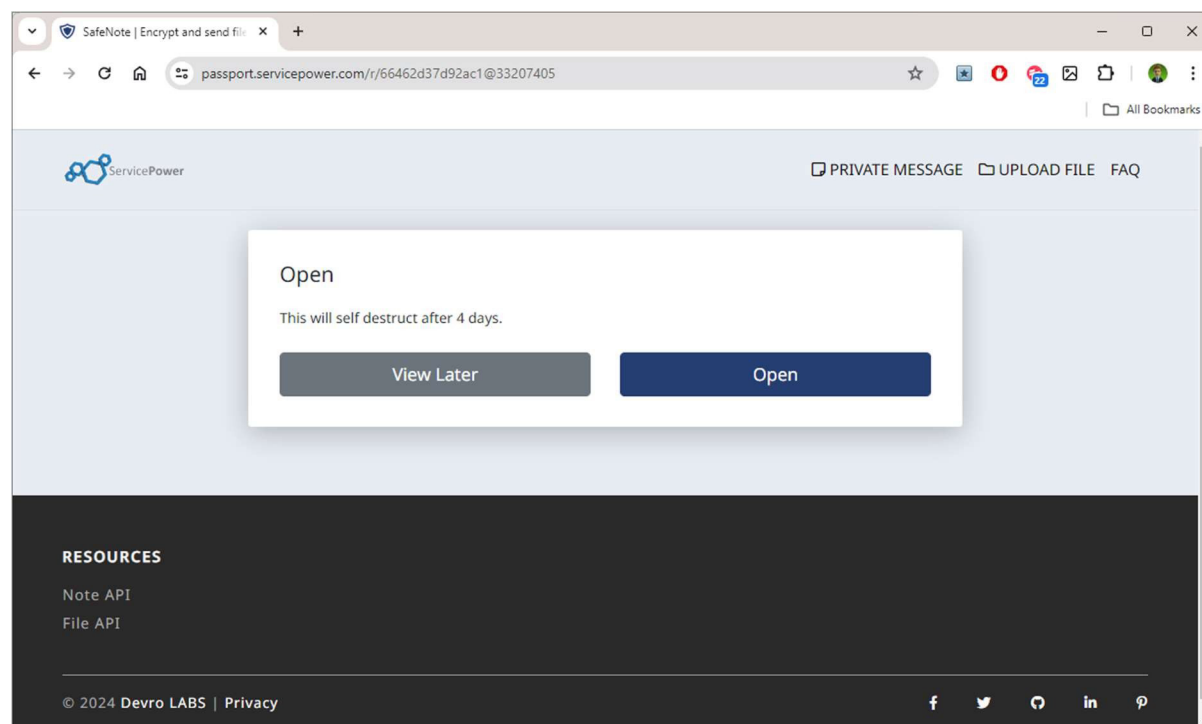


Figure 3 - Retrieving your temporary password.



4.2. ENVIRONMENTS AND URLS

ServicePower provides two environments for customers, a staging environment used for testing and configuration purposes, and a production environment. These are accessible to servicers supporting ServicePower customers.

NOTE: The Staging environment is a copy of the Production environment. For that reason, the URLs contained in the welcome email always point to the Production environment. Please ensure that you use the correct URLs documented below.

Your Staging systems can be accessed using the following URLs;

- North America: <https://fssstag.servicepower.com>
- Europe: <https://fss-stg.hostedservicepower.eu>

The Production environment can be found at;

- North America: <https://fss.servicepower.com>
- Europe: <https://fss.servicepower.eu>

Please note that you may receive an email to the staging system whilst a ServicePower customer project is ongoing. In these circumstances, an invitation to the production environment will be sent once the system is launched.

When accessing the system for the first time, you will be required to change your password. It is important to retain a copy of your password as this will be provided, along with your unique login ID, when accessing the system user interface and when communicating with ServiceDispatch using any API listed in this document.

5. GENERAL INFORMATION

ServiceDispatch APIs for Service Providers are implemented using Simple Object Access Protocol (SOAP) and must be accessed via HTTPS to ensure secure communication.

5.1. AUTHENTICATION

The web service has an authentication section named UserInfo which contains two elements - user ID and password. A manufacturer client must obtain a user and password that is valid only for web service connections. The user id and password used to connect to the website will not work.

Servicers may use the same user and password that is used to log on to the web site. The information is provided in the welcome email.

Below is a sample of the authentication section.



```
"UserInfo":  
  {  
    "UserId":"SOMEUSER",  
    "Password":"userpwd"  
  },
```

5.2. ELEMENT INFORMATION

Unless specifically indicated within the comments section of each table, elements are optional.

The accepted data types for an element are:

- A – Alphanumeric
- N – Numeric

If the data type of the element is numeric, the maximum number of decimal places will be indicated. A guide to syntax is included within the Request and Response Elements later in the document.

5.3. ERRORS

When the web service executes normally, the data is returned to the integrated system.

In the event of an error, the web service will provide an error code (defined in Section [14.1](#)) and a brief description of the error. It is recommended that these are mapped to user friendly error messages within the integrated system.

An example of the messages and errors array will be as follows.

```
"messages": [  
  {  
    "message":"Error Message 1"  
  },  
  {  
    "message":"Error Message 2"  
  }  
]
```

6. WEB SERVICE

6.1. APIS

The ServiceDispatch WSDL defines the following APIs;

- addAreaInfo – Maintenance task. Used to add an area of geographical coverage to your servicer profile.
- addGroupInfo – Maintenance task. Used to add a group to your servicer profile and to optionally specify warranty types, service locations, service types and industries.




- **addTechInfo** – Maintenance Task. Used to add new technicians to your servicer profile, add basic information such as contact details and capacity.
- **getCallAddresses** – Used to obtain address related information such as the service address, collection address and return address.
- **getCallAttributes** – Used to obtain extended information relating to a service call obtained via **getCallInfo**.
- **getCallInfo** – Used to obtain a list of available jobs within the ServiceDispatch system and query information relating to a service call.
- **getCallNotes** – Obtains notes added to a service call by the manufacturer. This functionality may be used to add special instructions such as directions or access codes for the service location or generic notes related to the call.
- **getProductCoverage** – Used to obtain details of warranty or insurance coverage.
- **getTestService** – Used for testing basic connectivity. E.g. Hello World
- **updateAreaInfo** – Maintenance task. Area information within ServiceDispatch defines the geographic locations where you are willing to accept service calls. This API is used to update an area of geographical coverage currently held within your servicer profile.
- **updateCallInfo** – Typically used after using **getCallInfo**, this API is used to update information on a service call, including accepting or rejecting the job and later to update the status of the job.
- **updateDispatchOfficeInfo** – Maintenance task. Used to update the information relating to a Dispatch Office previously added via the UI.
- **updateGroupInfo** – Maintenance task. Used to update a group currently held within your servicer profile.
- **updatePostCode** – Maintenance task. Used to add a single post code to an area.
- **UpdateServicerInfo** – Maintenance task. Used to update basic information relating to your servicer profile.
- **updateTechCapacity** – Maintenance task. Used to update the capacity of a technician.
- **updateTechInfo** – Maintenance task. Used to update technicians currently held within your servicer profile, and to update basic information such as contact details and capacity.

It is important to note that not all APIs are documented within this guide. Further information can be found within the ServiceDispatch WSDLs if necessary. However, the core APIs used by the majority of



client servicers have been detailed. ServicePower provides regular Servicer Support Sessions for any 3rd party requiring further information.

6.2. STANDARD JOB PROCESS FLOW

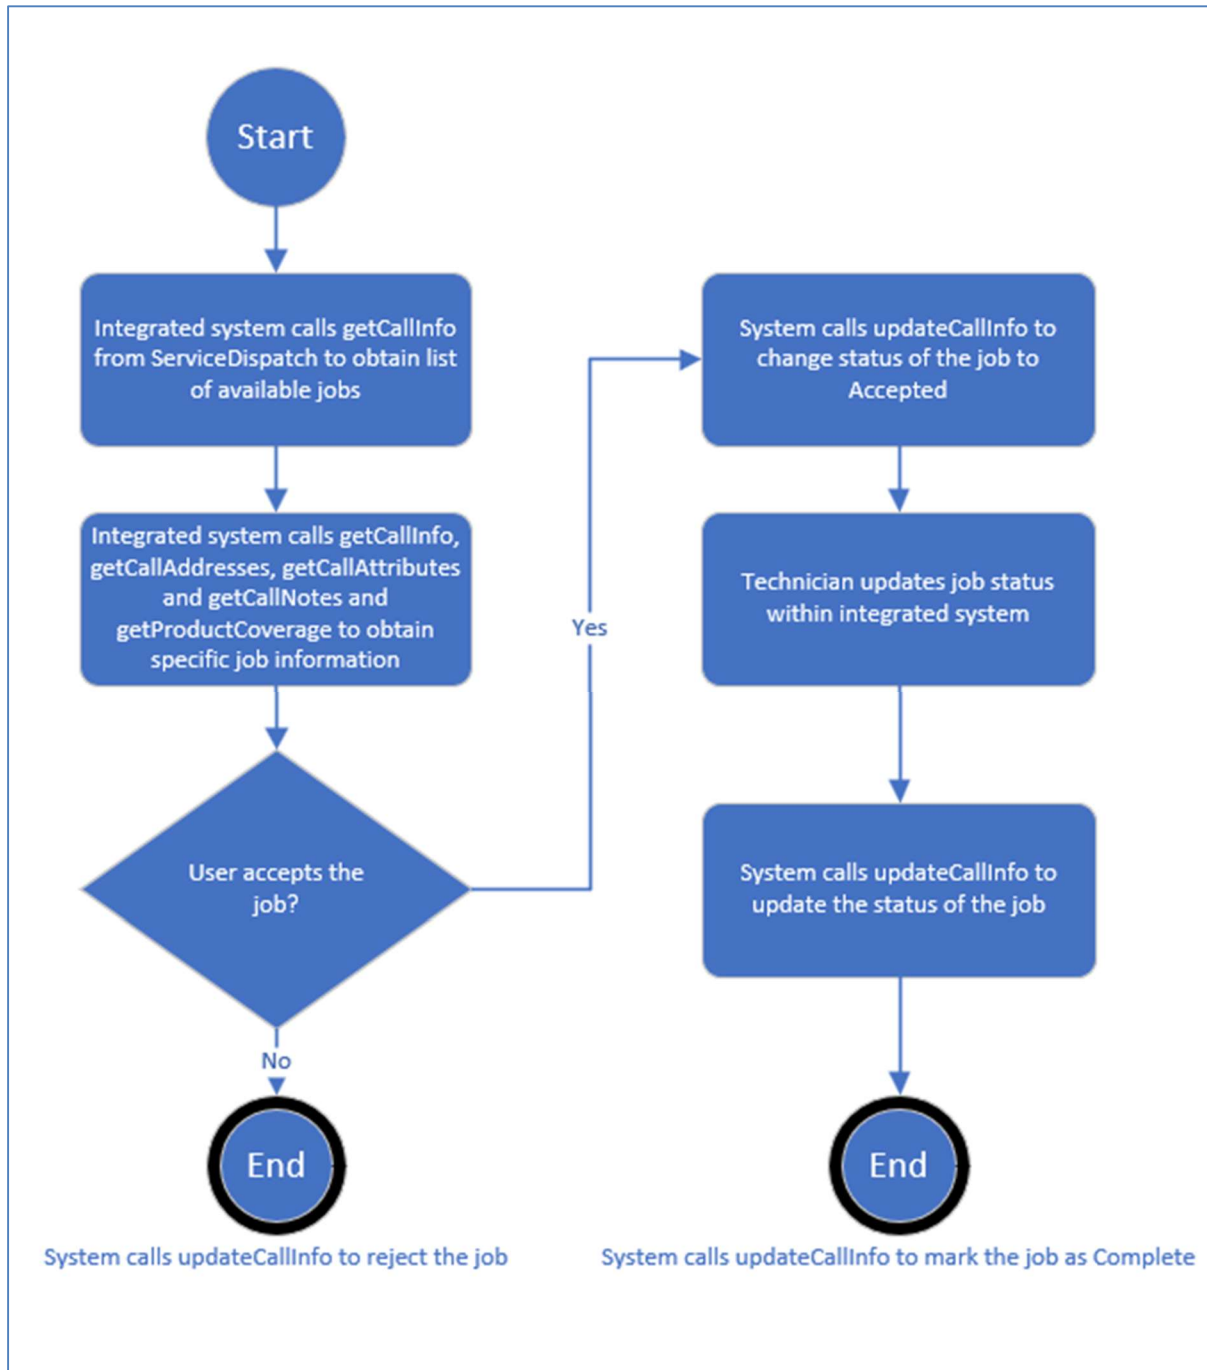

It is recommended that `getCallInfo` is scheduled to run at regular intervals throughout the day in order to obtain a list of updated jobs.

6.3. WSDL INFORMATION



Although broadly similar, WSDLs are separated by region. For the Staging environment, WSDLs can be found at the following locations;

- North America: <https://fssstag.servicepower.com/sms/services/SPDService?wsdl>
- Europe: <https://fss-stg.hostedservicepower.eu/sms/services/SPDService?wsdl>

For the Production environment these can be found at;

- North America: <https://fss.servicepower.com/sms/services/SPDService?wsdl>
- Europe: <https://fss.servicepower.eu/sms/services/SPDService?wsdl>

WSDLs can be imported into an application such as SoapUI, Postman or Altova XMLSpy that allow users to analyze, validate and interact with SOAP-based web services.

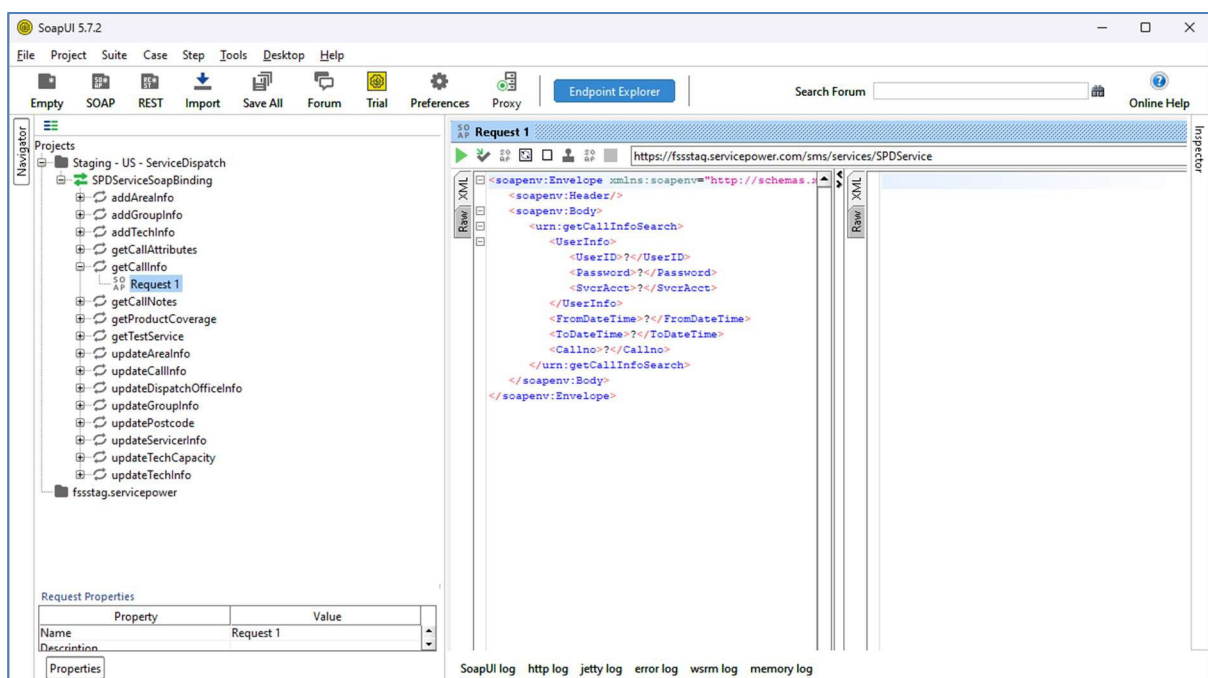


Figure 4 - The WSDL for ServiceDispatch imported into SoapUI.

Sample responses can be generated using the WSDL.



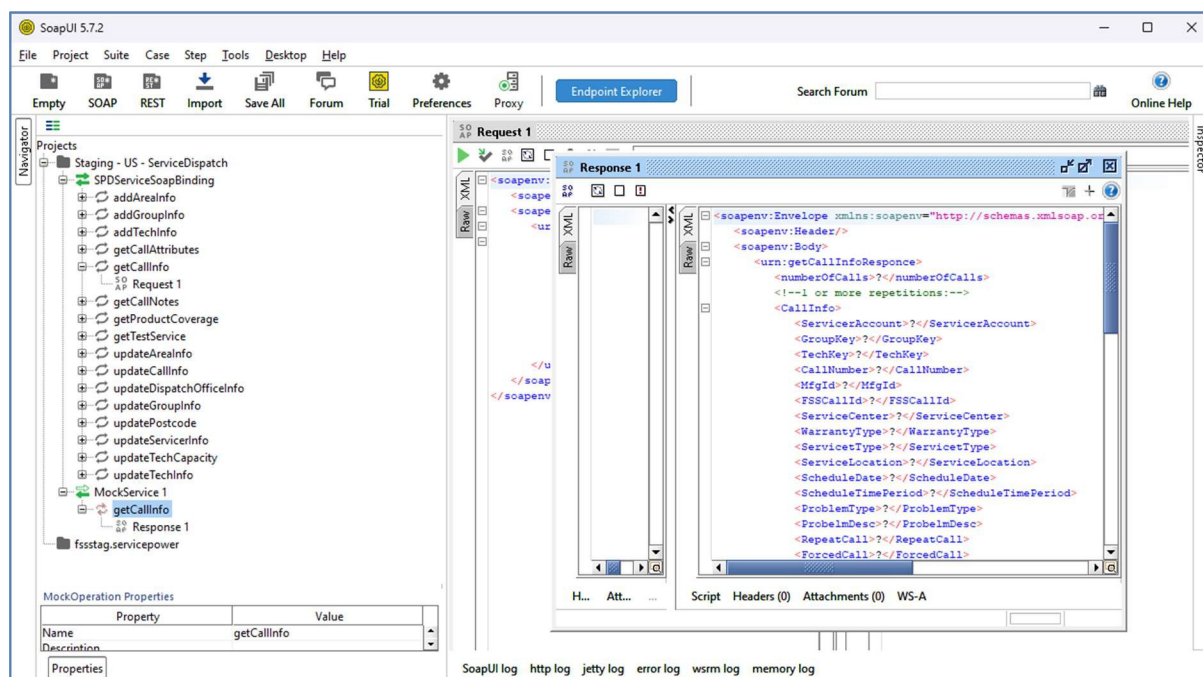


Figure 5 - Sample responses generated within SoapUI.

It is expected that the intended audience for this guide is familiar with the process of using testing applications such as a WSDL viewer and that they are capable of developing the integrated system in order for the API to be called. No guidance on the usage of external software is provided in this guide.

7. GET CALL INFO

getCallInfo is used to obtain a list of list of available jobs available between two supplied dates. Returns a list of calls together with job specific information such as the type of job, the affected device, a description of the fault together with basic contact information.

It is recommended that this API is scheduled to run frequently throughout the course of the day to return new jobs.



7.1. SCHEMA DIAGRAM FOR THE GETCALLINFO REQUEST

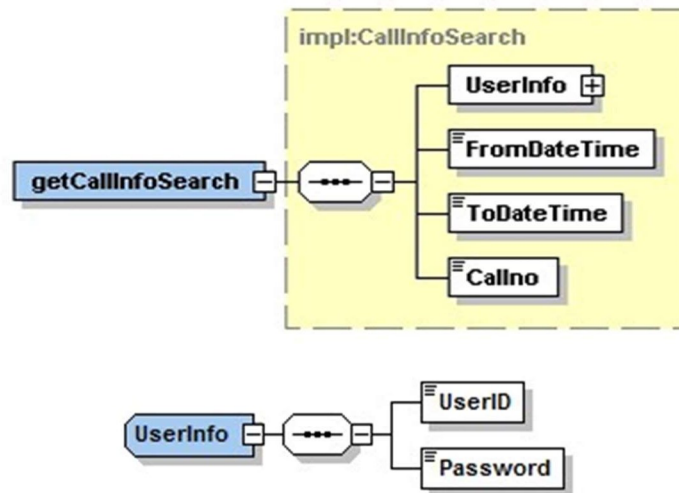


Figure 6 - Schema Diagram for getCallInfo request.



7.2. REQUEST PARAMETERS FOR GETCALLINFO

FIELD	REQUIRED	LENGTH	COMMENTS
UserId	Yes	10	Provided in the initial invitation email.
Password	Yes	10	Initially provided in the invitation email, this password can be updated within the ServiceDispatch user interface.
SvcrAcct	Yes	10	Servicer account number
FromDatetime	N		mm/dd/yyyy HH24:mi:ss
ToDateTime	N		mm/dd/yyyy HH24:mi:ss
Callno	N	20	Client's call reference number



7.3. SCHEMA DIAGRAM FOR THE GETCALLINFO RESPONSE

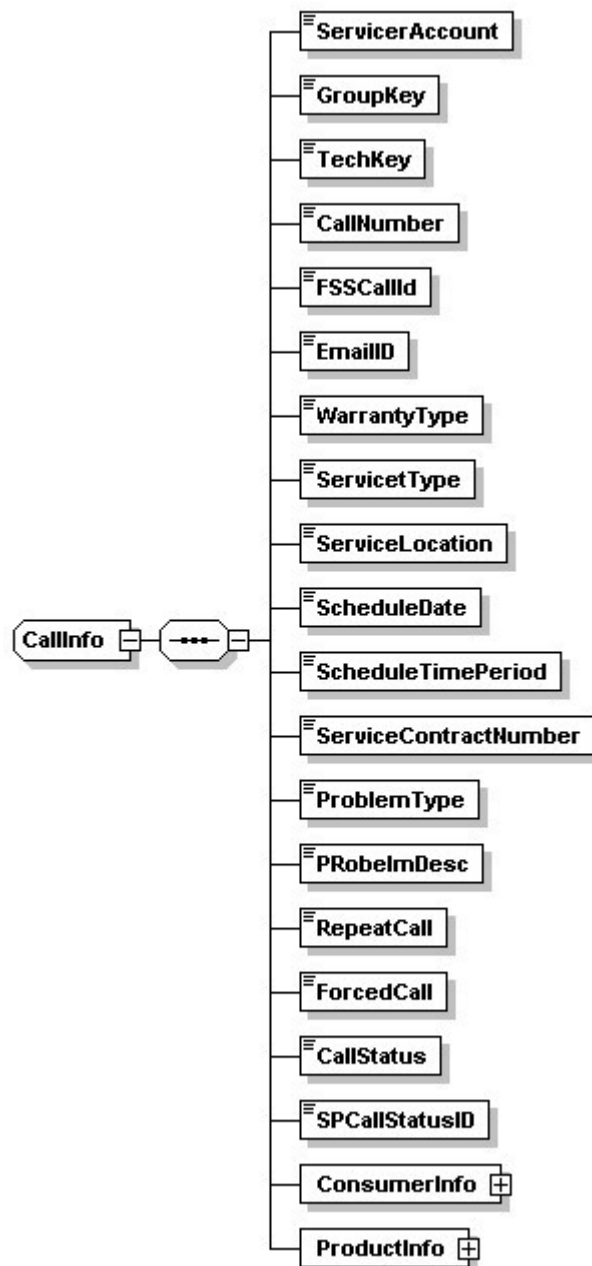


Figure 7 - The Schema Diagram for the `getCallInfoResponse`



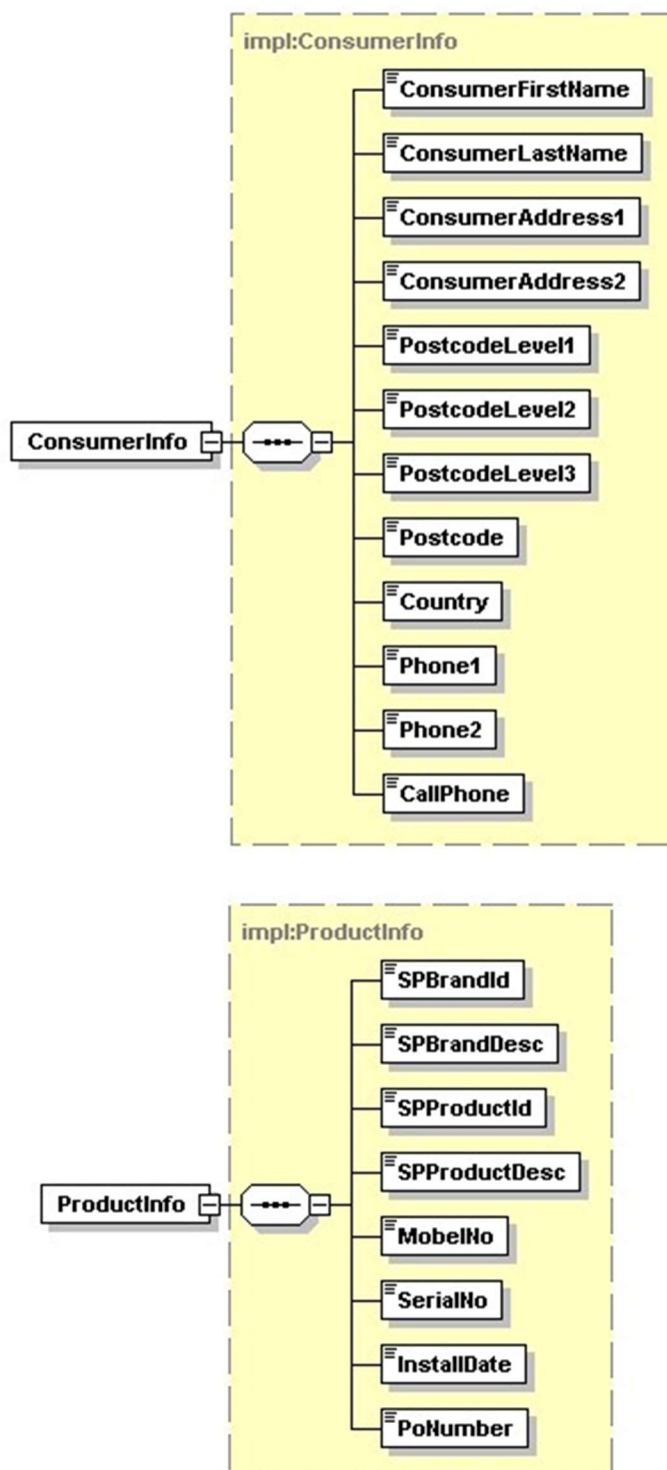


Figure 8 - Expanded diagram for ConsumerInfo and ProductInfo. To be used in conjunction with Figure 7.



7.4. RESPONSE PARAMETERS FOR GETCALLINFO

FIELD	REQUIRED	DATA TYPE	LENGTH	COMMENTS
ServicerAccount	Yes	VarChar	10	Servicer account number
GroupKey	Yes	VarChar		Group key ID
TechKey	No	VarChar		Technician key ID
CallNumber	Yes	VarChar	20	Clients call reference number.
MfgId	Yes	VarChar	10	NetworkId
FSSCallId	Yes	VarChar	10	Callid internal to fss
ServiceCenter	Yes	VarChar	10	The servicer center the call is assigned to
WarrantyType	Yes	VarChar	10	
ServicetType	Yes	VarChar	10	
ServiceLocation	Yes	VarChar	10	
ScheduleDate	No	VarChar		
ScheduleTimePeriod	No	VarChar		
ProblemType	No	VarChar	25	
ProbelmDesc	Yes	VarChar	224	
RepeatCall	Yes	VarChar	3	
ForcedCall	Yes	VarChar	3	
CallStatus	Yes	VarChar		Job status codes • OPEN • ACCEPTED • COMPLETED • REJECTED • RESCHEDULED • CANCELED • CLAIMED
SPCallStatusID	Yes	VarChar	10	Main status
CallSubStatus	Yes	VarChar		Call substatuses as outlined in Section 14.4
SPCallSubStatusID	Yes	VarChar	10	Substatuses to be mapped to servicer/client
CallCreatedOn	Yes	VarChar		
ConsumerInfo	Yes	Object		



FIELD	REQUIRED	DATA TYPE	LENGTH	COMMENTS
ConsumerFirstName	No	VarChar	25	For store repairs, contact First name is person to contact regarding the repair.
ConsumerLastName	No	VarChar	25	For store repairs, contact Last name is person to contact regarding the repair.
ConsumerAddress1	Yes	VarChar	50	Street address of repair location.
ConsumerAddress2	No	VarChar	50	Street address of repair location.
PostcodeLevel1	Yes	VarChar	30	State code of repair location.
PostcodeLevel2		VarChar	30	County of repair location.
PostcodeLevel3	Yes	VarChar	30	City of repair location.
Postcode	Yes	VarChar	9	Zip code of repair location.
Country	Yes	VarChar	5	Country of repair location.
Phone1	Yes	VarChar	10	Primary phone number
Phone2	No	VarChar	10	Secondary phone number
CellPhone	No	VarChar	10	Cell phone number
EmailId	No	VarChar	100	Email Id of the Consumer
ProductInfo		Object		
SPProductId	Yes	VarChar	10	Brand of the product being serviced.
SPProductDesc	Yes	VarChar	10	The type of product being serviced.
SPBrandId	No	VarChar		
SPBrandDesc	No	VarChar		
MobelNo	No	VarChar	30	Model number of the product being serviced.
SerialNo	No	VarChar	85	Serial number
InstallDate	No	VarChar	17	Format CCYYMMDD hh:mm:ss
ServiceContractNumber	No			Service contract number
PoNumber	No	VarChar	20	
PoAmount	No	VarChar	9	
CopayAmount	No	VarChar	8	



8. GET CALL ATTRIBUTES

Having obtained the list of available jobs from the ServicePower network using getCallInfo, servicers can submit a further call of getCallAttributes, providing the FSSCallID, to obtain extended information relating to the call such as a description of the fault.

8.1. SCHEMA DIAGRAM FOR THE GETCALLATTRIBUTES REQUEST

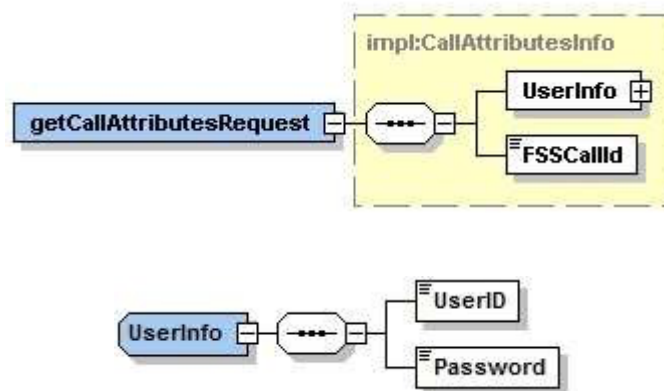


Figure 9 - Schema diagram for the getCallAttributesRequest



8.2. REQUEST PARAMETERS FOR GETCALLATTRIBUTES

FIELD	DATA TYPE	REQUIRED	LENGTH	COMMENTS
UserId	String	Yes	10	Provided in the initial invitation email.
Password	String	Yes	10	Initially provided in the invitation email, this password can be updated within the ServiceDispatch user interface.
SvcrAcct	String	Yes	10	Servicer account number
FSSCallId	String	Yes	12	Internal ID for the call This fss call id will be available in the getCallInfo operation.



8.3. SCHEMA DIAGRAM FOR THE GETCALLATTRIBUTES RESPONSE

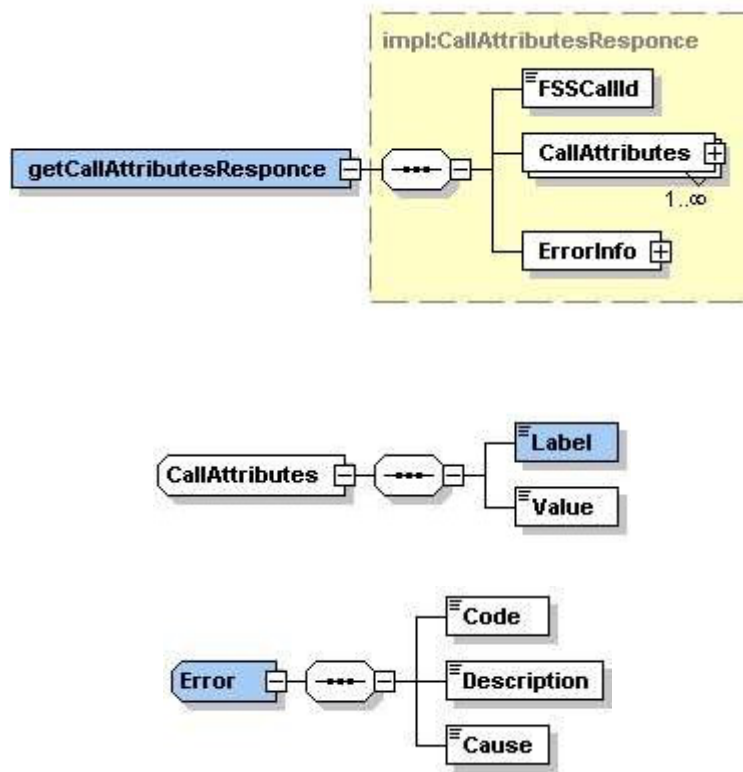


Figure 10 - Schema Diagram for the `getCallAttributes` response.



8.4. RESPONSE PARAMETERS FOR GETCALLATTRIBUTES

FIELD	REQUIRED	DATA TYPE	LENGTH	COMMENTS
FSSCallId	Yes	String	12	Internal ID for the call
label	No	String	100	Field name
Value	No	String	100	Field Value



9. GET PRODUCT COVERAGE

Having obtained the list of available jobs from the ServicePower network using getCallInfo, servicers can submit a further call of getProductCoverage to obtain warranty and product coverage information.

getProductCoverage requires that the FSSCallId, obtained using getCallInfo, is provided within the API call.

9.1. SCHEMA DIAGRAM FOR THE GETPRODUCTCOVERAGE REQUEST

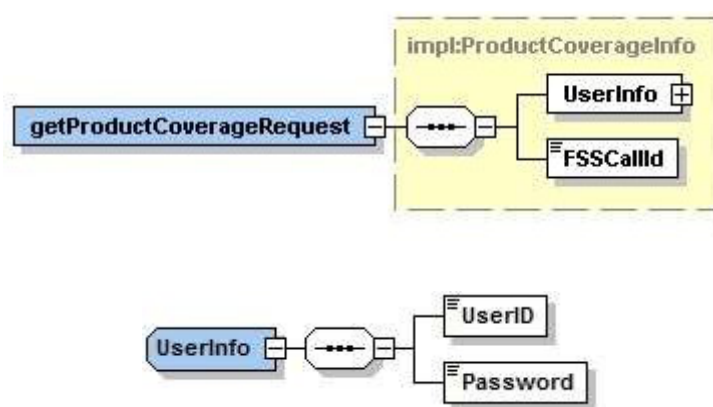


Figure 11 - Schema diagram for the getProductCoverage request.



9.2. REQUEST PARAMETERS FOR GETPRODUCTCOVERAGE

FIELD	DATA TYPE	REQUIRED	LENGTH	COMMENTS
UserId	String	Yes	10	Provided in the initial invitation email.
Password	String	Yes	10	Initially provided in the invitation email, this password can be updated within the ServiceDispatch user interface.
SvcrAcct	String	Yes	10	Servicer account number
FSSCallId	String	Yes	12	Internal ID for the call This FSSCallID is available in the getcallinfo Operation.



9.3. SCHEMA DIAGRAM FOR THE GETPRODUCTCOVERAGE RESPONSE

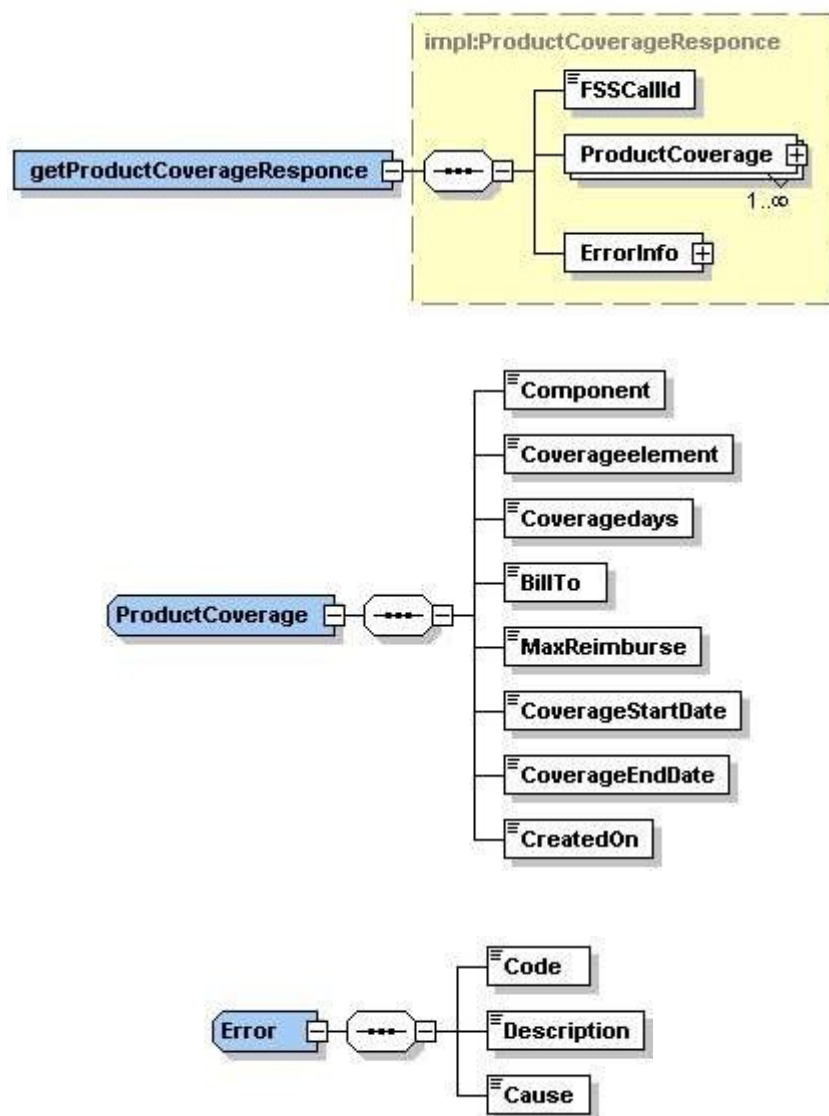


Figure 12 - Schema diagram for the getProductCoverage response.



9.4. RESPONSE PARAMETERS FOR GET PRODUCT COVERAGE

FIELD	REQUIRED	DATA TYPE	LENGTH	COMMENTS
FSSCallId	Yes	String	12	The unique identifier of the call, obtained using the getCallInfo API
Component	No	String	100	
Coverageelement	No	String	100	
BillTo	No	String	10	
Coveragedays	No	String	10	
Maxreimburse	No	String	10	
CoverageStartDate	No	String	8	The coverage start date in the format YYYYMMDD
CoverageEndDate	No	String	8	The coverage end date in the format YYYYMMDD
CreatedOn	No	String	17	YYYYMMDD HH:MI:SS



10.GET CALL ADDRESSES

Having obtained the list of available jobs from the ServicePower network using `getCallInfo`, servicers can submit a further call of `getCallAddresses` to obtain detailed information on the addresses added to the service call.

This may include the service location, a device collection address and a device return address.

In this operation user needs to pass the FSS call Id to get the call address information such as product and pickup locations.



10.1. REQUEST PARAMETERS FOR GET CALL ADDRESS

FIELD	REQUIRED	DATA TYPE	LENGTH	COMMENTS
UserId	Y	String	10	User Id ServicePower to provide
Password	Y	String	10	Password ServicePower to provide
SvcrAcct	Y	String	10	Servicer account number
FSSCallId	Y	String	12	Call ID. This will be available in the getCallinfo Operation
AddressType	Y	String	12	Address type e.g., Product or Pickup

10.2. RESPONSE PARAMETERS FOR GET CALL ADDRESS

FIELD	DATA TYPE	LENGTH	COMMENTS
FSSCallId	String	12	Call ID. This will be available in the getCallinfo Operation
AddressCount	Number	2	Number of addresses in call
AddressType	String	30	Address type e.g. Product or Pickup
contactName	String	100	Contact Name
Address1	String	50	Address line 1
Address2	String	50	Address line 2
PostcodeLevel1	String	30	USA=State, UK=Outcode Name
PostcodeLevel2	String	30	USA=County, UK not applicable
PostcodeLevel3	String	30	USA=State, UK=Incode Name
Postcode	String	9	USA=Zip Code, UK=Postal Code
Country	String	3	3-character ISO country code, e.g. USA, GBR
PhoneNumber1	String	15	Phone Number 1
PhoneNumber2	String	15	Phone Number 2



11.UPDATE CALL INFO

Having obtained the list of available jobs from the ServicePower network, servicers can update the call either within the user interface or by using the updateCallInfo API.

This API can be used to change the initial status of the call, either to Accepted or Rejected. It can subsequently be used to provide further detail such as the current status of the repair, parts required, or to provide a list of comments or remarks.

This document provides a list of all available elements within the API. However, not all ServicePower clients use all elements and, where this is the case, the information will not be recorded.

11.1. SCHEMA DIAGRAM FOR THE UPDATECALLINFO OBJECT REQUEST

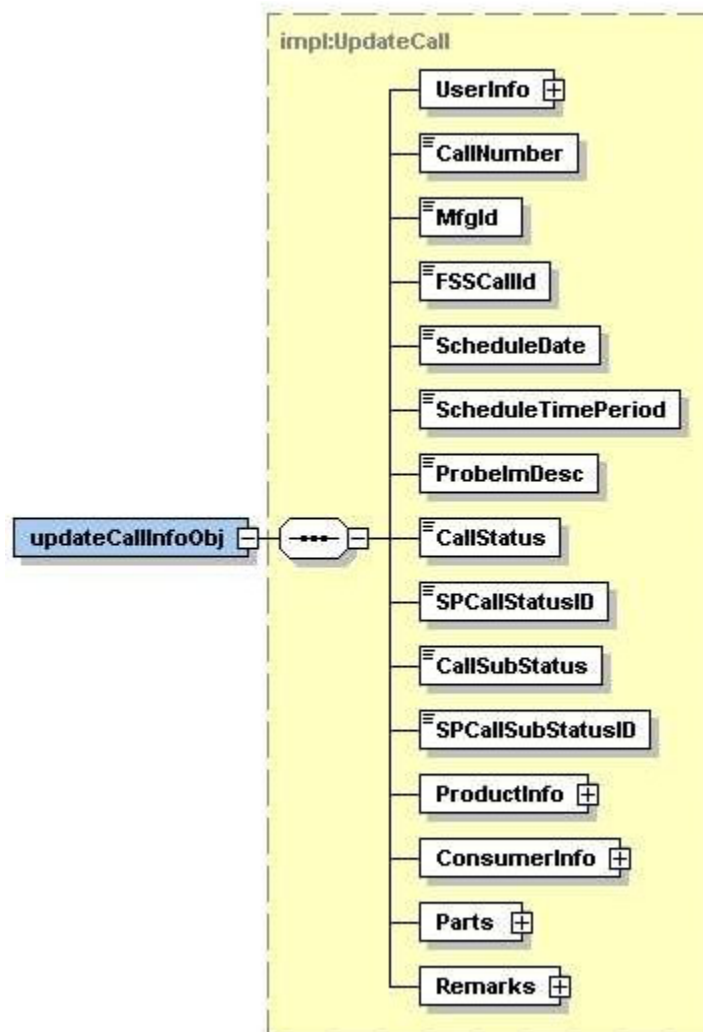


Figure 13 - Schema diagram for updateCallInfo object request.



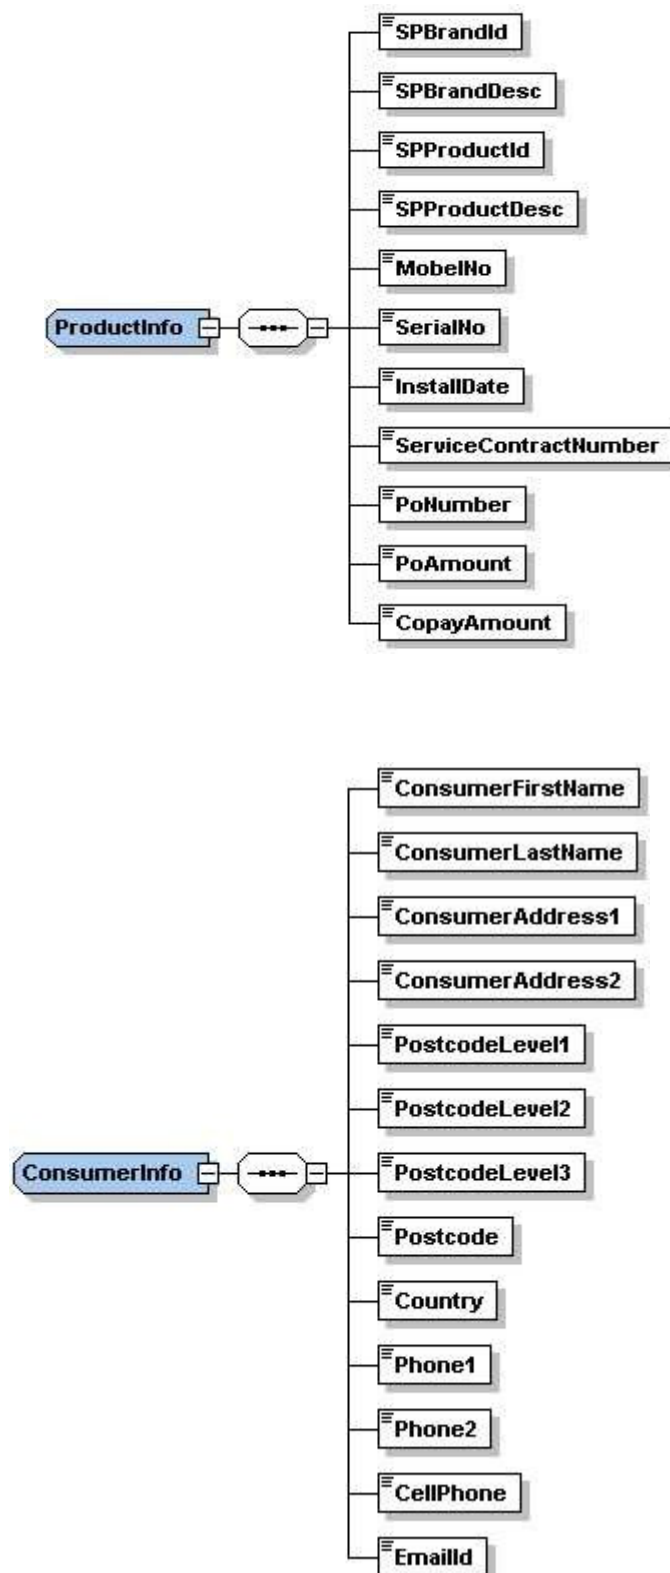


Figure 14 - Expanded diagram for ProductInfo and ConsumerInfo. To be used in conjunction with Figure 13



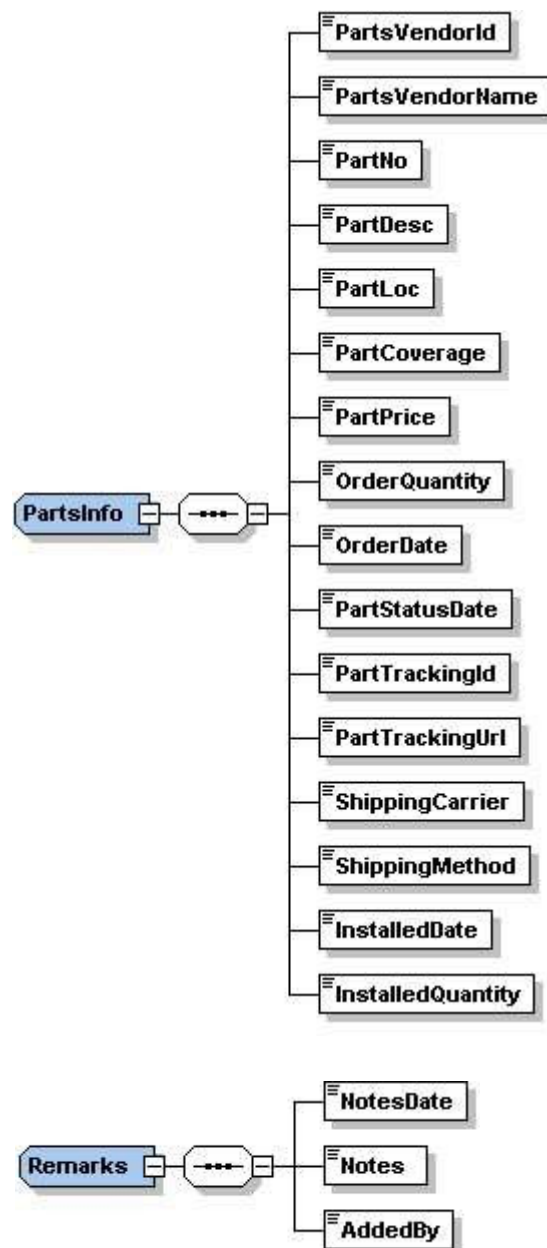


Figure 15 - Expanded diagram for PartsInfo and Remarks. To be used in conjunction with Figure 13



11.2. REQUEST PARAMETERS FOR UPDATECALLINFO

FIELD	REQUIRED	DATA TYPE	LENGTH	DESCRIPTION
UserInfo	Y	Object		
UserId	Y	VarChar	10	Provided in the initial invitation email.
Password	Y	VarChar	10	Initially provided in the invitation email, this password can be updated within the ServiceDispatch user interface.
SvcrAcct	Y	VarChar	10	Servicer account number
CallNumber	Y	VarChar	12	Clients call reference number
MfgId	Y	VarChar	10	Clients unique ID
FSSCallId	N	VarChar	10	Call ID. This will be available in the getCallinfo Operation
ScheduleDate	N	VarChar	8	The current date service is or was to be performed. Format CCYYMMDD
ScheduleTimePeriod	N	VarChar	--	Time Band Like , 8-12,12-17,8-17
ProbelmDesc	Y	VarChar	225	Problem description of the call
CallStatus	Y	VarChar		OPEN, ACCEPTED, COMPLETED REJECTED, RESCHEDULED (refer Data b)
SPCallStatusID	Y	VarChar	10	Main status
CallSubStatus	N	VarChar	--	Not required, and status field should be left blank when updating schedule information, call details, or adding notes
SPCallSubStatusID	Y	VarChar	10	Substatuses to be mapped to servicer/client
CompleteDate	N	VarChar	10	MM/DD/YYYY
ReasonCode	N	VarChar	10	Reason code that you want to pass to reschedule a call



WarrantyType	N	VarChar	10	Call Type code needs to be passed. CN = Concessions IS = Insurance IW = In Warranty MR = OEM Rework
--------------	---	---------	----	---



FIELD	REQUIRED	DATA TYPE	LENGTH	DESCRIPTION
				OW = Out Warranty SC = Service Contract SLSFL = Sales Fulfillment
JobCode	N	VarChar	5	Job Code if available
ServicerJobId	N	VarChar	10	Servicer Job Id if available
ConsumerInfo	N	Object		
ConsumerFirstName	N	VarChar	25	For store repairs, contact First name is person to contact regarding the repair.
ConsumerLastName	N	VarChar	25	For store repairs, contact Last name is person to contact regarding the repair.
ConsumerAddress1	Y	VarChar	50	Street address of repair location.
ConsumerAddress2	N	VarChar	50	Street address of repair location.
PostcodeLevel1	Y	VarChar	30	State code of repair location.
PostcodeLevel2		VarChar	30	County of repair location.
PostcodeLevel3	Y	VarChar	30	City of repair location.
Postcode	Y	VarChar	9	Zip code of repair location.
Country	Y	VarChar	5	Country of repair location.
Phone1	Y	VarChar	10	Primary phone number
Phone2	N	VarChar	10	Secondary phone number
CellPhone	N	VarChar	10	Cell phone number
EmailId	N	VarChar	100	Email Id of the Consumer
ProductInfo		Object		
SPProductId	Y	VarChar	10	Brand of the product being serviced.
SPProductDesc	Y	VarChar	10	The type of product being serviced.
SPBrandId	N	VarChar		
SPBrandDesc	N	VarChar		
MobelNo	N	VarChar	30	Model number of the product being serviced.
SerialNo	N	VarChar	85	Serial number
InstallDate	N	VarChar	17	Format CCYYMMDD hh:mm:ss
ServiceContractNumber	N	VarChar	25	Service contract number



FIELD	REQUIRED	DATA TYPE	LENGTH	DESCRIPTION
ServiceContractExpireDate	N	VarChar	10	Format YYYYMMDD
PoNumber	N	VarChar	20	
PoAmount	N	VarChar	9	
CopayAmount	N	VarChar	8	
Parts	N	Object		
Partno	Y/N**	VarChar	25	Part number is the identifier assigned by the manufacturer to a part. The parts number along with the division and pls uniquely identify a part.
Partdesc	N	VarChar	100	The text description corresponding to the part number.
Partloc	N	VarChar	50	
partcoverage	N	VarChar	10	Identifies how part will be paid for. Valid Values are: CC=Customer collect IW=In Warranty SP=Service Product (maintenance agreement, etc.) PT=Payroll Transfer
Partprice	N	VarChar	10	Format:no decimal or comma, two decimals are assumed.
orderquantity	N	VarChar	10	How much quantity was ordered.
Orderdate	N	VarChar	17	Format CCYYMMDD hh:mm:ss,
Partstatus	N	VarChar	3	Valid Values are: • IN = installed • OR = Ordered • UNI = Uninstalled • BO = Back ordered • FS = Filled shipped • PFS = partial filled shipped - FA = Factory • LLA = No Longer Available



FIELD	REQUIRED	DATA TYPE	LENGTH	DESCRIPTION
				• MI = Mistake • CO = counter • SB = Ship Branch • RT = received Tech • AT = Assigned Tech RE = received • TBR = To be returned • DA = Damaged • SU = Substitute • PR = partial received • RB = received Branch • PR = part Return • CA = Cancel • PD = Predicted • UB = Unit Backordered • PI = Picked • PP = partial Pick blank = unknown status
partstatusdate	N	VarChar	17	Format CCYYMMDD hh:mm:ss,
parttrackingid	N	VarChar	50	tracking id for tracking the parts online
parttrackingurl	N	VarChar	200	tracking url for tracking the parts online.
shippingcarrier	N	VarChar	25	Who is carrier ...like (fedex,uspor USPs)
shippingmethod	N	VarChar	25	Method of shipping used e.g. Ground, Air, Ship
Installeddate	N	VarChar	17	Format CCYYMMDD hh:mm:ss
installedquantity	N	VarChar	10	How many part are installed.
Remarks	N	Object		
Notesdate	N	VarChar	17	Format CCYYMMDD hh:mm:ss
Notes	N	VarChar	2024	The text of the message.
Addedby	N	VarChar	10	The agent who created the remark.



11.3. SCHEMA DIAGRAM FOR THE UPDATECALLINFO OBJECT RESPONSE

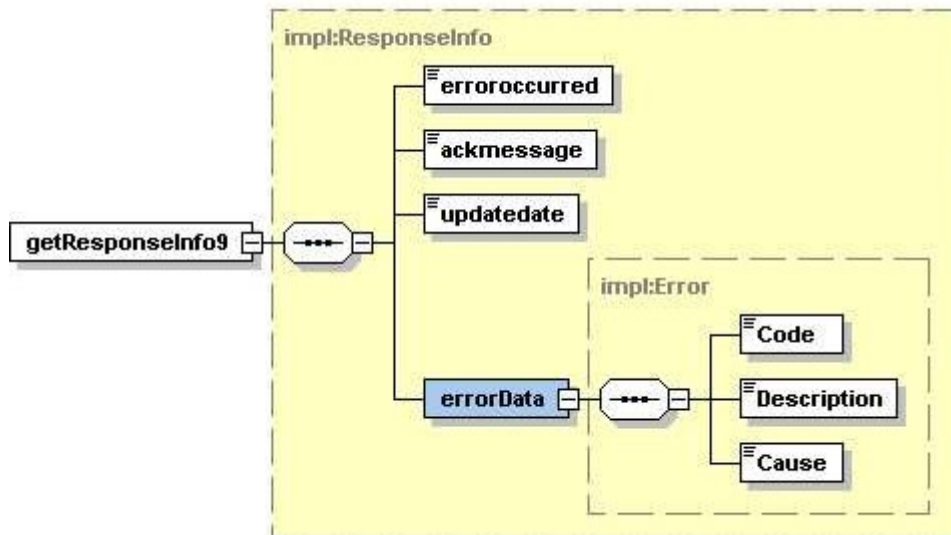


Figure 16 - Schema diagram for the `updateCallInfo` object response.



11.4. RESPONSE PARAMETERS FOR UPDATECALLINFO

FIELD	REQUIRED	LENGTH	COMMENTS
erroroccurred	Y	1	Provides information on whether the record was updated successfully in the following format. • N – Updated Successfully • Y – Failure An error message will be returned.
ackmessage	N	50	This explains if the transaction updated successfully. String returned value which contains success or error messages relating to the transaction.
updatedate	N	8	The date at which the transaction occurred in YYYYMMDD format
Errordata	N		Complex Object
Code	N	6	ServicePower defined error code referenced in Section 14.1
Description	N	255	String Literal explanation of error Code
Cause	N	255	When this error occurred.



12. UPDATE TECH INFO

This is a maintenance task, not part of the standard workflow. The updateTechInfo API is used to create or update technicians within a group.

The technician record contains a name (containing both first and last name), a unique identifier, and an associated group. The unique identifier, or the tech key should be unique within the servicer profile and should not be shared with any other technician in other teams. For this reason, an employee ID number from within the company HR system is usually suggested.

When submitting the updateTechInfo API, the ServiceDispatch system will use the key to determine whether to add a new technician, or to update an existing record. When creating a new record, the API can be used to add basic capacity data.

12.1. SCHEMA DIAGRAM FOR THE UPDATETECHINFO REQUEST

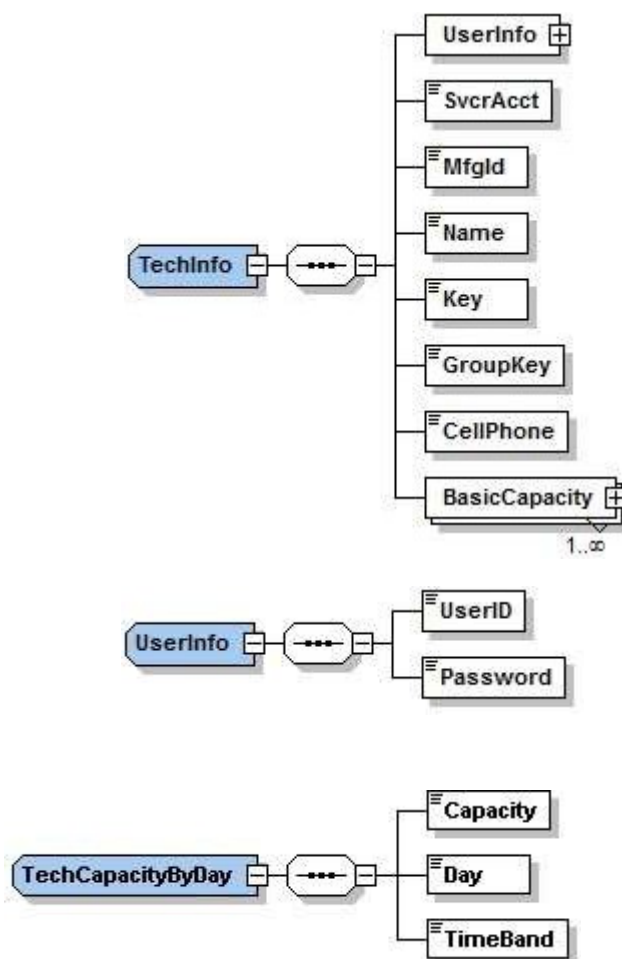


Figure 17 - Schema Diagram for the UpdateTechInfo request.



12.2. REQUEST PARAMETERS FOR UPDATETECHINFO

FIELD	REQUIRED	LENGTH	DESCRIPTION
UserId	Y	10	Provided in the initial invitation email.
Password	Y	10	Initially provided in the invitation email, this password can be updated within the ServiceDispatch user interface.
SvcrAcct	Y	10	Servicer account number
MfgId	Y	10	Client's unique ID
Name	Y	100	Technician name
Key	Y	100	Technician key Unique identifier for the servicer
GroupKey	Y	100	Defines which group the technician belongs to.
CellPhone	N	15	Cell Phone or Mobile Phone number.
BasicCapacity:Capacity	N	3	The basic capacity of the technician by day.
BasicCapacity:Day	N	3	Day of the week. Accepted values are • MON • TUE • WED • THU • FRI • SAT • SUN
BasicCapacity:TimeBand	N		Predefined time bands defined at end of the documents



12.3. SCHEMA DIAGRAM FOR THE UPDATETECHINFO RESPONSE

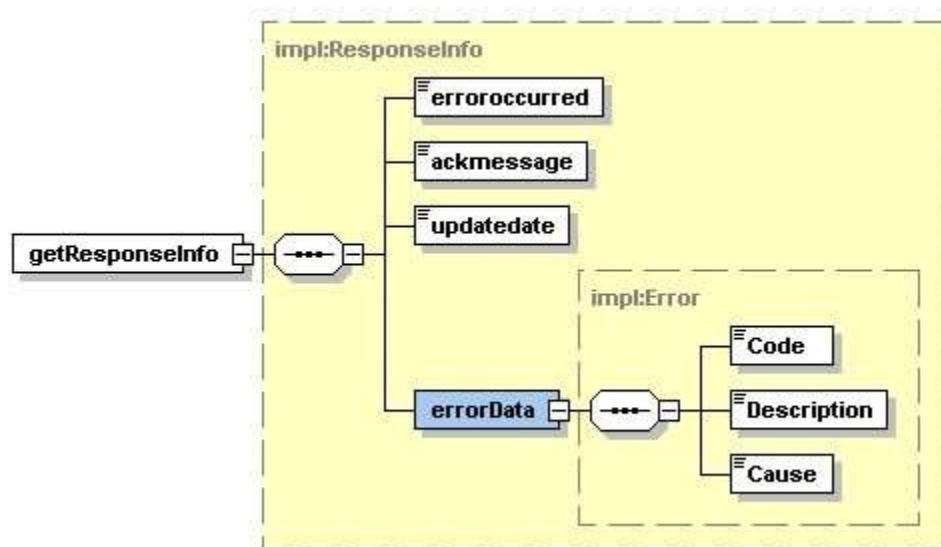


Figure 18 - Schema diagram for the `updateTechInfo` response.



12.4. RESPONSE PARAMETERS FOR UPDATETECHINFO

FIELD	REQUIRED	LENGTH	DESCRIPTION
erroroccurred	Y	1	Provides information on whether the record was updated successfully in the following format. • N – Updated Successfully • Y – Failure An error message will be returned.
ackmessage	N	50	This explains if the transaction updated successfully.
updatedate	N	8	String Literal date in YYYYMMDD format
errordata	N		Complex Object
Code	N	6	ServicePower defined error Code defined in Section 14.1
Description	N	255	String Literal explanation of error code.
Cause	N	255	When this error occurred.



13. UPDATE TECH CAPACITY

This is a maintenance task, not part of the standard workflow. The updateTechCapacity API is used update the capacity of a technician created either within the ServiceDispatch user interface or by using the updateTechInfo API.

13.1. SCHEMA DIAGRAM FOR THE UPDATETECHCAPACITY REQUEST

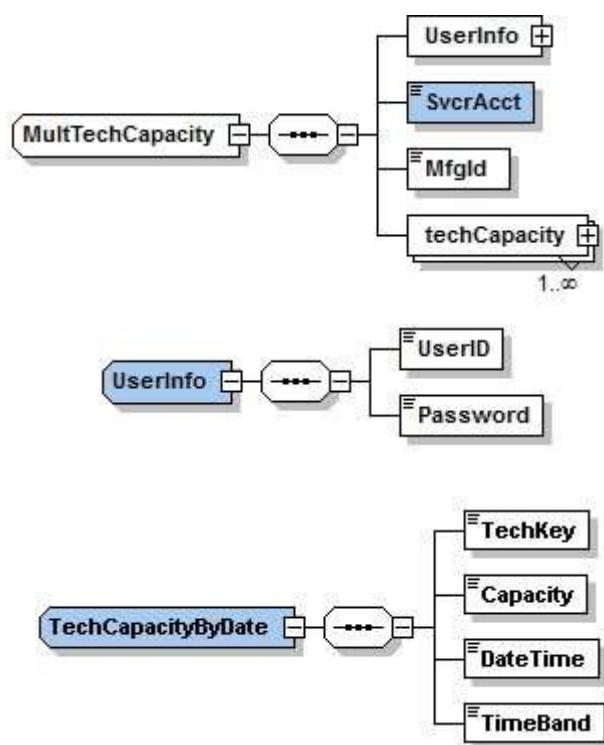


Figure 19 - Schema diagram for the updateTechCapacity request.



13.2. REQUEST PARAMETERS FOR UPDATETECHCAPACITY

FIELD	REQUIRED	LENGTH	DESCRIPTION
UserId	Y	10	Provided in the initial invitation email.
Password	Y	10	Initially provided in the invitation email, this password can be updated within the ServiceDispatch user interface.
SvcrAcct	Y	10	Servicer account number
MfgId	Y	10	Client's unique ID
Tech Key	Y	100	Unique identifier for the servicer
Capacity	Y	3	
Datetime	Y	8	YYYYMMDD
Timeband	Y	-	Predefined time bands defined at end of the documents



13.3. SCHEMA DIAGRAM FOR THE UPDATETECHCAPACITY RESPONSE

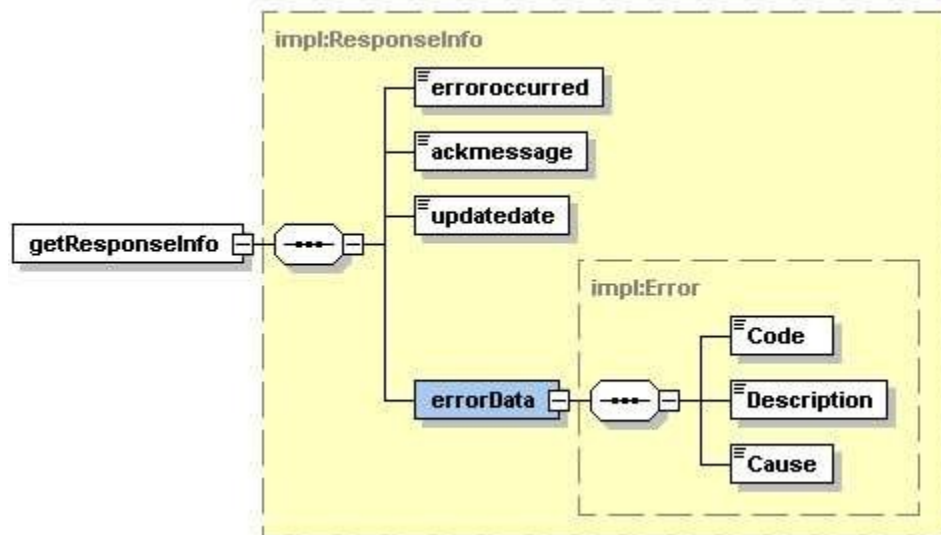


Figure 20 - Schema diagram for the updateTechCapacity response.



13.4. RESPONSE PARAMETERS FOR UPDATETECHCAPACITY

FIELD	REQUIRED	LENGTH	DESCRIPTION
erroroccurred	Y	1	Provides information on whether the record was updated successfully in the following format. - N – Updated Successfully - Y – Failure An error message will be returned.
ackmessage	N	50	This explains if the transaction updated successfully.
updatedate	N	8	YYYYMMDD
errordata	N		Complex Object
Code	N	6	ServicePower defined error Code
Description	N	255	String Literal explanation of error Code
Cause	N	255	When this error occurred.

14. DATA

14.1. ERROR CODES

CODE	ERROR DESCRIPTION
SP000	NO RECORDS FOUND
SP001	USER OBJECT DOES NOT EXIST IN THE REQUEST
SP002	USERID DOES NOT EXIST IN THE SYSTEM
SP003	PASSSSWORD CAN'T BE NULL OR BLANK
SP004	SVCR ACCT DOES NOT EXIST IN THE SYSTEM
SP005	USER AUTHENTICATION FAILED
SP041	GROUP CAN NOT BE CREATED WITH OUT WARRANTY TYPE(S).
SP042	GROUP CAN NOT BE CREATED WITH OUT SERVICE TYPE(S).



CODE	ERROR DESCRIPTION
SP043	GROUP CAN NOT BE CREATED WITH OUT SERVICE LOCATION(S).
SP044	GROUP CAN NOT BE CREATED WITH OUT INDUSTRY(S).
SP045	DISPATCH OFFICE DOESNOT EXISTS IN THE SYSTEM.
SP046	SKILL CODE DOESNOT EXISTS IN THE SYSTEM.
SP051	TECH KEY CAN NOT BE BLANK
SP052	TECH DOESNOT EXISTS IN THE SYSTEM.
SP053	TIMEBAND DOESNOT EXISTS IN THE SYSTEM.
SP054	GROUP KEY DOESNOT EXISTS IN THE SYSTEM.

14.2. TIME BANDS

TIME BAND ID	DESCRIPTION	START TIME	END TIME
8-12	MORNING	8:00	12:00
12-17	AFTERNOON	12:00	17:00
8-17	ALL DAY	8:00	17:00
17-21	EVENING	17:00	21:00
6-8	EARLY MORNING	6:00	8:00

14.3. CALL STATUSES

CALL_STATUS_ID	CALL_STATUS_DESC
2	OPEN
3	ACCEPTED
4	CANCELLED
5	COMPLETED
6	REJECTED
7	RESCHEDULED



14.4. CALL SUBSTATUSES

CALLSUBSTATUS	SPCALLSUBSTATUSID	CALLSTATUS
ACCEPTED	ACT01	ACCEPTED
WAITING ON TECH SUPPORT	ACT38	ACCEPTED
APPOINTMENT SCHEDULED	ACT03	ACCEPTED
AUTHORIZATION DENIED	ACT04	ACCEPTED
AUTHORIZATION RECEIVED	ACT05	ACCEPTED
AUTHORIZATION REQ. SUBMIT	ACT06	ACCEPTED
BAD PRODUCT RECEIVED	ACT07	ACCEPTED
BOX SHIPPED	ACT08	ACCEPTED
COMPLETED PER CUSTOMER	ACT09	ACCEPTED
CUSTOMER CONTACTED	ACT10	ACCEPTED
EN ROUTE	ACT11	ACCEPTED
LABEL GENERATED	ACT12	ACCEPTED
LEAVING SITE	ACT13	ACCEPTED
ON SITE	ACT14	ACCEPTED
ORDER PARTS	ACT15	ACCEPTED
PARTS ON BACKORDER	ACT16	ACCEPTED
PARTS ORDERED	ACT17	ACCEPTED
PARTS RECEIVED	ACT18	ACCEPTED
PARTS SHIPPED	ACT19	ACCEPTED
PRODUCT RECEIVED	ACT20	ACCEPTED
PRODUCT REPAIRED	ACT21	ACCEPTED
PRODUCT SHIPPED	ACT22	ACCEPTED
PRODUCT SHIPPED	ACT23	ACCEPTED
REPLACEMENT PRODUCT ACCEPTED	ACT24	ACCEPTED
REPLACEMENT PRODUCT DECLINED	ACT25	ACCEPTED
REPLACEMENT PRODUCT OFFERED	ACT26	ACCEPTED
REPLACEMENT PRODUCT SHIPPED	ACT27	ACCEPTED
RESCHEDULED	ACT28	ACCEPTED
RESCHEDULED- CUSTOMER REQUEST	ACT29	ACCEPTED



CALLSUBSTATUS	SPCALLSUBSTATUSID	CALLSTATUS
RESCHEDULED- OTHER	ACT30	ACCEPTED
RESCHEDULED- TRIAGE	ACT31	ACCEPTED
RESCHEDULED-PARTS INSTALL	ACT32	ACCEPTED
TRIAGE	ACT33	ACCEPTED
WAITING ON AUTHORIZATION	ACT34	ACCEPTED
WAITING ON CUSTOMER	ACT35	ACCEPTED
WAITING ON PARTS	ACT36	ACCEPTED
WAITING ON PRODUCT	ACT37	ACCEPTED
APPOINTMENT CONFIRMED	ACT02	ACCEPTED

