


Mudita Hospital — Field install FAQ

Take this to the customer site. Step-by-step commands: **DEPLOY.md**. Daily staff use: **CHEATSHEET** (PDF or Help → Print in app).

Architecture (one picture)

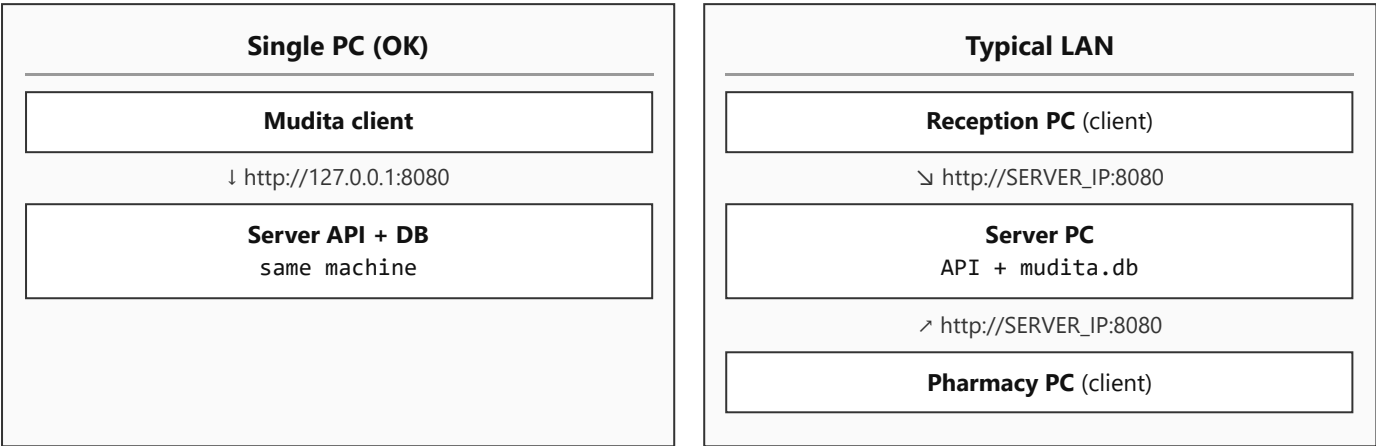

Setup	What to install
One PC (small clinic)	Server and Client on the same machine. First-run Server IP = 127.0.0.1
Several PCs (typical)	Server on one always-on PC; Client on each reception / pharmacy / clinic desk. Clients use the server's LAN IP (e.g. 192.168.1.10)

Important: Server and Client are **two separate packages**. There is no single setup that installs both. Order on site: **Server first** → **then Client(s)**.

All patient / stock / bill data lives **only on the server PC**. Clients are thin windows that talk over HTTP on port **8080**. No internet is required after you copy installers by USB.

Where does the server live?

Mode	Location
Hospital install	C:\MuditaHospital\Server\
Contents	mudita-api.exe, config.json, data\mudita.db, backups\, watchdog scripts
Autostart	Windows scheduled task MuditaHospitalAPI (SYSTEM) via run-watchdog.cmd
Your laptop (dev)	Repo server\ → DB at server\data\mudita.db; run .\scripts\run-server.ps1

Hospital config.json uses "host": "0.0.0.0" so other PCs can connect. Do **not** leave the hospital server on 127.0.0.1 if reception/pharmacy PCs need access.

Health check:

- On server: `http://127.0.0.1:8080/api/health`
- From another PC: `http://SERVER_IP:8080/api/health` → "status":"ok", "db":"ok"

How do I package for USB? (before the visit)

On your **build PC** (Go + Node + Rust for client build):

```
cd c:\Mudita_Software\Mudita-Hospital
.\scripts\package-server.ps1    # → dist\server-package\
.\scripts\package-client.ps1    # → dist\client-package\
```

Copy to USB, for example:

```
USB\
Mudita\
  Server\    ← entire dist\server-package\
  Client\    ← entire dist\client-package\
  Docs\      ← DEPLOY.md + FIELD_INSTALL_FAQ + CHEATSHEET
```

On the customer PC(s)

1. **Server machine** — Administrator PowerShell inside Server\:

```
.\install-server.ps1
```

Default path: C:\MuditaHospital\Server. Sets firewall rule for port 8080 + startup task.

2. **Each clinic PC** — install the .msi / NSIS setup if present, **or** copy/run MuditaHospital.exe.
3. First client launch → enter Server IP → sign in.

Deep steps: **DEPLOY.md**.

How do I access the database as a developer?

Fact	Detail
Engine	SQLite (WAL mode). No MySQL/Postgres process.
Dev file	server\data\mudita.db (+ -wal / -shm while API is running)
Production file	C:\MuditaHospital\Server\data\mudita.db
Tools	DB Browser for SQLite or sqlite3 CLI

Safe habits

- Prefer **Admin** → **Settings** → **Backup**, then open a file under backups\ for inspection.
- To edit the live DB: stop the API first (see "Restart the API"). Opening the live file while the API writes can corrupt it.
- Do not commit mudita.db or backup dumps with real patient data to git.

FAQ — customer day

Can it run on a single PC?

Yes. Install Server + Client on one machine. Server IP = 127.0.0.1. Good for a solo desk or a pilot. When they add a second desk later, keep the same Server and only install Client on the new PC (point at the server's LAN IP).

Do I need multiple PCs?

No, not required. Recommend multiple when reception and pharmacy work at the same time on different desks. Then: one Server PC (can be the quietest / always-on machine) + Client on each desk. Prefer **wired Ethernet**; avoid Wi-Fi for billing if possible.

Will “setup” install server and software at the same time?

No. Two packages:

1. install-server.ps1 → API + DB folder + autostart
2. Client MSI / MuditaHospital.exe → desktop app

Install Server first so health check works before clients connect.

Where will the server / data live?

Always on the **server PC disk**: C:\MuditaHospital\Server\data\mudita.db. Clients do **not** store the hospital database. If the server PC dies without backups, data is at risk — USB backup weekly.

What are the default logins?

Fresh database:

User	Password	Role
admin	admin123	Admin (must change password on first login)
reception	reception123	Reception
pharmacy	pharmacy123	Pharmacy

Change passwords before leaving the site. Create real staff users under Settings → Users (Admin).

What is the first-run Server IP screen?

Client asks once for the API address. Examples:

- Same PC: 127.0.0.1 or “This PC”
- LAN: 192.168.1.10 (whatever static IP you set on the server)

Port **8080** is assumed. Badge should turn green: **Server connected**. If offline: Retry, Change server IP, check cable / power / firewall.

What if the badge says Server offline?

1. Is the server PC on? Task **MuditaHospitalAPI** running?
2. Browser on server: <http://127.0.0.1:8080/api/health>
3. From client PC: http://SERVER_IP:8080/api/health
4. Ethernet cable / switch / wrong IP
5. Firewall port **8080** (install script usually adds the rule)

How do backups work?

Action	How
Backup now	Admin → Settings → Backup
Auto	Every 24h (default) into C:\MuditaHospital\Server\backups\
USB weekly	Copy that backups\ folder to a labeled USB; keep off-site if possible
Restore	Admin → Backup → Restore (API restarts; wait ~5s, then Retry). Replaces live data.

Only restore backups from **this** hospital.

How do I restart the API?

Administrator PowerShell (Access Denied usually means the task runs as SYSTEM):

```
Stop-ScheduledTask -TaskName "MuditaHospitalAPI"  
Get-Process mudita-api -ErrorAction SilentlyContinue | Stop-Process -Force  
Start-ScheduledTask -TaskName "MuditaHospitalAPI"
```

After a rebuild, copy the new mudita-api.exe into C:\MuditaHospital\Server\ before starting the task again.

Dev laptop: stop mudita-api / Ctrl+C, then .\scripts\run-server.ps1.

What is Training mode?

Admin → Settings → **Training**: seeds DEMO- items and [TRAINING] sample bills for practice. Reset only removes DEMO / TRAINING rows — not real users. Prefer a practice DB or Training seed for demos; do not teach on live cash without the hospital's OK.

Language / staff cheat sheet?

- App: **English** /  in the top bar.
- Desk laminate: CHEATSHEET.pdf or Help → Print cheat sheet in the app (? key).
- This file = **installer / developer** FAQ, not the reception laminate.

Is internet required?

No after USB copy. Offline LAN only. Updates = bring a new USB package later.

Hardware expectations?

Cheap Windows PCs (~2GB class) are in scope. Wired switch + static IP on the server. WebView2 is normally already on Windows 10/11 for the client.

Uninstall server?

Admin PowerShell from the package folder:

```
.\uninstall-server.ps1  
# optional wipe DB/backups:  
.\uninstall-server.ps1 -RemoveData
```

Site checklist

Before you leave the office

- ☐ package-server.ps1 + package-client.ps1 on USB
- ☐ This FAQ + DEPLOY.md + CHEATSHEET on USB
- ☐ Know the planned static IP (or confirm single-PC 127.0.0.1)

Single-PC install

- ☐ Admin: install-server.ps1
- ☐ Health: <http://127.0.0.1:8080/api/health>
- ☐ Install / run client; Server IP 127.0.0.1
- ☐ Admin login → change password
- ☐ Backup now; show USB backup folder
- ☐ Print or leave CHEATSHEET for staff

Multi-PC install

- ☐ Server: static IP + install-server.ps1
- ☐ Health from a second PC: http://SERVER_IP:8080/api/health
- ☐ Client on each desk → same Server IP
- ☐ Reception + Pharmacy login smoke
- ☐ Tiny OPD or restock on a client
- ☐ Backup now + USB copy ritual agreed

Full smoke list: **DEPLOY.md §4.**

Canonical text: FIELD_INSTALL_FAQ.md · Print layout: FIELD_INSTALL_FAQ.html · Regenerate PDF with Edge headless print-to-pdf if this form changes.