

# Kubernetes Full Stack Application

Marco Jakob

March 28, 2019

# Contents

|          |                                      |          |
|----------|--------------------------------------|----------|
| <b>1</b> | <b>Introduction</b>                  | <b>3</b> |
| 1.1      | Technology . . . . .                 | 3        |
| 1.2      | Model . . . . .                      | 3        |
| <b>2</b> | <b>Installing Kubernetes</b>         | <b>4</b> |
| <b>3</b> | <b>Create Services</b>               | <b>4</b> |
| 3.1      | Database . . . . .                   | 4        |
| 3.2      | Random Generator . . . . .           | 4        |
| 3.3      | Middle Tier . . . . .                | 5        |
| 3.4      | Statistic Service . . . . .          | 8        |
| 3.5      | Frontend . . . . .                   | 8        |
| 3.6      | running with Docker . . . . .        | 8        |
| <b>4</b> | <b>Deploy Services to Kubernetes</b> | <b>9</b> |

# 1 Introduction

This Introduction should give an end to end overview to deploy a sample Application with multiple Services and a Databases completely on Kubernetes. The Application generates Random Numbers, saves them with a Timestamp on a database. Displays the new Number on a Frontend and also shows Graphs from previous Random Numbers based on their Producers Id. The Goal of the whole application is first to create an end to end Application fully Cloud native which runs as well locally without any changes. The second goal is to show graphically the self healing process of Kubernetes, namely when we delete a random generator Pod, it should automatically create a new Random generator Pod with a new Id.


## 1.1 Technology

| Service                                 | Technology               |
|---|--------------------------|
| Random Number Generator circle          | Python Flask             |
| Database to store previous Numbers      | Mysql Database           |
| Microservice for requesting new Numbers | Spring Boot Java         |
| Microservice for gathering Statistics   | Spring Boot Java         |
| Frontend                                | Angular with Spring Boot |
| Routing Server                          | Nginx                    |
| Server OS                               | Ubuntu Server 18.5.1 LTS |

All the Applications are Running inside of an own Docker Container and Managed within a Kubernetes Pod and accessible via a Kubernetes Service where only the Frontend Service is bound to a Node Port.

## 1.2 Model

The Following Picture should give an overview about the different Services and how they work with each other.

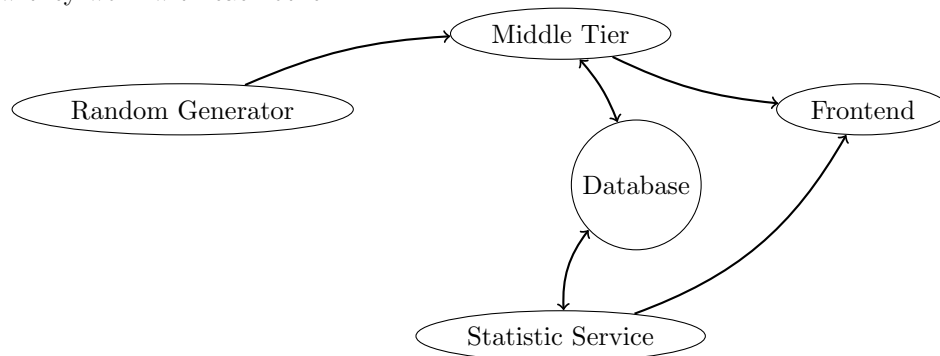

## 2 Installing Kubernetes

## 3 Create Services

### 3.1 Database

In the further sections we will use a plain mysql docker container as a database. In order to use the Application completely locally, a local mySQL database has to be installed and a schema for the random generator application needs to be provided for a specific randgenuser. If there is not yet a local mySQL database installed it can be done with the following command:

```
1 sudo apt-get update
2 sudo apt-get install mysql-server
```

After the installation log in to MySQL as root.

```
1 sudo mysql
```

Now the Database and the user can be created and permissions to the respective schema will be given.

```
1 CREATE database db_example;
2 CREATE USER 'springuser'@'localhost' IDENTIFIED BY ThePassword;
3 GRANT ALL PRIVILEGES ON *.db_example TO 'springuser'@'localhost';
```

With this, the Database is ready to be used by the Random Generator Example from localhost.

### 3.2 Random Generator

The Random Generator will be a very simple Python App which has a unique Id per Service instance. It will return its id and a new Random Number. For this application we create a folder called RandGen with the following Structure.

```
RandGen
├── Dockerfile
├── rand_gen.py
└── requirements.txt
```

The Dockerfile is needed to create the Docker Image which will be used from Kubernetes to Create the Random Generator Service. rand\_gen.py is the complete Random Generator Python application based on Flask<sup>1</sup>.

```
1 from flask import Flask, jsonify
2 import random
3 import uuid
4
5 app = Flask(__name__)
6 user_id = uuid.uuid4().int
7
8 @app.route('/')
```

---

<sup>1</sup>More information about Flask can be found on the official Homepage <http://flask.pocoo.org/>

```

9 def random_number():
10     object = {'id': str(user_id),
11               'randNumber': str(random.randint(0,1000))}
12     return jsonify(object)
13
14 if __name__ == '__main__':
15     app.run(port=5050,host='0.0.0.0')

```

In requirements.txt are the Python packages specified. In this case it is flask. therefore this file contains only one line which is

Flask==1.0.2

The Dockerfile to create the Docker image:

### 3.3 Middle Tier

The Middle Tier Application is created with Spring Initializer. Under the following link <https://start.spring.io/> Helps to bootstrap very fast a simple Spring Boot application. In our case the fields should be filled out as followed:

|              |  |
|--------------|--|
| Project      | Maven Project  |
| Language     | Java   |
| Spring Boot  | 2.1.3 (All versions would apply)                     |
| Group        | ch.toky.randgen                                      |
| Artifact     | middletier   |
| Name         | MiddleTier   |
| Description  | Middle Tier Service for Random Generator Application |
| Packaging    | Jar  |
| Java Version | 8  |
| Dependencies | Web, JPA, MySQL, Rest Repositories                   |

The Website will create a zip file to download. This zipfile has to be extracted to the desired Project folder.

```

middletier
├── Dockerfile
├── mvnw
├── mvnw.cmd
├── pom.xml
└── src

```

all blue folders are already given. the Dockerfile still has to be created.

Now inside of the Project create the following Project Structure and files.

```

ch.toky.randgen.middletier
├── MiddletierApplication.java
├── ch.toky.rand-gen.middle-tier.model
│   ├── PodStat.java
│   └── RandomNumber.java
└── ch.toky.rand-gen.middle-tier.repository
    └── PodStatRepository.java

```

The file `MiddleTierApplication.java` should already be in place. as Spring Boot Initializr created this with the complete Folder structure. the packages controller, model and repository need to be created. Inside of controller, A file named `MiddleTierController.java` needs to be created with the following content.

Within the model package two new Files have to be created: `PodStat.java` and `RandomNumber.java`.

`PodStat` is an Entity and therefore the class has to be annotated with `@Entity`. It contains the following fields with their respective getter and Setter Methods.

```
1 @Id
2 @GeneratedValue(strategy=GenerationType.AUTO)
3 private Long podStatID;
4 private String id;
5 private Long timeStamp;
6 private Long counter;
```

The class `RandomNumber` is only a DTO which is retrieved from the random generator Service. Therefore there is no need for a annotation. Only the following Fields needs to be declared with their getters and setters:

```
1 private String id;
2 private Long randomNumber;
```

In the repository package the file `PodStatRepository.java` will be created. As this java file is not a class but an interface it needs to be changed to interface and extends `JpaRepository<PodStat, Long>`, and it will be annotated with `@Repository`

Now those two methods are created

```
1 @Query("Select count(ps.id) from PodStat ps where ps.id = ?1")
2 Long countUniqueId(String id);
3
4 @Query("Select count(ps.id) from PodStat ps")
5 Long findMaxCount();
```

Within the controller all the endpoints are declared. Therefore it will be annotated with `@RestController`

Those fields are needed within the controller and are therefore declared first.

```
1 @Autowired
2 private ObjectMapper objectMapper;
3 @Autowired
4 private PodStatRepository podStatRepository;
5 private Map<String, String> env = System.getenv();
```

As there should not be any hardcoded url according to the 12 Factor application<sup>2</sup>, the Url will be retrieved through a System Variable.

Now a controller Method with the business logic can be declared:

```
1 @RequestMapping(value = "/", produces = "application/json")
2 public RandomNumber getRandom() {
3
```

---

<sup>2</sup> Accessible at <https://12factor.net/>

```

4     RandomNumber randNum = getNewRandomNumber();
5     Long maxCountId = podStatRepository.countUniqueId(randNum.getId());
6     Long maxCountOverall = podStatRepository.findMaxCount();
7     PodStat tmpPod = new PodStat();
8     tmpPod.setId(randNum.getId());
9     tmpPod.setTimeStamp(maxCountOverall+1);
10    tmpPod.setCounter(maxCountId +1);
11    podStatRepository.save(tmpPod);
12
13    return randNum;
14
15 }

```

The above Method listens on the path / and returns the Random number after saving it to the database with the actual count.

Now the last Method is used to retrieve the Random Number from the Random Generator Service.

```

1 private RandomNumber getNewRandomNumber() {
2
3     String randGenUrl=env.get("RANDOM.GENERATOR.URL");
4     String URL = randGenUrl;
5     RestTemplate restTemplate = new RestTemplate();
6
7     return restTemplate.getForObject(URL, RandomNumber.class);
8
9 }

```

Above Source code contains the Controller and the Service, which should be separated optimally. Next two files represents POJOs which are going to be used from controller and provided by Repositories.

The last thing which needs to be done for the Middle Tier Service is to setup the default values for the Database Connection.

```

1 spring.jpa.hibernate.ddl-auto=update
2 spring.datasource.username=random-user
3 spring.datasource.password=random-password
4 spring.datasource.url=jdbc:mysql://localhost:3306/rand_numbers

```

The datasource configurations are going to be overwritten by Environment Variables once they run inside of a Docker Container.

```

1 FROM anapsix/alpine-java:latest
2
3 ADD target/middletier-0.0.1-SNAPSHOT.jar /opt/middle-tier.jar
4
5 ENV SPRING.DATASOURCE_URL=jdbc:mysql://rand-gen-database/
   rand_numbers
6
7 ENV SPRING.DATASOURCE_USERNAME=random-user
8
9 ENV SPRING.DATASOURCE_PASSWORD=random-password
10
11 ENV RAND-GEN.URL=rand-gen-app
12
13 CMD java -jar /opt/middle-tier.jar

```

We are using anapsix base image, as we want to keep the Docker image as small as possible.

Finally we can create the docker image with the following Command.

Important is, we need to be in the root directory of the Project where also the Dockerfile is stored.

```
1 docker build -t middle-tier .
```

the flag -t indicates that the name of the image and the dot at the end tells docker to use the Dockerfile from the current working directory.

### 3.4 Statistic Service

The Statistic Service has the same setup as the Middle Tier client. Therefore the Project will be created too with Spring Boot initializer.

|              |  |
|--------------|--|
| Project      | Maven Project  |
| Language     | Java   |
| Spring Boot  | 2.1.3 (All versions would apply)                       |
| Group        | ch.toky.randgen  |
| Artifact     | stattier   |
| Name         | Stattier   |
| Description  | Statistic Tier Client for Random Generator Application |
| Packaging    | Jar  |
| Java Version | 8  |
| Dependencies | Web, JPA, MySQL, Rest Repositories                     |

For the statistic Tier Service we need to create the following Package structure:

```
ch.toky.randgen.statsservice
├── StatsserviceApplication.java
├── ch.toky.randgen.statsservice.controller
│   └── Controller.java
├── ch.toky.randgen.statsservice.model
│   ├── PodStat.java
│   ├── Series.java
│   ├── SeriesItem.java
│   └── Stat.java
├── ch.toky.randgen.statsservice.repository
│   └── PodStatRepository.java
└── ch.toky.randgen.statsservice.service
    └── StatService.java
```

For this time, we will leave the Main Class alone in the file StatsserviceApplication.java. Which means we do not have to change this file as Spring Boot already did everything needed for us.

Controller.java will be annotated with @RestController as it contains all our endpoints.

next, we need the StatService class in this controller, this is why we inject it with @Autowired.



```

1 @Autowired
2 StatService statService;

```

Now we can also create our two endpoints, one for all stats, and one with the history.

```

1 @RequestMapping(method = RequestMethod.GET, value="/")
2 public List<Stat> getAllPodStats() {
3
4     return statService.getAllPodStats();
5 }
6
7
8 @RequestMapping(method = RequestMethod.GET, value="/history")
9 public List<Series> getAllPodStatsHistory() {
10
11     return statService.getPodHistory();
12 }

```

We could leave the method out as GET is anyway the default method but we leave it here for for the understanding.

next we are going to declare all our Entities.

All of them are annotated with @Entity. For simplicity i will only show all fields but of course also the getter and setter methods needs to be implemented.

Fields for PodStat:

```

1 @Id
2 @GeneratedValue(strategy=GenerationType.AUTO)
3 private Long podStatID;
4 private String id;
5 private Long timeStamp;
6 private Long counter;
7 ...

```

Series not annotated with @Entity as it is only a helper Entity we have also a constructor in order to initialize a new Array List.

```

1 private String name;
2 private List<SeriesItem> series;
3 public Series(String name) {
4     super();
5     this.name = name;
6     this.series = new ArrayList<SeriesItem>();
7 }
8 ...

```

SeriesItem is the second helper class we are going to use and therefore as well not annotated with @Entity

```

1 private Long name;
2 private Long value;
3
4 public SeriesItem(Long name, Long value) {
5     super();
6     this.name = name;
7     this.value = value;
8 }

```

```

1 private String id;
2 private Long counter;
3
4 public Stat(String id, Long counter) {
5     super();
6     this.id = id;
7     this.counter = counter;
8 }

```

Now we can implement the Repository (annotated with @Repository) as an interface which extends JpaRepository<PodStat, String>

```

1 @Query("Select count(ps.id) from PodStat ps where ps.id = ?1")
2 Long countUniqueId(String id);
3
4 @Query("Select distinct ps.id from PodStat ps")
5 List<String> findUniqueIds();
6
7 @Query("Select ps from PodStat ps where ps.id = ?1")
8 List<PodStat> findByIds(String id);

```

Now the last file is the most important one as there we will have all the business logic in it.

We need to annotate it with @Service in order to make it available for Spring Boot to create a Bean out of it.

```

1 @Autowired
2 PodStatRepository podStatRepository;
3
4 private Iterable<String> getAllIds() {
5     Iterable<String> source = podStatRepository.findUniqueIds();
6     return source;
7 }
8
9 public List<Stat> getAllPodStats() {
10
11     Iterable<String> source = getAllIds();
12     List<Stat> podStatistics = new ArrayList<Stat>();
13     source.forEach((id) -> {
14         podStatistics.add(new Stat(id, podStatRepository.countUniqueId(
15             id)));
16     });
17     return podStatistics;
18 }
19
20 public List<Series> getPodHistory() {
21
22     Iterable<PodStat> source = podStatRepository.findAll();
23     Map<String, Series> podHistorys = new HashMap<>();
24     source.forEach((entry) -> {
25         if(podHistorys.get(entry.getId()) == null) {
26             podHistorys.put(entry.getId(), new Series(entry.getId()));
27         }
28         podHistorys.get(entry.getId())
29             .appendSeriesItem(new SeriesItem(entry.getTimeStamp(), entry.
30                 getCounter()));
31     });
32 }

```

```

31 List<Series> plainSeries = new ArrayList<>();
32 for(Map.Entry<String, Series> entry: podHistorys.entrySet()) {
33     plainSeries.add(entry.getValue());
34 }
35 return plainSeries;
36 }

```

Now that all the java files are created we can also create the Dockerfile for this Service.

```

1 FROM anapsix/alpine-java:latest
2
3 ADD target/stat-service-0.0.1-SNAPSHOT.jar /opt/stat-tier.jar
4
5 ENV SPRING_DATASOURCE_URL=jdbc:mysql://rand-gen-database/
   rand_numbers
6
7 ENV SPRING_DATASOURCE_USERNAME=random_user
8
9 ENV SPRING_DATASOURCE_PASSWORD=random_password
10
11 CMD java -jar /opt/stat-tier.jar

```

Basically the Dockerfile for this Service looks pretty much the same as the one for the Middle tier except that we do not need to declare an environment variable for the random generator.

### 3.5 Frontend

The frontend Application is build with Spring Boot and  
Creating Spring Boot Application:

|              |                                  |
|--------------|----------------------------------|
| Project      | Maven Project                    |
| Language     | Java                             |
| Spring Boot  | 2.1.3 (All versions would apply) |
| Group        | ch.toky.randgen                  |
| Artifact     | frontend                         |
| Name         | Frontend                         |
| Description  | Frontend Service                 |
| Packaging    | Jar                              |
| Java Version | 8                                |
| Dependencies | Web, Rest Repositories           |

### 3.6 running with Docker

#### Create a Network

```

1 docker network create -d bridge rand-gen-network

```

#### Start the Database Container

```

1 docker run -d --name rand-gen-database \
2 -e MYSQL_ROOT_PASSWORD='password' \
3 -e MYSQL_USER='random_user' \

```

```
4 -e MYSQLPASSWORD='random_password' \  
5 -e MYSQLDATABASE='rand_numbers' \  
6 --network rand-gen-network \  
7 mysql:5.6
```

### **Start the Random Generator App**

```
1 docker run -d --name=rand-gen-app \  
2 --network rand-gen-network \  
3 rand-gen-image
```

### **Start the middle tier Application**

```
1 docker run -d \  
2 --name middle-tier \  
3 --network rand-gen-network \  
4 middle-tier
```

### **Starting the Stat Tier Application**

```
1 docker run -d \  
2 --name stat-tier \  
3 --network rand-gen-network \  
4 stat-tier-image
```

### **Start the Frontend Service**

```
1 docker run -d -p 8080:8080 \  
2 --network rand-gen-network \  
3 --name rand-frontend \  
4 rand-frontend
```

## **4 Deploy Services to Kubernetes**