

Kubernetes Full Stack Application

Marco Jakob

April 12, 2019

Contents

1	Introduction	3
2	Prerequisites	3
2.1	Technology	4
2.2	Model	4
3	Development	5
3.1	Database	5
3.2	Random Generator	6
3.3	Middle Tier	7
3.4	Statistic Service	10
3.5	Frontend	14
4	Docker	22
4.1	Creating the Docker Images	22
4.2	running with Docker	25
5	Kubernetes	26
5.1	Installing Kubernetes	26
5.2	Deploy Services	27

1 Introduction

This Introduction should give an end to end overview to develop a sample Application with multiple microservices and a Databases completely on Kubernetes. Furthermore, the application should run on a local machine as well as on simple Docker containers without any manual changes. The Application generates random numbers, saves them with a Timestamp on a database, displays the new number on a Frontend and also shows graphs from previous random numbers based on their producerservices Id. The goal of the whole application is primarily to develop an end to end Application fully cloud native with all configurations based on requirements for cloud native applications. The second goal is to show graphically the self healing process of Kubernetes, namely when we delete a random generator Pod, it should automatically create a new Random generator Pod with a new Id.

2 Prerequisites

To create the application it is assumed that we already have a machine with the following Software running:

- Java Development Kit (minimum 1.8, JAVA_HOME set)
- Maven build tool (MAVEN_HOME and M2_HOME set)
- Python 3.6
- node package manager
- Docker
- Angular (minimum version 6) and Angular CLI

Not Required but recommended


- Visual Studio Code
- Spring tool suite

2.1 Technology

Service	Technology
Random Number Generator circle	Python Flask
Database to store previous Numbers	Mysql Database
Microservice for requesting new Numbers	Spring Boot Java
Microservice for gathering Statistics	Spring Boot Java
Frontend	Angular with Spring Boot
Routing Server	Nginx
Server OS	Ubuntu Server 18.4.2 LTS

2.2 Model

The Following Picture should give an overview about the different Services and how they work with each other.

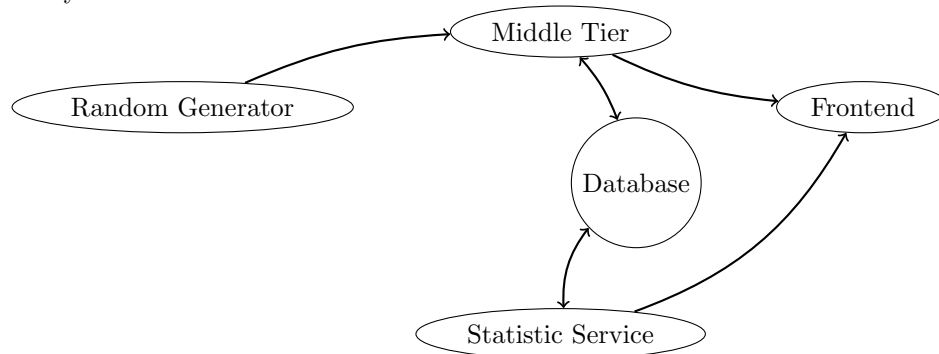

The random generator service creates a JSON file with an unique id and a random number. The middle tier service calls the random generator, saves the number with the id, saves it in the database and forwards it to the frontend. The statistic service is fetched from the frontend to deliver historic data for the graph and the table with all counts from previous calls.

3 Development

3.1 Database

In the further sections we will use a plain mysql docker container as a database. In order to use the Application completely locally, a local mySQL database has to be installed and a schema for the random generator application needs to be provided for a specific randgenuser. If there is not yet a local mySQL database installed it can be done with the following command:

```
1 sudo apt-get update
2 sudo apt-get install mysql-server
```

After the installation log in to MySQL as root.

```
1 sudo mysql
```

Now the Database and the user can be created and permissions to the respective schema will be given.

```
1 CREATE database rand_numbers;
2 CREATE USER 'random_user'@'localhost' IDENTIFIED BY '
   random_password';
3 GRANT ALL PRIVILEGES ON rand_numbers.* TO 'random_user'@'localhost'
   ;
```

With this, the Database is ready to be used by the Random Generator Example from localhost.

3.2 Random Generator

The Random Generator will be a very simple Python app which has a unique Id per Service instance. It will return his id and a new randomly generated number. For this application we create a folder called generator with the following Structure.

```
generator
├── Dockerfile
├── rand_gen.py
└── requirements.txt
```

The Dockerfile is needed to create the Docker Image which will be used from Kubernetes to create the random generator service. rand_gen.py is the complete Random Generator Python application based on Flask¹.

```
1 from flask import Flask, jsonify
2 import random
3 import uuid
4
5 app = Flask(__name__)
6 user_id = uuid.uuid4().int
7
8 @app.route('/')
9 def random_number():
10     object = {'id': str(user_id),
11              'randNumber': str(random.randint(0,1000))}
12     return jsonify(object)
13
14 if __name__ == '__main__':
15     app.run(port=5050, host='0.0.0.0')
```

In requirements.txt are the Python packages specified which are needed to be installed. In our case we need flask. Therefore, this file contains only one line which is:

```
Flask==1.0.2
```

¹More information about Flask can be found on the official Homepage <http://flask.pocoo.org/>

3.3 Middle Tier

The Middle Tier Application is created with Spring Initializer. Under the following link <https://start.spring.io/> Helps to bootstrap very fast a simple Spring Boot application. In our case the fields should be filled out as followed:

Project	Maven Project
Language	Java
Spring Boot	2.1.3 (All versions would apply)
Group	ch.toky.randgen
Artifact	middletier
Name	MiddleTier
Description	Middle Tier Service for Random Generator Application
Packaging	Jar
Java Version	8
Dependencies	Web, JPA, MySQL, Rest Repositories (Actuator)

Actuator is optional in case you want to monitor your application. The Website will create a zip file to download. This zipfile has to be extracted to the desired Project folder.

```
middletier
├── Dockerfile
├── mvnw
├── mvnw.cmd
├── pom.xml
└── src
```

Spring Initializer already created mostly the whole structure. the Dockerfile has to be created only.

Now inside of the Project /src/main/java create the following Project Structure and files.

```
ch.toky.randgen.middletier
├── MiddletierApplication.java
├── ch.toky.rand-gen.middle-tier.model
│   ├── PodStat.java
│   └── RandomNumber.java
└── ch.toky.rand-gen.middle-tier.repository
    └── PodStatRepository.java
```

The file MiddleTierApplication.java should already be in place. as Spring Boot Initializr created this with the complete Folder structure. the packages controller, model and repository need to be created. Inside of controller, A file named MiddletierController.java needs to be created with the following content.

Within the model package two new Files have to be created: PodStat.java and RandomNumber.java.

PodStat is an Entity and therefore the class has to be annotated with @Entity. It contains the following fields with their respective getter and Setter Methods.

```
1  @Id
2  @GeneratedValue(strategy= GenerationType.AUTO)
3  private Long podStatID;
4  private String id;
5  private Long timeStamp;
6  private Long counter;
```

The class RandomNumber is only a DTO which is retrieved from the random generator Service. Therefore there is no need for an annotation. Only the following Fields need to be declared with their getters and setters:

```
1  private String id;
2  private Long randomNumber;
```

In the repository package the file PodStatRepository.java will be created. As this java file is not a class but an interface it needs to be changed to interface and extends JpaRepository<PodStat, Long> and it will be annotated with @Repository. Now those two methods can be created

```
1  @Query("Select count(ps.id) from PodStat ps where ps.id = ?1")
2  Long countUniqueId( String id);
3
4  @Query("Select count(ps.id) from PodStat ps")
5  Long findMaxCount();
```

Within the controller all the endpoints are declared. Therefore it will be annotated with @RestController

Those fields are needed within the controller and are therefore declared first.

```
1  @Autowired
2  private ObjectMapper objectMapper;
3  @Autowired
4  private PodStatRepository podStatRepository;
5  private Map<String, String> env = System.getenv();
```


As there should not be any hardcoded url according to the 12 Factor application ², the Url will be retrieved through a System Variable.

Now we create a controller method with the business logic inside:

```
1  @RequestMapping(value = "/", produces = "application/json")
2  public RandomNumber getRandom() {
3
4      RandomNumber randNum = getNewRandomNumber();
5      Long maxCountId = podStatRepository.countUniqueId(randNum.
6      getId());
7      Long maxCountOverall = podStatRepository.findMaxCount();
8      PodStat tmpPod = new PodStat();
9      tmpPod.setId(randNum.getId());
10     tmpPod.setTimeStamp(maxCountOverall+1);
11     tmpPod.setCounter(maxCountId +1);
12     podStatRepository.save(tmpPod);
13
14     return randNum;
15 }
```

The above Method listens on the path / and returns the Random number after saving it to the database with the actual count.

Now the last Method is used to retrieve the Random Number from the Random Generator Service.

```
1  private RandomNumber getNewRandomNumber() {
2
3      String randGenUrl=env.get("RANDOMGENERATORURL");
4      String URL = randGenUrl;
5      RestTemplate restTemplate = new RestTemplate();
6
7      return restTemplate.getForObject(URL, RandomNumber.class)
8      ;
9  }
```

Above Source code contains the Controller and the Service, which should be separated optimally. Next two files represents POJOs which are going to be used from controller and provided by Repositories.

The last thing which needs to be done for the Middle Tier Service is to setup the default values for the Database Connection.

The datasource configurations are going to be overwritten by Environment Variables once they run inside of a Docker Container.

²Accessible at <https://12factor.net/>

3.4 Statistic Service

The Statistic Service has the same setup as the Middle Tier client. Therefore the Project will be created too with Spring Boot initializer.

Project	Maven Project
Language	Java
Spring Boot	2.1.3 (All versions would apply)
Group	ch.toky.randgen
Artifact	stattier
Name	Stattier
Description	Statistic Tier Client for Random Generator Application
Packaging	Jar
Java Version	8
Dependencies	Web, JPA, MySQL, Rest Repositories

For the statistic Tier Service we need to create the following Package structure:

```
ch.toky.randgen.statsservice
├── StatServiceApplication.java
├── ch.toky.randgen.statsservice.controller
│   └── Controller.java
├── ch.toky.randgen.statsservice.model
│   ├── PodStat.java
│   ├── Series.java
│   ├── SeriesItem.java
│   └── Stat.java
├── ch.toky.randgen.statsservice.repository
│   └── PodStatRepository.java
└── ch.toky.randgen.statsservice.service
    └── StatService.java
```

This time, we will create a separate controller class. Therefore, inside of StatServiceApplication.java will only be the main method which calls the Spring Boot application. Which means we do not have to change this file as Spring Boot already did everything needed for us.

Controller.java will be annotated with @RestController as it contains all our endpoints.

next, we need the StatService class in this controller, this is why we inject it with @Autowired.

```
1  @Autowired
2  StatService statService;
```

Now we can also create our two endpoints, one for all stats, and one with the history.

```
1  @RequestMapping(method = RequestMethod.GET, value = "/")
2  public List<Stat> getAllPodStats() {
3
4      return statService.getAllPodStats();
5  }
6
7  @RequestMapping(method = RequestMethod.GET, value = "/history")
8  public List<Series> getAllPodStatHistory() {
9
10     return statService.getPodHistory();
11 }
12
```

We could leave the method out as GET is anyway the default method but we leave it here for for understanding.

Next we are going to declare the Entities and DTOs.

For simplicity i will only show all fields but of course also the getter and setter methods needs to be implemented.

Fields for PodStat:

```
1  @Id
2  @GeneratedValue(strategy = GenerationType.AUTO)
3  private Long podStatID;
4  private String id;
5  private Long timeStamp;
6  private Long counter;
```

Series will be a DTO and therefore not annotated with Entity we have also a constructor in order to initialize a new Array List.

```
1  private String name;
2  private List<SeriesItem> series;
3
4  public Series(String name){
5      this.name = name;
6      this.series = new ArrayList<SeriesItem>();
7  }
8
9  public void appendSeriesItem(SeriesItem seriesItem){
10     this.series.add(seriesItem);
11 }
```

SeriesItem is the second DTO class we are going to use and therefore as well not annotated with @Entity

```
1  private Long name;
2  private Long value;
3
4  public SeriesItem(Long name, Long value){
5      super();
6      this.name = name;
7      this.value = value;
8  }
```

Stat Class:

```
1 private String id;
2 private Long counter;
3
4 public Stat(String id, Long counter) {
5     this.id = id;
6     this.counter = counter;
7 }
```

Now we can implement the Repository (annotated with @Repository) as an interface which extends JpaRepository<PodStat, String>

```
1 @Query("SELECT count(pd.id) FROM PodStat pd WHERE pd.id = ?1")
2 Long countUniqueId(String id);
3
4 @Query("SELECT distinct ps.id FROM PodStat ps")
5 List<String> findUniqueIds();
6
7 @Query("SELECT ps from PodStat ps WHERE ps.id = ?1")
8 List<PodStat> findByIds(String id);
```

Now the last file is the most important one as there we will have all the business logic in it.

We need to annotate it with `@Service` in order to make it available for Spring Boot to create a Bean out of it.

```
1  @Autowired
2  PodStatRepository podStatRepository;
3
4  private Iterable<String> getAllIds(){
5      Iterable<String> source = podStatRepository.findUniqueIds()
6      ;
7
8      return source;
9  }
10
11 public List<Stat> getAllPodStats(){
12     Iterable<String> source = getAllIds();
13     List<Stat> podStatistics = new ArrayList<Stat>();
14
15     source.forEach( id -> {
16         podStatistics.add(new Stat(id, podStatRepository.
17             countUniqueId(id)));
18     });
19
20     return podStatistics;
21 }
22
23 public List<Series> getPodHistory(){
24     List<PodStat> source = podStatRepository.findAll();
25
26     Map<String, Series> podHistorys = new HashMap<>();
27     source.forEach( entry ->{
28         if(podHistorys.get(entry.getId()) == null){
29             podHistorys.put(entry.getId(), new Series(entry.
30                 getId()));
31         }
32         podHistorys.get(entry.getId()).appendSeriesItem(new
33             SeriesItem(entry.getTimestamp(), entry.getCounter()));
34     });
35
36     List<Series> plainSeries = new ArrayList<>(podHistorys.
37         values());
38
39     return plainSeries;
40 }
```

Now that all the java files are created we can also create the Dockerfile for this Service.

3.5 Frontend

The frontend Application is build with Spring Boot and Angular together.

Creating Spring Boot Application:

Project	Maven Project
Language	Java
Spring Boot	2.1.3 (All versions would apply)
Group	ch.toky.randgen
Artifact	frontend
Name	Frontend
Description	Frontend Service
Packaging	Jar
Java Version	8
Dependencies	Web, Rest Repositories

Until now we only have the controller part of our User interface with the Spring boot application, we need to create the Angular partnow.

Therefore, we create a new Project directly with Angular CLI within the folder where all the other Projects are stored.

```
ng new ui-frontend
```

Now to try if the project has been set up correctly. Change path to the new project folder and run **ng serve**. Once the server is ready we should be able to access <http://localhost:4200> and see a sample home page created by angular cli.

As the frontend should be only one single application we will now move all folders into the Spring boot application folder.

in the Folder where all Projects are stored we execute those commands.

```
mv ui-frontend/src/* frontend/src/  
rm -rf ui-frontend/src/  
mv ui-frontend/* frontend/  
rm -rf ui-frontend
```

In order to serve all the frontend files from the Spring Boot application we need to tell angular to save all compiled files into the target/classes/static folder. In order to achieve this, we need to change the output path option in the file angular.json

```
1  "options": {  
2    "outputPath": "target/classes/static",  
3    "index": "src/index.html",
```

Now every time the Angular Project is built with **ng build** it will be compiled and copied directly to the path where spring boot serves static files. Every time the spring boot application has started we will get the static web files under the root path `/`.

Now we are going to modify the Angular Project itself.

First we create all interfaces with the following commands.

```

ng generate interface models/randomNumber
ng generate interface models/seriesItem
ng generate interface models/series
ng generate interface models/podStatistic

```

Within Interface RandomNumber, declare those two fields.

```

1   id: string;
2   randomNumber: number;

```

Within Interface PodStatistic

```

1   id: string;
2   counter: number;

```

Interface SeriesItem

```

1   name: number;
2   value: number;

```

Interface Series

```

1   name: string;
2   series: SeriesItem;

```

In order to have some empty Objects we also need to declare the following Classes within the folder implementation.

```

ng generate class RandNumberImpl
ng generate class PodStatisticImpl

```

Where RandomNumberImpl implements RandomNumber and PodStatisticImpl implements PodStatistic Within those classes we define all Strings as empty Strings and all numbers as 0. This prevents us from getting an error from the Html due to an undefined object.

```

ng generate service statistic
ng generate service fetch-number

```

this created 4 new files for us two typescript and two spec.ts files which would be needed for the end to end tests. Both Services also need to be declared in the providers array from *app.module.ts* if not yet done from angular cli.

We will now modify first the fetch-number service

withing the Constructor argument field we pass a HttpClient.

```

1   constructor(private _http: HttpClient) { }

```

Therefore you need to make sure to implement the following Line.

```

1   import { HttpClient } from '@angular/common/http';

```

```

1 getRandomNumber(): Observable<RandomNumber>{
2   return this._http.get<RandomNumber>('randomNumber');
3 }

```

In the Statistic Service File we declare the same HttpClient to be passed to the constructor.

```

1 constructor(private _http: HttpClient) { }

```

Then the following methods are going to be declared:

```

1 getStatistics(): Observable<PodStatistic[]>{
2
3   return this._http.get<PodStatistic[]>('statistics');
4 }
5
6 getHistory(): Observable<Series[]>{
7
8   return this._http.get<Series[]>('history');
9 }

```

As we are using Material design, we need to create a separate Module to manage all dependencies which are used for Material design.

ng generate module material

Within the newly created *material.module.ts* file we add the following Modules into imports and exports array.

```

1   CommonModule,
2   MatButtonModule,
3   MatCheckboxModule,
4   MatCardModule,
5   MatTableModule

```

In order to be able to use our newly created Material Module within our app, we need to add it to the import array from *app.module.ts* along with all the following imports.

```

1   BrowserModule,
2   MaterialModule,
3   HttpClientModule,
4   NgxChartsModule,
5   BrowserAnimationsModule

```

By now we cannot import all the declared Module Dependencies. this is because we use a lot of external libraries which we now have to install via npm. in order to use Angular Material ³

```

npm install --save @angular/material \
@angular/cdk @angular/animations

```

³documentation via following link <https://material.angular.io/guide/getting-started>

Ngx-Charts Module is to display the statistics as a graph. ⁴

It can be installed with the following command.

```
npm install @swimlane/ngx-charts --save
```

Now we can start adding the business logic. Within the Main Component file *app.component.ts*. First we declare the Variables which we are going to use.

```
1  randomNumber: RandomNumber = new RandNumberImpl();
2  statistics: PodStatistic[] = [new PodStatisticImpl()];
3  dataSource: any;
4  multi: Series[];
5  displayedColumns: string[] = ['id', 'counter'];
```

In the constructor, we provide our two services as Private.

next we create the Methods which fetches the data from the service.

```
1  getNewNumber() {
2      this.fetchNumberService.getRandomNumber()
3      .subscribe(
4          data => { this.randomNumber = data; });
5  };
6
7  getStatistics() {
8      this.statisticService.getStatistics()
9      .subscribe(
10         data => {
11             this.dataSource = new MatTableDataSource<PodStatistic>(
12                 data); });
13     }
14
15     getHistory() {
16         this.statisticService.getHistory()
17         .subscribe(
18             data => { this.multi = data; })
19     };
```

We also need to define a method Called *ButtonClick* as we want to use it from the Html file. within this Method we will do nothing more than just calling all fetch methods.

```
1  buttonClick() {
2      this.getNewNumber();
3      this.getStatistics();
4      this.getHistory();
5  }
```

From *ngOnInit* we call only *buttonClick()*.

then we also have a *onSelect* which we need to provide for the graph;

```
1  onSelect(event) {
2      console.log(event);
3  }
```

⁴Documentation can be found here <https://swimlane.gitbook.io/ngx-charts/>

As a last thing in this file we need to add some configuration Variables.

```

1 // Graph
2 view: any[] = [700, 400];
3 showXAxis = true;
4 showYAxis = true;
5 gradient = false;
6 showLegend = true;
7 showXAxisLabel = true;
8 xAxisLabel = 'Sum of all Calls';
9 showYAxisLabel = true;
10 yAxisLabel = 'Calls per Pod';
11 timeline = true;
12 autoScale = true;
13 colorScheme = {
14   domain: ['#5AA454', '#A10A28', '#C7B42C', '#AAAAAA']
15 };

```

the Last file we need to create for the Frontend is the html from our component Class.

```

1 <section class="mat-typography">
2   <h1>Random Number</h1>
3
4   <mat-card>
5     <mat-card-header>
6       <p>Id: {{randomNumber.id}}</p>
7     </mat-card-header>
8     <mat-card-content>
9       <p>Number: {{randomNumber.randNumber}}</p>
10    </mat-card-content>
11  </mat-card>
12  <button mat-button (click)="buttonClick()">Get New Number</button>
13
14  <mat-card>
15    <mat-card-header>
16      <p>Statistics Table</p>
17    </mat-card-header>
18    <mat-card-content>
19      <table mat-table [dataSource]="dataSource">
20        <ng-container matColumnDef="id">
21          <th mat-header-cell *matHeaderCellDef>ID</th>
22          <td mat-cell *matCellDef="let element">{{element.id}}</td>
23        </ng-container>
24        <ng-container matColumnDef="counter">
25          <th mat-header-cell *matHeaderCellDef>Counter</th>
26          <td mat-cell *matCellDef="let element">{{element.counter}}</td>
27        </ng-container>
28      <tr mat-header-row *matHeaderRowDef="displayedColumns"></tr>
29      <tr mat-row *matRowDef="let row; columns: displayedColumns;"></tr>
30    </table>
31  </mat-card-content>
32 </mat-card>

```

```

33 <ngx-charts-line-chart
34   [view]="view"
35   [scheme]="colorScheme"
36   [results]="multi"
37   [gradient]="gradient"
38   [xAxis]="showXAxis"
39   [yAxis]="showYAxis"
40   [legend]="showLegend"
41   [showXAxisLabel]="showXAxisLabel"
42   [showYAxisLabel]="showYAxisLabel"
43   [xAxisLabel]="xAxisLabel"
44   [yAxisLabel]="yAxisLabel"
45   [autoScale]="autoScale"
46   [timeline]="timeline"
47   (select)="onSelect($event)">/ngx-charts-line-chart>
48
49
50 </section>

```

Now it is time to go through the Server side Part of the Frontend, which is from our Spring Boot frontend. Like we did it for all the previous Spring boot Applications, we will first create all folders and .java files. From within src/main/java

```

ch.toky.randgen.frontend
├── FrontendApplication.java
├── ch.toky.randgen.frontend.model
│   ├── PodStat.java
│   ├── RandomNumber.java
│   ├── Series.java
│   └── SeriesItem.java
└── ch.toky.randgen.frontend.service
    └── RestService.java

```

All classes under the Model Package, represent our DTOs like we had it for all the previous services.

Fields from PodStat:

```

1  private Long podStatID;
2  private String id;
3  private Long timeStamp;
4  private Long counter;

```

Fields from RandomNumber:

```

1  private String id;
2  private Long randNumber;

```

Series:

```

1  private String name;
2  private List<SeriesItem> series;

```

SeriesItem:

```

1  private Long name;
2  private Long value;

```

All fields from above classes must have as well their corespensive getter and setter methods.

To fetch all the Data we need to declare witin *RestService.java* all the methods which communicates to Statistic Service and to Middle Tier Service.

As this service should be injected within Main Application we need to annotate this Class with `@Service`.

Fields from RestService:

```
1 private Map<String, String> env = System.getenv();
2 private final String statURL = env.get("STAT.URL");
3 private final String randNumURL = env.get("RAND.NUM.URL");
4 private final String historyURL = env.get("HISTORY.URL");
5 private RestTemplate restTemplate = new RestTemplate();
```

As one can see, we will retrieve all endpoints via environment Variables which are either declared directly within the docker Container or via Kubernetes Environment Variable configurations.

Now we declare the methods.

```
1 public List<PodStat> getStatistics(){
2     PodStat[] tmpStats = restTemplate.getForObject(statURL,
3     PodStat[].class);
4     return Arrays.asList(tmpStats);
5 }
6
7 public RandomNumber getRandomNumber(){
8     return restTemplate.getForObject(randNumURL, RandomNumber.
9     class);
10 }
11
12 public List<Series> getHistory(){
13     Series[] series = restTemplate.getForObject(historyURL,
14     Series[].class);
15     return Arrays.asList(series);
16 }
```

This was the last method for *RestService.java*. Within the Main Application file *FrontendApplication.java* we will also declare our endpoints we provide to the Angular application. Therefore we need to add the `@RestController` annotation besides the `@SpringBootApplication` which should already be in place.

There is one dependency with @Autowired and this is our previously declared RestService.

```
1 @Autowired
2 private RestService restService;
```

Now declare all endpoint methods.

```
1 @GetMapping("/statistics")
2 public List<PodStat> getStatistics() {
3     return restService.getStatistics();
4 }
5
6 @GetMapping("/randomNumber")
7 public RandomNumber getRandomNumber() {
8     return restService.getRandomNumber();
9 }
10
11 @GetMapping("/history")
12 public List<Series> getHistory() {
```

Within the root directory of the project we can place the Docker file like we did it for all the other services. Except that we now have to add another stage for the angular build.

4 Docker

4.1 Creating the Docker Images

As we were always using multi stage builds we are now able to build the Project directly with Docker without any manual execution of some maven build commands or angular build commands. It is mostly important for the build from our Frontend, as we do not need to run `ng build` and after that `mvn clean package`. With this we can also always be sure to have the latest version of the jar file, as we are building the jar together with the Docker Image.

There is one huge disadvantage. As every docker Container has its own environment and we cannot mount a hostpath during the build, we need to download all the dependencies for each build which takes quite some time.

As our builds will run every time in a new Container, it needs to load all dependencies each time we are going to build the Project. This takes a lot of time and there are plugins which makes this much easier. For example the spotify docker Maven plugin which would enable us to build the Dockerfile directly with maven ⁵. There is also a maven plugin to execute the angular build before building the jar file ⁶. All of them can make our life easier but as we want to dive a little bit deeper into Docker, we will do it with plain Dockerfiles.

Database

```
1 FROM mysql:5.6
2
3 ENV MYSQL_ROOT_PASSWORD=password
4
5 ENV MYSQL_USER=random_user
6
7 ENV MYSQL_PASSWORD=random_password
8
9 ENV MYSQL_DATABASE=rand_numbers
```

Create Random Generator

The Dockerfile to create the Docker image:

```
1 FROM python:3.6-alpine
2
3 COPY requirements.txt /app/requirements.txt
4
5 COPY rand-gen.py /app/rand-gen.py
6
7 WORKDIR /app
8
9 RUN pip install -r requirements.txt
10
11 ENTRYPOINT [ "python" ]
12
13 CMD [ "rand-gen.py" ]
```

within the root directory of the Random Generator.

⁵<https://github.com/spotify/docker-maven-plugin>

⁶<https://github.com/eirslett/frontend-maven-plugin>

the flag `-t` indicates that the name of the image and the dot at the end tells docker to use the Dockerfile from the current working directory.

```
1 docker build -t rand-gen-image .
```

Middle Tier Docker Image

```
1 FROM maven:3.5-jdk-8 AS builder
2
3 COPY ./pom.xml /app/pom.xml
4
5 COPY ./src /app/src
6
7 RUN mvn -f /app/pom.xml package -DskipTests
8
9 FROM anapsix/alpine-java:latest
10
11 COPY --from=builder /app/target/middletier-0.0.1-SNAPSHOT.jar /opt/
    middle-tier.jar
12
13 ENV SPRING.DATASOURCE_URL=jdbc:mysql://rand-gen-database:3306/
    rand_numbers
14
15 ENV SPRING.DATASOURCE_USERNAME=random_user
16
17 ENV SPRING.DATASOURCE_PASSWORD=random_password
18
19 ENV RANDOM.GENERATOR_URL=http://rand-gen-tier:5050/
20
21 ENTRYPOINT [ "java" ]
22
23 CMD [ "-jar", "/opt/middle-tier.jar" ]
```

We are using anapsix base image, as we want to keep the Docker image as small as possible.

Finally we can create the docker image with the following Command.

Important is, we need to be in the root directory of the Project where also the Dockerfile is stored.

```
1 docker build -t rand-middle-image .
```

As previously mentioned, we will use multi stage builds. In this case we use a maven base image as a builder. Reference for using maven with Docker https://hub.docker.com/_/maven/

Statistic Service For the image itself we are using anapsix base image as this is currently the smallest possible java base image <https://hub.docker.com/r/anapsix/alpine-java/dockerfile/> If you want to run the project on a raspberry, you would need to change the base image to hypriot as a Raspberry has a different underlying CPU architecture which is based on ARM ⁷

```
1 FROM maven:3.5-jdk-8 AS builder
2
3 COPY ./pom.xml /app/pom.xml
4
5 COPY ./src /app/src
```

⁷<https://github.com/hypriot/rpi-java>

```

6
7 RUN mvn -f /app/pom.xml package -DskipTests
8
9 FROM anapsix/alpine-java:latest
10
11 COPY --from=builder /app/target/statservice-0.0.1-SNAPSHOT.jar /opt/
  /stat-tier.jar
12
13 ENV SPRING_DATASOURCE_URL=jdbc:mysql://rand-gen-database/
  rand_numbers
14
15 ENV SPRING_DATASOURCE_USERNAME=random_user
16
17 ENV SPRING_DATASOURCE_PASSWORD=random_password
18
19 ENTRYPOINT ["java"]
20
21 CMD ["-jar", "/opt/stat-tier.jar"]

```

Basically the Dockerfile for this Service looks pretty much the same as the one for the Middle tier except that we do not need to declare an environment variable for the random generator.

```

1 docker build -t rand-stat-image .

```

Frontend Service

As we have one more step within the Frontend service. We need to have one more stage. As we need node package manager to build the angular application we are going to use a node.js docker base image ⁸.

```

1 FROM node:10-alpine as frontbuilder
2
3 WORKDIR /app
4
5 COPY . .
6
7 RUN npm install
8
9 RUN npm run build
10
11 FROM maven:3.5-jdk-8 AS builder
12
13 COPY --from=frontbuilder app/ /app/
14
15 RUN mvn -f /app/pom.xml package -DskipTests
16
17 FROM anapsix/alpine-java:latest
18
19 COPY --from=builder /app/target/frontend-0.0.1-SNAPSHOT.jar /opt/
  front-tier.jar
20
21
22 ENV STAT_URL=http://rand-stat-tier:8080/
23
24 ENV RAND_NUM_URL=http://rand-middle-tier:7070/

```

⁸ Node Repository Docker hub https://hub.docker.com/_/node/


```

25
26 ENV HISTORY_URL=http://rand-stat-tier:8080/history
27
28 ENTRYPOINT ["java"]
29
30 CMD ["-jar", "/opt/front-tier.jar"]

1 docker build -t rand-front-image .

```

4.2 running with Docker

Create a Network

```
1 docker network create -d bridge rand-network
```

Start the Database Container

```

1 docker run -d --name rand-gen-database \
2 -e MYSQL_ROOT_PASSWORD='password' \
3 -e MYSQL_USER='random_user' \
4 -e MYSQL_PASSWORD='random_password' \
5 -e MYSQL_DATABASE='rand_numbers' \
6 --network rand-network \
7 mysql:5.6

```

Start the Random Generator App

```

1 docker run -d --name=rand-gen-tier \
2 --network rand-network \
3 rand-gen-image

```

Start the middle tier Application

```

1 docker run -d --name rand-middle-tier \
2 --network rand-network \
3 rand-middle-image

```

Starting the Stat Tier Application

```

1 docker run -d \
2 --name rand-stat-tier \
3 --network rand-network \
4 rand-stat-image

```

Start the Frontend Service

```

1 docker run -d -p 8080:8080 \
2 --network rand-network \
3 --name rand-frontend \
4 rand-front-image

```

All the default environment Variables are already set within the Dockerfiles therefore we can startup all the services one by one.

5 Kubernetes

5.1 Installing Kubernetes

To play around and get to know Kubernetes it is recommended to install minikube⁹ which is running inside a VM on your local machine. If you want to use Kubernetes on a Server and deploy PROD ready application then you have the option to rent directly a Kubernetes Cluster from a Vendor

- AWS EKS <https://aws.amazon.com/de/eks/>
- GKE Google Cloud <https://cloud.google.com/kubernetes-engine/>
- IBM Kubernetes Service <https://www.ibm.com/cloud/container-service>

You can also install Kubernetes on a plain server, we use ubuntu for this setup. we use the following instruction to get this done¹⁰ But first we need to add the Kubernetes to our installation repository.

```
curl -s https://packages.cloud.google.com/apt/doc/apt-key.gpg | sudo apt-key add
sudo apt-add-repository "deb http://apt.kubernetes.io/ kubernetes-xenial main"
$ sudo apt install kubeadm

sudo swapoff -a
```

Now we have Kubeadm installed, we can continue with the server setup based on the instruction from Kubernetes itself¹¹

The pod network will be Calico.

```
kubeadm init --apiserver-advertise-address=<ip-address> --pod-network-cidr=192.168.0.0/16
```

Switch back to non root user and execute those commands.

```
mkdir -p $HOME/.kube
sudo cp -i /etc/kubernetes/admin.conf $HOME/.kube/config
sudo chown $(id -u):$(id -g) $HOME/.kube/config
```

```
/proc/sys/net/bridge/bridge-nf-call-iptables to 1
```

Now we just need to deploy the pod network.

```
kubect1 apply -f https://docs.projectcalico.org/v3.3/getting-started/kubernetes/installation
kubect1 apply -f https://docs.projectcalico.org/v3.3/getting-started/kubernetes/installation
```

Wait until all pods are up and running. `kubect1 get pods --all-namespaces`

If we are using a single node cluster, we need to tell Kubernetes that it is allowed to deploy pods on the master node (which is the only node in the cluster) `kubect1 taint nodes --all node-role.kubernetes.io/master-`

Now we are done with the setup and we can start deployin pods to the Kubernetes cluster.

⁹<https://kubernetes.io/docs/tasks/tools/install-minikube/>

¹⁰<https://linuxconfig.org/how-to-install-kubernetes-on-ubuntu-18-04-bionic-beaver-linux>

¹¹<https://kubernetes.io/docs/setup/independent/create-cluster-kubeadm/>

5.2 Deploy Services

All the Applications are running inside of a docker container and managed within a Kubernetes Pod and accessible via a Kubernetes Service where only the Frontend Service is bound to a Node Port.

Database A database is always quite special for a deployment as the whole Container setup is meant to run stateless. Which means all the data is lost once a container dies. Mostly this is very bad for a database as there all the relevant data should be persisted.

Docker itself provides therefore persistent Volumes which can be mounted by a Container.

Within Kubernetes we create therefore a PersistentVolumeClaim ¹² before we start a

Deployment

```
1 apiVersion: apps/v1
2 kind: Deployment
3 metadata:
4   name: database-deployment
5   labels:
6     app: rand-gen
7     location: backend
8 spec:
9   replicas: 1
10  selector:
11    matchLabels:
12      app: rand-gen
13      location: backend
14  template:
15    metadata:
16      labels:
17        app: rand-gen
18        location: backend
19    spec:
20      containers:
21      - name: database-container
22        image: mysql:5.6
23        env:
24        - name: MYSQLROOTPASSWORD
25          value: password
26        - name: MYSQLUSER
27          value: springuser
28        - name: MYSQLPASSWORD
29          value: ThePassword
30        - name: MYSQLDATABASE
31          value: db_example
32      ports:
33      - containerPort: 3306
```

As a pod can always vary its ip adress, we need to have a stable endpoint to access the pods. Specifcily for this purpose, kubernetes provides services. Service to make the Database Pod available

¹²<https://kubernetes.io/docs/concepts/storage/persistent-volumes/>

```

1 apiVersion: v1
2 kind: Service
3 metadata:
4   name: database-svc
5   labels:
6     app: rand-gen
7 spec:
8   selector:
9     app: rand-gen
10    location: backend
11    clusterIP: None
12  ports:
13    - port: 3306

```

Random Generator Now we also declare the deployment for the generator service. Notice that we have two replicas for the generator. this is because we want to have two different ids as a source for our generator.

```

1 apiVersion: apps/v1
2 kind: Deployment
3 metadata:
4   name: random-generator-deployment
5   labels:
6     app: rand-gen
7     location: backend
8 spec:
9   replicas: 2
10  selector:
11    matchLabels:
12      app: rand-gen
13      location: backend
14  template:
15    metadata:
16      labels:
17        app: rand-gen
18        location: backend
19    spec:
20      containers:
21        - name: random-generator-container
22          image: random-generator-image
23          imagePullPolicy: Never
24          ports:
25            - containerPort: 5050

```

The corresponding service.

```

1 apiVersion: v1
2 kind: Service
3 metadata:
4   name: random-generator-svc
5   labels:
6     app: rand-gen
7 spec:
8   selector:
9     app: rand-gen
10    location: backend
11  ports:
12    - protocol: TCP

```

```
13     port: 5050
14     targetPort: 5050
15
16
```

Middle Tier service

```
1  apiVersion: apps/v1
2  kind: Deployment
3  metadata:
4    name: middle-tier-controller
5    labels:
6      app: rand-gen
7      location: backend
8  spec:
9    replicas: 1
10   selector:
11     matchLabels:
12       app: rand-gen
13       location: backend
14   template:
15     metadata:
16       labels:
17         app: rand-gen
18         location: backend
19     spec:
20       containers:
21       - name: random-controller-container
22         image: random-controller-image
23         imagePullPolicy: Never
24         ports:
25         - containerPort: 7070
```

The service

```
1  apiVersion: v1
2  kind: Service
3  metadata:
4    name: middle-tier-svc
5    labels:
6      app: rand-gen
7  spec:
8    selector:
9      app: rand-gen
10     location: backend
11     type: NodePort
12   ports:
13   - protocol: TCP
14     port: 7070
15     targetPort: 7070
16     nodePort: 31234
17
18
```

Statistic Service

```
1  apiVersion: apps/v1
2  kind: Deployment
3  metadata:
```

```

4   name: random-statistic-deployment
5   labels:
6     app: rand-gen
7     location: backend
8 spec:
9   replicas: 1
10  selector:
11    matchLabels:
12      app: rand-gen
13      location: backend
14  template:
15    metadata:
16      labels:
17        app: rand-gen
18        location: backend
19    spec:
20      containers:
21      - name: random-statistic-container
22        image: random-statistic-image
23        imagePullPolicy: Never
24        ports:
25        - containerPort: 7080

```

Service

```

1  apiVersion: v1
2  kind: Service
3  metadata:
4    name: random-statistic-svc
5    labels:
6      app: rand-gen
7  spec:
8    selector:
9      app: rand-gen
10     location: backend
11     type: NodePort
12    ports:
13    - protocol: TCP
14      port: 7080
15      targetPort: 7080
16      nodePort: 31255

```

Frontend

```

1  apiVersion: apps/v1
2  kind: Deployment
3  metadata:
4    name: frontend-deployment
5    labels:
6      app: rand-gen
7      location: backend
8 spec:
9   replicas: 1
10  selector:
11    matchLabels:
12      app: rand-gen
13      location: backend
14  template:
15    metadata:

```

```
16     labels:
17       app: rand-gen
18       location: backend
19     spec:
20       containers:
21       - name: frontend-container
22         image: frontend-image
23         imagePullPolicy: Never
24         ports:
25         - containerPort: 8080
```

Service:

```
1 apiVersion: v1
2 kind: Service
3 metadata:
4   name: frontend-svc
5   labels:
6     app: rand-gen
7 spec:
8   selector:
9     app: rand-gen
10    location: backend
11   type: NodePort
12   ports:
13   - protocol: TCP
14     port: 5123
15     targetPort: 8080
```