


实验八报告

作业 1:

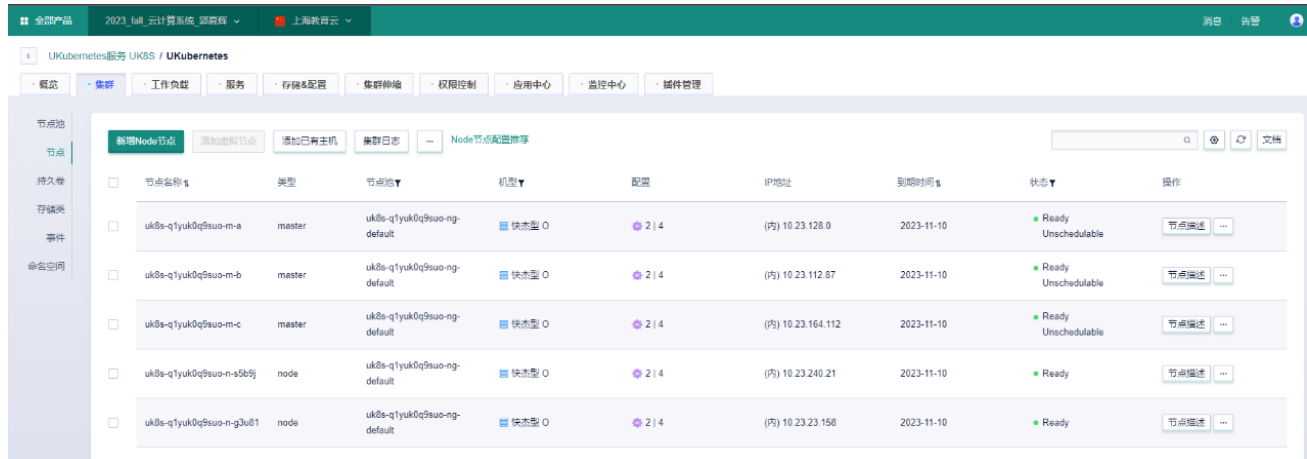

作业 2:

```
[root@10-23-54-71 .kube]# kubectl version -o json
{
  "clientVersion": {
    "major": "1",
    "minor": "19",
    "gitVersion": "v1.19.0",
    "gitCommit": "e19964183377d0ec2052d1f1fa930c4d7575bd50",
    "gitTreeState": "clean",
    "buildDate": "2020-08-26T14:30:33Z",
    "goVersion": "go1.15",
    "compiler": "gc",
    "platform": "linux/amd64"
  },
  "serverVersion": {
    "major": "1",
    "minor": "22",
    "gitVersion": "v1.22.5",
    "gitCommit": "5c99e2ac2ff9a3c549d9ca665e7bc05a3e18f07e",
    "gitTreeState": "clean",
    "buildDate": "2021-12-16T08:32:32Z",
    "goVersion": "go1.16.12",
    "compiler": "gc",
    "platform": "linux/amd64"
  }
}
```

作业 3: 最开始我用 `curl http://localhost:8001/api/v1/namespaces/default/pods/$POD_NAME/proxy/` 并没有复现预期的 html 网页:

```
[root@10-23-54-71 ~]# curl http://localhost:8001/api/v1/namespaces/default/pods/$POD_NAME/proxy/
{
  "kind": "PodList",
  "apiVersion": "v1",
  "metadata": {
    "resourceVersion": "5804"
  },
  "items": [
    {
      "metadata": {
        "name": "webapp-54c8dff7d-wwx8q",
        "generateName": "webapp-54c8dff7d-",
        "namespace": "default",
        "uid": "6edd7f8e-9043-4449-8dca-1951dcfb78ca",
        "resourceVersion": "4513",
        "creationTimestamp": "2023-11-09T15:57:02Z",
        "labels": {
          "app": "webapp",
          "pod-template-hash": "54c8dff7d"
        },
        "annotations": {
          "cni.projectcalico.org/podIP": "10.23.167.234"
        },
        "ownerReferences": [
          {
            "apiVersion": "apps/v1",
            "kind": "ReplicaSet",
            "name": "webapp-54c8dff7d",
            "uid": "cc4255cf-0984-4561-9265-87ea22b19c10",
            "controller": true,
            "blockOwnerDeletion": true
          }
        ]
      },
      "spec": {
        "containers": [
          {
            "name": "webapp",
            "image": "nginx:1.19",
            "ports": [
              {
                "containerPort": 80
              }
            ]
          }
        ],
        "restartPolicy": "Always",
        "terminationGracePeriodSeconds": 30,
        "dnsPolicy": "ClusterFirst",
        "serviceAccountName": "default",
        "securityContext": {
          "seccompProfile": {
            "type": "Default"
          }
        }
      },
      "status": {
        "phase": "Running",
        "conditions": [
          {
            "type": "Ready",
            "status": "True",
            "lastProbeTime": null,
            "lastTransitionTime": "2023-11-09T15:57:02Z"
          }
        ],
        "ip": "10.23.167.234",
        "hostIP": "10.23.167.234"
      }
    }
  ]
}
```

然后我间接调用了一下，就复现成功了：

```
[root@10-23-54-71 ~]# curl http://localhost:8001/api/v1/namespaces/default/pods/webapp-54c8dff7d-wwx8q/proxy/
<!DOCTYPE html>
<html lang="en">
<head>

  <!-- Basic Page Needs
  ----- -->
  <meta charset="utf-8">
  <title>Docker :)</title>
  <meta name="description" content="">
  <meta name="author" content="">

  <!-- Mobile Specific Metas
  ----- -->
  <meta name="viewport" content="width=device-width, initial-scale=1">

  <!-- FONT
  ----- -->
  <link href="//fonts.googleapis.com/css?family=Raleway:400,300,600" rel="stylesheet" type="text/css">

  <!-- CSS
  ----- -->
  <link rel="stylesheet" href="css/normalize.css">
  <link rel="stylesheet" href="css/skeleton.css">

  <!-- Favicon
  ----- -->
  <link rel="icon" type="image/png" href="images/favicon.png">

</head>
<body>

  <!-- Primary Page Layout
  ----- -->
  <div class="container">
    <div class="row">
      <div class="one-half column" style="margin-top: 25%">
        <h4>Hello Docker!</h4>
        <p>This is being served from a <strong>docker</strong> container running Nginx.</p>
      </div>
    </div>
  </div>

<!-- End Document
  ----- -->
</body>
</html>
[root@10-23-54-71 ~]#
```

作业 4:

```
[root@10-23-54-71 ~]# kubectl get pods -o wide
NAME                                READY    STATUS    RESTARTS   AGE    IP              NODE              NOMINATED NODE    READINESS GATES
webapp-54c8dff7d-5mqmf             1/1      Running   0           2m3s   10.23.172.85    10.23.88.178      <none>             <none>
webapp-54c8dff7d-71djk             1/1      Running   0           2m3s   10.23.157.197   10.23.23.158      <none>             <none>
webapp-54c8dff7d-br6dl             1/1      Running   0           2m3s   10.23.100.253   10.23.217.217     <none>             <none>
webapp-54c8dff7d-c5q5f             1/1      Running   0           2m3s   10.23.155.76    10.23.196.28      <none>             <none>
webapp-54c8dff7d-cft94             1/1      Running   0           2m3s   10.23.239.188   10.23.196.28      <none>             <none>
webapp-54c8dff7d-m6lkw             1/1      Running   0           2m3s   10.23.226.136   10.23.23.158      <none>             <none>
webapp-54c8dff7d-pcpqz             1/1      Running   0           2m3s   10.23.198.190   10.23.240.21      <none>             <none>
webapp-54c8dff7d-s115l             1/1      Running   0           2m3s   10.23.45.64     10.23.196.28      <none>             <none>
webapp-54c8dff7d-spq2k             1/1      Running   0           2m3s   10.23.154.70    10.23.217.217     <none>             <none>
webapp-54c8dff7d-wwx8q             1/1      Running   0           9m53s   10.23.167.234   10.23.88.178      <none>             <none>
[root@10-23-54-71 ~]#
```

作业 5:

```
[root@10-23-54-71 ~]# kubectl get services
NAME          TYPE          CLUSTER-IP    EXTERNAL-IP    PORT(S)          AGE
kubernetes    ClusterIP     172.17.0.1    <none>         443/TCP          27m
webapp        LoadBalancer  172.17.4.152  113.31.102.78  80:31887/TCP     11s
[root@10-23-54-71 ~]#
```

Docker :)

← → ↻ ⚠ 不安全 | 113.31.102.78

Hello Docker!

This is being served from a **docker** container running Nginx.