

Thesis

Tomas Kontrimas

2024-09-06

Table of contents

Preface	4
Abstract	5
Zusammenfassung	6
1 Introduction	7
2 High-Energy Cosmic Particles	8
2.1 Cosmic rays	8
2.2 Gamma rays	8
2.3 Neutrinos	8
2.4 Multi messenger astronomy	8
3 Neutrino Observatories	9
3.1 The IceCube Neutrino Observatory	9
3.2 The Pacific Ocean Neutrino Experiment (P-ONE)	9
4 Software Packages	10
4.1 skyllh	10
4.1.1 Unbinned likelihood ratio	10
4.1.2 Stacking	10
4.1.3 Custom flux models, including Seyfert flux model	10
4.2 p1skyllh	10
4.3 skykde tool	10
4.4 icetray	10
4.4.1 ml_suite	10
4.4.2 photospline	10
5 Improved Point Source Analysis	11
5.1 Point source likelihood ratio test	11
5.2 Reconstruction of observables	11
5.2.1 BDT	11

5.2.2	KDE	11
5.3	Point source methods: skyscan, catalog search, binomial test	11
5.4	Analysis performance: biases, sens, dp	11
5.5	Results	11
6	Seyferts	12
6.1	Seyferts–neutrino connection	12
6.2	Core-corona model	12
6.3	BASS catalog	12
6.3.1	swift	12
6.3.2	nustar?	12
6.4	Point source methods: stacking	12
6.5	Analysis performance: biases, sens, dp	12
6.6	Results	12
7	Extended Point Source Analysis	13
7.1	Monte-Carlo and KDE improvements	13
7.2	IC79 subselection	13
7.3	Analysis performance: biases, sens, dp	13
7.4	Results	13
7.5	Future work	13
7.5.1	normalizing flows	13
7.5.2	likelihood free inference	13
8	Conclusion	14
9	Acknowledgements	15
	References	16

Preface

Abstract

Zusammenfassung

1 Introduction

See Knuth (1984)

2 High-Energy Cosmic Particles

2.1 Cosmic rays

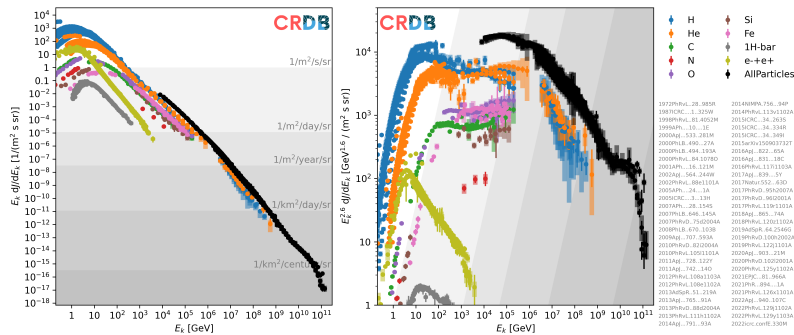


Figure 2.1: CRs

2.2 Gamma rays

2.3 Neutrinos

2.4 Multi messenger astronomy

3 Neutrino Observatories

3.1 The IceCube Neutrino Observatory

3.2 The Pacific Ocean Neutrino Experiment (P-ONE)

4 Software Packages

4.1 skyllh

4.1.1 Unbinned likelihood ratio

4.1.2 Stacking

4.1.3 Custom flux models, including Seyfert flux model

4.2 p1skyllh

4.3 skykde tool

4.4 icetray

4.4.1 ml_suite

4.4.2 photospline

5 Improved Point Source Analysis

5.1 Point source likelihood ratio test

5.2 Reconstruction of observables

5.2.1 BDT

5.2.2 KDE

5.3 Point source methods: skyscan, catalog search, binomial test

5.4 Analysis performance: biases, sens, dp

5.5 Results

6 Seyferts

6.1 Seyferts–neutrino connection

6.2 Core-corona model

6.3 BASS catalog

6.3.1 swift

6.3.2 nustar?

6.4 Point source methods: stacking

6.5 Analysis performance: biases, sens, dp

6.6 Results

7 Extended Point Source Analysis

7.1 Monte-Carlo and KDE improvements

7.2 IC79 subselection

7.3 Analysis performance: biases, sens, dp

7.4 Results

7.5 Future work

7.5.1 normalizing flows

7.5.2 likelihood free inference

8 Conclusion

9 Acknowledgements

References

Knuth, Donald E. 1984. “Literate Programming.” *Comput. J.* 27 (2): 97–111. <https://doi.org/10.1093/comjnl/27.2.97>.