


dotnamecpp::utils::
UtilsFactory::createBundle

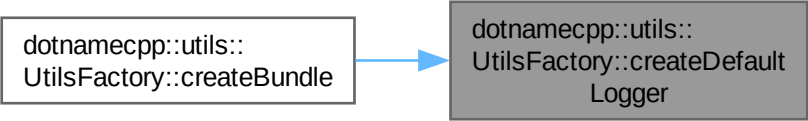

```
graph LR; A["dotnamecpp::utils::  
UtilsFactory::createBundle"] --> B["dotnamecpp::utils::  
UtilsFactory::createDefault  
Logger"]
```

A diagram showing a function call. A light gray box on the left contains the text "dotnamecpp::utils::" and "UtilsFactory::createBundle". A blue arrow points from this box to a darker gray box on the right. The darker gray box contains the text "dotnamecpp::utils::", "UtilsFactory::createDefault", and "Logger" on three separate lines.

dotnamecpp::utils::
UtilsFactory::createDefault
Logger