


dotnamecpp::utils::
UtilsFactory::createPlatformInfo

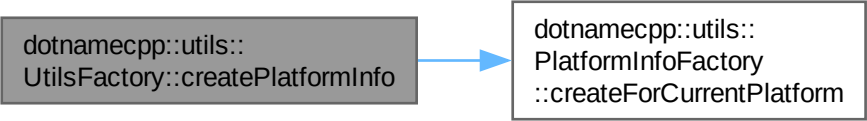

```
graph LR; A["dotnamecpp::utils::  
UtilsFactory::createPlatformInfo"] --> B["dotnamecpp::utils::  
PlatformInfoFactory  
::createForCurrentPlatform"]
```

A diagram illustrating a function call. On the left, a grey rectangular box contains the text "dotnamecpp::utils::" followed by "UtilsFactory::createPlatformInfo" on the next line. A blue arrow points from the right side of this box to the left side of a white rectangular box on the right. The white box contains the text "dotnamecpp::utils::" followed by "PlatformInfoFactory" on the next line, and "::createForCurrentPlatform" on the third line.

dotnamecpp::utils::
PlatformInfoFactory
::createForCurrentPlatform