
## Nu Html Checker

This tool is an ongoing experiment in better HTML checking, and its behavior remains subject to change

## Showing results for contents of text-input area

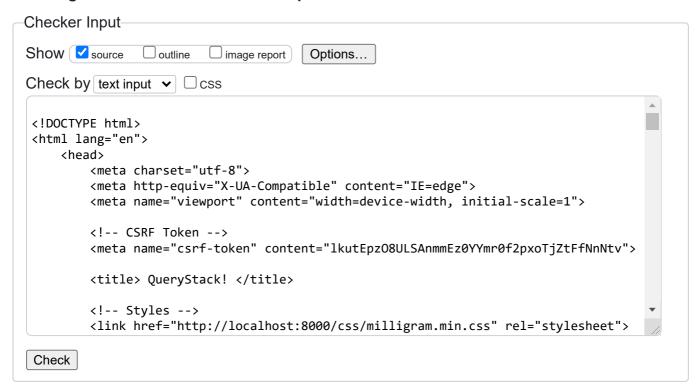

Use the Message Filtering button below to hide/show particular messages, and to see total counts of errors and warnings.

Message Filtering

```
1. Error An input element with a type attribute whose value is hidden must not have an autocomplete attribute whose value is on or off.

From line 197, column 25; to line 197, column 127

<input type="hidden" name="_token"

value="lkutEpz08ULSAnmmEz0YYmr0f2pxoTjZtFfNnNtv" autocomplete="off">
```

Document checking completed.

## Source

```
10.
             <meta name="csrf-token"</pre>
    content="lkutEpz08ULSAnmmEz0YYmr0f2pxoTjZtFfNnNtv">↔
11.
12.
            <title> QueryStack! </title>↔
13. ←
14.
            <!-- Styles -->↔
            <link href="http://localhost:8000/css/milligram.min.css"</pre>
15.
    rel="stylesheet">↔
16.
            <link href="http://localhost:8000/css/app.css" rel="stylesheet">↔
17.
            <link href="http://localhost:8000/css/about.css" rel="stylesheet">↔
18.
            <link href="http://localhost:8000/css/question-page.css"</pre>
    rel="stylesheet">↔
19.
             <link href="http://localhost:8000/css/home-page.css"</pre>
    rel="stylesheet">↔
20.
             <link href="http://localhost:8000/css/search-page.css"</pre>
    rel="stylesheet">↔
21.
             <link href="http://localhost:8000/css/admin-page.css"</pre>
    rel="stylesheet">↔
22.
            <link href="http://localhost:8000/css/user.css" rel="stylesheet">←
23.
            <link href="http://localhost:8000/css/report.css" rel="stylesheet">↔
            <link href="http://localhost:8000/css/tags.css" rel="stylesheet">←
24.
25.
             <link href="http://localhost:8000/css/notification.css"</pre>
    rel="stylesheet">↔
26.
             <link href="http://localhost:8000/css/recover-password.css"</pre>
    rel="stylesheet">
27.
             <link href="http://localhost:8000/css/blocked_users.css"</pre>
    rel="stylesheet">↔
28. ←
29.
30.
            <script src="https://kit.fontawesome.com/03bf23ebdb.js"</pre>
    crossorigin="anonymous"></script>↔
31.
            <!-- Bootstrap -->↔
32.
    href="https://cdn.jsdelivr.net/npm/bootstrap@5.3.2/dist/css/bootstrap.min.css"
    rel="stylesheet" integrity="sha384-
    T3c6CoIi6uLrA9TneNEoa7RxnatzjcDSCmG1MXxSR1GAsXEV/Dwwykc2MPK8M2HN"
    crossorigin="anonymous">↔
33.
            <link rel="stylesheet" href="https://cdn.jsdelivr.net/npm/bootstrap-</pre>
    icons@1.11.2/font/bootstrap-icons.min.css">↔
34.
            <!-- jQuery, Popper.js and Bootstrap scripts-->↔
35.
            <script src="https://code.jquery.com/jquery-3.5.1.slim.min.js">
    </script>↔
36.
            <script
    src="https://stackpath.bootstrapcdn.com/bootstrap/4.5.2/js/bootstrap.min.js">
    </script>↩
37.
            <script
    src="https://cdn.jsdelivr.net/npm/bootstrap@5.3.2/dist/js/bootstrap.bundle.min.
    js"></script>↔
38.
39.
            <script src="https://cdn.jsdelivr.net/npm/axios/dist/axios.min.js">
    </script>↔
40.
41.
            <script src=http://localhost:8000/js/app.js defer></script>↔
42.
                     <script src=http://localhost:8000/js/notification.js defer>
    </script>↩
43.
                     <script>←
44.
                 document.addEventListener('DOMContentLoaded', function () { ↔
45.
                     if (window.location.pathname === '/about' &&
    window.location.hash === '#platform-contacts') { ↔
46.
                         const contactsSection =
    document.getElementById('contacts'); ←
47.
                         if (contactsSection) { \hookleftarrow // Scroll to the "Contacts" section with smooth
48.
49.
    behavior↩
50.
                              contactsSection.scrollIntoView({←
51.
                                  behavior: 'smooth'↔
                             });←
52.
                    }
}
}
53.
54.
                 ن+;({
55.
```

```
56.
             </script>↔
 57.
             <script src="https://js.pusher.com/8.2.0/pusher.min.js"></script>↔
 58.
             <script>↔
 59.
                  // Enable pusher logging - don't include this in production↔
 60.
                  //Pusher.logToConsole = true;↔
 61.
 62.
                  var pusher = new Pusher('833280c9b0db39c0f30d', \{ \leftarrow \}
                      cluster: 'eu'↔
 63.
 64.
                  });←
 65.
             </script>↔
 66.
         </head>↩
 67.
         <body>←
 68.
             <main>←
 69.
                  <header>←
 70.
                      <nav class="navbar navbar-expand-lg navbar-light bg-light flex-</pre>
     container">↩
         <a class="navbar-brand" href="http://localhost:8000"><h1>QueryStack!</h1>
 71.
     </a>←
 72.
                  <button class="navbar-toggler" type="button" data-toggle="collapse"</pre>
 73.
     data-target="#navbarSupportedContent" aria-controls="navbarSupportedContent"
     aria-expanded="false" aria-label="Toggle navigation">←
74.
                  <span class="navbar-toggler-icon"></span>←
 75.
             </button>←
 76.
 77.
                  <div class="nav_search_container align-items-center hover-</pre>
     container-down" >↩
 78.
                  <form class="form-inline my-2 my-lg-0 align-items-center m-0"</pre>
     action="http://localhost:8000/search" method="GET">↔
                      <input class="form-control mr-sm-2 h-50" style="min-width:</pre>
 79.
     150px" name="search" value="" type="search" placeholder="Search..." aria-
     label="Search">↔
 80.
                      <button class="btn btn-outline-success text-dark p-2 rounded-5"</pre>
     type="submit"><i class="bi bi-search p-1"></i></button>↔
                      <div class="icon-container">↔
 81.
 82.
                          <i class="fa-solid fa-circle-question" style="color:</pre>
     #0f4aa8;"></i>↔
 83.
                          <span class="hover-text-down">Here you can search for the
     questions you want using words, and having the chance of finding one that
     solves your problem.</span>↔
 84.
                      </div>↩
 85.
                  </form>←
 86.
             </div>←
 87.
 88.
 89.
         <div class="collapse navbar-collapse nav_buttons"</pre>
     id="navbarSupportedContent">↔
90. ←
 91.
                      <div class="custom-dropdown">←
         <button class="dropdown-toggle" id="customDropdown" aria-haspopup="true"</pre>
 92.
     aria-expanded="false">↔
 93.
             <i class="fa fa-bell"></i></i>
 94.
             <span id="unread-count" class="badge badge-light bg-success badge-</pre>
     xs">7</span>↔
 95.
         </button>←
         <div class="dropdown-menu" aria-labelledby="customDropdown">←
 96.
              <div class="header-container">←
 97.
 98.
                  <div class="header">Notifications</div>←
 99.
                  <a id="mark-all-as-read" class="btn btn-primary">Mark All as
     Read</a>↔
100.
             </div>←
101.
             <div class="dropdown-divider"></div>←
102.
             <div id="notifications-container">←
                                   <a id="notification-2" class="notification-box</pre>
103.
     unread">↩
104.
                          <div class="notification-content">←
105.
                               <span>You just won the badge Welcome</span>↔
106.
                          </div>←
107.
                          <div class="notification-date">↔
108.
                               <span>Dec 21, 2023 12:52:05</span>↔
109.
                          </div>←
```

var channel = pusher.subscribe('notifications.'+userId); ↔

←

167. </script>↔

166.

168.

```
class="nav-item active">↔
                 ↩
                 \downarrow
174. ←
                 ←
                     <a class="nav-link dropdown-toggle" href="#"</pre>
     id="navbarDropdown" role="button" data-toggle="dropdown" aria-haspopup="true"
    aria-expanded="false">↔
                     </a>←
                         <span>admin</span>←
                     <div class="dropdown-menu dropdown_user_menu" aria-</pre>
     labelledby="navbarDropdown">↔
                             <a class="dropdown-item"</pre>
    href="http://localhost:8000/member/1/edit">Edit Profile</a>↔
                                                 <a class="dropdown-item"</pre>
    href="http://localhost:8000/member/1">Profile</a>↔
                                             <div class="admin-area">↔
                             <div class="admin-buttons">↔
                                 <a class="dropdown-item"</pre>
    href="http://localhost:8000/admin/assign">Assign Moderator</a>↔
                                 <a class="dropdown-item" href="</pre>
    http://localhost:8000/admin/remove">Remove Moderator</a>↔
                                 <a class="dropdown-item"</pre>
    href="http://localhost:8000/tags">Tags</a>↔
                                 <a class="dropdown-item"</pre>
    href="http://localhost:8000/reports">Reports</a>↔
                                 <a class="dropdown-item"</pre>
    href="http://localhost:8000/members/blocked">Blocked Users</a>↔
                             </div>↔
                         </div>
                           _{\leftarrow}
194. ←
                         <div class="dropdown-divider"></div>←
                         <form class="m-0" action="http://localhost:8000/logout"</pre>
    method="post">↔
                             <input type="hidden" name="_token"</pre>
    value="lkutEpz08ULSAnmmEz0YYmr0f2pxoTjZtFfNnNtv" autocomplete="off">
     <button class="dropdown-item text-danger" type="submit">Logout</button>↔
198.
                         </form>←
199.
200.
                     </div>←
201.
                 ↔
202.
203.
             ←
204. ←
205.
         </div>↔
206. </nav>↔
207. ←
208. ←
209.
                 </header>←
210.
                 <section id="content">←
211.
                     <div class="reports-header">←
212.
         <h1 class="header-title">All Reports</h1>↔
213.
         <a class="button" href="http://localhost:8000/closedReports">Closed
     Reports</a>←
214. </div>←
215. ←
216.
         ←
217.
             <thead>←
218.
                 <
219.
                     Creator↔
220.
                     Reason←
221.
                     Text←
222.
                     Tag←
223.
                     Select←
224.
                     Assigned←
225.
                 ↔
```

278.

279.

href="http://localhost:8000/about#faqs">FAQ</a>↔

</div>←

</div>←

```
280. </div>←
281. </div>←
282. </div>←
283. </footer>←
284. ←
285. </body>←
286. </html>
```

Used the HTML parser.

Total execution time 52 milliseconds.

About this checker • Report an issue • Version: 23.11.28