
Nu Html Checker

This tool is an ongoing experiment in better HTML checking, and its behavior remains subject to change

Showing results for contents of text-input area

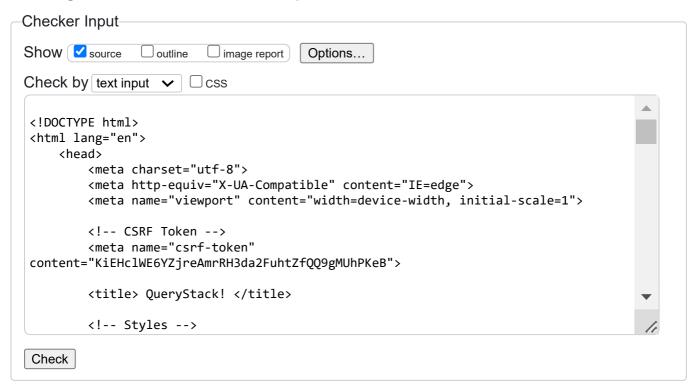

Use the Message Filtering button below to hide/show particular messages, and to see total counts of errors and warnings.

Message Filtering

```
1. Error An input element with a type attribute whose value is hidden must not have an autocomplete attribute whose value is on or off.

From line 106, column 5; to line 106, column 107

orm"> ← <input type="hidden" name="_token"

value="KiEHclWE6YZjreAmrRH3da2FuhtZfQQ9gMUhPKeB" autocomplete="off"> ← <
```

Document checking completed.

Source

```
10.
             <meta name="csrf-token"</pre>
    content="KiEHclWE6YZjreAmrRH3da2FuhtZfQQ9gMUhPKeB">↔
11.
12.
            <title> QueryStack! </title>↔
13. ←
14.
            <!-- Styles -->↔
            <link href="http://localhost:8000/css/milligram.min.css"</pre>
15.
    rel="stylesheet">↔
16.
            <link href="http://localhost:8000/css/app.css" rel="stylesheet">↔
17.
            <link href="http://localhost:8000/css/about.css" rel="stylesheet">↔
18.
            <link href="http://localhost:8000/css/question-page.css"</pre>
    rel="stylesheet">↔
             <link href="http://localhost:8000/css/home-page.css"</pre>
19.
    rel="stylesheet">↔
20.
             <link href="http://localhost:8000/css/search-page.css"</pre>
    rel="stylesheet">↔
21.
             <link href="http://localhost:8000/css/admin-page.css"</pre>
    rel="stylesheet">↔
22.
            <link href="http://localhost:8000/css/user.css" rel="stylesheet">←
23.
            <link href="http://localhost:8000/css/report.css" rel="stylesheet">←
            <link href="http://localhost:8000/css/tags.css" rel="stylesheet">←
24.
25.
             <link href="http://localhost:8000/css/notification.css"</pre>
    rel="stylesheet">↔
26.
             <link href="http://localhost:8000/css/recover-password.css"
    rel="stylesheet">
27.
             <link href="http://localhost:8000/css/blocked_users.css"</pre>
    rel="stylesheet">↔
28. ←
29.
30.
            <script src="https://kit.fontawesome.com/03bf23ebdb.js"</pre>
    crossorigin="anonymous"></script>↔
31.
            <!-- Bootstrap -->↔
32.
    href="https://cdn.jsdelivr.net/npm/bootstrap@5.3.2/dist/css/bootstrap.min.css"
    rel="stylesheet" integrity="sha384-
    T3c6CoIi6uLrA9TneNEoa7RxnatzjcDSCmG1MXxSR1GAsXEV/Dwwykc2MPK8M2HN"
    crossorigin="anonymous">↔
33.
            <link rel="stylesheet" href="https://cdn.jsdelivr.net/npm/bootstrap-</pre>
    icons@1.11.2/font/bootstrap-icons.min.css">↔
            <!-- jQuery, Popper.js and Bootstrap scripts-->↔
34.
35.
            <script src="https://code.jquery.com/jquery-3.5.1.slim.min.js">
    </script>↔
36.
            <script
    src="https://stackpath.bootstrapcdn.com/bootstrap/4.5.2/js/bootstrap.min.js">
    </script>↔
37.
            <script
    src="https://cdn.jsdelivr.net/npm/bootstrap@5.3.2/dist/js/bootstrap.bundle.min.
    js"></script>↔
38.
39.
            <script src="https://cdn.jsdelivr.net/npm/axios/dist/axios.min.js">
    </script>↔
40.
41.
            <script src=http://localhost:8000/js/app.js defer></script>←
42.
                     <script>←
43.
                 document.addEventListener('DOMContentLoaded', function () \{\leftrightarrow\}
44.
                     if (window.location.pathname === '/about' &&
    window.location.hash === '#platform-contacts') { ↔
45.
                         const contactsSection =
    document.getElementById('contacts'); ↔
46.
                         if (contactsSection) { \hookleftarrow // Scroll to the "Contacts" section with smooth
47.
48.
    behavior↩
49.
                              contactsSection.scrollIntoView({←
50.
                                  behavior: 'smooth'↔
51.
                              });←
                         }←
52.
                     }←
53.
54.
                 });↩
55.
            </script>↔
56.
            <script src="https://js.pusher.com/8.2.0/pusher.min.js"></script>↔
```

```
57.
             <script>↩
58.
                 // Enable pusher logging - don't include this in production↔
59.
                 //Pusher.logToConsole = true;↔
60.
61.
                 var pusher = new Pusher('833280c9b0db39c0f30d', {↔
                     cluster: 'eu'↔
62.
63.
                 });↩
64.
             </script>↔
65.
         </head>↩
66.
         <body>←
67.
             <main>←
68.
                 kheader>←
                     <nav class="navbar navbar-expand-lg navbar-light bg-light flex-</pre>
69.
     container">↩
70.
         <a class="navbar-brand" href="http://localhost:8000"><h1>QueryStack!</h1>
     </a>←
71.
         \downarrow
72.
73.
                 <div class="nav search container align-items-center hover-</pre>
     container-down" >↔
                 <form class="form-inline my-2 my-lg-0 align-items-center m-0"</pre>
74.
     action="http://localhost:8000/search" method="GET">↔
                     <input class="form-control mr-sm-2 h-50" style="min-width:</pre>
75.
     150px" name="search" value="" type="search" placeholder="Search..." aria-
     label="Search">↔
76.
                     <button class="btn btn-outline-success text-dark p-2 rounded-5"</pre>
     type="submit"><i class="bi bi-search p-1"></i></button>↔
                     <div class="icon-container">←
77.
78.
                         <i class="fa-solid fa-circle-question" style="color:</pre>
    #0f4aa8;"></i>↔
79.
                         <span class="hover-text-down">Here you can search for the
    questions you want using words, and having the chance of finding one that
     solves your problem.</span>↔
80.
                     </div>←
                 </form>↩
81.
82.
             </div>←
83.
84. ←
85.
         <div class="collapse navbar-collapse nav_buttons"</pre>
    id="navbarSupportedContent">↔
86.
87.
                     ←
88.
89.
                             ←
90.
                     <a class="nav-link login-button"</pre>
    href="http://localhost:8000/login"> Login </a> ↔
91.
                 ↩
92.
                 ←
93.
                     <a class="nav-link register-button"</pre>
    href="http://localhost:8000/register"> Register </a>↔
94.
                 ↩
95.
                 \leftarrow
96.
                 ے
97.
             98. ←
99.
         </div>↩
100. </nav>↔
101. ←
102. ←
103.
                 </header>←
104.
                 <section id="content">←
105.
                     <form method="POST" action="http://localhost:8000/register"</pre>
     enctype="multipart/form-data" class="register-form">←
         <input type="hidden" name="_token"</pre>
106.
    value="KiEHclWE6YZjreAmrRH3da2FuhtZfQQ9gMUhPKeB" autocomplete="off">↔
107.
         <h1>Register</h1>↔
108.
         <div class="mb-3">↔
109.
110.
             <label for="username" class="form-label">Username</label>←
             <input id="username" type="text" name="username" value="" required</pre>
111.
    autofocus class="form-control">↔
```

```
112.
         </div>←
113. ←
114.
         <div class="mb-3">↔
115.
             <label for="email" class="form-label">E-Mail Address</label>←
             <input id="email" type="email" name="user_email" value="" required</pre>
116.
    class="form-control">←
117.
         </div>↔
118. ←
         <div class="mb-3">↔
119.
120.
             <label for="birthdate" class="form-label">Birthdate</label>↔
             <input id="birthdate" type="date" name="user_birthdate" value=""</pre>
121.
    required class="form-control">↔
122.
         </div>←
123. ←
124.
         <div class="mb-3">↔
125.
             <label for="password" class="form-label">Password</label>←
126.
             <input id="password" type="password" name="password" required</pre>
    class="form-control">↔
127.
         </div>←
128.
129.
         <div class="mb-3">↔
130.
             <label for="password-confirm" class="form-label">Confirm
    Password</label>←
             <input id="password-confirm" type="password"</pre>
131.
    name="password_confirmation" required class="form-control">←
132.
         </div>←
133.
         ے
134.
         <div class="mb-3">↔
135.
             <label for="picture" class="form-label">Profile Picture [Optional]
     </label>↩
136.
             <input id="picture" type="file" name="picture" accept="image/png"</pre>
    class="form-control">←
137.
             Accepted formats: png
138.
         </div>←
139. ←
140.
             \leftarrow
141.
         <button type="submit" class="btn btn-primary">Register/button>←
142.
         <a class="btn btn-outline-primary"</pre>
    href="http://localhost:8000/login">Login</a>↔
143. </form>←
144. ←
                 </section>↩
145.
146.
             </main>↔
147.
             <footer class="bg-dark text-light py-4 ">←
         <div class="container">↔
148.
149.
             <div class="row align-items-center">←
150.
                 <div class="col-md-6 text-center text-md-start mb-3 mb-md-0">←
151.
                     The best Q&A Platform for technology
     questions
←
152.
                 </div>←
153.
                 <div class="col-md-6 text-center text-md-end">←
154.
                     <div class="d-flex justify-content-center justify-content-md-</pre>
     end">↩
                         © Query Stack!↔
155.
156.
                         <div class="site-map ms-3">↔
157.
                             <a class="btn btn-outline-light me-2 mb-md-0"</pre>
    href="http://localhost:8000/about">About</a>↔
158.
                             <a class="btn btn-outline-light me-2 mb-md-0"</pre>
    href="http://localhost:8000/about#platform-contacts">Contacts</a>↔
159.
                             <a class="btn btn-outline-light"</pre>
    href="http://localhost:8000/about#faqs">FAQ</a>↔
160.
                          </div>↩
161.
                     </div>↔
162.
                 </div>↩
163.
             </div>←
         </div>←
164.
165. </footer>↔
166. ←
167.
         </body>←
168. </html>
```

Used the HTML parser.

Total execution time 21 milliseconds.

About this checker • Report an issue • Version: 23.11.28