APS Discovery Service Provider

User Guide

Version: 0.9.0

Author: Tommy Svensson

Copyright © 2013 Natusoft AB

Table of Contents

1 APSDiscoveryService	1
1.1 APIs	1

1 APSDiscoveryService

This is actually a service directory that also multicasts on the network to find other instances of itself and makes the services in other instances available also.

A *service* here means anything that can be called either with an URL or a host and port. It does not specifically indicate what type of service it is. Each published service however has an id that can be used to better identify it. Basically clients of services have to know the id of the service they want and by that know what it is and how to talk to it

1.1 APIs

public *class* **APSDiscoveryPublishException** extends APSRuntimeException [se.natusoft.osgi.aps.api.net.discovery.exception] {

Thrown on service publish problems.

public APSDiscoveryPublishException(String message)

Creates a new APSRuntimeException instance.

Parameters

message - The exception message.

public APSDiscoveryPublishException(String message, Throwable cause)

Creates a new APSRuntimeException instance.

Parameters

}

```
message - The exception message.

cause - The cause of this exception.
```

public interface ServiceDescription [se.natusoft.osgi.aps.api.net.discovery.model] {

Describes a service.

String getDescription()

A short description of the service.

String getServiceId()

An id/name of the service.

String getVersion()

The version of the service.

String getServiceHost()

The targetHost of the service.

int getServicePort()

The targetPort of the service.

String getServiceURL()

An optional URL to the service.

}

public *class* **ServiceDescriptionProvider** implements ServiceDescription [se.natusoft.osgi.aps.api.net.discovery.model] {

Describes a service.

public ServiceDescriptionProvider()

Creates a new ServiceDescirption.

public String toString()

Returns a string representation of this object.

public String getDescription()

A short description of the service.


public void setDescription(String description)

Sets a short description of the service.

Parameters

description - The description to set.

public void setServiceId(String serviceId)

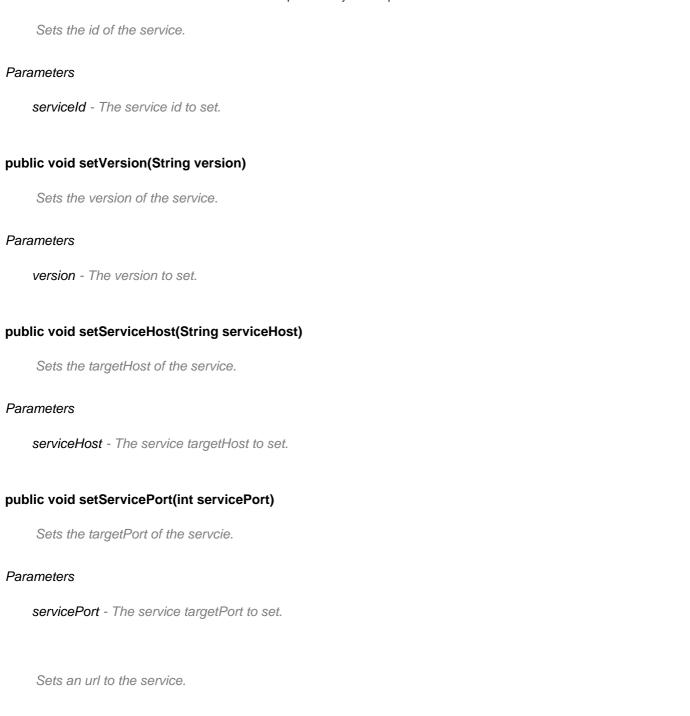

Parameters

serviceURL - The servcie url to set.

}

public interface APSSimpleDiscoveryService [se.natusoft.osgi.aps.api.net.discovery.service] {

A network service discovery.

public List<ServiceDescription> getRemotelyDiscoveredServices()

Returns all remotely discovered services.

public List<ServiceDescription> getLocallyRegisteredServices()

Returns the locally registered services.

public List<ServiceDescription> getAllServices()

Returns all known services, both locally registered and remotely discovered.

public List<ServiceDescription> getService(String serviceId, String version)

Returns all discovered services with the specified id.

Parameters

serviceId - The id of the service to get.

version - The version of the service to get.

public void publishService(ServiceDescription service) throws APSDiscoveryPublishException

Publishes a local service. This will announce it to other known APSSimpleDiscoveryService instances.

Parameters

service - The description of the servcie to publish.

Throws

APSDiscoveryPublishException - on problems to publish (note: this is a runtime exception!).

public void unpublishService(ServiceDescription service) throws APSDiscoveryPublishException

Recalls the locally published service, announcing to other known APSSimpleDiscoveryService instances that this service is no longer available.

Parameters

service - The service to unpublish.

Throws

APSDiscoveryPublishException - on problems to publish (note: this is a runtime exception!).

}