

MarkdownDoc

User Guide

2. Ø. Ø



Tommy Svensson

Copyright (C) 2016 Natusoft AB

MarkdownDoc User Guide	1
<i>Introduction</i>	1
Binaries	1
Thanks	1
How markdown is MarkdownDoc ?	1
<i>File specifications</i>	2
Command Line	3
<i>General</i>	3
Maven Plugin	4
<i>generatorOptions</i>	4
<i>Example</i>	4
HTML Support	6
 	6
<i>HTML comments</i>	6
<i>Divs</i>	6
Library	7
<i>Usage</i>	7
Parsers	7
se.natusoft.doc.markdown.parser.MarkdownParser	7
se.natusoft.doc.markdown.parser.JavadocParser	7
se.natusoft.doc.markdown.parser.ParserProvider	8
Generators	8
se.natusoft.doc.markdown.generator.PDFGenerator	9
se.natusoft.doc.markdown.generator.HTMLGenerator	9
se.natusoft.doc.markdown.generator.MarkdownGenerator	9
se.natusoft.doc.markdown.util.MDDocFileHandler	9
<i>Bugs</i>	9
By me	9
By IText (PDF generating)	9
MSS (Markdown Style Sheet)	11
Settings / Options	16
<i>Common options</i>	16
generator (R)	16
parser (O)	16
inputPaths (R)	16
parserOptions (O)	16
JavaDoc2MDParser options	16
MarkdownParser options	17
<i>PDFGenerator options</i>	17
resultFile : String (R)	17
rootDir : String (O)	17
pageSize : String (O)	17
title : String (O)	17
subject : String (O)	17
titlePageImage : String (O)	17
keywords : String (O)	17
author : String (O)	17
version : String (O)	17
copyright : String (O)	17
authorLabel : String (O)	17
versionLabel : String (O)	17
pageLabel : String (O)	17
tableOfContentsLabel : String (O)	18
hideLinks : Boolean (O)	18
unorderedListItemPrefix : String (O)	18
firstLineParagraphIndent : Boolean (O)	18
backgroundColor : String (O)	18
blockQuoteColor : String (O)	18
codeColor : String (O)	18
mss : String (O)	18
generateSectionNumbers : Boolean (O)	18
generateTOC : Boolean (O)	18
generateTitlePage : Boolean (O)	18
help (Only from command line!)	18

Comment block annotation setting of options	18
<i>HTMLGenerator options</i>	19
resultFile : String (R)	19
inlineCSS : Boolean (O)	19
css : String (O)	19
primitiveHTML : Boolean (O)	19
makeFileLinksRelativeTo : String (O)	19
help (Only from command line!)	19
<i>MarkdownGenerator options</i>	20
resultFile : String (R)	20
makeFileLinksRelativeTo : String (O)	20
help (Only from command line!)	20
MarkdownDoc Editor	21
<i>Features</i>	21
Styling as you type	21
HTML Preview	21
Editing effects	21
Undo / Redo (as of 1.4)	22
Generate PDF & HTML	22
Configurable	22
Load file by drag & drop	22
Special preview drag & drop feature	22
Fullscreen support	22
Mac OS X	22
Windows (10)	22
MarkdownDocEditor.app	23
Version 1.4 usage changes	23
<i>Running</i>	23
<i>Requirements</i>	23
<i>Functions</i>	23
Bringing upp the toolbar	23
Save file(s)	24
Open file	24
Open / Create	24
List of open files popup	24
Insert heading	25
Insert bold	25
Insert italics	25
Insert list	25
Insert quote	25
Insert image	26
Insert link	26
Preview	26
Generate PDF	26
Page size	27
Title	27
Subject	27
Keywords	27
Author	27
Version	27
Copyright year	27
Copyright by	27
Generate section numbers	28
Generate title page:	28
Generate TOC	28
Open result	28
Generate HTML	28
Inline CSS	28
CSS file	28
file: links relative to	28
Open result	28
Setting	29
Restyle document	29
Restyle on paste	29

Goto next open file	29
<i>If you're on a Mac</i>	29
<i>Currently Missing</i>	29
<i>Laptop power warning</i>	29
<i>Bugs</i>	29
By me	30
By Oracle	30
Other	30
The mddoc file type	31
<i>.mddoc format (myfile.mddoc)</i>	31
Version history	32
1.4.4	32
Editor	32
1.4.3	32
Library	32
1.4.2	32
Editor	32
1.4.1	32
1.4	32
1.3.9	33
1.3.8	33
1.3.7	34
1.3.6	34
1.3.5	34
1.3.4	34
1.3.3	34
1.3.2	34
1.3.1	34
1.3	35
1.2.10	35
1.2.9	35
1.2.8	35
1.2.7	35
1.2.6	35
1.2.5	35
1.2.4	35
1.2.3	35
1.2.2	36
Simple Markdown Reference	37
<i>Headings</i>	37
<i>Paragraphs</i>	37
<i>Italics</i>	37
<i>Bold</i>	37
<i>Blockquote</i>	37
<i>Lists</i>	37
Unordered lists (* or -)	37
Ordered list (n.)	38
<i>Code block (pre formatted with a fixed width font)</i>	38
<i>Horizontal rule</i>	38
<i>Links</i>	38
<i>Images</i>	38
<i>backslash (\)</i>	39
Licenses	40
<i>Project License</i>	40
<i>Third Party Licenses</i>	40
License Texts	41
<i>Apache License version 2.0</i>	41
<i>Apache Software License version 2.0</i>	47
<i>Apache version 2.0</i>	49
<i>GNU Affero General Public License version 3.0</i>	53

MarkdownDoc User Guide

Introduction

MarkdownDoc is a tool that basically does what the name sounds like. My intention with this tool was to be able to document my java opensource tools in markdown and be able to generate both html and PDF from it using a maven plugin.

So why not use mavens site plugin which does support markdown ? These days generating a whole site for your project seems a bit much. Both Bitbucket and GitHub supports markdown documentation right off in a nice and easy way. I want to choose where to put my documentation (ok, most locations in maven can be configured) and I also had the following requirements:

- Be able to generate one PDF document from a whole collection of separate markdown documents so that I can spread them out in different subproject for multi maven project projects. If you are reading this in PDF format this PDF have been put together from multiple sources.
- Be able to generate a table of contents and a title page.
- I just wanted to do it my way OK! :-)

It does also provide a java -jar executable variant. The main functionality is available as a library.

In short MarkdownDoc provides the following:

- Markdown document model.
- Markdown parser.
- Javadoc comment parser.
- PDF generator.
- HTML generator.
- Markdown generator.
- java -jar commandline executable.
- Markdown editor that formats Markdown while writing with preview and PDF + HTML generation.
Can be run with java -jar.
- Maven plugin.

Binaries

Binaries are made available at [Bintray](#) and Bintrays JCenter repository: <http://jcenter.bintray.com> which also mirrors everything in maven central.

Thanks

Thanks to [John Gruber](#) for the brilliant [markdown](#) document format, and to [PDFBox Apache Project](#) for making a completely open source PDF renderer under the sensible Apache 2.0 license.

How markdown is MarkdownDoc ?

Well, it implements the "specification" as documented on [daringfireball.net](#). This specification however is not extremely exact so there might be some differences.

The known (and intentional) differences are:

- No HMTL pass-through! Well, there is a small exception to that. HTML comments are passed along. Mostly because there is no markdown comment format and I wanted to be able to put comments in my documents. " " is passed through to create indents that are not code blocks. "<div class='...'">...</div>" is also passed through. The reason for no general HTML pass-through is that MarkdownDoc takes it directly from markdown to a document model which is then used to generate

PDF without any HTML rendering in between. The main purpose of this tool is to write documentation not generate HTML sites (though that has become easier in version 1.4 with the div support).

- Escaping with '\'. In MarkdownDoc you can escape any character with \ and it will be passed through as is without being acted on if it has markdown meaning.
- No entity encoding of email addresses.
- No multiple block quote levels (as of now). I've never personally missed having multiple quote levels, which is why I haven't done something about that yet. No one has contacted me asking for it either :-).
- Does not support any other formatting within strong, emphasized, or header. I personally don't see enough of a problem with this, that I'll prioritize it.

If you find any of the missing features a problem, I'll happily accept pull requests. :-) Seriously, it is OK to contact me with functionality wishes. Do note however that I work on this and other projects entirely in my spare time.

File specifications

With both the maven plugin and the command line execution jar file you can specify a set of files to use as input. These are basically a comma separated list of files, but with the following additions:

/my/path

All files in the directory pointed to by the path.

/my/path/**

All files in the directory pointed to by the path and sub directories.

/my/path/**/regexp pattern

All files matching the pattern in the directory pointed to by the path and sub directories.

/my/path/regexp pattern

All files matching the pattern in the directory pointed to by the path.

/my/path/fileset.fs

The above rules are applied to all file specifications in files having the .fs extension. # are comment lines within .fs files.

Command Line

General

MarkdownDoc can be run using `java -jar markdownoc-cmd-line-n.n[.n]-exec.jar`. If you just run it without any arguments you get the following:

```
Usage: java -jar markdownoc-cmd-line-n.n[.n].exec.jar <generator> --help
      or
      java -jar markdownoc-cmd-line-n.n[.n].exec.jar <generator> <fileSpec>
          --<generator option> ...
      or
      java -jar markdownoc-cmd-line-n.n[.n].exec.jar <generator> <fileSpec>
          parserOptions:<parserOptions> --<generator option> ...
      or
      java -jar markdownoc-cmd-line-n.n[.n].exec.jar <path to a .mddoc file>
```

The last usage example requires an *.mddoc* file. See '*The mddoc file type*' (section 5) for more information on this file type.

What the generator options are depends on the specified generator.

The `markdownoc-cmd-line-n.n[.n]-exec.jar` is a jar generated to contain all dependencies in the same jar, making it easy to execute with `java -jar`.

The `<generator>` part should be either *pdf*, *html*, or *md*.

The `<fileSpec/>` part is a comma separated list of paths relative to the current directory. The filename part of the path can contain regular expressions and the directory part of the path can specify `.../**/...` to mean any levels of subdirectories.

Example: `root/**/docs/*.*.md`

See "Settings / Options" elsewhere in this document for all the options to the different generators and parsers.

Maven Plugin

The maven plugin is rather straight forward. It has 3 sets of configuration structures, one common and one for each generator.

generatorOptions

There is a config section that is common to all generators and specifies which generator to run and what input files to include. The following example is from the generation of this manual:

```
<generatorOptions>
    <generator>pdf</generator>
    <inputPaths>
        Docs/parts/H1UserGuide.mddoc,
        Docs/MarkdownDoc.md,
        MavenPlugin/docs/*.md,
        CommandLine/docs/*.md,
        Library/docs/*.md,
        Docs/parts/H1Licenses.mddoc,
        Docs/licenses.md,
        Docs/parts/H1LicenseTexts.mddoc,
        Docs/*.md
    </inputPaths>
    <parserOptions>option=value,....</parserOptions>
</generatorOptions>
```

If the `<inputPaths>...</inputPaths>` section only contain one file of type `.mddoc` then no other parameters need to be specified, not even `<generator>...</generator>`! In this case all information needed to generate final documents resides in the `.mddoc` file. See '*The mddoc file type*' elsewhere in this document for more information on this file type.

The current valid argument for `<generator>...</generator>` are `pdf`, `html`, and `md`.

The input paths are comma separated and are always relative to the root of the maven project. To clarify that, for a multi module maven build it is always the top root with the top pom that is the root even if you start the build at a lower level. This root is resolved by starting at `#{basedir}` and going up until the parent directory does not have a pom. I have found no way to let maven tell me this path.

The paths can have wildcards in form of regular expressions for the file names. There is also a special directory name `**` that means any level of subdirectories.

All the input paths are parsed into the same document model that then gets passed to the generator. They are parsed in the order they are specified. When it comes to wildcards it is hard to say which order they will be in. It might differ on different platforms.

Example

Following is a complete plugin specification with all options specified:

```
<plugin>
    <groupId>se.natusoft.tools.doc.markdowndoc</groupId>
    <artifactId>markdowndoc-maven-plugin</artifactId>
    <version>n.n[n]</version>

    <executions>
        <execution>
            <id>generate-docs</id>
            <goals>
                <goal>doc</goal>
            </goals>
            <phase>install</phase>
            <configuration>

                <generatorOptions>
                    <generator>pdf|html|md</generator>
                </generatorOptions>
            </configuration>
        </execution>
    </executions>
</plugin>
```

```
<inputPaths>
  ...
</inputPaths>
</generatorOptions>

<pdf|html|mdGeneratorOptions>
  ...
</pdf|html|mdGeneratorOptions>

</configuration>
</execution>
</executions>
</plugin>
```

See the "Options / Settings" part elsewhere in this document for all the specific options.

HTML Support

As said in the introduction, MarkdownDoc generates both HTML and PDF, but in either case it goes directly from parsing the markdown to generating the target format using a markdown document model between parser and generators. That means that HTML is just one target format. It is not an intermediate between other target formats. Thereby only markdown, and not HTML is supported in input. There are however a few exceptions to that.

This is recognized as a special space. It will not be reacted on for code blocks for example. Thereby it can be used to indent text without creating a code block when the indent reaches 4 spaces.

HTML comments

These are recognized, parsed and passed along in model. It is up to generator to decide to generate comments or not. The HTMLGenerator do generate comments, as do the MarkdownGenerator. The PDFGenerator does not for obvious reasons.

I think it is nice to be able to have comments in documents. Comment blocks are also used to hide other MarkdownDoc special features also. For example options annotations.

Divs

HTML div tags are supported and will be generated by HTMLGenerator. But the PDFGenerator can also make use of div tags. As of version 1.4 the PDFGenerator makes use of a JSON based markdown stylesheet I've called MSS. In MSS you can also define styles in divs that will only apply to text within those div blocks. This allows for great styling flexibility also to PDF documents.

Due to a GitHub feature that stops markdown rendering between divs in markdown documents I've implemented 2 ways of specifying the divs:

```
<div class="class">
  ...
</div>
```

or

```
<!-- @Div("class") -->
  ...
<!-- @EndDiv -->
```

The latter does not affect GitHub. In either usage the HTMLGenerator will generate a correct HTML div, while the MarkdownGenerator will generate the comment variant, and the PDFGenerator will not generate anything, but will use the divs to affect styling via MSS.

The div has to be the only thing on the line, both start and end tag! Also, there can be a maximum of 3 spaces before the div tag. If there are 4 or more it will become a code block!

Note: that the HTML div variant will have to look exactly like the example above. Only `class="..."` is allowed in the tag! The start div will not be recognized if you add more to it, and there will be confusion when the end tag is seen in that case.

Library

The library is made up of a document model representing all formats of markdown, parsers and generators. The parsers produce a document model and the generators generate from that model. The document model represents the markdown formats. Thereby there are no HTML pass-through from a markdown document! This tool only deals with markdown, not HTML.

The API docs for the library can be found [here](#).

Usage

In package se.natusoft.doc.markdown.api there are 3 API classes:

Options - This represents options for a generator. It should be seen as a narrow variant of Object representing only generator options, but any such. It has one method common to all `public boolean isHelp()`. Implementations should have a default constructor.

Parser - This represents a parser.

```
public interface Parser {  
    public void parse(Doc document, File parseFile, Properties parserOptions) throws IOException,  
        ParseException;  
}
```

The parser gets passed an already created Doc model allowing the document to be built from multiple source files by parsing into the same document.

Generator - This represents a generator.

```
public interface Generator {  
    public Class getOptionsClass();  
    public void generate(Doc document, Options options, File rootDir) throws IOException,  
        GenerateException;  
}
```

`getOptionsClass()` returns the class implementing Options and holding all the options for the generator.

`generate(...)` generates the document provided by *document* using the specified *options* and producing the result in whatever *rootDir* relative path is specified in the *options*.

Parsers

se.natusoft.doc.markdown.parser.MarkdownParser

This parser parses markdown and only markdown! It ignores HTML with the exception of comments, and divs.

Example usage:

```
Parser parser = new MarkdownParser();  
Doc document = new Doc();  
Properties parserOptions = new Properties();  
parser.parse(document, parseFile, parserOptions);
```

se.natusoft.doc.markdown.parser.JavadocParser

This parser parses java source files (should also handle groovy source files) and extracts class and method declarations and javadoc comment blocks. It produces a document model looking like this (in

markdown format):

```
public _class/interface_ __class-name__ extends something [package] {  
> class javadoc  
  
    __full method declaration__  
> method javadoc  
    _Returns_  
> description  
    _Parameters_  
> __param__ - description  
    _Throws_  
> __exception__ - description  
    _See_  
> description  
  
    ...  
}
```

This allows you to include API documentation in your documentation without having to duplicate it. Please note that if `markdownJavadoc=true` parser option have been specified then `class javadoc` and `method javadoc` will not be formatted but passed to the `MarkdownParser` instead.

Example usage:

```
Parser parser = new JavadocParser();  
Doc document = new Doc();  
Properties parserOptions = new Properties();  
parser.parse(document, parseFile, parserOptions);
```

se.natusoft.doc.markdown.parser.ParserProvider

This is a utility to get a parser based on file extension. ".md", ".markdown", ".mdpart", and ".java" are valid extensions that will return a parser. If the passed file does not have a valid extension null will be returned.

Example usage:

```
Parser parser = ParserProvider.getParserForFile(parseFile);  
Doc document = new Doc();  
Properties parserOptions = new Properties();  
parserOptions.setProperty("...", "...");  
parser.parse(document, parseFile, parserOptions);
```

Generators

Example usage:

```
public static void main(String[] args) {  
    Doc document = new Doc();  
  
    ... parsing of document.  
  
    Generator generator = new [PDF|HTML|Markdown]Generator();  
  
    // I'm using OptionsManager to load the options in this example.  
    // If you use maven or ant then those tools will have loaded  
    // the options for you and getOptionsClass() is not relevant  
    // in that case.  
    CommandLineOptionsManager<Options> optMgr =  
        new CommandLineOptionsManager<Options>(generator.getOptionsClass());  
    Options options = optMgr.loadOptions("--", args);  
    if (options.isHelp()) {  
        optMgr.printHelpText("--", "", System.out);  
    }  
    else {
```

```
        File rootDir = new File();
        generator.generate(document, options, rootDir);
    }
}
```

Please note that the CommandLineOptionsManager used in the example is part of the OptionsManager tool also by me. Available at github.com/tombensve/OptionsManager.

se.natusoft.doc.markdown.generator.PDFGenerator

This generator produces a PDF document.

se.natusoft.doc.markdown.generator.HTMLGenerator

This generator produces an HTML document.

se.natusoft.doc.markdown.generator.MarkdownGenerator

This generator produces a Markdown document. So why would we want to generate markdown ? Well, it became needed after I added the JavadocParser. Now I can have both markdown and java files as input and the PDF and HTML files contains the whole result including the javadoc information. The original markdown document however does not have the javadoc parts, and this markdown document is read as is on github and will then not be complete. Therefore I added this generator and moved my real source document into docs/src and also generate a markdown version into docs that will be as complete as the pdf and html version.

se.natusoft.doc.markdown.util.MDDocFileHandler

This is a class with one static method that completely handles the .mddoc format.

Usage:

```
MDDocFileHandler.execute("<path to .mddoc file>");
```

This will generate all output formats as specified in the .mddoc file.

See the "The mddoc file type" section for more information on the .mddoc format.

Bugs

By me

Nothing currently known by me.

By IText (PDF generating)

The position of images on the page gets somewhat off when text and image is mixed in the same paragraph (or section in IText language). IText also seem to have problems calculating the size of a paragraph that has an image in it, making text go beyond the bottom of a page. As long as images are on their own with no other text the PDF result will be as expected.

For example, this will cause problems:

```
Toolbar icon: 
Bla bla ...
```

Also note that the first might look more or less OK, but the more of these in the document it will get

more and more off. After around 6 such the image appears in the paragraph above!

This will not cause a problem:

```
Toolbar icon:  
  
Bla bla ...
```

MSS (Markdown Style Sheet)

The MSS format is a JSON document describing the styles (colors and fonts) to use for different sections of a markdown document (standard text, heading, bold, code, etc). It contains 3 main sections: front page, TOC, pages. There is a *default.mss* embedded in the jar that is used if no external mss files is provided. The default MSS should be compatible with styles used in previous versions.

Currently the MSS file is only used by the PDF generator. But it could also be relevant for other formats, like word if I ever add such a generator. I gladly take a pull request if anybody wants to do that :-).

The best way to describe the MSS file is to show the *default.mss* file:

```
{
```

This section is specific to PDF files, and specifies ttf, otf, and other font types supported by iText. For the *internal* fonts "HELVETICA" or "COURIER" is specified as "family", but to use a font specified here, just use the name set as "family" here. If you are using an external Helvetica font specified here, dont call it just "HELVETICA" since there will be confusion!

A best effort is used to resolve the font in "path":. If the specified path does not match relative to current directory then it will try the parent directory and so on all the way up to the filesystem root.

```
"pdf": {  
    "extFonts": [  
        {  
            "family": "MDD-EXAMPLE",  
            "encoding": "UTF-8",  
            "path": "/fonts/ttf/some-font.ttf"  
        }  
    ]  
},
```

The "colors" section just provide names for colors. This list was taken from the default color names for CSS colors, with the exception of the first 3. Any color specification in sections below that does not contain any ":" character will be taken as a name and looked up here.

```
"colors": {  
    "white": "255:255:255",  
    "black": "0:0:0",  
    "mddgrey": "128:128:128",  
    "AliceBlue": "F0F8FF",  
    "AntiqueWhite": "FAEBD7",  
    "Aqua": "00FFFF",  
    "Aquamarine": "7FFFAD",  
    "Azure": "F0FFFF",  
    "Beige": "F5F5DC",  
    "Bisque": "FFE4C4",  
    "Black": "000000",  
    "BlanchedAlmond": "FFEBBC",  
    "Blue": "0000FF",  
    "BlueViolet": "8A2BE2",  
    "Brown": "A52A2A",  
    "BurlyWood": "DEB887",  
    "CadetBlue": "5F9EA0",  
    "Chartreuse": "7FFF00",  
    "Chocolate": "D2691E",  
    "Coral": "FF7F50",  
    "CornflowerBlue": "6495ED",  
    "Cornsilk": "FFF8DC",  
    "Crimson": "DC143C",  
    "Cyan": "00FFFF",  
    "DarkBlue": "00008B",  
    "DarkCyan": "008B8B",  
    "DarkGoldenRod": "B8860B",  
}
```

```
"DarkGray": "A9A9A9",
"DarkGreen": "006400",
"DarkKhaki": "BDB76B",
"DarkMagenta": "8B008B",
"DarkOliveGreen": "556B2F",
"DarkOrange": "FF8C00",
"DarkOrchid": "9932CC",
"DarkRed": "8B0000",
"DarkSalmon": "E9967A",
"DarkSeaGreen": "8FBBC8F",
"DarkSlateBlue": "483D8B",
"DarkSlateGray": "2F4F4F",
"DarkTurquoise": "00CED1",
"DarkViolet": "9400D3",
"DeepPink": "FF1493",
"DeepSkyBlue": "00BFFF",
"DimGray": "696969",
"DodgerBlue": "1E90FF",
"FireBrick": "B22222",
"FloralWhite": "FFFFAF0",
"ForestGreen": "228B22",
"Fuchsia": "FF00FF",
"Gainsboro": "DCDCDC",
"GhostWhite": "F8F8FF",
"Gold": "FFD700",
"GoldenRod": "DAA520",
"Gray": "808080",
"Green": "008000",
"GreenYellow": "ADFF2F",
"HoneyDew": "F0FFF0",
"HotPink": "FF69B4",
"IndianRed": "CD5C5C",
"Indigo": "4B0082",
"Ivory": "FFFFFF0",
"Khaki": "F0E68C",
"Lavender": "E6E6FA",
"LavenderBlush": "FFF0F5",
"LawnGreen": "7CFC00",
"LemonChiffon": "FFFACD",
"LightBlue": "ADD8E6",
"LightCoral": "F08080",
"LightCyan": "E0FFFF",
"LightGoldenRodYellow": "FAFAD2",
"LightGray": "D3D3D3",
"LightGreen": "90EE90",
"LightPink": "FFB6C1",
"LightSalmon": "FFA07A",
"LightSeaGreen": "20B2AA",
"LightSkyBlue": "87CEFA",
"LightSlateGray": "778899",
"LightSteelBlue": "B0C4DE",
"LightYellow": "FFFFE0",
"Lime": "00FF00",
"LimeGreen": "32CD32",
"Linен": "FAF0E6",
"Magenta": "FF00FF",
"Maroon": "800000",
"MediumAquaMarine": "66CDAA",
"MediumBlue": "0000CD",
"MediumOrchid": "BA55D3",
"MediumPurple": "9370DB",
"MediumSeaGreen": "3CB371",
"MediumSlateBlue": "7B68EE",
"MediumSpringGreen": "00FA9A",
"MediumTurquoise": "48D1CC",
"MediumVioletRed": "C71585",
"MidnightBlue": "191970",
"MintCream": "F5FFFA",
"MistyRose": "FFE4E1",
"Moccasin": "FFE4B5",
"NavajoWhite": "FFDEAD",
"Navy": "000080",
"OldLace": "FDF5E6",
"Olive": "808000",
"OliveDrab": "6B8E23",
"Orange": "FFA500",
"OrangeRed": "FF4500",
"Orchid": "DA70D6",
```

```

    "PaleGoldenRod": "EEE8AA",
    "PaleGreen": "98FB98",
    "PaleTurquoise": "AFEEEE",
    "PaleVioletRed": "DB7093",
    "PapayaWhip": "FFEF5",
    "PeachPuff": "FFDAB9",
    "Peru": "CD853F",
    "Pink": "FFC0CB",
    "Plum": "DDA0DD",
    "PowderBlue": "B0E0E6",
    "Purple": "800080",
    "RebeccaPurple": "663399",
    "Red": "FF0000",
    "RosyBrown": "BC8F8F",
    "RoyalBlue": "4169E1",
    "SaddleBrown": "8B4513",
    "Salmon": "FA8072",
    "SandyBrown": "F4A460",
    "SeaGreen": "2E8B57",
    "SeaShell": "FFF5EE",
    "Sienna": "A0522D",
    "Silver": "C0C0C0",
    "SkyBlue": "87CEEB",
    "SlateBlue": "6A5ACD",
    "SlateGray": "708090",
    "Snow": "FFF176",
    "SpringGreen": "00FF7F",
    "SteelBlue": "4682B4",
    "Tan": "D2B48C",
    "Teal": "008080",
    "Thistle": "D8bfd8",
    "Tomato": "FF6347",
    "Turquoise": "40E0D0",
    "Violet": "EE82EE",
    "Wheat": "F5DEB3",
    "White": "FFFFFF",
    "WhiteSmoke": "F5F5F5",
    "Yellow": "FFFF00",
    "YellowGreen": "9ACD32"
},

```

This section deals with document styles. It has 3 sections: "pages", "front_page", and "toc". If a style is not set in a specific section it will fall back to what is specified in a more general section. For example, if a subsection of "document" does not specify "color" then it will fall back to the "color": "black" directly under "document".

```

"document": {
    "color": "black",
    "background": "white",
    "family": "HELVETICA",
    "size": 10,
    "style": "Normal",

    "image": {
        "imgScalePercent": 60.0,
        "imgAlign": "LEFT",
        "imgRotateDegrees": 0.0
    },
    "pages": {
        "block_quote": {
            "style": "Italic",
            "color": "mddgrey"
        },
        "h1": {
            "size": 20,
            "style": "BOLD"
        },
        "h2": {
            "size": 18,
            "style": "BOLD",
            "hr": true
        },
        "h3": {
            "size": 16,

```

```

        "style": "BOLD"
    },
    "h4": {
        "size": 14,
        "style": "BOLD"
    },
    "h5": {
        "size": 12,
        "style": "BOLD"
    },
    "h6": {
        "size": 10,
        "style": "BOLD"
    },
    "emphasis": {
        "style": "ITALIC"
    },
    "strong": {
        "style": "BOLD"
    },
    "code": {
        "family": "COURIER",
        "size": 9,
        "color": "64:64:64"
    },
    "anchor": {
        "color": "128:128:128"
    },
    "list_item": {
    },
    "footer": {
        "size": 8
    }
},
"divs": {
    "mdd-example": {
        "color": "white",
        "background": "black",
        "block_quote": {
            "family": "COURIER",
            "color": "120:120:120",
            "background": "10:11:12"
        }
    }
},
"front_page": {
    "color": "0:0:0",
    "background": "255:255:255",
    "family": "HELVETICA",
    "size": 10,
    "style": "NORMAL",
    "image": {
        "imgScalePercent": 60.0,
        "imgRotateDegrees": 0.0
    },
    "title": {
        "size": 25,
        "style": "UNDERLINE"
    },
    "subject": {
        "size": 15
    },
    "version": {
        "size": 12,
    },
    "copyright": {
    },
    "author": {
        "size": 12,
    }
},
"toc": {

```

```
"color": "0:0:0",
"background": "255:255:255",
"family": "HELVETICA",
"size": 9,
"style": "NORMAL",
"toc": {
},
"h1": {
    "style": "BOLD"
},
"h2": {
},
"h3": {
},
"h4": {
},
"h5": {
},
"h6": {
}
}
```

Settings / Options

The options for each generator are represented by a JavaBean model using [OptionsManager](#) annotations. Independent of how you run a generator it is the same options model that is used the only difference is in how it is populated. If it is from code you just use setter methods to set values. If it is from the command line jar then each option name is prefixed with -- and passed as command line argument. In this case it is OptionsManager that will populate the model from arguments. If it is from the maven plugin then each option is set in the pom with xml tags of the same name as the options. In this case it is maven that populates the options.

The options will be described here in general, not centric to any way of running.

(R) after an option means it is required.

(O) after an option means it is optional.

Note that values of **Boolean** type should have a value of either "true" or "false". They do need a value when specified from command line! Just a `--firstLineParagraphIndent` will not work!

Common options

generator (R)

Specifies the generator to run. Current valid values are:

- pdf
- html
- markdown

parser (O)

Selects the parser to run. Valid values are:

- markdown
- byext[ension] *This is the default value!*

The latter selects parser based on extension of file being parsed. This is in general a good idea to use since there are currently both a markdown parser and a javadoc parser. By using `byext` it is possible to pass both .md and .java (and .groovy) files. Each parser is registered as a standard Java service and loaded with ServiceLoader. Each parser also provides which file extensions it recognizes. This is how a parser is resolved.

inputPaths (R)

A comma separated list of files and paths. A path can look like this: `MavenPlugin/docs/./*.md`. A path supports [regular expressions](#).

Files will be parsed in the order they are specified. When regular expressions are used to include multiple files the order is unspecified.

parserOptions (O)

This is a comma separated list of `name=value`.

JavaDoc2MDParser options

Just setting **markdownJavadoc** to any value will make it take the javadoc text as markdown and

parse that also.

MarkdownParser options

This parser currently has no options.

PDFGenerator options

resultFile : String (R)

The path to the PDF file to write.

rootDir : String (O)

A root dir to make image paths relative to.

pageSize : String (O)

The pagesize name like LETTER or A4. Default is A4.

title : String (O)

The title of the document. This is used if **generateTitlePage** is set to true.

subject : String (O)

The subject of the document.

titlePageImage : String (O)

Put an image on the title page. Format: <path/URL>:x:y

keywords : String (O)

Meta keywords

author : String (O)

The author of the document.

version : String (O)

The version to put on the title page. Must be specified to be rendered!

copyright : String (O)

The copyright message to put on the title page. Must be specified to be rendered!

authorLabel : String (O)

The label text for 'Author:'.

versionLabel : String (O)

The label text for 'Version:'.

pageLabel : String (O)

The label text for 'Page'.

tableOfContentsLabel : String (O)

The text for 'Table of Contents'.

hideLinks : Boolean (O)

If true then links are not rendered as link the link text will be rendered as plain text.

unorderedListItemPrefix : String (O)

What item marking to use for unordered lists. Default is '- '.

firstLineParagraphIndent : Boolean (O)

If true then the first line of each paragraph is indented. Default is false.

backgroundColor : String (O)

DEPRECATED! Use an .mss file instead! The background color of the document in "R:G:B" format where each R, G, and B are a number 0 - 255.

blockQuoteColor : String (O)

DEPRECATED! Use an .mss file instead! The blockquote color to use in this document in "R:G:B" format where each R, G, and B are a number 0 - 255.

codeColor : String (O)

DEPRECATED! Use an .mss file instead! The code color to use in this document in "R:G:B" format where each R, G, and B are a number 0 - 255.

mss : String (O)

This specifies the path to an .mss file to use for setting fonts and colors and image styling of the generated document.

generateSectionNumbers : Boolean (O)

If true all chapters and sections will be numbered. This was the only option before version 1.4.

generateTOC : Boolean (O)

This generates a table of contents. Default is false!

generateTitlePage : Boolean (O)

This will generate one first page with a title, version, author, and copyright. Default is false.

help (Only from command line!)

Shows help.

Comment block annotation setting of options

The PDF generator have a special feature to be able to set options via an annotation in a comment block. The annotations look like this:

```
<!--
```

```
@PDF<option name>(<option value>)
@PDF<option name>(" <option value> ")
```

-->

The following annotation options are available:

- @PDFTitle(title)
- @PDFSubject(subject)
- @PDFKeywords(keywords)
- @PDFAuthor(author)
- @PDFVersion(version)
- @PDFCopyright(copyright line)
- @PDFAuthorLabel(label)
- @PDFVersionLabel(label)
- @PDFPageLabel(label)
- @PDFTableOfContentsLabel(label)
- @PDFPageSize(size)
- @PDFHideLinks(true/false)
- @PDFUnorderedListItemPrefix(prefix)
- @PDFFirstLineParagraphIndent(true/false)
- @PDFGenerateSectionNumbers(true/false)
- @PDFGenerateTOC(true/false)
- @PDFGenerateTitlePage(true/false)
- @PDFTitlePageImage(imageref)

Put this comment block at the top of the document! The options provided this way will not have an effect until the comment block have been processed by the generator, and the annotations found. Thereby it is also theoretically possible to change options further down the document. This should be seen as a side effect rather than a feature!!

HTMLGenerator options

resultFile : String (R)

Where to write the result.

inlineCSS : Boolean (O)

If true then the css will be included in the generated HTML.

css : String (O)

The path to a CSS file.

primitiveHTML : Boolean (O)

When true very primitive HTML will be generated. This will work for rendering with JEditorPane.

makeFileLinksRelativeTo : String (O)

The path file links should be relative to.

help (Only from command line!)

Shows help.

MarkdownGenerator options

resultFile : String (R)

Where to write the result.

makeFileLinksRelativeTo : String (O)

The path file links should be relative to.

help (Only from command line!)

Shows help.

MarkdownDoc Editor

This is an editor for editing markdown documents.

MarkdownDoc Editor

This is an editor for editing markdown documents.

```
<div class="editorImage">

</div>
```

Features

Styling as you type

Can markdown style as you write. Headings, bold, italics, and monospaced are styled. This can be turned on/off in settings. Styles the whole document on load, and after that restyles only the currently edited paragraph due to performance reasons. There is a function (default Ctrl+R) that restyles the whole document. This is also done on paste if you have mapped the correct paste key in Settings/Keyboard.

HTML Preview

Can preview in HTML format (toggles between preview and edit mode). This is activated by a toolbar button (the eye) and a keyboard shortcut.

Editing effects

Can make formatting characters to be made very tiny while editing, by enabling a settings option. Try it to see the effect!

Generate PDF & HTML

Can generate both PDF and HTML from the editor window. Use toolbar button or keyboard shortcut.

Configurable

Features

Styling as you type

Can markdown style as you write. Headings, bold, italics, and monospaced are styled. This can be turned on/off in settings. Styles the whole document on load, and after that restyles only the currently edited paragraph due to performance reasons. There is a function (default Ctrl+R) that restyles the whole document. This is also done on paste if you have mapped the correct paste key in Settings/Keyboard.

HTML Preview

Can preview in HTML format (toggles between preview and edit mode). This is activated by a toolbar button (the eye) and a keyboard shortcut.

Editing effects

Can make formatting characters to be made very tiny while editing, by enabling a settings option. Try it to see the effect!

Undo / Redo (as of 1.4)

Attaches an UndoManager to the document model. Ctrl-Z does an undo, and Ctrl-Y does a redo for all platforms except Mac, which uses Meta-Z for undo, and Shift-Meta-Z for redo.

Do note however that if you enable styling as you type in settings, then the styling actions also gets recorded by the UndoManager! So the first Ctrl-Z might just undo the styling, and the next Ctrl-Z does what you expected it to do. I have currently not found a way around this.

Generate PDF & HTML

Can generate both PDF and HTML from the editor window. Use toolbar button or keyboard shortcut.

Configurable

The settings dialog allows you to configure almost anything/everything:

- All keyboard shortcuts.
 - Don't write the keyboard shortcut in text, just press the keyboard shortcut you want to set.
- Margins.
- Editor font.
- Monospaced font.
- Preview font.
- Font sizes.
- Background color.
- Text color.
- Toolbar variant to use.

Load file by drag & drop

Instead of using the GUI open dialog you can just drag and drop a file in the editor to edit it.

Special preview drag & drop feature

While in preview mode, drag and drop a markdown file on the preview window to have it formatted and displayed. This does not affect the edit buffer in any way. Exiting preview mode will bring you back to whatever you have in the editor, and previewing again will preview the editor content.

But by just opening an empty editor and entering a blank preview you can quickly read multiple markdown documents formatted by just dropping them on the window.

Fullscreen support

When in fullscreen mode then the settings popup will still popup to the right, but on top of the editor window, so it will still work in that mode.

Mac OS X

When you run this editor on a Mac with Lion+ you will get a little double arrow in the right corner of the window titlebar, or with Mavericks+ it will be the green dot, which will bring up the editor window in fullscreen.

Windows (10)

On Windows10 pressing the square button on the top right side of the window will enter some kind of fullscreen.

MarkdownDocEditor.app

The editor is also available in MarkdownDocEditor.app format. The build plugin that creates this .app packaging does however not support passing on arguments to the app when run this way. That means selecting a markdown file and doing "open with" will fail. It will always open the file chooser for you to select the file(s) to edit.

Also note that since this .app is not signed, Mac OS X Mavericks and up will not allow you to run the app if you do not open up for running all types of apps in the security settings.

Due to GUI bugs in the editor component of earlier versions of Java, Java 1.8 or higher is required to be installed on your system for the app to be able to run, assuming you are using the version I'm providing for download in the README.md document. If you checkout the source and build yourself then it will require Java 1.6 and up. But be warned: You will be annoyed if you use Java lower than 1.8!

Version 1.4 usage changes

In previous versions there were only one file per window and you could open multiple windows. Now there is only one window and you can open multiple files and select which file to work with in the editor window. It is like a tabbed window, but instead of tabs there is a popup list of all open files and you click on the one you want to edit. The reason for this is to have editing distraction free. When you are writing, you only have the text you are working on and nothing else in the window. This works even better with full screen.

Since the editor now has become very file oriented you can no longer edit an unknown file that you specify a file for later when you save. So when you press the "+" toolbar icon or start the editor without any files specified then a file chooser will popup. In this case you can either navigate to a directory and then enter a name for a new file and it will be created or you can specify existing files and they will be opened. Do note that since you can open multiple files at the same time, the opened files does not necessarily become the current edited file visible in the window! But if you open the files pop up you will get the newly opened files in the file list.

Running

Can be run with java -jar or double clicked on. If you are using Windows 7 or 8 take a look at this page: <http://johann.loefflmann.net/en/software/jarfix/index.html> (<http://johann.loefflmann.net/en/software/jarfix/index.html>).

The executable jar have the following name: MarkdownDocEditor-n.n.n-App.jar

One or more files or directories can be specified as arguments. For a directory all markdown files found in the directory and subdirectories will be loaded. As said above this does not apply if you are running the .app version.

Requirements

This requires Java 7+!

Functions

This section documents the different functions of the editor, and how to trigger the function.

The images are the toolbar icon for the function. Not all functions install themselves in the toolbar.

Bringing up the toolbar

Move the mouse to the top of the editor window and the toolbar will automatically popup. Move the mouse down again and it will go away.

Save file(s)



Default key: Ctrl+S. This is changeable in the settings.

This saves all open files that have been modified and not saved. A small popup appears for a short while in the upper left corner of the window to indicate how many files were saved. If it the number is 0 then there were no modified files needing save.

Open file



Default key: Ctrl+O. This is changeable in the settings.

This opens a file chooser to select one markdown file to open. The opened file will be selected for editing in the window.

This function is kind of unnecessary in this version, but I decided to leave it in anyhow. It differs slightly from Open/Create. It is likely to go away in future versions.

In addition to markdown files the open function will also allow opening the same .fs files as the maven plugin can use. In this case all references to markdown files in the .fs file will be opened.

Open / Create



Default key: Ctrl+N. This is changeable in the settings.

This opens a file chooser where you can also enter a filename in the chooser dialog. Here you can navigate to a directory, and then enter the name of a new file that will then be created and opened. In this file chooser you can alternatively navigate to a directory and then select one or more existing files and have all selected files being opened.

Since there can be more than one file, no file is set as the current edited in the window. You have to bring up the list of open files and select one of the newly added files to edit it.

The exception to this is when you have started the editor without any files, which will trigger this file chooser then one of the selected files will become the edited file since there always have to be one file in the editor.

In addition to markdown files the open function will also allow opening the same .fs files as the maven plugin can use. In this case all references to markdown files in the .fs file will be opened.

List of open files popup



Default key: Ctrl+1. This is changeable in the settings.

This is new in version 1.4.2. This opens the popup window that allows for selecting which open file to work on. This was previously triggered by moving the mouse to the left window edge.

Insert heading



Default key: Ctrl+T. This is changeable in the settings.

This just adds a # character which is the markdown heading character. Insert as many as the heading level you want, max 6.

Insert bold



Default key: Ctrl+B. This is changeable in the settings.

This adds 4 '_' characters with the cursor placed between the first 2 and the last 2. 2 underscores before and after makes bold text in markdown. 2 asterisks before and after does the same thing, but the editor uses underscores for this specific help function.

Insert italics



Default key: Ctrl+I. This is changeable in the settings.

This adds 2 '_' characters with the cursor placed between them. 1 underscore before and after makes italic text in markdown. 1 asterisk before and after does the same thing, but the editor uses underscores for this specific help function. Asterisks also means other things in markdown so underscores in this case is less confusing.

Insert list



Default key: Ctrl+L. This is changeable in the settings.

This adds an asterisk and a space which is how you make a list entry for an unordered list in markdown. Do note that it is also possible to make a numbered list, in which case you replace the asterisk with a number like 1. See the markdown reference section of this document for more information.

Insert quote



Default key: Ctrl+Q. This is changeable in the settings.

This inserts a '>' character and a space which is how you make quoted text in markdown.

Insert image



Default key: Ctrl+M. This is changeable in the settings.

This function will open a small popup window where you can enter 3 pieces of information: 1) An alt text. 2) A URL to the image. 3) An image title. Only the URL is required. When you press the "Insert" button in the popup window, then the image reference will be inserted into the text in markdown format: `![Alt text](url "title")`.

Insert link



Default key: Ctrl+N. This is changeable in the settings.

This function will open a small popup window where you can enter 3 pieces of information: 1) The link text. 2) The link URL. 3) A link title. You should provide a link text and an URL as minimum. When you press the "Insert" button in the popup window, then the link will be inserted into the text in markdown format: `[link text](url "title")`.

Preview



Default key: Ctrl+F. This is changeable in the settings.

This will format the markdown in the editor into HTML and show it in readonly mode instead of the editable content. To go back to editing again do a Ctrl+F again or use the toolbar button. Do note that while in preview mode it is possible to drag and drop markdown files into the window to have them previewed. This does not affect what you are editing in any way. When you go back to edit mode again your edited text will be there and a new preview will preview that text.

Please also note that the preview HTML rendering is done by the Java GUI library (Swing) component JEditorPane. This is far from an optimal HTML renderer! It can make things look strange sometimes. It also insists on indenting the beginning of every code block. If anyone knows of a free, open source, swing compatible HTML renderer, that is better please let me know.

Generate PDF




Default key: Ctrl+P. This is changeable in the settings.

This will first open a file chooser to select target PDF file to generate to. Then a popup window with

meta data for the PDF generation will open.

Press the "Generate" button to actually generate the PDF document.

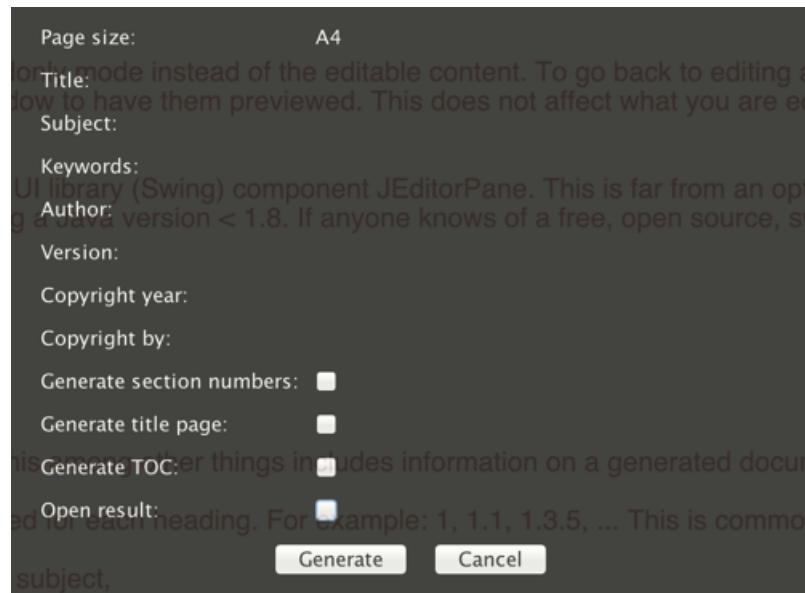

The choices are:

Page size

This is one of the standard paper sizes like A4 or Letter.

Title

This is the title of the document. This will be shown on the front page.

Subject

This is an optional subject / subtitle. This will be shown on the front page.

Keywords

A space separated set of keywords. These will not be shown anywhere, but will be added as meta data to the PDF document.

Author

The author of the document. This will be shown on the front page.

Version

The current version of the document. This will be shown on the front page.

Copyright year

The year of copyright. This will be shown on the front page in the format: "Copyright (C) {year} by {by}".

Copyright by

The one holding the copyright.

Generate section numbers

When this is selected numbers are generated for each heading. For example: 1, 1.1, 1.3.5, ... This is common for professional documents.

Generate title page:

This will produce a first page with a document title, subject, author, version and copyright.

Generate TOC

This will generate a table of contents. This will come after the title page if that is generated, but before the document.

Open result

If this is selected then the generated PDF will be opened by the system default PDF viewer.

Generate HTML



Default key: Ctrl+H. This is changeable in the settings.

This will first open a file chooser to select HTML file to generate to. Then a popup window will be opened containing meta data for generation of the HTML.



Inline CSS

If you select this option then the CSS file you point out will be included within the generated HTML file.

CSS file

This is the CSS file to use. Write a path to the CSS file or use the "Select" button to open a file chooser. This is optional and can be skipped, but the resulting HMTL can be rather boring if you don't provide a CSS.

file: links relative to

This is a path that file: links in the document isrelative to. This is used to resolve local filesystem images.

Open result

If this is selected then the generated HTML will be opened by the system default browser.

Setting

?

Default key: Ctrl+E. This is changeable in the settings.

This opens the settings popup window where you can configure keys, margins, colors, etc.

Restyle document

Default key: Ctrl+R. This is changeable in the settings.

This will force a complete restyling of the whole document.

Restyle on paste

Default key: Ctrl+V. This is changeable in the settings.

This also forces a restyle of the document, but when paste of text into the document is done. For this to work it must be mapped to the same key as is used for paste. On windows and linux it is Ctrl+V, on Mac it is Cmd+V. This function can be disabled by setting the key to something else than the paste key.

Goto next open file

This is an alternative to the above function and allows you to jump around the open files. Each time this function is triggered the editor window will switch content. Internally the editor just keeps a list of all open files, and this just jumps to the next file in that list until the last file is reached and it jumps to the first instead. This function will also show the name of the current "jumped to" file at the bottom of the window just like when you move the mouse up to the toolbar area.

Note that this function has no default key configured and must be set in the settings window before it can be used. On Mac Alt+Tab works since it is not used by the system, on Windows and Linux you probably need some other key combination.

This function is new in version 1.4.1.

If you're on a Mac

If you are on a Mac you might want to change the keyboard mappings to use Cmd rather than Ctrl. Do note however that Cmd+H and Cmd+Q are really nasty on Mac OS X! Since these keys immediatly kills the app these keys are impossible to set in the first place, but you will loose other unsaved settings when you try.

Currently Missing

Fancy functions like search and replace.

Laptop power warning

The markdown styling as you type in the editor do pull some CPU since basically the whole paragraph needs to be reformatted on every key. My Mac Book Pro marks this app as a heavy energy user. To minimize battery drain you can turn off the styling as you type in the settings.

Bugs

By me

All *known* bugs have been fixed.

By Oracle

This editor uses the standard Swing component JTextPane. This is unfortunately not an optimal component. Specially for styling it gets slow for large documents. In earlier versions of Java 7 this component had a word wrap problem when deleting text either using backspace or cutting text. In that case it rerendered the text screwing up the format until new text was entered again. *As of Java 8 this bug is fixed*, but other new bugs have been added. They are however smaller and don't occur so often.

Sometimes when the JTextPane is opened the pane will not render at all! Just increase the width of the window until text appears. Then save so that the window size for that file will be remembered. I have one and only one document for which this happens and I cannot tell what it is that causes the problem. This could be a mac only problem.

Other

On Windows 7 generating a PDF within the editor throws a NullPointerException! This does not happen on Mac OS X, Linux, nor Windows 10. I see this as a Windows 7 bug.

The mddoc file type

There is a special file type that describes a complete document in any or all of the 3 output formats. It has the extension of `.mddoc`. It is really a properties file with `key: value` entries.

A path to an `.mddoc` file can be specified as only argument to command line variant, or as only file in `<inputPaths>...</inputPaths>` section in maven plugin (no other options/parameters are needed then) to produce output documents as described by the `.mddoc` file.

.mddoc format (myfile.mddoc)

```
# --- Generators to run ---
generate.pdf: true
generate.html: true
generate.markdown: true

# A comma separated list of paths to sources. A .fs file can also be
# specified as an input file in which case it is read for a further
# set of files to parse. The order of the specified files are important.
inputPaths: docs/intro.md,docs/install.md,docs/usage.md,docs/appendix.md

# --- PDF ---
# The name of the file to produce.
pdf.resultFile: MyDoc.pdf

# The page size. For example:A4, LETTER Optional. Default: A4
pdf.pageSize: A4

...
# --- HTML ---
# The name of the file to produce.
html.resultFile: MyDoc.html

# The path to the css file for the generated html file. Required.
html.css: css/my.css

...
# --- Markdown ---
# The name of the file to produce.
markdown.resultFile: MyDoc.md

# This affects links and images. When specified the resulting file: URLs in the
# result will be relative to the path specified by "path" if the absolute path
# of the URL starts with the specified path. If a plus sign (+) and a prefix
# path is specified it will be prefixed to the final URL. Optional.
markdown.makeFileLinksRelativeTo: path[+prefix]
```

As you can see pdf options are prefixed with "pdf.", html options are prefixed with "html.", and markdown options are prefixed with "markdown.". After the prefix are the same options as documented under the "Options / Settings" section.

Version history

About versions, they are hell! After personal experience of having different versions for each module / produced jar which was close to impossible to keep track of which was compatible with which, I decided to go with just one and the same version for all modules of the tool. This has the side effect of changes in any submodule, even the editor, which probably not everyone uses, will change the version for all even though no changes have been done for some modules. What have changed for each version is documented below so that you can determine if upgrading to the latest version is wanted/needed or not.

1.4.4

Editor

The settings popup is now popped up to the right of the window, not over it, unless in fullscreen mode then the popup will still be to the right, but on top of the editor window obviously :-). This makes it easier to see the result when playing with settings.

1.4.3

Library

Implemented a suggestion from Mikhail Kopylov that also allows images to be referenced relative from the .md file they are part of.

Added information about options for referencing images in *MarkdownDoc* under the *Markdown Reference* section.

1.4.2

Editor

The editor has been updated:

- The popup window of all open files is no longer accessible by moving the mouse pointer to the left side of the window. This was a really bad idea! It was very easy to unintentionally trigger this popup. This function has now gotten an icon and been added to the toolbar instead. It already had a keyboard shortcut before and still does.
- All toolbar icons have been redone.
- It is now also possible to open the same .fs files as supported by the maven plugin. All markdown documents referenced in the .fs file will be opened in the editor. If an .fs file also points out a java source file for javadoc parsing it will be ignored. Only markdown documents are opened.

1.4.1

Only fixes in editor!

- The popup windows now only popup over the editor window. The fullscreen popups worked badly on different platforms which reserves different parts of the screen.
- Disabled rounded corner popup windows since they also worked with different quality on different platforms.
- Added editor function to *Alt-Tab or something* around opened files in the editor. For this to work at all you need to open configuration and set a keyboard combination that triggers this. There is no failsafe default that works on all platforms. The config is called "content switch keyboard shortcut".

1.4

- Added support for what I call *Markdown Style Sheet* or MSS for short. This is only applicable to PDF generation. For HTML there is CSS, and generating CSS from the MSS is a bad idea. The MSS is relatively simple and JSON based.
 - It supports ttf, otf, and any other format supported by iText for external fonts.
 - It allows for image configuration like scaling, rotating, and alignment. Before all images were aligned to the left. Now they can be aligned to the left, middle, or right. In previous versions all images was scaled to 60 percent due to iText rendering images very much bigger than any other image viewer (that I have at least). This scaling can now be set with MSS.
- Added support for `<div class="...">...</div>`. This tool is mainly for writing documentation and generating PDF, but I wanted to add more flexibility for generating HTML pages also. Even though you probably want to keep a common style throughout a document, I did add div support to MSS. Divs within divs inherit styles upward. This was relatively simple to do. Note that the "Options / Settings" section uses a div with slightly different formatting than the rest of the document. Each option is a level 3 heading (H3) which is why it is part of the TOC, but styled with a smaller font with a different color.
- Added possibility to also have an image on the title page.
- Added annotations within a comment block. Most of the options for the PDF generator can now be specified with annotations in the document. For example `@PDFPageSize("A4")`. This means for example that the title page can be part of the document. This comment with annotations should preferably be the first thing in the document. The reason for the very Javaish format of the annotation is that it is explicit enough to not be accidentally and unwantedly matched.
- Added labels in options for all previously hardcoded text strings in PDFGenerator. It should now be possible to completely generate a document in a different language than English. These can also be set with comment annotations as mentioned above.
- Added Undo / Redo to editor. Swing apparently provides support for this for a JTextPane/JEditorPane, you just have to register an UndoManager. **However**, it reacts on all changes, including styling. Since styling is applied afterward, and on the whole paragraph since it is not only about the current character, this is also registered as a change in the undo manager. So undos will undo styling also. So after undoing what you wanted to undo, do a Ctrl/Cmd+R to fix styling again.
- Editor updated quite a lot!
 - All known bugs fixed.
 - Now handles multiple files in one editor window. It actually only supports one window now, but you switch between the open files by moving mouse to the left window edge which will popup a list of all open files and you just click on the one you want to work on.
 - It is possible to specify a directory as input to editor. In this case it will scan the directory for markdown files and open all found. It is actually possible to specify multiple directories just as it is possible to specify multiple files.
 - When the toolbar is shown at the top of the window, the name of the current file is also shown at the bottom of the window.
 - The editor GUI has gone through some cosmetics.

The addition of MSS made huge changes to the code. To be as backwards compatible as possible, the defaults for the MSS settings are as things looked before. There is also a `default.mss` file that gets used if you don't supply your own. This has settings that mimics the previous styles.

Also note that the PDF UserGuide now shows off the new features, mostly for that purpose :-).

1.3.9

Only bugfix in editor when generating HTML directly from editor, which caused an NPE.

1.3.8

Bad internal version dependencies in well ... probably from version 1.3.4 up to 1.3.7. The markdowndoc-maven-plugin were using a too old (hardcoded!!) version of markdown-doc-lib, which is the core of MarkdownDoc! It was pointing to version 1.3.3. This means that fixes in 1.3.4 and 1.3.5 were not available when maven plugin was used! It now uses `${project.version}`. The command line

jar and the editor have had the correct version dependency.

Very sorry for this!

1.3.7

- Bugfixes in the maven plugin.
- The maven plugin also no longer has any runtime dependency on CodeLicenseManager which is a build only plugin, something maven does not really distinguish.
- Includes a pull request submitted by both komarevsky and iorixxx that fixes an XML error in an example in the user guide. Thanks for seeing that and submitting pull requests!

1.3.6

Bug fixes in MarkdownDocEditor:

- Preformatted styling should now behave correctly.
- Preformatted font (monospace) settings now work. Also defaulted font size of monospace to 14 rather than 16.

1.3.5

What I did not mention in the information for version 1.3.4 is that the editor was converted from Java to Groovy. Here I apparently ran into a Groovy gotcha: What looked to be a member reference were actually a property reference to the same method that tried to reference member. In this case it was an anonymously implemented interface with a getter whose implementation tried to reference the outer class member of same name as getter property, and got the property rather than the member causing a never ending loop resulting in `java.lang.StackOverflowError`.

This affected only generating of PDF and HTML. The error occurred after writing generated output, but before opening the generated output (when told to do so by checkbox setting). This problem is now fixed by this version and is the only thing that differs from previous version.

1.3.4

Fixed a bug with relative path for images using *PDFGenerator* reported by Maher Gamal. There are now 5 ways to specify paths to images for PDF:

1. Absolute path
2. Relative to current directory.
3. Relative to markdown document.
4. Relative to resulting PDF document.
5. Relative to a supplied root dir. This can now be specified in the PDF generator options. If using the library, passing `rootDir` will override the options `rootDir`.

These paths will be automatically resolved.

1.3.3

Ironed out all *known* bugs in editor.

1.3.2

Added markdown formatting as you write.

1.3.1

Bug fixes. Monospaced font now rendering correctly.

Deleting text with backspace have strange effects on text layout. That is, the place where a sentence is broken to the right and moved down to the next line keeps moving around while deleting text, in some completely different paragraph! This is entirely handled by JTextPane. I have tried to find a way to intercept the delete key and handle delete myself, but I have not been successful in finding a way to do that if it is even possible. Continuing writing new text after deleting text seems to restore the layout. This oddity has no effect on the final text, it is just the layout while editing that is affected. You will also only see this if you write paragraphs as one block of text that wraps around into multiple lines without pressing return until the end of the paragraph.

1.3

Made big changes to the editor, finally making it into what I want, with some markdown formatting as you write, and far more configuration in settings dialog, which have also been redone.

Bug fixes.

1.2.10

Added support for <, >, and &;

1.2.9

Added markdown file reading feature by allowing markdown files to be dropped on the editor in preview mode, in which case the dropped file will be formatted and displayed without changing the content of the editor. Exiting preview and doing a preview again will again preview the editor content.

1.2.8

Headings can now **not** be more than one line (not include LF/CRLF). Before they were treated like paragraphs. This to be more compatible with other Markdown tools and Markdown documents.

1.2.7

Added settings for specifying top, bottom, left, and right margins in editor. Please note that I've been a bit lazy here. The sizes are in pixels, not characters/lines!

1.2.6

Added the new *.mddoc* format, which makes command line usage easier, but it is also supported by the maven plugin and the library has a utility that completely handles this format.

Added a Java Swing based editor for editing markdown with support.

1.2.5

Added *parserOptions* now used by JavadocParser to markdown parse javadoc comments if *markdownJavadoc=true* is provided. The Parser API is thus also updated to take a Properties object for the parser options.

1.2.4

Added *makeFileLinksRelativeTo* option for HTMLGenerator and MarkdownGenerator mostly to be able to manipulate *file:* references to images in the generated result so that the image paths still work in source when editing with a markdown tool and is still correct when generated to a different path.

1.2.3

If image paths are not absolute and not http referenced then they are now looked for relative to the source markdown file first, and then the are looked for relative to the result file as before. This makes it easier to generate a big document for a whole project containing several subproject with local markdown documents and referenced images. The image reference can still be relative to the subproject local markdown file.

1.2.2

Added support for non breaking space (nbsp) to be able to indent text. This is one more exception to no html pass through.

Simple Markdown Reference

Headings

```
# Heading level 1  
## Heading level 2  
...  
##### Heading level 6
```

Paragraphs

An empty line marks the end of a paragraph.

```
Paragraph 1 ...  
More text in paragraph 1.  
  
Paragraph 2 ...
```

Paragraph 1 ... More text in paragraph 1.

Paragraph 2 ...

Italics

```
_This is in italics_  
  
This *is also italics* but can't start a line with * since it will be treated as list.
```

This is in italics

This is also italics but can't start a line with * since it will be treated as list.

Bold

```
__This text is bold.__  
  
**This text is also bold.**
```

This text is bold.

This text is also bold.

Blockquote

```
> This line is block quoted.
```

This line is block quoted.

Lists

Unordered lists (* or -)

```
* item 1  
  Also part of item 1.  
  
- item 2  
  * item 2.1 (this is indented 4 spaces!)
```

- item 1 Also part of item 1.
- item 2
 - item 2.1 (this is indented 4 spaces!)

Ordered list (n.)

```
1. item 1.
2. item 2.
   1. item 2.1
```

1. item 1.
2. item 2.
 - 2.1. item 2.1

Please note that the actual numbers does not matter! They could all be "1."! The items will be enumerated automatically in order no matter what numbers you enter in the source.

Code block (pre formated with a fixed width font)

Each line starting with a tab or 4 spaces are considered belonging to a pre formated block.

```
This
  is
    a
      preformatted
        block!
```

Horizontal rule

Any of:

```
* * *
 ***
*****...***
- - -
----
```

Links

```
[This is a link to markdown syntax on
daringfireball.net](http://daringfireball.net/projects/markdown/syntax)
```

This is a link to markdown syntax on daringfireball.net

Short "autolink" version:

```
<http://www.daringfireball.net>
```

<http://www.daringfireball.net>

Images

```
![Alt text](/path/to/img.png)
![Alt text](/path/to/img.png "title")
```

Note that for **MarkdownDoc** "/path/to/img.png" can be one of the following:

- A http URL.
- A local path which is resolved by first looking at the current directory. If not found the parent directory is tried. This repeats until root directory is reached. You should never use ".." in these paths!
- A local path relative to the *.md* document referencing it. In this case "../images/myimg.png" is valid.

"file:" URLs are also allowed and behave the same as local paths.

backslash (\)

The \ character can be used to escape characters that have markdown meaning. \\ will for example produce \. * will produce *.

Licenses

Project License

[Apache version 2.0](#)

Third Party Licenses

[Apache version 2.0](#)

The following third party products are using this license:

- [OptionsManager-2.0.3](#)
- [annotations-13.0](#)
- [pdfbox-2.0.2](#)
- [groovy-all-2.4.4](#)

License Texts

Apache License version 2.0

```
<!DOCTYPE HTML PUBLIC "-//W3C//DTD HTML 4.01 Transitional//EN">
<html lang="en">
  <head>
    <title>Apache License, Version 2.0</title>

    <meta http-equiv="Content-Type" content="text/html; charset=UTF-8" />
    <meta property="og:image" content="http://www.apache.org/images/asf_logo.gif" />

    <link rel="stylesheet" type="text/css" media="screen" href="/css/style.css">
    <link rel="stylesheet" type="text/css" media="screen" href="/css/code.css">

    <script type="text/javascript" src="/js/jquery.js"></script>
    <script type="text/javascript" src="/js/apache_boot.js"></script>

    <!-- Licensed to the Apache Software Foundation (ASF) under one or more contributor license
        agreements. See the NOTICE file distributed with this work for additional information regarding copyright ownership
     </head>

  <body>
    <div id="page" class="container_16">
      <div id="header" class="grid_8">
        
        <h1>The Apache Software Foundation</h1>
        <h2>Apache License, Version 2.0</h2>
      </div>
      <div id="nav" class="grid_8">
        <ul>
          <!-- <li><a href="/" title="Welcome!">Home</a></li> -->
          <li><a href="/foundation/" title="The Foundation">Foundation</a></li>
          <li><a href="http://projects.apache.org" title="The Projects">Projects</a></li>
          <li><a href="http://people.apache.org" title="The People">People</a></li>
          <li><a href="/foundation/getinvolved.html" title="Get Involved">Get Involved</a></li>
          <li><a href="/dyn/closer.cgi" title="Download">Download</a></li>
          <li><a href="/foundation/sponsorship.html" title="Support Apache">Support
          Apache</a></li>
        </ul>
        <p><a href="/">Home</a>&nbsp;&nbsp;<a href="/licenses/">Licenses</a></p>
        <form name="search" id="search" action="http://www.google.com/search" method="get">
          <input value=".apache.org" name="sitesearch" type="hidden"/>
          <input type="text" name="q" id="query">
          <input type="submit" id="submit" value="Search">
        </form>
      </div>
      <div class="clear"></div>
      <div id="content" class="grid_16"><div class="section-content"><p>Apache
      License<br><br>Version 2.0, January 2004<br><br><a href="http://www.apache.org/licenses/">http://www.apache.org/licenses/</a> </p>
      <p>TERMS AND CONDITIONS FOR USE, REPRODUCTION, AND DISTRIBUTION</p>
      <p><strong><a name="definitions">1. Definitions</a></strong>. </p>
      <p>"License" shall mean the terms and conditions for use, reproduction, and
      distribution as defined by Sections 1 through 9 of this document.</p>
      <p>"Licensor" shall mean the copyright owner or entity authorized by the
      copyright owner that is granting the License.</p>
      <p>"Legal Entity" shall mean the union of the acting entity and all other
      entities that control, are controlled by, or are under common control with
      that entity. For the purposes of this definition, "control" means (i) the
      power, direct or indirect, to cause the direction or management of such
      entity, whether by contract or otherwise, or (ii) ownership of fifty
      percent (50%) or more of the outstanding shares, or (iii) beneficial
      ownership of such entity.</p>
      <p>"You" (or "Your") shall mean an individual or Legal Entity exercising
      permissions granted by this License.</p>
      <p>"Source" form shall mean the preferred form for making modifications,
      including but not limited to software source code, documentation source,
      and configuration files.</p>
      <p>"Object" form shall mean any form resulting from mechanical transformation
      or translation of a Source form, including but not limited to compiled
      object code, generated documentation, and conversions to other media types.</p>
      <p>"Work" shall mean the work of authorship, whether in Source or Object form,
      made available under the License, as indicated by a copyright notice that
      
```

is included in or attached to the work (an example is provided in the Appendix below).</p>

<p>"Derivative Works" shall mean any work, whether in Source or Object form, that is based on (or derived from) the Work and for which the editorial revisions, annotations, elaborations, or other modifications represent, as a whole, an original work of authorship. For the purposes of this License, Derivative Works shall not include works that remain separable from, or merely link (or bind by name) to the interfaces of, the Work and Derivative Works thereof.</p>

<p>"Contribution" shall mean any work of authorship, including the original version of the Work and any modifications or additions to that Work or Derivative Works thereof, that is intentionally submitted to Licensor for inclusion in the Work by the copyright owner or by an individual or Legal Entity authorized to submit on behalf of the copyright owner. For the purposes of this definition, "submitted" means any form of electronic, verbal, or written communication sent to the Licenser or its representatives, including but not limited to communication on electronic mailing lists, source code control systems, and issue tracking systems that are managed by, or on behalf of, the Licenser for the purpose of discussing and improving the Work, but excluding communication that is conspicuously marked or otherwise designated in writing by the copyright owner as "Not a Contribution."</p>

<p>"Contributor" shall mean Licenser and any individual or Legal Entity on behalf of whom a Contribution has been received by Licenser and subsequently incorporated within the Work.</p>

<p>2. Grant of Copyright License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable copyright license to reproduce, prepare Derivative Works of, publicly display, publicly perform, sublicense, and distribute the Work and such Derivative Works in Source or Object form.</p>

<p>3. Grant of Patent License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable (except as stated in this section) patent license to make, have made, use, offer to sell, sell, import, and otherwise transfer the Work, where such license applies only to those patent claims licensable by such Contributor that are necessarily infringed by their Contribution(s) alone or by combination of their Contribution(s) with the Work to which such Contribution(s) was submitted. If You institute patent litigation against any entity (including a cross-claim or counterclaim in a lawsuit) alleging that the Work or a Contribution incorporated within the Work constitutes direct or contributory patent infringement, then any patent licenses granted to You under this License for that Work shall terminate as of the date such litigation is filed.</p>

<p>4. Redistribution. You may reproduce and distribute copies of the Work or Derivative Works thereof in any medium, with or without modifications, and in Source or Object form, provided that You meet the following conditions:</p>

<p>You must give any other recipients of the Work or Derivative Works a copy of this License; and</p>

<p>You must cause any modified files to carry prominent notices stating that You changed the files; and</p>

<p>You must retain, in the Source form of any Derivative Works that You distribute, all copyright, patent, trademark, and attribution notices from the Source form of the Work, excluding those notices that do not pertain to any part of the Derivative Works; and</p>

<p>If the Work includes a "NOTICE" text file as part of its distribution, then any Derivative Works that You distribute must include a readable copy of the attribution notices contained within such NOTICE file, excluding those notices that do not pertain to any part of the Derivative Works, in at least one of the following places: within a NOTICE text file distributed as part of the Derivative Works; within the Source form or documentation, if provided along with the Derivative Works; or, within a display generated by the Derivative Works, if and wherever such third-party notices normally appear. The contents of the NOTICE file are for informational purposes only and do not modify the License. You may add Your own attribution notices within Derivative Works that You distribute, alongside or as an addendum to the NOTICE text from the Work, provided that such additional attribution notices cannot be construed as modifying the License.

You may add Your own copyright statement to Your modifications and may provide additional or different license terms and conditions for use, reproduction, or distribution of Your modifications, or for any such Derivative Works as a whole, provided Your use, reproduction, and distribution of the Work otherwise complies with the conditions stated in this License.</p>

<p>5. Submission of Contributions. Unless You explicitly state otherwise, any Contribution intentionally submitted for inclusion in the Work by You to the Licensor shall be under the terms and conditions of this License, without any additional terms or conditions. Notwithstanding the above, nothing herein shall supersede or modify the terms of any separate license agreement you may have executed with Licensor regarding such Contributions.</p>
<p>6. Trademarks. This License does not grant permission to use the trade names, trademarks, service marks, or product names of the Licensor, except as required for reasonable and customary use in describing the origin of the Work and reproducing the content of the NOTICE file.</p>
<p>7. Disclaimer of Warranty. Unless required by applicable law or agreed to in writing, Licensor provides the Work (and each Contributor provides its Contributions) on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied, including, without limitation, any warranties or conditions of TITLE, NON-INFRINGEMENT, MERCHANTABILITY, or FITNESS FOR A PARTICULAR PURPOSE. You are solely responsible for determining the appropriateness of using or redistributing the Work and assume any risks associated with Your exercise of permissions under this License.</p>
<p>8. Limitation of Liability. In no event and under no legal theory, whether in tort (including negligence), contract, or otherwise, unless required by applicable law (such as deliberate and grossly negligent acts) or agreed to in writing, shall any Contributor be liable to You for damages, including any direct, indirect, special, incidental, or consequential damages of any character arising as a result of this License or out of the use or inability to use the Work (including but not limited to damages for loss of goodwill, work stoppage, computer failure or malfunction, or any and all other commercial damages or losses), even if such Contributor has been advised of the possibility of such damages.</p>
<p>9. Accepting Warranty or Additional Liability. While redistributing the Work or Derivative Works thereof, You may choose to offer, and charge a fee for, acceptance of support, warranty, indemnity, or other liability obligations and/or rights consistent with this License. However, in accepting such obligations, You may act only on Your own behalf and on Your sole responsibility, not on behalf of any other Contributor, and only if You agree to indemnify, defend, and hold each Contributor harmless for any liability incurred by, or claims asserted against, such Contributor by reason of your accepting any such warranty or additional liability.</p>
<p>END OF TERMS AND CONDITIONS</p>
<h1 id="apply">APPENDIX: How to apply the Apache License to your work</h1>
<p>To apply the Apache License to your work, attach the following boilerplate notice, with the fields enclosed by brackets "[]" replaced with your own identifying information. (Don't include the brackets!) The text should be enclosed in the appropriate comment syntax for the file format. We also recommend that a file or class name and description of purpose be included on the same "printed page" as the copyright notice for easier identification within third-party archives.</p>
<div class="codehilite"><pre> Copyright [yyyy] [name of copyright owner]

Licensed under the Apache License, Version 2.0 (the "License");
you may not use this file except in compliance with the License.
You may obtain a copy of the License at

 http://www.apache.org/licenses/LICENSE-2.0

Unless required by applicable law or agreed to in writing, software
distributed under the License is distributed on an "AS IS" BASIS,
WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied.
See the License for the specific language governing permissions and
limitations under the License.
</pre></div></div></div>
<div class="clear"></div>
</div>
<div id="footer" class="container_16">
 <div class="links grid_16">
 <div class="grid_3">

```

        <h4>Projects</h4>
        <ul>
<li><a href="http://httpd.apache.org/" title="Apache Web Server (httpd)">HTTP Server</a></li>
<li><a href="http://abdera.apache.org/" title="Atom Publishing Protocol Implementation">Abdera</a></li>
<li><a href="http://accumulo.apache.org/" title="Sorted, distributed key/value store">Accumulo</a></li>
<li><a href="http://ace.apache.org/" title="Centralized life cycle management and deployment of OSGi based and related modular software artifacts for distribution.">ACE</a></li>
<li><a href="http://activemq.apache.org/" title="Distributed Messaging System">ActiveMQ</a></li>
<li><a href="http://ant.apache.org/" title="Java-based build tool">Ant</a></li>
<li><a href="http://apr.apache.org/" title="Apache Portable Runtime libraries">APR</a></li>
<li><a href="http://archiva.apache.org/" title="Build Artifact Repository Manager">Archiva</a></li>
<li><a href="http://aries.apache.org/" title="Enterprise OSGi application programming model">Aries</a></li>
<li><a href="http://avro.apache.org/" title="A Serialization System">Avro</a></li>
<li><a href="http://axis.apache.org/" title="Java SOAP Engine">Axis</a></li>
<li><a href="http://buildr.apache.org/" title="Simple and intuitive build system for Java applications">Buildr</a></li>
<li><a href="http://bval.apache.org/" title="Apache BVal: JSR-303 Bean Validation Implementation and Extensions">BVal</a></li>
<li><a href="http://camel.apache.org/" title="Spring based Integration Framework which implements the Enterprise Integration Patterns">Camel</a></li>
<li><a href="http://cassandra.apache.org/" title="Highly scalable second-generation distributed database">Cassandra</a></li>
<li><a href="http://cayenne.apache.org/" title="User-friendly Java ORM with Tools">Cayenne</a></li>
<li><a href="http://chemistry.apache.org/" title="CMIS (Content Management Interoperability Services) Clients and Servers">Chemistry</a></li>
<li><a href="http://click.apache.org/" title="User-friendly page and component oriented web framework">Click</a></li>
<li><a href="http://cocoon.apache.org/" title="Web development framework: separation of concerns, component-based">Cocoon</a></li>
<li><a href="http://commons.apache.org/" title="Reusable Java components">Commons</a></li>
<li><a href="http://continuum.apache.org/" title="Continuous Integration and Build Server">Continuum</a></li>
<li><a href="http://couchdb.apache.org/" title="RESTful document database">CouchDB</a></li>
<li><a href="http://creadur.apache.org/" title="Comprehension and auditing of software distributions">Creadur</a></li>
<li><a href="http://cxfr.apache.org/" title="Service Framework">CXF</a></li>
<li><a href="http://db.apache.org/" title="Database access">DB</a></li>
<li><a href="http://deltacloud.apache.org/" title="RESTful cloud management interface">Deltacloud</a></li>
<li><a href="http://directory.apache.org/" title="Apache Directory Server">Directory</a></li>
<li><a href="http://empire-db.apache.org/" title="Relational Data Persistence">Empire-db</a></li>
<li><a href="http://esme.apache.org/" title="Enterprise Social Messaging Environment">ESME</a></li>
<li><a href="http://felix.apache.org/" title="OSGi Framework and components.">Felix</a></li>
<li><a href="http://forrest.apache.org/" title="Aggregated multi-channel documentation, separation of concerns">Forrest</a></li>
<li><a href="http://geronimo.apache.org/" title="Java2, Enterprise Edition (J2EE) container">Geronimo</a></li>
<li><a href="http://gora.apache.org/" title="ORM framework for column stores such as Apache HBase and Apache Cassandra with a specific focus on Hadoop">Gora</a></li>
<li><a href="http://gump.apache.org/" title="Continuous integration of open source projects">Gump</a></li>
<li><a href="http://hadoop.apache.org/" title="Distributed computing platform">Hadoop</a></li>
<li><a href="http://hbase.apache.org/" title="Hadoop Database">HBase</a></li>
<li><a href="http://hive.apache.org/" title="Data warehouse infrastructure using the Hadoop Database">Hive</a></li>
<li><a href="http://hc.apache.org/" title="Java toolset of low level HTTP components">HttpComponents</a></li>
<li><a href="http://jackrabbit.apache.org/" title="Content Repository for Java">Jackrabbit</a></li>
<li><a href="http://james.apache.org/" title="Java Apache Mail Enterprise Server">James</a></li>
<li><a href="http://jmeter.apache.org/" title="Java performance and functional testing">JMeter</a></li>
<li><a href="http://juddi.apache.org/" title="Java implementation of the Universal Description, Discovery, and Integration specification">jUDDI</a></li>
<li><a href="http://karaf.apache.org/" title="Server-side OSGi distribution">Karaf</a></li>
<li><a href="http://lenya.apache.org/" title="Content Management System">Lenya</a></li>
<li><a href="http://libcloud.apache.org/" title="Unified interface to the cloud">Libcloud</a></li>
<li><a href="http://logging.apache.org/" title="Cross-language logging services">Logging</a></li>
<li><a href="http://lucene.apache.org/" title="Search engine library">Lucene</a></li>
<li><a href="http://lucy.apache.org/" title="Search engine library for dynamic languages">Lucy</a></li>
<li><a href="http://mahout.apache.org/" title="Scalable machine learning library">Mahout</a></li>

```

```

<li><a href="http://maven.apache.org/" title="Java project management and comprehension tools">Maven</a></li>
<li><a href="http://mina.apache.org/" title="Multipurpose Infrastructure for Network Application">MINA</a></li>
<li><a href="http://myfaces.apache.org/" title="JavaServer(tm) Faces implementation and components">MyFaces</a></li>
<li><a href="http://nutch.apache.org/" title="Open Source Web Search Software">Nutch</a></li>
<li><a href="http://ode.apache.org/" title="Orchestration Director Engine: Business Process Management (BPM), Process Orchestration and Workflow through service composition.">ODE</a></li>
<li><a href="http://oodt.apache.org/" title="Object Oriented Data Technology (middleware metadata)">OODT</a></li>
<li><a href="http://ofbiz.apache.org/" title="Open for Business: enterprise automation software">OFBiz</a></li>
<li><a href="http://openejb.apache.org/" title="OpenEJB: a modular, configurable, and extendable EJB Container System and Server">OpenEJB</a></li>
<li><a href="http://openjpa.apache.org/" title="OpenJPA: Object Relational Mapping for Java">OpenJPA</a></li>
<li><a href="http://opennlp.apache.org/" title="Machine learning based toolkit for the processing of natural language text">OpenNLP</a></li>
<li><a href="http://openwebbeans.apache.org/" title="OpenWebBeans: JSR-299 Context and Dependency Injection for Java EE Platform Implementation">OpenWebBeans</a></li>
<li><a href="http://pdfbox.apache.org/" title="Java library for working with PDF documents">PDFBox</a></li>
<li><a href="http://perl.apache.org/" title="Dynamic websites using Perl">Perl</a></li>
<li><a href="http://pig.apache.org/" title="Platform for analyzing large data sets">Pig</a></li>
<li><a href="http://pivot.apache.org/" title="Rich Internet applications in Java">Pivot</a></li>
<li><a href="http://poi.apache.org/" title="Java API for OLE 2 Compound and OOXML Documents">POI</a></li>
<li><a href="http://portals.apache.org/" title="Portal technology">Portals</a></li>
<li><a href="http://qpid.apache.org/" title="Multiple language implementation of the latest Advanced Message Queuing Protocol (AMQP)">Qpid</a></li>
<li><a href="http://rave.apache.org/" title="Web and social mashup engine">Rave</a></li>
<li><a href="http://river.apache.org/" title="Jini service oriented architecture">River</a></li>
<li><a href="http://roller.apache.org/" title="Java blog server">Roller</a></li>
<li><a href="http://santuario.apache.org/" title="XML Security in Java and C++">Santuario</a></li>
<li><a href="http://servicemix.apache.org/" title="Enterprise Service Bus">ServiceMix</a></li>
<li><a href="http://shindig.apache.org/" title="Opensocial Reference Implementation">Shindig</a></li>
<li><a href="http://shiro.apache.org/" title="Powerful and easy-to-use application security framework">Shiro</a></li>
<li><a href="http://sling.apache.org/" title="Web Framework for JCR Content Repositories">Sling</a></li>
<li><a href="http://spamassassin.apache.org/" title="Mail filter to identify spam">SpamAssassin</a></li>
<li><a href="http://stdcxx.apache.org/" title="Apache C++ Standard Library">STDCXX</a></li>
<li><a href="http://sqoop.apache.org/" title="Bulk Data Transfer for Hadoop and Structured Datastores">Sqoop</a></li>
<li><a href="http://struts.apache.org/" title="Model 2 framework for building Java web applications">Struts</a></li>
<li><a href="http://subversion.apache.org/" title="Version Control">Subversion</a></li>
<li><a href="http://synapse.apache.org/" title="Enterprise Service Bus and Mediation Framework">Synapse</a></li>
<li><a href="http://tapestry.apache.org/" title="Component-based Java Web Application Framework">Tapestry</a></li>
<li><a href="http://tcl.apache.org/" title="Dynamic websites using TCL">Tcl</a></li>
<li><a href="http://thrift.apache.org/" title="Framework for scalable cross-language services development">Thrift</a></li>
<li><a href="http://tika.apache.org/" title="Content Analysis and Detection Toolkit">Tika</a></li>
<li><a href="http://tiles.apache.org/" title="A templating framework for web application user interfaces">Tiles</a></li>
<li><a href="http://tomcat.apache.org/" title="A Java Servlet and JSP Container">Tomcat</a></li>
<li><a href="http://trafficserver.apache.org/" title="A fast, scalable and extensible HTTP/1.1 compliant caching proxy server">Traffic Server</a></li>
<li><a href="http://turbine.apache.org/" title="A Java Servlet Web Application Framework and associated component library">Turbine</a></li>
<li><a href="http://tuscany.apache.org/" title="An SCA based Service Composition Framework">Tuscany</a></li>
<li><a href="http://uima.apache.org/" title="Framework and annotators for unstructured information analysis">UIMA</a></li>
<li><a href="http://velocity.apache.org/" title="A Java Templating Engine">Velocity</a></li>
<li><a href="http://ws.apache.org/" title="Web Services">Web Services</a></li>
<li><a href="http://whirr.apache.org/" title="Libraries for running Cloud Services">Whirr</a></li>
<li><a href="http://wicket.apache.org/" title="Component-based Java Web Application Framework.">Wicket</a></li>
<li><a href="http://xalan.apache.org/" title="XSLT processors in Java and C++">Xalan</a></li>
<li><a href="http://xerces.apache.org/" title="XML parsers in Java, C++ and Perl">Xerces</a></li>
<li><a href="http://xml.apache.org/" title="XML solutions focused on the web">XML</a></li>
<li><a href="http://xmlbeans.apache.org/" title="XML-Java binding tool">XMLBeans</a></li>

```

```

<li><a href="http://xmlgraphics.apache.org/" title="Conversion from XML to graphical output">XML
    Graphics</a></li>
<li><a href="http://zookeeper.apache.org/" title="Centralized service for maintaining
    configuration information">ZooKeeper</a></li>
</ul>
</div>
<div class="grid_3">
    <h4>Foundation</h4>
    <ul>
        <li><a href="/foundation/faq.html">FAQ</a></li>
        <li><a href="/licenses/" title="Overview of the Apache License">Licenses</a></li>
        <li><a href="/foundation/marks/" title="Apache marks policies and
listing">Trademarks</a></li>
        <li><a href="/foundation/news.html" title="Official news feed of Foundation
announcements">News</a></li>
        <li><a href="/press/" title="Press, Media, and Analyst contact">Press
Inquiries</a></li>
        <li><a href="/foundation/records/" title="Formal corporate records and board meeting
minutes">Public Records</a></li>
        <li><a href="/foundation/mailinlists.html" title="Mailing lists and Apache">Mailing
Lists</a></li>
        <li><a href="/foundation/sponsorship.html" title="Sponsor the
Foundation">Sponsorship</a></li>
        <li><a href="/foundation/contributing.html" title="Donate to the
Foundation">Contributing</a></li>
        <li><a href="/foundation/buy_stuff.html" title="Buy Apache branded merchandise">Buy
Stuff</a></li>
        <li><a href="/foundation/thanks.html" title="Thank you to our Sponsors">Thanks</a></li>
        <li><a href="/foundation/contact.html" title="Contact Us">Contact</a></li>
    </ul>
</div>
<div class="grid_3 suffix_1">
    <h4>Foundation Projects</h4>
    <ul>
        <li><a href="http://attic.apache.org/" title="Inactive projects
repository">Attic</a></li>
        <li><a href="/foundation/conferences.html" title="Meetings of developers and
users">Conferences</a></li>
        <li><a href="http://community.apache.org/" title="Helping newcomers to the
ASF">Community Development</a></li>
        <li><a href="http://incubator.apache.org/" title="Shepherd for new
projects">Incubator</a></li>
        <li><a href="/dev/" title="ASF Infrastructure: Operations and howto documents for PMCs
and contributors">Infrastructure</a></li>
        <li><a href="http://labs.apache.org/" title="The Innovation Laboratories of the Apache
Software Foundation">Labs</a></li>
        <li><a href="/legal/" title="Legal Affairs">Legal Affairs</a></li>
        <li><a href="/press/" title="Public Relations">Public Relations</a></li>
        <li><a href="/security/" title="Security">Security</a></li>
        <li><a href="/travel/" title="Travel Assistance">Travel Assistance</a></li>
    </ul>
</div>

<div class="grid_3">
    <h4>Community</h4>
    <ul>
        <li><a href="http://people.apache.org/" title="Apache committer
homepages">People</a></li>
        <li><a href="/memorials/" title="In memoriam of past committers">Memorials</a></li>
        <li><a href="http://feathercast.org/" title="Apache Podcasts">Feathercast</a></li>
        <li><a href="http://blogs.apache.org/" title="Apache Project Blogs">Project
Blogs</a></li>
        <li><a href="http://planet.apache.org/committers/" title="Apache Committers'
Blogs">PlanetApache</a></li>
    </ul>
</div>
<div class="grid_3">
    <h4>How It Works</h4>
    <ul>
        <li><a href="/foundation/how-it-works.html">Introduction</a></li>
        <li><a href="/foundation/how-it-works.html#meritocracy">Meritocracy</a></li>
        <li><a href="/foundation/how-it-works.html#structure">Structure</a></li>
        <li><a href="/foundation/how-it-works.html#roles">Roles</a></li>
        <li><a href="/foundation/how-it-works.html#management">Collaboration</a></li>
        <li><a href="/foundation/how-it-works.html#incubator">Incubator</a></li>
        <li><a href="/foundation/how-it-works.html#other">Other entities</a></li>
        <li><a href="/foundation/glossary.html">Glossary</a></li>
        <li><a href="/foundation/voting.html">Voting</a></li>
    </ul>
</div>

```

```

        </ul>
    </div>
</div>
<div class="clear"></div>

</div>
<div id="copyright" class="container_16">
    <p>Copyright © 2012 The Apache Software Foundation, Licensed under the <a href="http://www.apache.org/licenses/LICENSE-2.0">Apache License, Version 2.0</a>. <br/> Apache and the Apache feath...
    </div>
</body>
</html>

```

Apache Software License version 2.0

Apache License
Version 2.0, January 2004
<http://www.apache.org/licenses/>

TERMS AND CONDITIONS FOR USE, REPRODUCTION, AND DISTRIBUTION

1. Definitions.

"License" shall mean the terms and conditions for use, reproduction, and distribution as defined by Sections 1 through 9 of this document.

"Licensor" shall mean the copyright owner or entity authorized by the copyright owner that is granting the License.

"Legal Entity" shall mean the union of the acting entity and all other entities that control, are controlled by, or are under common control with that entity. For the purposes of this definition, "control" means (i) the power, direct or indirect, to cause the direction or management of such entity, whether by contract or otherwise, or (ii) ownership of fifty percent (50%) or more of the outstanding shares, or (iii) beneficial ownership of such entity.

"You" (or "Your") shall mean an individual or Legal Entity exercising permissions granted by this License.

"Source" form shall mean the preferred form for making modifications, including but not limited to software source code, documentation source, and configuration files.

"Object" form shall mean any form resulting from mechanical transformation or translation of a Source form, including but not limited to compiled object code, generated documentation, and conversions to other media types.

"Work" shall mean the work of authorship, whether in Source or Object form, made available under the License, as indicated by a copyright notice that is included in or attached to the work (an example is provided in the Appendix below).

"Derivative Works" shall mean any work, whether in Source or Object form, that is based on (or derived from) the Work and for which the editorial revisions, annotations, elaborations, or other modifications represent, as a whole, an original work of authorship. For the purposes of this License, Derivative Works shall not include works that remain separable from, or merely link (or bind by name) to the interfaces of, the Work and Derivative Works thereof.

"Contribution" shall mean any work of authorship, including the original version of the Work and any modifications or additions to that Work or Derivative Works thereof, that is intentionally submitted to Licensor for inclusion in the Work by the copyright owner or by an individual or Legal Entity authorized to submit on behalf of the copyright owner. For the purposes of this definition, "submitted" means any form of electronic, verbal, or written communication sent to the Licensor or its representatives, including but not limited to communication on electronic mailing lists, source code control systems, and issue tracking systems that are managed by, or on behalf of, the Licensor for the purpose of discussing and improving the Work, but excluding communication that is conspicuously marked or otherwise designated in writing by the copyright owner as "Not a Contribution."

"Contributor" shall mean Licensor and any individual or Legal Entity on behalf of whom a Contribution has been received by Licensor and subsequently incorporated within the Work.

2. Grant of Copyright License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable copyright license to reproduce, prepare Derivative Works of, publicly display, publicly perform, sublicense, and distribute the Work and such Derivative Works in Source or Object form.
3. Grant of Patent License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable (except as stated in this section) patent license to make, have made, use, offer to sell, sell, import, and otherwise transfer the Work, where such license applies only to those patent claims licensable by such Contributor that are necessarily infringed by their Contribution(s) alone or by combination of their Contribution(s) with the Work to which such Contribution(s) was submitted. If You institute patent litigation against any entity (including a cross-claim or counterclaim in a lawsuit) alleging that the Work or a Contribution incorporated within the Work constitutes direct or contributory patent infringement, then any patent licenses granted to You under this License for that Work shall terminate as of the date such litigation is filed.
4. Redistribution. You may reproduce and distribute copies of the Work or Derivative Works thereof in any medium, with or without modifications, and in Source or Object form, provided that You meet the following conditions:
 - (a) You must give any other recipients of the Work or Derivative Works a copy of this License; and
 - (b) You must cause any modified files to carry prominent notices stating that You changed the files; and
 - (c) You must retain, in the Source form of any Derivative Works that You distribute, all copyright, patent, trademark, and attribution notices from the Source form of the Work, excluding those notices that do not pertain to any part of the Derivative Works; and
 - (d) If the Work includes a "NOTICE" text file as part of its distribution, then any Derivative Works that You distribute must include a readable copy of the attribution notices contained within such NOTICE file, excluding those notices that do not pertain to any part of the Derivative Works, in at least one of the following places: within a NOTICE text file distributed as part of the Derivative Works; within the Source form or documentation, if provided along with the Derivative Works; or, within a display generated by the Derivative Works, if and wherever such third-party notices normally appear. The contents of the NOTICE file are for informational purposes only and do not modify the License. You may add Your own attribution notices within Derivative Works that You distribute, alongside or as an addendum to the NOTICE text from the Work, provided that such additional attribution notices cannot be construed as modifying the License.
- You may add Your own copyright statement to Your modifications and may provide additional or different license terms and conditions for use, reproduction, or distribution of Your modifications, or for any such Derivative Works as a whole, provided Your use, reproduction, and distribution of the Work otherwise complies with the conditions stated in this License.
5. Submission of Contributions. Unless You explicitly state otherwise, any Contribution intentionally submitted for inclusion in the Work by You to the Licensor shall be under the terms and conditions of this License, without any additional terms or conditions. Notwithstanding the above, nothing herein shall supersede or modify the terms of any separate license agreement you may have executed with Licensor regarding such Contributions.
6. Trademarks. This License does not grant permission to use the trade names, trademarks, service marks, or product names of the Licensor,

except as required for reasonable and customary use in describing the origin of the Work and reproducing the content of the NOTICE file.

7. Disclaimer of Warranty. Unless required by applicable law or agreed to in writing, Licensor provides the Work (and each Contributor provides its Contributions) on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied, including, without limitation, any warranties or conditions of TITLE, NON-INFRINGEMENT, MERCHANTABILITY, or FITNESS FOR A PARTICULAR PURPOSE. You are solely responsible for determining the appropriateness of using or redistributing the Work and assume any risks associated with Your exercise of permissions under this License.
8. Limitation of Liability. In no event and under no legal theory, whether in tort (including negligence), contract, or otherwise, unless required by applicable law (such as deliberate and grossly negligent acts) or agreed to in writing, shall any Contributor be liable to You for damages, including any direct, indirect, special, incidental, or consequential damages of any character arising as a result of this License or out of the use or inability to use the Work (including but not limited to damages for loss of goodwill, work stoppage, computer failure or malfunction, or any and all other commercial damages or losses), even if such Contributor has been advised of the possibility of such damages.
9. Accepting Warranty or Additional Liability. While redistributing the Work or Derivative Works thereof, You may choose to offer, and charge a fee for, acceptance of support, warranty, indemnity, or other liability obligations and/or rights consistent with this License. However, in accepting such obligations, You may act only on Your own behalf and on Your sole responsibility, not on behalf of any other Contributor, and only if You agree to indemnify, defend, and hold each Contributor harmless for any liability incurred by, or claims asserted against, such Contributor by reason of your accepting any such warranty or additional liability.

END OF TERMS AND CONDITIONS

APPENDIX: How to apply the Apache License to your work.

To apply the Apache License to your work, attach the following boilerplate notice, with the fields enclosed by brackets "[]" replaced with your own identifying information. (Don't include the brackets!) The text should be enclosed in the appropriate comment syntax for the file format. We also recommend that a file or class name and description of purpose be included on the same "printed page" as the copyright notice for easier identification within third-party archives.

Copyright [yyyy] [name of copyright owner]

Licensed under the Apache License, Version 2.0 (the "License"); you may not use this file except in compliance with the License. You may obtain a copy of the License at

<http://www.apache.org/licenses/LICENSE-2.0>

Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

Apache version 2.0

The Apache Software Foundation
Apache License, Version 2.0

Home -->
Foundation
Projects
People
Get Involved
Download

<http://www.apache.org/licenses/> TERMS AND CONDITIONS FOR USE, REPRODUCTION, AND DISTRIBUTION

1. Definitions. "License" shall mean the terms and conditions for use, reproduction, and distribution as defined by Sections 1 through 9 of this document. "Licensor" shall mean the copyright owner or entity authorized by the copyright owner that is granting the License. "Legal Entity" shall mean the union of the acting entity and all other entities that control, are controlled by, or are under common control with that entity. For the purposes of this definition, "control" means (i) the power, direct or indirect, to cause the direction or management of such entity, whether by contract or otherwise, or (ii) ownership of fifty percent (50%) or more of the outstanding shares, or (iii) beneficial ownership of such entity. "You" (or "Your") shall mean an individual or Legal Entity exercising permissions granted by this License. "Source" form shall mean the preferred form for making modifications, including but not limited to software source code, documentation source, and configuration files. "Object" form shall mean any form resulting from mechanical transformation or translation of a Source form, including but not limited to compiled object code, generated documentation, and conversions to other media types. "Work" shall mean the work of authorship, whether in Source or Object form, made available under the License, as indicated by a copyright notice that is included in or attached to the work (an example is provided in the Appendix below). "Derivative Works" shall mean any work, whether in Source or Object form, that is based on (or derived from) the Work and for which the editorial revisions, annotations, elaborations, or other modifications represent, as a whole, an original work of authorship. For the purposes of this License, Derivative Works shall not include works that remain separable from, or merely link (or bind by name) to the interfaces of, the Work and Derivative Works thereof. "Contribution" shall mean any work of authorship, including the original version of the Work and any modifications or additions to that Work or Derivative Works thereof, that is intentionally submitted to Licensor for inclusion in the Work by the copyright owner or by an individual or Legal Entity authorized to submit on behalf of the copyright owner. For the purposes of this definition, "submitted" means any form of electronic, verbal, or written communication sent to the Licensor or its representatives, including but not limited to communication on electronic mailing lists, source code control systems, and issue tracking systems that are managed by, or on behalf of, the Licensor for the purpose of discussing and improving the Work, but excluding communication that is conspicuously marked or otherwise designated in writing by the copyright owner as "Not a Contribution." "Contributor" shall mean Licensor and any individual or Legal Entity on behalf of whom a Contribution has been received by Licensor and subsequently incorporated within the Work.
2. Grant of Copyright License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable copyright license to reproduce, prepare Derivative Works of, publicly display, publicly perform, sublicense, and distribute the Work and such Derivative Works in Source or Object form.
3. Grant of Patent License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable (except as stated in this section) patent license to make, have made, use, offer to sell, sell, import, and otherwise transfer the Work, where such license applies only to those patent claims licensable by such Contributor that are necessarily infringed by their Contribution(s) alone or by combination of their Contribution(s) with the Work to which such Contribution(s) was submitted. If You institute patent litigation against any entity (including a cross-claim or counterclaim in a lawsuit) alleging that the Work or a Contribution incorporated within the Work constitutes direct or contributory patent infringement, then any patent licenses granted to You under this License for that Work shall

terminate as of the date such litigation is filed.

4. Redistribution. You may reproduce and distribute copies of the Work or Derivative Works thereof in any medium, with or without modifications, and in Source or Object form, provided that You meet the following conditions:

You must give any other recipients of the Work or Derivative Works a copy of this License; and

You must cause any modified files to carry prominent notices stating that You changed the files; and

You must retain, in the Source form of any Derivative Works that You distribute, all copyright, patent, trademark, and attribution notices from the Source form of the Work, excluding those notices that do not pertain to any part of the Derivative Works; and

If the Work includes a "NOTICE" text file as part of its distribution, then any Derivative Works that You distribute must include a readable copy of the attribution notices contained within such NOTICE file, excluding those notices that do not pertain to any part of the Derivative Works, in at least one of the following places: within a NOTICE text file distributed as part of the Derivative Works; within the Source form or documentation, if provided along with the Derivative Works; or, within a display generated by the Derivative Works, if and wherever such third-party notices normally appear. The contents of the NOTICE file are for informational purposes only and do not modify the License. You may add Your own attribution notices within Derivative Works that You distribute, alongside or as an addendum to the NOTICE text from the Work, provided that such additional attribution notices cannot be construed as modifying the License. You may add Your own copyright statement to Your modifications and may provide additional or different license terms and conditions for use, reproduction, or distribution of Your modifications, or for any such Derivative Works as a whole, provided Your use, reproduction, and distribution of the Work otherwise complies with the conditions stated in this License.

1. Submission of Contributions. Unless You explicitly state otherwise, any Contribution intentionally submitted for inclusion in the Work by You to the Licensor shall be under the terms and conditions of this License, without any additional terms or conditions. Notwithstanding the above, nothing herein shall supersede or modify the terms of any separate license agreement you may have executed with Licensor regarding such Contributions.
2. Trademarks. This License does not grant permission to use the trade names, trademarks, service marks, or product names of the Licensor, except as required for reasonable and customary use in describing the origin of the Work and reproducing the content of the NOTICE file.
3. Disclaimer of Warranty. Unless required by applicable law or agreed to in writing, Licensor provides the Work (and each Contributor provides its Contributions) on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied, including, without limitation, any warranties or conditions of TITLE, NON-INFRINGEMENT, MERCHANTABILITY, or FITNESS FOR A PARTICULAR PURPOSE. You are solely responsible for determining the appropriateness of using or redistributing the Work and assume any risks associated with Your exercise of permissions under this License.
4. Limitation of Liability. In no event and under no legal theory, whether in tort (including negligence), contract, or otherwise, unless required by applicable law (such as deliberate and grossly negligent acts) or agreed to in writing, shall any Contributor be liable to You for damages, including any direct, indirect, special, incidental, or consequential damages of any character arising as a result of this License or out of the use or inability to use the Work (including but not limited to damages for loss of goodwill, work stoppage, computer failure or malfunction, or any and all other commercial damages or losses), even if such Contributor has been advised of the possibility of such damages.
5. Accepting Warranty or Additional Liability. While redistributing the Work or Derivative Works thereof, You may choose to offer, and charge a fee for, acceptance of support, warranty, indemnity, or other liability obligations and/or rights consistent with this License. However, in accepting such obligations, You may act only on Your own behalf and on Your sole responsibility, not on behalf of any other Contributor, and only if You agree to indemnify, defend, and hold each Contributor harmless for any liability incurred by, or claims asserted against, such Contributor by reason of your accepting any such warranty or additional liability. END OF TERMS AND CONDITIONS
APPENDIX: How to apply the Apache License to your work To apply the Apache License to your

work, attach the following boilerplate notice, with the fields enclosed by brackets "" replaced with your own identifying information. (Don't include the brackets!) The text should be enclosed in the appropriate comment syntax for the file format. We also recommend that a file or class name and description of purpose be included on the same "printed page" as the copyright notice for easier identification within third-party archives. Copyright yyyy name of copyright owner Licensed under the Apache License, Version 2.0 (the "License"); you may not use this file except in compliance with the License. You may obtain a copy of the License at
<http://www.apache.org/licenses/LICENSE-2.0> Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License. Projects

HTTP Server Abdera Accumulo ACE ActiveMQ Airavata Ant APR Archiva Aries Avro Axis Buildr BVal Camel Cassandra Cayenne Chemistry Click Cocoon Commons Continuum CouchDB Creadur CXF DB Deltacloud Directory Empire-db ESME Etch Felix Flex Flume Forrest Geronimo Gora Gump Hadoop Hama HBase Hive HttpComponents Jackrabbit James Jena JMeter jUDDI Karaf Lenya Libcloud Logging Lucene Lucy Mahout ManifoldCF Maven MINA MRUnit MyFaces Nutch ODE OFBiz Oltu OODT Oozie OpenJPA OpenMeetings OpenNLP OpenOffice OpenWebBeans PDFBox Perl Pig Pivot POI Portals Qpid Rave River Roller Santuario ServiceMix Shindig Shiro Sling SpamAssassin STDCXX Sqoop Struts Subversion Synapse Syncope Tapestry Tcl Thrift Tika Tiles Tomcat TomEE Traffic Server Turbine Tuscany UIMA Velocity Web Services Whirr Wicket Xalan Xerces XMLBeans XML Graphics ZooKeeper

Foundation

- [FAQ](#)
- [Licenses](#)
- [Trademarks](#)
- [News](#)
- [Press Inquiries](#)
- [Public Records](#)
- [Mailing Lists](#)
- [Sponsorship](#)
- [Donations](#)
- [Buy Stuff](#)
- [Thanks](#)
- [Contact](#)

Foundation Projects

- [Attic](#)
- [Conferences](#)
- [Community Development](#)
- [Incubator](#)
- [Infrastructure](#)
- [Labs](#)
- [Legal Affairs](#)
- [Public Relations](#)
- [Security](#)
- [Travel Assistance](#)

Community

- [People](#)
- [Memorials](#)
- [Feathercast](#)
- [Project Blogs](#)
- [PlanetApache](#)

How It Works

- [Introduction](#)
- [Meritocracy](#)

[Structure](#)
[Roles](#)
[Collaboration](#)
[Incubator](#)
[Other entities](#)
[Glossary](#)
[Voting](#)

Copyright © 2012 The Apache Software Foundation, Licensed under the Apache License,
Version 2.0. Apache and the Apache feather logo are trademarks of The Apache Software Foundation.

GNU Affero General Public License version 3.0
