

$\tilde{F}$ **Input tile**

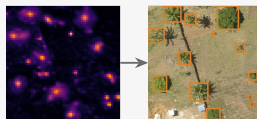
RGB, 0.1 m/px

1) Interlaced encoding ❄️

16 px patches
offset by 8 px

interlaced
stride 8 px

DINOv3 ViT-L/16, 4 passes
 $\tilde{F} \in \mathbb{R}^{1024 \times 256 \times 256}$


2) Detection 🔥

centre heatmap


boxes

CenterNet-style head


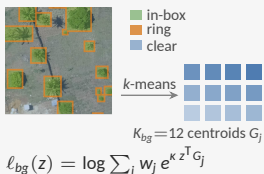
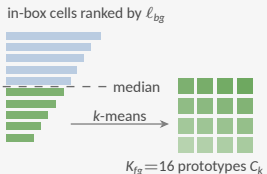
trained on boxes

3) Box $\rightarrow$ Mask 🔥 p_{fg} per cell

fitted from boxes

Output




low high

masks ranked by s' **3) Box $\rightarrow$ Mask module****Fit once on training boxes****1) Whiten****2) Background mixture****3) Initialise foreground****4) Expectation-Maximisation** 🔁 $\times 30$ **E-step** per box

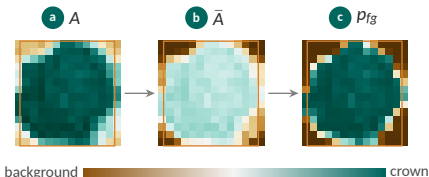
- a** $A = \log \sum_k \hat{p}_k e^{kappa z^T C_k} - l_{bg}$
- b** $\bar{A} = A - \text{mean}_{\text{box}} A$
- c** $p_{fg} = \sigma(\bar{A} + \alpha \logit \sum_k p_k)$

M-step all boxes

- $C_k \leftarrow \text{norm}(P_k - \beta \bar{N}_k)$
- $\rho_k(\text{bin}) \leftarrow \text{mean}_{\text{bin}} r_{nk}$
- Prune starved C_k

**Fitted masker** $\{\mu, W, \lambda, G, w, C, \rho\}$ learned $\sum_k \rho_k$ in a box**Inference per predicted box**

predicted box
 $s = 0.49$
single E-step

**Rescore**

$$\begin{aligned} \bar{p} &= \text{mean } p_{fg} \\ m &= \text{mean} |2p_{fg} - 1| \\ s' &= s \bar{p} m \\ &= 0.49 \times 0.65 \times 0.81 = 0.26 \end{aligned}$$

 $p_{fg} \geq \tau$