CONFIDENTIAL

GK & A
Logistics Services LTD

GK & A LOGISTICS SERVICES LTD

EMERGENCY RESPONSE PLAN

Import/Export Terminal, Warehouse, and Reefer Containers

Document No.: ERP-IE-002 | Version: 1.5

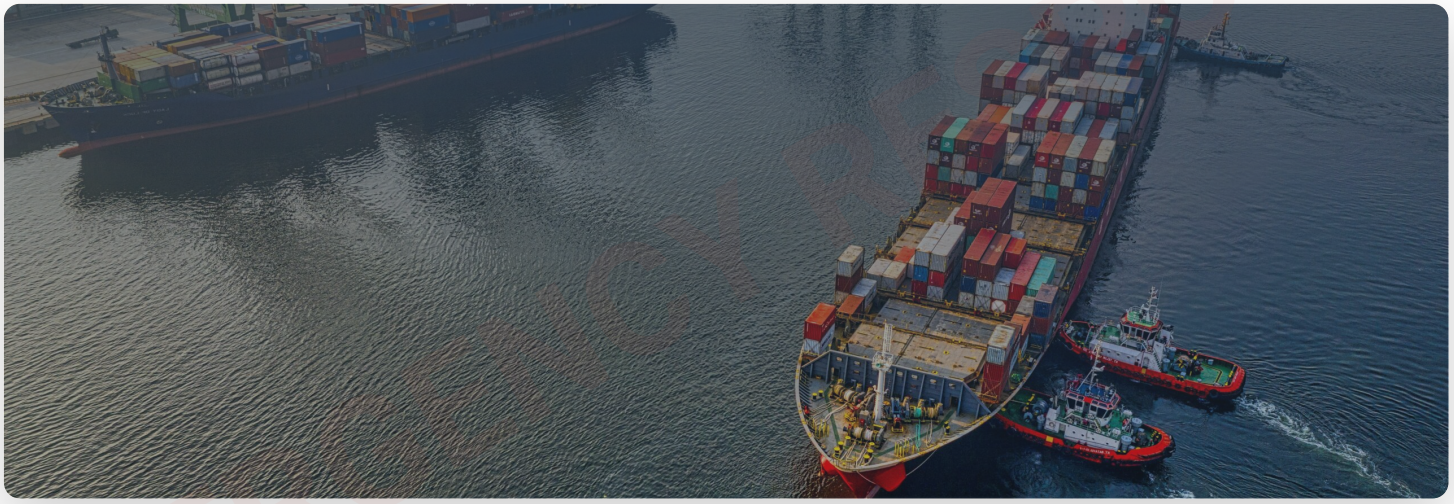

Facility: GK & A Terminal, NPA Lighter Terminal (Ikorodu)
NPA Lighter Terminal Complex, Ipakodo Road, Ipakodo
Ikorodu, Lagos State, 104101, Nigeria

EFFECTIVE DATE
November 1, 2025

REVIEW DATE
October 26, 2026

EMERGENCY CONTACT
Lagos State: Dial 112 or 727

Plan Owner: HSE Manager | Authority: Managing Director
Approval - Distribution: Internal (All Departments), NPA Liaison, Critical Contractors on NDA

© 2025 GK & A Logistics Services Ltd. All rights reserved.

Emergency Response Plan

Executive Statement

Safety, environmental protection, and legal compliance take precedence over production. This Plan is compulsory. Any deviation without prior written approval from the NPA Safety Director and the GK & A Managing Director is a breach subject to disciplinary action, removal from site, and contract termination for cause.

Introduction

This Plan is a jointly endorsed, auditable operational control developed under Nigerian Ports Authority (NPA) oversight. Procedures, notification chains, and role interfaces have been reviewed with NPA and are mandatory for all personnel and contractors on GK & A-controlled areas of the NPA Lighter Terminal, Ikorodu.

AspectDescriptionEnforcementRoles and accountabilities are assigned in writing. Compliance is continuously monitored. Violations are escalated through disciplinary protocols and may trigger regulatory reporting to NPA and relevant authorities.Joint ExecutionGK & A and NPA Safety Officers shall co-lead emergency activations, joint drills, audits, debriefs, and corrective actions. NPA retains authority to intervene and direct operations where necessary to protect life, environment, and port security.

1. Purpose

This Plan establishes an integrated, zero-harm emergency management framework to:

ObjectiveDescriptionProtectionProtect people, property, cargo integrity, and the environmentPreventionPrevent escalation and minimize business interruptionComplianceAchieve and evidence compliance with NPA directives; ISPS Code; IMDG Code; ISO 45001 and ISO 14001 principles; ILO/IMO Code of Practice for Safety and Health in Ports; Lagos State and Federal environmental obligationsStandardsApply the most stringent requirement when standards overlap

Measurable Objectives

MetricTargetFatalitiesZeroSerious InjuriesZero (life-altering)Notification TimeInitiated within 5 minutes of emergency declarationHeadcount ReconciliationFull headcount within 10 minutes of

evacuation orderDrill Participation≥ 90% of on-duty personnelCorrective Action Closure≤ 30 daysSpill ContainmentNo uncontrolled discharge to water; all spills contained within site boundary

---

2. Scope

This plan applies 24/7 to GK & A-controlled operations within the NPA Lighter Terminal, Ikorodu.

AreaDescriptionPrimary OperationsQuay, jetties, cargo yards, and operational zones under NPA regulationStorageWarehouses and open storage areasRefrigerationReefer container stacks, plug-in racks, and associated power/refrigeration systems

Interfaces and Inclusions

GroupCoveragePersonnelAll employees, contractors, subcontractors, visitors, clients, and third-party carriersThird PartiesTenants or third parties while in GK & A-controlled zonesRegulatory OversightNPA Safety Officers participate in activations, drills, debriefs, and reviews

Exclusions

CategoryDetailsNon-GK & A PremisesExcludes non-GK & A premises beyond defined interface pointsMutual AidGK & A shall support NPA-directed mutual aid and information sharing as requested

---

3. Definitions

TermDefinitionEmergencyUnplanned event that threatens life, environment, assets, cargo integrity, or operational continuityIncident Commander (IC)On-scene authority responsible for declaring emergencies, managing incident response, and approving re-entry to affected areasDeputy ICAuthorized backup command capability when the primary IC is unavailable or needs assistanceEmergency Response Team (ERT)Trained specialists organized into functional groups including Fire, HAZMAT/Spill, Medical, Refrigerant/Technical, and Security respondersPublic Information Officer (PIO)Sole authorized spokesperson for all external communications, ensuring consistent and controlled messagingMuster PointDesignated safe assembly locations where personnel gather for headcount verification following evacuation ordersExclusion ZoneControlled perimeter that restricts access to only trained and authorized personnel during incident responseALARPAs Low As Reasonably Practicable; risk threshold for conducting operations and rescue activitiesRefrigerantSubstances used in refrigerated containers, including A1 classifications such as R-134a, R-404A, and R-452A, as well as any A2L mildly flammable refrigerantsShelter-in-placeControlled indoor protection measures during external airborne threats or security incidentsCommand Post (CP)Primary and secondary locations where the IC and key staff coordinate incident response activitiesStaging AreaControlled locations where emergency resources and response teams assemble before being assigned to specific tasks

4. Regulatory and Standards Alignment

This Plan aligns with and references:

Regulation/StandardDescriptionNPA Safety DirectivesSafety directives, permits, and port facility requirementsISPS CodePort Facility Security Plan (PFSP) interfacesIMDG CodeSDS obligations; dangerous goods segregationEnvironmental LawsLagos State and Federal environmental laws; LASEPA/NESREA notificationsILO/IMO CodeCode of Practice for Safety and Health in PortsLASEMA/NEMAIncident coordination guidanceLSSCLagos State Safety Commission guidanceLASWA/NIWACoordination for waterway/marine incidentsGood PracticeNFPA firefighting guidance; EN 378 for refrigerating systems and machinery rooms (where applicable)Data ProtectionNigeria Data Protection Act (NDPA) for incident/CCTV data handling

Where requirements differ, the stricter requirement applies.

5. Risk Profile and Major Accident Hazards (MAH)

Top Credible Scenarios

ScenarioDescriptionFireWarehouse or reefer-stack fire; electrical cabinet fires; fuel firesHazardous SpillsFuels, oils, chemicals, battery acidRefrigerant ReleasesA1 asphyxiants; A2L mildly flammableMedical EmergenciesSerious injury/medical emergencies; heat illnessSecurity EventsIntrusion, theft, bomb/suspicious package, civil disturbanceSevere WeatherLightning, high winds, flooding, storm surgeWater IncidentsPerson overboard at quayEquipment FailuresCrane/rigging failure; dropped container; stack collapse; plant rolloverConfined SpaceExposure/rescue (sumps, voids, reefer machinery spaces)Cyber IncidentsImpacting safety systems, reefer monitoring, access controlUtility LossBlack start; emergency power changeover

Seasonal Considerations

SeasonRiskMitigationRainy SeasonFlooding riskPre-season stormwater inspectionsHot SeasonHeatwavesWork/rest cycles and hydration protocols

6. Governance, Command, and Responsibilities

6.1 Command and Control

ElementDescriptionICS StructureIC; Sections for Operations, Planning, Logistics, Finance/Admin; Safety Officer; PIO; NPA Liaison Officer. Scalable per incidentCommand PostsPrimary CP:

Terminal Control Room, Admin Block Level 1; Secondary CP: Security Gatehouse; Media Area: Visitor car parkStaging AreasYard staging bay north of Warehouse 1

6.2 Roles and Authorities

RoleResponsibilitiesManaging DirectorProvides resources; approves Plan revisions; chairs Joint Emergency Steering Committee; authorizes escalations and CAPEX for life-safetyNPA Safety DirectorCo-chairs governance; endorses revisions; ensures NPA alignmentIncident CommanderDeclares emergencies; sets priorities; approves re-entry; orders evacuations and search/rescue; authorizes hot work via permitDeputy ICEnsures continuity of command; assumes IC role if neededNPA Liaison OfficerCoordinates with NPA Port Control, Port Police, Marine units; ensures statutory notificationsERT LeadersTask, supervise, and account for teams; ensure PPE and gas monitoring; report status to ICWarehouse ControllerExecutes emergency shutdown; secures hazardous storage; supports accountabilityReefer Maintenance LeadManages reefer power isolation/restore; engages certified contractors; safeguards temperature-critical cargoSecurity SupervisorEstablishes perimeters; manages access control; preserves evidence; liaises with NPA Port PolicePIOControls public/media/customer messaging; issues holding statements; maintains rumor control; enforces social media policyAll Personnel/ContractorsRaise alarms; stop work; evacuate; follow IC/ERT instructions; participate in drills; support headcounts

6.3 Minimum Staffing and Duty Rosters

RequirementDetailsOn-shift ERTFire 3; HAZMAT 2; Medical 2; Security 2; Technical 1; IC/Deputy IC accessible within 10 minutesCompetency CurrencyAll on-duty ERT members shall be current on SCBA and gas monitoring within 12 months; first aiders with AED competency within 24 months

6.4 Business Continuity Linkage

AspectDescriptionBCP Tie-inReefer continuity, alternate cold storage, mutual aid for reefer power, client comms during prolonged outages

---

7. Activation, Notification, and Initial Actions

7.1 Triggers

TriggerDescriptionFire/ExplosionFire/explosion/smoke alarmChemical SpillChemical or fuel spillRefrigerant LeakRefrigerant alarm/odorMedical EmergencySerious injurySecurity IncidentSecurity incidentSevere WeatherSevere weather/flooding/lightningStructural ThreatStructural compromiseWater IncidentPerson overboardPower LossExtensive power loss affecting reefers

7.2 First Five Minutes (Mandatory)

ActionDescriptionRaise AlarmPull station or radio in clear text "EMERGENCY – Location – Type"Declare EmergencyIC or senior-most present declares emergency; stands up Command Post; assigns scribe; opens Incident Log with time-stampsDispatch ERTConfirm PPE (SCBA for unknown atmospheres)Notify AuthoritiesNotify NPA Port Control immediately; escalate to Fire/EMS/Police/LASEMA/LASWA/NIWA as needed per matrixSecure SiteLock down or open gates as appropriate to incident type to secure site or facilitate emergency ingress

7.3 First Ten Minutes

ActionDescriptionEvacuation/ShelterOrder evacuation or shelter-in-place as conditions dictateExclusion ZonesEstablish exclusion zones; deny entryHeadcountAchieve full headcount reconciliation at muster points within 10 minutes; identify missing persons; do not start rescue unless risk is ALARP and approved by ICSITREPIssue SITREP 1 to leadership and NPA

7.4 Alerting Systems

SystemDescriptionPrimarySite sirens/PA; UHF radios (Channels: 1 Ops, 2 ERT, 3 Command); SMS/app alertsBackupAir horns, runners

---

8. Emergency Response Procedures

General Priorities

PriorityDescription1. Protect LifeImmediate protection of personnel2. Isolate HazardsContain and control the incident3. Prevent EscalationStop the incident from worsening4. Protect EnvironmentPrevent environmental damage5. Preserve EvidenceMaintain evidence for investigation

8.1 Fire

AspectProcedurePPEFull structural gear and SCBA for interior/close approachElectrical FiresIsolate power first if safe; use CO2/DCP; avoid water on live componentsFlammable Liquid FiresApply foam; protect drains; deploy booms to capture runoff; avoid fluorinated foams unless no alternative; prefer fluorine-free foam (F3)Warehouse/Stack FiresEstablish 360° size-up; protect exposures; set collapse zones; use TIC to confirm knockdown; ventilate cautiously to prevent flashover; compartment doors stay closed until cooled and monitoredPost-fireFire watch 60 minutes minimum; water/runoff containment and sampling; document all actions and foam use

8.2 Hazardous Spills/HAZMAT

StepActionApproachApproach upwind/upstream; identify via SDS/IMDG; don chemical-resistant PPE; consider SCBA for unknown/toxic atmospheresControlStop the source; isolate ignition sources; ground/bond for flammables; deploy drain covers, booms, absorbents, temporary bunds; protect watercoursesCollectionOverpack drums, labeled containers; segregate waste; store in

designated HAZMAT area for licensed disposalNotificationsNPA Port Control; LASEPA/NESREA where thresholds met; record volumes and materialsDecontaminationEstablish gross decon for responders/casualties when required before EMS handover

8.3 Refrigerant Leaks (Reefer Stacks)

Hazards

HazardDescriptionA1Oxygen displacementA2LMild flammability; ignition risk; decomposition products if heated

Immediate Controls

ControlActionEvacuationEvacuate immediate area; mark no-ignition zoneCordonMinimum cordon: 50 m if concentration and wind unknown; adjust based on readingsHot WorkProhibit hot work; isolate electrical power to affected unit(s)

Monitoring

EquipmentProcedureLeak DetectorUse calibrated refrigerant leak detector (NDIR/IR for halocarbons) plus multi-gas meterAlarm Set-pointsWarn at 10% LFL for A2L; evacuate/cordon at ≥20–25% LFL; manage A1 as asphyxiant—use SDS OEL (often ~1,000 ppm TWA; confirm per SDS)

Response

ActionDescriptionVentilationVentilate naturally or mechanically; ensure continuous ventilation in reefer alleys; interlock hot work shutdown where fixed detection existsRepairOnly qualified technicians to isolate/repair; recover refrigerant to approved cylinders; record loss and service details

Re-occupy Only When

ParameterAcceptable RangeO219.5–23.5%LEL< 10%RefrigerantBelow OEL per SDSStabilityTwo consecutive stable readings 5–10 minutes apart

8.4 Medical Emergencies

StepActionScene SafetyEnsure scene safety; announce "Medical Emergency – General Hospital Ikorodu"; deploy AED/trauma kitFirst AidDRSABC; control bleeding; burns: cool with clean water (≥20 minutes); chemical exposures: flush ≥15 minutes and consult SDSHeat StressRemove from heat, active cooling, hydration, monitor vitalsEMS CoordinationCoordinate LASAMBUS/112/727; guide ambulance through designated gate; ensure casualty/witness logs; decon equipment after use

8.5 Security Incidents

Incident TypeResponseLockdownLockdown/access control per PFSP; badge deactivation if required; ensure CCTV preservation and evidence handlingBomb/Suspicious PackageFollow

checklist; evacuate upwind; avoid radios within 15 m of suspect deviceIntrusion/TheftDo not pursue; preserve scene; notify NPA Port PoliceCivil DisturbanceShelter-in-place; safe room protocols; code words for silent alerts; comply with law enforcementCommunicationsPIO manages all external comms; staff prohibited from social media posting

8.6 Severe Weather and Flooding

Monitoring

ParameterActionAlertsLightning alerts; wind thresholds; tidal/surge data

Actions

ActionDescriptionSecure AssetsSecure loose cargo/equipment; suspend high-risk work; cease crane operations above defined wind speedsProtect GoodsElevate vulnerable goods; protect critical records; shut non-essential powerStormwaterActivate stormwater controls; deploy sandbags/booms; isolate drains (where valved)Reefer ContinuityTransfer to emergency power per prioritization matrix; manual temp checks/logs during outagesPost-EventStructural/electrical/environmental inspections; document findings and corrective actions

8.7 Person Overboard

StepActionAlertShout "Man Overboard"; maintain constant visual; point at casualtyEquipmentThrow lifebuoy with light/line; deploy additional flotation and throw-bagsVesselsHalt nearby craft unless directed; notify NPA Marine/Police; launch designated rescue craft if safe; approach leeward; avoid crush pointsRecoveryTreat for hypothermia/aspiration; call ambulance; preserve evidence; debrief

8.8 Confined Space Incident/Rescue

RequirementProcedureEntry ProtocolDo not enter without permit and rescue plan; perform atmospheric testing; continuous monitoringRescueRescue only by trained team with retrieval systems and standby; use SCBA or supplied air as required; keep entry/exit logs

8.9 Crane/Load Handling Incidents

ActionDescriptionIsolateEstablish collapse zone; isolate area; confirm structural stabilityRecoveryDo not move load until assessed; engage specialist recovery; investigate rigging failure; preserve lifting gear as evidence

8.10 Cyber Incident Impacting Safety/Operations

ResponseActionIncident ResponseActivate incident response; isolate affected networks; move to manual controls for safety-critical systems (reefer monitoring, access control) per BCP; maintain paper logs; notify leadership and NPA if port operations affected

8.11 Utility Loss/Black Start

StepActionChecklistBlack start checklist: verify generator readiness; initiate ATS/manual transfer; confirm priority loads (reefer racks, control room, lighting, comms); load shed per matrix; verify fuel autonomy and quality (water-in-fuel test); document times and loads

---

9. Evacuation, Shelter-in-Place, Accountability, and Re-entry

9.1 Evacuation

Triggers

TriggerDescriptionFireFire incidentHAZMATHazardous material/refrigerant releaseStructuralStructural threatWaterPerson overboard in proximitySecurityAs per IC directiveWeatherSevere weather conditions

Routes and Muster Points

ElementDescriptionRoutesUse primary/secondary routes to four muster points located upwind/up-current and away from reefer banks and HAZMAT stores; maps in Appendix B; muster capacity limits postedAssisted EvacuationBuddy system; evacuation chairs where needed; Wardens/Marshals sweep zones, stairwells, amenitiesVehiclesDo not use unless directed for controlled egress or to clear critical paths

9.2 Shelter-in-Place

Trigger

TriggerDescriptionExternal ThreatExternal toxic plume; civil disturbance/armed threat; lightning with no safe egress

Actions

ActionDescriptionMove IndoorsMove indoors; close doors/windows; switch off ventilation; seal gaps; stay tuned to Channel 3; await all-clear

9.3 Accountability

ProcedureDescriptionHeadcountHeadcount completed within 10 minutes using T-cards, access logs, visitor registers, PTW lists; report missing persons with last known location; IC approves search-and-rescue only when risk is ALARP

9.4 Re-entry and Re-energization

IC grants re-entry with NPA concurrence after

RequirementStandardAtmosphereO2 19.5–23.5%; LEL < 10%; CO < 25 ppm; H2S/other toxics below OEL per SDS; refrigerant below OEL per SDS; two consecutive stable readings 5–10 minutes apartPhysicalNo visible smoke/heat; structural integrity confirmed; utilities safe; spills neutralized/contained; drains protected

Phased Re-entry

PhaseDescriptionEssentialEssential personnel firstFullFull re-energization via permit-to-work and hot work permits as applicable

Post Re-entry

ActionDescriptionFire Watch60-minute fire watch and status update to all staff/clients as needed

---

10. Communications and Information Management

10.1 Radio and Channels

ChannelUse1Operations2ERT3CommandProtocolPlain language; call signs; minimize non-essential traffic. Radio fallback: spare radios, charged batteries, cellular PTT if available

10.2 Notifications and Scripts

ActionDescriptionAuthoritiesIC or delegate notifies NPA Port Control; Lagos State Fire and Rescue; LASEMA/NEMA; LASAMBUS (112/727); Nigeria Police (including Marine); LASEPA/NESREA; LASWA/NIWA; power utility; mutual aidScriptsUse standard PA/holding statements (Appendix F)

10.3 Public Information

ProtocolDescriptionPIO OnlyOnly PIO communicates externally; all statements approved; social media posting by staff prohibited

10.4 Information Governance

ElementDescriptionRecordsIncident Log and Situation Reports (SITREPs) maintained; evidence preserved (CCTV, photos, samples) with chain-of-custodyData ProtectionHandle personal data and CCTV per NDPA; restrict access; define retention and deletion for non-incident footage

10.5 Records Retention

RequirementDurationIncident RecordsMinimum five years for incident records, training, detector calibrations, environmental manifestsExtensionsLonger if required by regulator/insurer

---

11. Resources, Equipment, and Maintenance

11.1 Minimum Critical Inventory

Firefighting

EquipmentMinimumDCP/CO2/foam extinguishersBy hazard classHydrants/hose reelsAs requiredFire pumpsAs requiredFoam trailerF3 preferredThermal imaging camerasAs required

HAZMAT

EquipmentMinimumSpill kitsOil/chemical/universalDrain coversAs requiredAbsorbent boomsAs requiredOverpack drumsAs requiredNeutralizersAs required

Detection

EquipmentMinimumMulti-gas metersO2, LEL, CO, H2SRefrigerant detectorsCompatible with installed gasesFixed detectionWhere installed

Respiratory/Rescue

EquipmentMinimumSCBA setsWith spare cylindersEscape hoodsAs requiredLifebuoysWith lights/lines every 25–50 mThrow-bagsAs requiredQuay laddersAs requiredRescue boatReadiness

Medical

EquipmentMinimumFirst-aid kitsAs requiredTrauma kitsAs requiredAEDsAs requiredStretchers/spine boardsAs requiredEyewash/shower stationsAs required

Power

EquipmentMinimumEmergency generatorsWith ATS prioritizing reefer circuits, control room, lighting, commsFuel autonomy≥ 48 hoursCritical sparesATS controller, breakers, reefer plugs/connectors

11.2 Maintenance and Assurance

ActivityFrequencyCMMS inspectionsAs scheduledVisual checksMonthlyFunctional testsQuarterlyDetector bump testsPer shift useCalibrationPer manufacturerSCBA flow testsAs requiredAED maintenancePads/battery within expiryHydrant testsFlow testsGenerator testsMonthly load tests; quarterly full-load bank testsColor-tag systemIn service/out of serviceThird-party serviceContracts for pumps, detectors, SCBA, AEDs, generators, reefer systems

---

12. Training, Competency, and Drills

12.1 Induction (Mandatory for All Before Access)

TopicDescriptionSite HazardsOverview of site hazardsAlarmsEmergency alarm proceduresMuster PointsLocation and use of muster pointsStop-workAuthority to stop unsafe workIncident ReportingHow to report incidentsPPEPersonal protective equipment requirementsPTWPermit-to-work systemSocial MediaRestrictions on social media use

12.2 Core Training (All Staff)

TrainingDescriptionFire ExtinguisherUse of portable fire extinguishersSpill AwarenessRecognition and basic response to spillsFirst-Aid AwarenessBasic first aid awarenessSecurity AwarenessSecurity awareness trainingEmergency CommsEmergency communication proceduresShelter-in-PlaceShelter-in-place procedures

12.3 Role-Specific Competencies

ERT

CompetencyDescriptionAdvanced FirefightingIndustrial/port firefighting techniquesHAZMAT Spill ControlSpill containment and controlSCBASelf-contained breathing apparatus useConfined SpaceConfined space awarenessWater RescueWater rescue elementsIncident CommandICS 100/200; ICS 300 for IC/DeputyRefrigerant HazardsRefrigerated cargo hazards

Operators

CompetencyDescriptionEquipmentForklift/crane operationBanksmanBanksman/signaller trainingLoad SecurementCargo load securementWork at HeightWork at height safetyLOTOLockout/tagout procedures

Technicians

CompetencyDescriptionRefrigerant SafetyRefrigerant safety including A2L awarenessElectrical SafetyElectrical safety proceduresArc-flashArc-flash awarenessHot WorkHot work permit systemLOTOLockout/tagout procedures

Wardens/Marshals

CompetencyDescriptionEvacuation LeadershipLeading evacuationsHeadcountHeadcount proceduresCrowd ManagementCrowd management techniquesAssisted EvacuationAssisting persons with mobility issues

PIO/Comms

CompetencyDescriptionCrisis CommsCrisis communication techniquesMedia HandlingMedia handling proceduresMessage MapsCreating and using message mapsRumor ControlControlling rumors during emergencies

12.4 Drill Program and Cadence

Drill TypeFrequencySite-wide EvacuationQuarterly (include 1 night-shift and 1 no-notice annually)HAZMAT/RefrigerantSemi-annual (at least one A2L scenario)Multi-agency Full-scaleAnnual with NPA and emergency services (include water rescue)Table-topQuarterly for leadership/supervisors with injects

12.5 KPIs and Records

KPITargetHeadcount TimeWithin 10 minutesResponse TimesAs definedParticipation≥ 90% on-duty participationCorrective ActionsClosed ≤ 30 daysRequalificationBefore expiryRecordsTraining matrix and certificates maintained

---

13. Post-Incident Actions and Reporting

13.1 Stabilization and Handover

ActionDescriptionScene SafetyConfirm scene safetyCommand RetentionMaintain command until formal transfer to authoritiesDocumentationDocument handover times and accepting authority

13.2 Notifications

RecipientTimelineNPAImmediateEnvironmentalLASEPA/NESREA within prescribed periodsInsurersWithin policy termsClientsPer contract/PIO guidance

13.3 Investigation

ElementDescriptionLead InvestigatorAppointed by HSE ManagerMethods5 Whys, bow-tie, fault treeEvidencePreserve evidence with chain-of-custodyInterviewsDocumented interviewsTimelineReconstructed via CCTV/access logs

13.4 Corrective and Preventive Actions (CAPA)

ActionDescriptionAssignmentAssign owners and due datesVerificationVerify effectivenessManagement ReviewInclude in management reviewERP UpdatesUpdate ERP/SOPs within 30 days where requiredMOCRaise MOC for systemic changes

13.5 Environmental Remediation

ActivityDescriptionSamplingSampling/monitoringRegulatorRegulator engagementContractorsLicensed waste contractors with manifests retained

13.6 Learning and Reporting

OutputDescriptionFinal ReportFinal incident reportRegulatoryRegulatory submissionsInsurerInsurer loss packClientClient reportsLessonsLessons shared via safety alerts/toolbox talks

14. Financial Provisioning and Insurance

ElementDescriptionEmergency FundingPre-approved thresholds for rapid procurement and contractor call-outs; emergency vendor list activated by IC/ProcurementProperty DamageProperty damage/BI insuranceMachinery BreakdownMachinery breakdown (generators/reefer electrical)Terminal LiabilityTerminal operators liability/bailee's liabilityEmployers' LiabilityEmployers' liability/workers' compensationPublic LiabilityPublic liabilityEnvironmentalEnvironmental impairment/pollution liabilityMarine CargoMarine cargo as applicableClaims ManagementImmediate loss notice; mitigation; evidence preservation; adjuster coordination; cost tracking; salvage/repair decisions; claims coordinator designated

15. Plan Governance, Review, and Distribution

ElementDescriptionOwnershipPlan Owner HSE Manager; approval by Managing Director; NPA Safety concurrence recordedReview CycleAnnual or after major incident, regulatory change, significant exercise findings, or material facility/process changeDocument ControlVersioning; revision log; change summaries and approvers; controlled copies in Control Room, Security Gatehouse, ERT lockers; digital repository access-controlledAssuranceInternal audits and joint NPA reviews; KPI dashboard to leadership; actions tracked to closureMOCRequired for any change affecting layout, risks, alarms, egress, utilities, or emergency power priorities; training and communication delivered before change goes live

16. Appendices

AppendixContentAContact and Notification Matrix (internal, regulators, emergency services, mutual aid, utilities, insurers; time limits and scripts)BSite Plans, Zoning, Evacuation Routes, Muster Points; hydrants, shut-offs, reefer plug racks; Command Post and Staging; Media AreaCEmergency Resources Inventory and Maintenance Schedule (minimum quantities; inspection/calibration/test cadences; tagging rules)DTraining Matrix and Role Competency Profiles (currency/recert intervals; duty roster coverage)EChecklists and Forms (activation; size-up; headcount; search-and-rescue authorization; re-entry; hot work and gas test; SITREP; investigation; CAPA; decon; bomb threat)FStandard PA Scripts, Alarm Tones, and Media Holding Statements (fire, spill, medical, severe weather, security lockdown, reefer service interruption)GChemical/Refrigerant Inventory and SDS Index (OELs, LFLs, detector compatibility)HRegulatory/Standards Reference List and Compliance Mapping (NPA, ISPS, IMDG, LASEPA/NESREA, LSSC, LASWA/NIWA, EN 378, NFPA)IInsurance Certificates and Broker/Insurer Contacts (notification windows, claim pack contents)JMutual-Aid Agreements/MoUs and Service SLAs (refrigeration contractors, spill response, fuel supply, heavy lift/crane

recovery)KGlossary and AcronymsLRecords Retention Schedule (including NDPA data governance)

Compliance Statement

Compliance with this Plan is compulsory and jointly enforced by GK & A and NPA. All personnel, contractors, and visitors are bound by these requirements. Any deviation, delay, or shortcut is a breach of GK & A and NPA mandates and will trigger immediate corrective measures and disciplinary action, up to removal from site and contract termination for cause. Continuous readiness, rapid notification, disciplined execution, and complete documentation are non-negotiable.

90-Day Implementation Roadmap

TaskTimelinePopulate AppendicesA–G with site-specific names, 24/7 numbers, maps, inventories, and formsConfirm LocationsCommand Post, Staging, and Media Areas on plans; post evacuation maps in English and Yoruba; show prevailing wind/tidal directionsAlert SystemsVerify siren/PA coverage; prepare backup alert kits (air horns, runners)Equipment InventoryInventory and close gaps on critical equipment (SCBA, detectors, spill kits, foam F3, life rings/throw-bags, AEDs, reefer plugs/spares)CalibrationCalibrate/bump-test detectors; label due dates; stock calibration gasesDuty RostersFinalize duty rosters; minimum on-shift ERT coverage; publish escalation treePower SystemsTest ATS, black start, and 48-hour fuel autonomy; define load-shedding and reefer prioritization matrixTabletop ExerciseExecute a tabletop within 30 days (scenario: refrigerant leak + concurrent medical)Evacuation DrillConduct a night-shift evacuation drill within 60 daysFull-scale DrillSchedule a full-scale multi-agency drill within 90 days (include water rescue and reefer incident)CommunicationsIssue social media restrictions reminder; brief PIO and Client Relations on scriptsCAPA TrackerLaunch CAPA tracker; report progress monthly to the Joint Emergency Steering Committee

Appendix A — Contact and Notification Matrix (External Authorities and Insurers)

A.1 External Authorities (Ikorodu/Lagos)

AuthorityContactDetailsNPA Port Control (Ikorodu)Phone: +234 901 222 3101Email: ikorodu.portcontrol@nigerianports.gov.ng (verify with NPA Liaison)NPA Port Police (Ikorodu)Phone: +234 902 222 3102Email: portpolice.ikorodu@nigerianports.gov.ng (verify with NPA Liaison)Nigeria Police Marine/Water UnitPhone: +234 903 222 3103Email: info@npf.gov.ng (use phone for activation; email for follow-up)Lagos State Fire and Rescue ServicePhone: +234 904 222 3104Email: info@lsfrs.lagosstate.gov.ng (verify current address; activation via 112/727 only)LASAMBUS/Ambulance (Lagos)Phone: +234 905 222 3105Email: info@health.lagosstate.gov.ng (use 112/727 for activation; email for admin follow-up)LASEMA (Emergency Management Agency)Phone: +234 906 222 3106Email: info@lasema.lagosstate.gov.ngNEMA (Federal)Phone: +234 907 222 3107Email: info@nema.gov.ngLASEPA (Environmental Protection Agency)Phone: +234 908 222 3108Email: info@lasepa.lagosstate.gov.ngNESREA (Federal Environmental Regulator)Phone: +234 909 222 3109Email: info@nesrea.gov.ngLASWA (Waterways Authority)Phone: +234 910 222 3110Email: info@laswa.lagosstate.gov.ngNIWA (National Inland Waterways Authority)Phone: +234 911 222 3111Email: info@niwa.gov.ngPower utility control room (Ikorodu area – likely Ikeja Electric)Phone: +234 912 222 3112Email: customercare@ikejaelectric.com (verify service coverage for your feeders)Mutual Aid — Ikorodu Jetty Operators AssociationPhone: +234 913 222 3113Email: admin@ijoa.org.ng (verify)Marine Tug/Rescue — Ikorodu Marine ServicesPhone: +234 914 222 3114Email: ops@ikorodumarine.com.ng (verify)Industrial Fire Support (Regional)Phone: +234 915 222 3115Email: duty@regionalfiresupport.com.ng (verify)

A.2 Insurance and Claims

InsurerContactDetailsBroker — NaijaRisk Brokers (Primary)Phone: +234 701 444 5101Email: service@naijariskbrokers.com.ng (verify)Broker — NaijaRisk Brokers (Backup)Phone: +234 702 444 5102Email: claims@naijariskbrokers.com.ng (verify)Property/Business Interruption — Guardian AssurancePhone: +234 703 444 5103Policy: TBD-PA-2025-001; Email: claims@guardianassurance.com.ng (verify)Machinery Breakdown — Atlas Engineering Ins.Phone: +234 704 444 5104Policy: TBD-MB-2025-002; Email: claims@atlasengineeringins.com.ng (verify)Terminal Operators/Bailee's Liability — Coastal Liability Ins.Phone: +234 705 444 5105Policy: TBD-TL-2025-003; Email: claims@coastalliability.com.ng (verify)Employers' Liability/Workers' Comp — Safeguard Ins.Phone: +234 706 444 5106Policy: TBD-EL-2025-004; Email: claims@safeguardins.com.ng (verify)Public Liability — Guardian AssurancePhone: +234 707 444 5107Policy: TBD-PL-2025-005; Email: liability@guardianassurance.com.ng (verify)Environmental Impairment/Pollution — GreenShield Ins.Phone: +234 708 444 5108Policy: TBD-EP-2025-006; Email: envclaims@greenshieldins.com.ng (verify)Marine Cargo (if applicable) — OceanCoverPhone: +234 709 444 5109Policy: TBD-MC-2025-007; Email: claims@oceancover.com.ng (verify)

Appendix B — Site Plans, Zoning, Evacuation, and Key Locations

B.1 Site Identification

ElementDetailsFacilityGK & A Terminal, NPA Lighter Terminal (Ikorodu)AddressNPA Lighter Terminal Complex, Ipakodo Road, Ipakodo, Ikorodu, Lagos State, 104101, NigeriaMain Gate GPS6.5990068, 3.4814838Emergency ActivationDial 112 or 727Site Emergency Emailinfo@gkaport.com

B.2 Command, Staging, and Media Points

LocationDetailsPrimary Command Post (CP)Terminal Control Room, Admin Block Level 1; Reference: Admin Block near Main Gate at 6.5990068, 3.4814838; Features: Hard-wired power/UPS; dedicated radios/spares; wall site plan; Incident Log kit; gas monitor cacheSecondary CPSecurity Gatehouse (co-located at Main Gate); Reference: 6.5990068, 3.4814838; Features: Redundant radios; CCTV access; duplicate muster board; basic logsStaging Area S1Yard staging bay north of Warehouse 1; Reference: Signed "S1—Staging"; cones and signage stored at GatehouseMedia AreaVisitor car park outside the operations fence near Main Gate; Reference: Signed "Media Area—PIO Control Only"; segregated from muster points

B.3 Evacuation Routes and Muster Points

ElementDescriptionPrimary RoutesFrom warehouses and reefer alleys to North Car Park and West Laydown via signed paths; avoid reefer stacks and HAZMAT storesSecondary RoutesSouthern and eastern egress to South Green Space and East Open GroundMuster PointsA: North Car Park (capacity 120); B: West Laydown Yard (capacity 120); C: South Green Space (capacity 150); D: East Open Ground (capacity 150)AccessibilityEvacuation chairs at Admin Block stairwell and Warehouse 1 mezzanine; wardens sweep amenities/stairwells before leavingSignageBilingual English/Yoruba; reflective; "Avoid Reefer Stacks" icons

B.4 Fire Water Supplies and Critical Utilities

EquipmentLocation/DetailsHydrants/MonitorsH1 Quay NW; H2 Quay mid-berth; H3 Quay SE; H4 Perimeter west curve; H5 W1 north wall; H6 W1 south wall; H7 Admin frontage; H8 Fuel point bund (outside); H9 Reefer aisle; H10 Yard east perimeter; Fixed monitors: M1 Quay NW; M2 Quay SEFire Pump Room(s)PR-1: Annex south of Warehouse 1; diesel duty + electric standby; access clear; keys at Gatehouse and Control RoomElectrical Main IsolationELV-1: Main LV room by Control Room; lockable main incomers; LOTO points; YDP-1: Yard distribution panel (west yard) feeding reefer racks and lighting; labeled feedersReefer Plug RacksR1: Western reefer alley Row 1; R2: Eastern reefer alley Row 2; spares in Technician cage near ELV-1

B.5 HAZMAT Storage and Environmental Controls

LocationDetailsHazardous StoresHS-1 Battery electrolyte/acid cabinet—Workshop annex (bunded, ventilated); HS-2 Paints/solvents flame-proof cabinet—W1 north alcove; HS-3 Oils/greases—Workshop lubricants rackFuel Points/TanksFP-1 Diesel tank + dispensing—West yard; bonded/grounded; spill berm intactStorm Drains/OutfallsDrains D1–D6 marked "Drain—Cover Here"; drain covers stored Gatehouse cage DC-1; Outfall OF-1: Perimeter culvert to waterway; deploy booms on riskSpill Kit StationsSK-1 Gatehouse; SK-2 W1 north door; SK-3 Workshop; SK-4 Reefer west alley; SK-5 Fuel point FP-1

B.6 Quay and Water Safety

EquipmentLocationQuay LaddersL1 Quay NW; L2 Mid-berth; L3 Quay SELifebuoys with Lights/LinesLB-1 to LB-8 along quay; monthly inspection tagsThrow-bags/Rescue PolesRB-1 Gatehouse; RB-2 Quay mid-berth kiosk; RB-3 W1 south doorRescue BoatMid-berth cleat cluster; signed launch path; weekly outboard checks

B.7 Prevailing Conditions and Shelter-in-Place

ConditionDetailsWindPredominantly SW→NE; rainy-season squalls possible—IC selects upwind CP/musterTide/CurrentEbb/flood directions noted on daily ops board; watch flood-prone drains D4–D6Indoor Shelter RoomsS-1 Admin Ground-Floor Meeting Room—limited windows; HVAC isolation switch; S-2 Warehouse 1 Office Core—solid walls; doors sealable; eyewash W1-EW-2 nearby

B.8 Traffic and Access Control

ElementDetailsGatehouses/AccessMain Gate (6.5990068, 3.4814838) primary; East Gate normally closed—open only by Security SupervisorEmergency Lanes/One-WayRed-lined lanes along W1 north edge and quay spine; keep clear; removable bollards for Fire/EMS ingressCrowd-Control BarriersStored Gatehouse Store GC-1; deploy to cordon Media Area/exclusion zones

B.9 Map Legend

SymbolMeaningCPCommand Post (star)StagingStaging Area (triangle)MediaMedia Area (square)Muster A–DMuster Points (circles)Hydrants/MonitorsFire water suppliesFire PumpsFire pump locationsElectrical IsolationElectrical isolation pointsReefer RacksReefer plug rack locationsHAZMAT StoresHazardous material storageFuel PointsFuel storage and dispensingDrains/OutfallsStorm drains and outfallsLife Rings/LaddersWater safety equipmentShelter RoomsIndoor shelter locationsAccess GatesEntry/exit pointsPrimary/Secondary RoutesEvacuation routes

Appendix C — Emergency Resources Inventory and Maintenance Schedule

C.1 Firefighting Equipment

EquipmentMinimumCurrentMaintenancePortable ExtinguishersDCP 9 kg40TBDMonthly visual; Annual service; Hydrotest 5-yearCO2 5 kg25TBDMonthly visual; Annual service; Hydrotest 5-yearFoam 9 L20TBDMonthly visual; Annual serviceHose Reels20TBDMonthly visual; Annual flow testHydrants18TBDQuarterly flow test; Annual full-system testFoam Concentrate1,000 LTBDAnnual sample QAThermal Imaging Cameras2TBDQuarterly function checkColor TaggingGreen—in service; Red—OOS with defect tag and work order ID

C.2 Spill/HAZMAT Equipment

EquipmentMinimumCurrentMaintenanceSpill KitsOil12TBDInspect monthly; Restock after useChemical8TBDUniversal Absorbent Pads30 balesTBDBooms450 mTBD300 m oil-only; 150 m chemicalDrain Covers20TBDOverpack Drums12TBDNeutralizersAs neededTBDBattery acid, caustic, solvent; SDS stored with kitsAnti-Sparking Tools2 setsTBD

C.3 Detection and Monitoring

EquipmentMinimumCurrentMaintenanceMulti-Gas Meters8TBDBump test before use/shift; Calibrate quarterlyRefrigerant Detectors4 portableTBDCalibrate per OEMFixed DetectionAs installedTBDQuarterly function test; Annual calibrationCalibration GasesAs neededTBDStock and log expiry dates

C.4 Respiratory/Rescue and Water Safety

EquipmentMinimumCurrentMaintenanceSCBA Sets8TBDMonthly checks; Annual flow test; Spare cylinders 16Escape Hoods20TBDLifebuoys with Lights/LinesEvery 25–50 mTBDMonthly inspectionThrow-bags10TBDQuay LaddersEvery ~50 mTBDQuarterly inspection

C.5 Medical

EquipmentMinimumCurrentMaintenanceAEDs4TBDPads/batteries within expiry; Monthly testTrauma Kits8TBDSpine Boards/Stretchers4TBDEyewash/Showers8 stationsTBDWeekly activation; Annual service

C.6 Power Continuity

EquipmentMinimumCurrentMaintenanceGenerators2 x [kVA TBD]TBDMonthly start test; Quarterly load bank; Fuel autonomy ≥ 48 h; Water-in-fuel checksATSAs requiredTBDFunctional test quarterly; Critical spares: controller and contactorsReefer Plug RacksAs installedTBDCurrent plug count: TBD; Spare plugs/connectors 20

C.7 Maintenance and CMMS Controls

ActivityDescriptionInspectionsEntered into CMMS within 24 h; defects assigned with SLAOOS EquipmentEscalated same day to HSE Manager and ICThird-party ServiceCertificates filed and auditable

Appendix D — Training Matrix and Competency Profiles

D.1 Roles and Mandatory Competencies

RoleCompetenciesRefreshIncident Commander/Deputy ICICS 100/200 (IC), ICS 300 (IC/Deputy); Emergency decision-making and dynamic risk assessment; Hot work authorization and gas testingICS: 3 years; Others: AnnualERT FireAdvanced firefighting (industrial/port); SCBA user; Thermal imaging, foam operations, exposure protectionFirefighting: 2 years; Others: AnnualERT Spill/HAZMATHAZMAT awareness/operations; Spill containment/booming; drain protection; decon; SDS/IMDG interpretation2 years; AnnualERT MedicalFirst Aid/CPR/AED; Trauma management/bleeding control; Heat stress recognition/management2 years; AnnualERT SecurityAccess control/crowd management; Evidence preservation and PFSP interfaces; Bomb threat and suspicious package protocols2 years; AnnualTechnical/ReeferElectrical safety, LOTO; Refrigerant safety (A1/A2L), gas detection; Emergency power/ATS operationsAnnualWardens/MarshalsEvacuation leadership/headcount; Assisted evacuationAnnualOperatorsEquipment certification; Banksman/slinging as applicable1–3 years; 2 yearsAll Staff and ContractorsSite induction and emergency orientation; Fire extinguisher practical; Spill awareness; Security awareness and social media restrictionsBefore access/2 years; Annual

D.2 Drill Cadence (Minimum)

Drill TypeFrequencyEvacuationQuarterly (include 1 night-shift and 1 no-notice annually)HAZMAT/refrigerantSemi-annual (include A2L scenario if applicable)Full-scale multi-agencyAnnual with NPA Fire/Police, LASEMA, marine rescueTable-top for leadershipQuarterly with injects

D.3 Duty Roster Coverage (Minimum)

RequirementMinimumOn-shift ERTFire 3; HAZMAT 2; Medical 2; Security 2; Technical 1; IC/Deputy reachable ≤ 10 minutesFirst aiders per shift≥ 2 per zone (warehouse, yard/quay, admin)

D.4 Records and KPIs

KPITargetTraining currency≥ 95%Drill participation≥ 90% of on-dutyCorrective actions closed≤ 30 days

Appendix G — Chemical and Refrigerant Inventory and SDS Index

G.1 Inventory Fields

FieldDescriptionMaterialChemical or refrigerant nameUN/IMDG/PGUN number, IMDG class, Packing GroupCASChemical Abstracts Service numberStorage locationWhere material is storedMax quantityMaximum quantity allowedSDS version/dateSafety Data Sheet version and dateOEL TWA/STELOccupational Exposure Limit - Time Weighted Average/Short Term Exposure LimitLFL/UFLLower/Upper Flammability LimitVapor densityVapor density relative to airWater reactivityReactivity with waterDetector compatibilityCompatible detection equipmentPrimary hazards/PPEPrimary hazards and required PPEFirst-aid notesFirst-aid proceduresSpill kit requiredRequired spill kit typeSegregationRequired segregation from other materialsNotification thresholdsThresholds for regulatory notification

G.2 Example Entries (Replace with Actuals)

MaterialDetailsDiesel FuelUN 1202; IMDG 3; PG III; CAS 68334-30-5; Storage: Fuel tank FT-1 (bunded), Yard West; Max qty: TBD L; SDS date: TBD; OEL: Oil mists 5 mg/m3 TWA; LFL/UFL: ~0.6–7.5% vol; Vapor density: >1; Detector: LEL (catalytic/IR); PPE: Anti-static PPE; nitrile gloves; goggles; Spill kit: Oil-only; booms; drain covers; foam for fire as needed; Segregation: Away from oxidizersLubricating OilNot regulated as DG (check SDS); Storage: Workshop rack; Max qty: TBD L; OEL: Oil mists 5 mg/m3; Spill kit: Oil-onlyBattery ElectrolyteUN 2796; IMDG 8; PG II; CAS 7664-93-9; Storage: Battery room; acid cabinet; bunded; Max qty: TBD L; OEL: 0.2 ppm STEL (check SDS); Detector: Acid gas; PPE: Acid-resistant gloves/apron/face shield; Neutralizer: Sodium bicarbonate; copious water; Segregation: Away from bases/metals; Notification: LASEPA if > TBD L enters environmentPaints/SolventsUN 1263; IMDG 3; PG II/III (varies); Storage: Paint locker (ventilated/flame-proof); LFL: ~1–1.4%; Controls: No ignition sources; bonding/groundingCleaning ChemicalsSDS-driven hazards; segregate from acids; eyewash nearbyRefrigerantsR-134a (A1, non-flammable); Asphyxiant at high conc.; OEL: ~1,000 ppm TWA (check SDS); Storage: in-use and spare cylinders in ventilated cage; Detector: IR; R-404A (A1); OEL: ~1,000 ppm TWA; R-452A (A1); OEL: per SDS; If A2L present (e.g., R-1234yf/ze): mildly flammable; monitor %LFL; ensure ventilation and no ignition sources

G.3 SDS Management

ActivityDescriptionMaster IndexAccessible to staff; SDS at point-of-use; QR codes optional; annual review

G.4 Segregation and Labeling

RequirementDescriptionIMDG SegregationPer class; corrosives away from bases/flammables; oxidizers isolatedGHS LabelingGHS labeling; secondary containers labeledStorage RoomsVentilated with eyewash/shower nearby

G.5 Environmental Thresholds and Notifications

RequirementDescriptionReportable QuantitiesDefine with LASEPA/NESREA (confirm with regulators)Immediate NotificationPhone notification for any release to waterwayWritten ReportsFollow statutory written report timelines