LAB | Storing Terraform State in Remote S3 with DynamoDB

```
seife@SeifEddine MINGW64 ~ (main)
$ mkdir remote-state-example-seif
cd remote-state-example-seif

seife@SeifEddine MINGW64 ~/remote-state-example-seif (main)
$ code .


seife@SeifEddine MINGW64 ~/remote-state-example-seif (main)
$ touch providers.tf variables.tf main.tf

seife@SeifEddine MINGW64 ~/remote-state-example-seif (main)
$
```

EXPLORER

REMOTE-ST...

- main.tf
- providers.tf
- variables.tf

providers.tf | variables.tf | main.tf

main.tf

```tf
resource "aws_instance" "web_server" {
  ami           = var.ami_image_name
  instance_type = var.instance_type

  tags = {
    Name = "Terraform-Managed-Instance"
  }
}
```

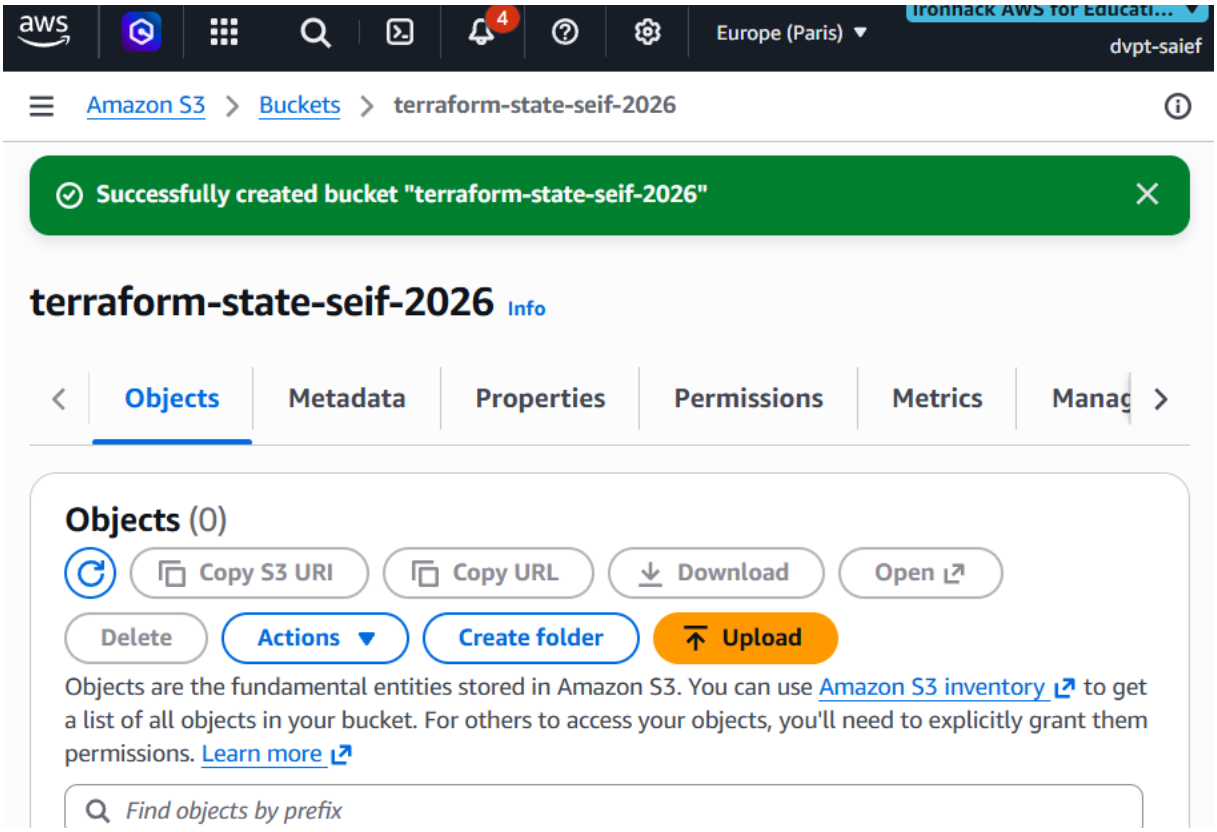
aws
4
Europe (Paris)
Ironhack AWS for Educati...
dvpt-saief
Amazon S3 > Buckets > terraform-state-seif-2026
Successfully created bucket "terraform-state-seif-2026"
terraform-state-seif-2026 Info
Objects
Metadata
Properties
Permissions
Metrics
Manag
Objects (0)
Copy S3 URI
Copy URL
Download
Open
Delete
Actions
Create folder
Upload
Objects are the fundamental entities stored in Amazon S3. You can use Amazon S3 inventory to get a list of all objects in your bucket. For others to access your objects, you'll need to explicitly grant them permissions. Learn more
Find objects by prefix

Ironhack AWS for Educati...
dvpt-saief
Europe (Paris)

The terraform-state-lock table was created successfully.

Notifications 0 0 1 1 0

Tables (2) Info

Last updated
April 25, 2026, 15:17 (UTC+2:00)

Actions

Delete | Create table

terraform-state-lock

Filter by tag
Any tag key

Filter by tag value
Any tag value

1

Name	Status	Partit
mjgruber-terraform-state-lock	Active	LockID
terraform-state-lock	Active	LockID

```
seife@SeifEddine MINGW64 ~/remote-state-example-seif (main)
$ terraform init
Initializing the backend...
Initializing provider plugins...
- Finding latest version of hashicorp/aws...
- Installing hashicorp/aws v6.42.0...
```

```
seife@SeifEddine MINGW64 ~/remote-state-example-seif (main)
$ terraform init
so that Terraform can guarantee to make the same selections by default when
you run "terraform init" in the future.

Terraform has been successfully initialized!

You may now begin working with Terraform. Try running "terraform plan" to see
any changes that are required for your infrastructure. All Terraform commands
should now work.

If you ever set or change modules or backend configuration for Terraform,
rerun this command to reinitialize your working directory. If you forget, other
commands will detect it and remind you to do so if necessary.
```

```
seife@SeifEddine MINGW64 ~/remote-state-example-seif (main)
$ terraform validate
Success! The configuration is valid.


seife@SeifEddine MINGW64 ~/remote-state-example-seif (main)
$ terraform plan

Terraform used the selected providers to generate the following execution plan.
Resource actions are indicated with the following symbols:
  + create

Terraform will perform the following actions:

  # aws_instance.web_server will be created
  + resource "aws_instance" "web_server" {
```

```
seife@SeifEddine MINGW64 ~/remote-state-example-seif (main)
$ terraform apply -auto-approve

      + root_block_device (known after apply)

      + secondary_network_interface (known after apply)
    }

Plan: 1 to add, 0 to change, 0 to destroy.
aws_instance.web_server: Creating...
aws_instance.web_server: Still creating... [00m10s elapsed]
aws_instance.web_server: Creation complete after 13s [id=i-056263c94ec306ed7]

Apply complete! Resources: 1 added, 0 changed, 0 destroyed.
```

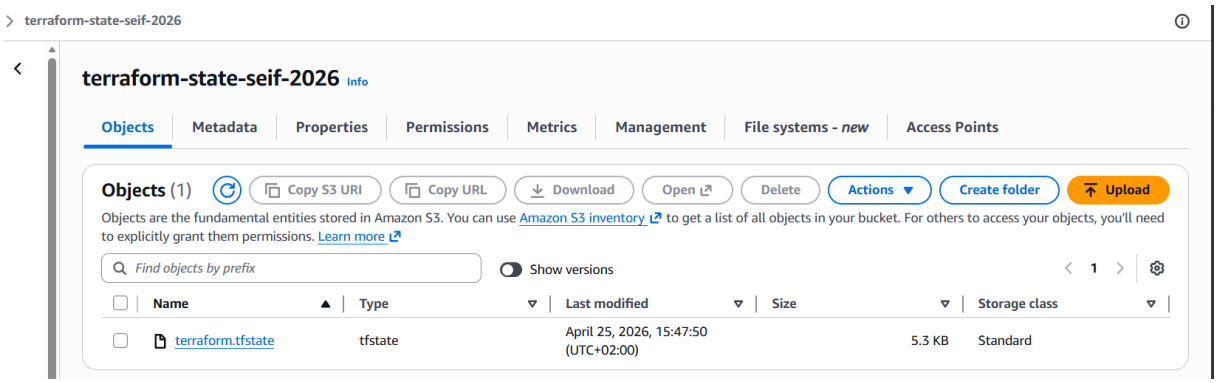

```
seife@SeifEddine MINGW64 ~/remote-state-example-seif (main)
$ terraform destroy -auto-approve
          - volume_size           = 8 -> null
          - volume_type           = "gp3" -> null
            # (1 unchanged attribute hidden)
        }
    }

Plan: 0 to add, 0 to change, 1 to destroy.
aws_instance.web_server: Destroying... [id=i-01c5065b994299603]
aws_instance.web_server: Still destroying... [id=i-01c5065b994299603, 00m10s ela
aws_instance.web_server: Destruction complete after 20s

Destroy complete! Resources: 1 destroyed.

seife@SeifEddine MINGW64 ~/remote-state-example-seif (main)
$
```