# LAB | Host a Static Website on S3

Step 1

Amazon S3 > Buckets > Create bucket

## Create bucket Info

Buckets are containers for data stored in S3.

### General configuration

**AWS Region**

Europe (Frankfurt) eu-central-1

**Bucket namespace**

Choose the namespace where you want to create your bucket. Learn more

- (●) Global namespace
  By default, S3 creates general purpose buckets in the global namespace.
- ( ) Account Regional namespace (recommended)
  General purpose buckets created in your account Regional namespace are unique to your account. These buckets can never be created by another AWS account.

**Bucket name** Info

my-static-site-bucket-seif

Bucket names must be 3 to 63 characters and unique within the global namespace. Bucket names must also begin and end with a letter or number. Valid characters are a-z, 0-9, periods (.), and hyphens (-). Learn more

**Copy settings from existing bucket - *optional***

Only the bucket settings in the following configuration are copied.

Choose bucket

Format: s3://bucket/prefix

[ ] **Block *all* public access**

Turning this setting on is the same as turning on all four settings below. Each of the following settings are independent of one another.

## Bucket Versioning

Versioning is a means of keeping multiple variants of an object in the same bucket. You can use versioning to preserve, retrieve, and restore every version of every object stored in your Amazon S3 bucket. With versioning, you can easily recover from both unintended user actions and application failures. Learn more

**Bucket Versioning**

- ( ) Disable
- (●) Enable

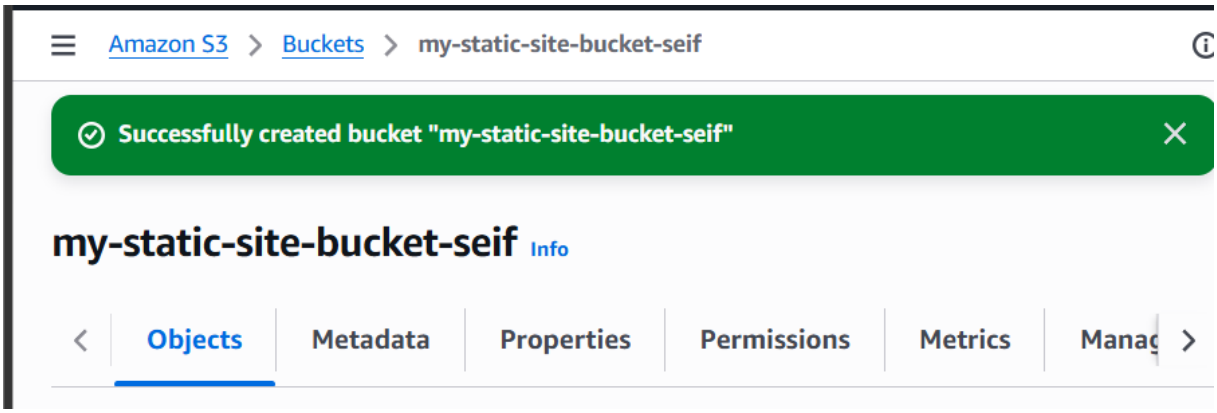
Amazon S3 > Buckets > my-static-site-bucket-seif
Successfully created bucket "my-static-site-bucket-seif"
my-static-site-bucket-seif Info
Objects
Metadata
Properties
Permissions
Metrics
Manag

Step 2

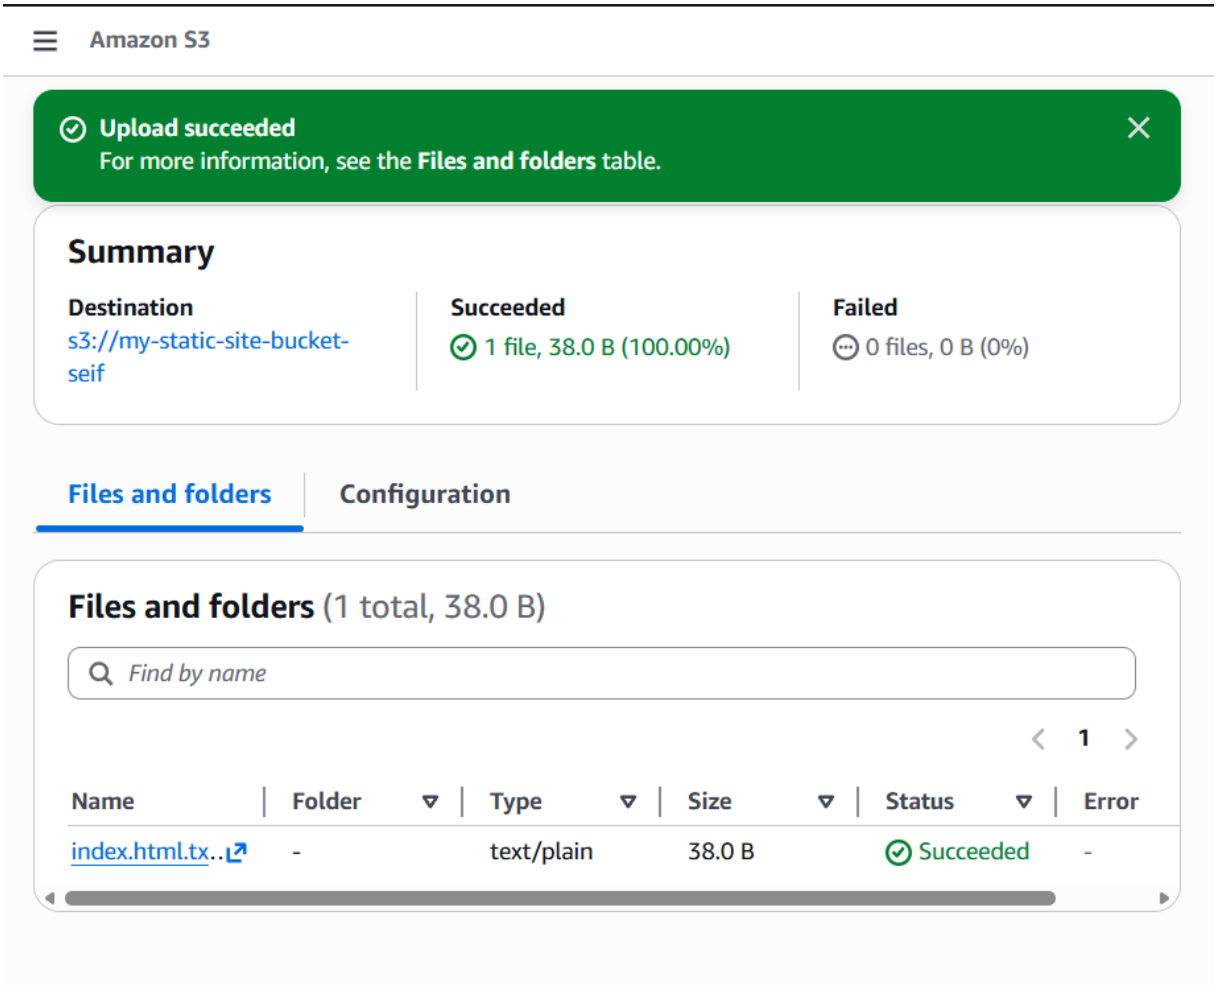
Amazon S3
Upload succeeded
For more information, see the Files and folders table.
Summary
Destination
s3://my-static-site-bucket-seif
Succeeded
1 file, 38.0 B (100.00%)
Failed
0 files, 0 B (0%)
Files and folders
Configuration
Files and folders (1 total, 38.0 B)
Find by name
1
Name
Folder
Type
Size
Status
Error
index.html.tx..
-
text/plain
38.0 B
Succeeded
-

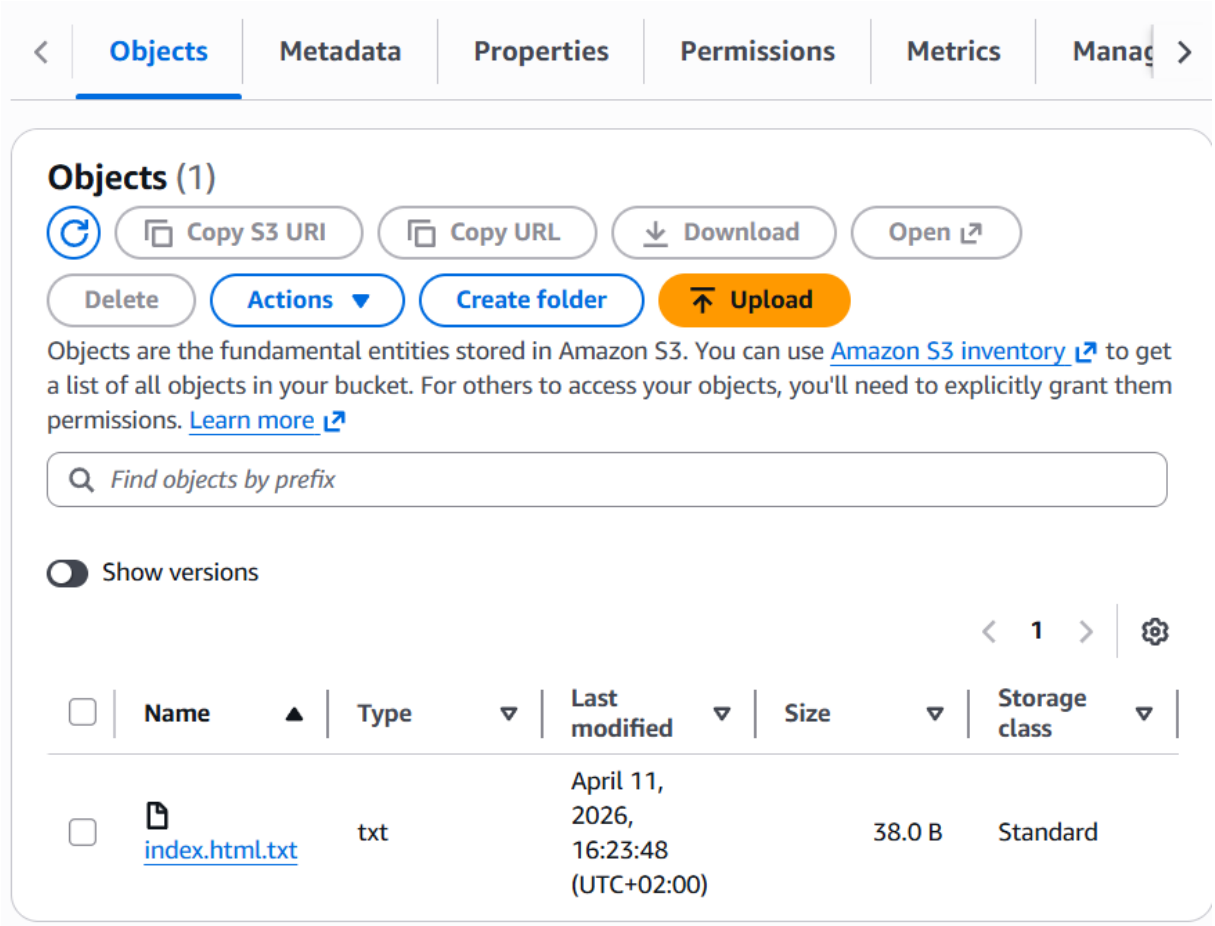
Objects
Metadata
Properties
Permissions
Metrics
Manag
Objects (1)
Copy S3 URI
Copy URL
Download
Open
Delete
Actions
Create folder
Upload
Objects are the fundamental entities stored in Amazon S3. You can use Amazon S3 inventory to get a list of all objects in your bucket. For others to access your objects, you'll need to explicitly grant them permissions. Learn more
Find objects by prefix
Show versions
1
Name
Type
Last modified
Size
Storage class
index.html.txt
txt
April 11, 2026, 16:23:48 (UTC+02:00)
38.0 B
Standard

Step 3

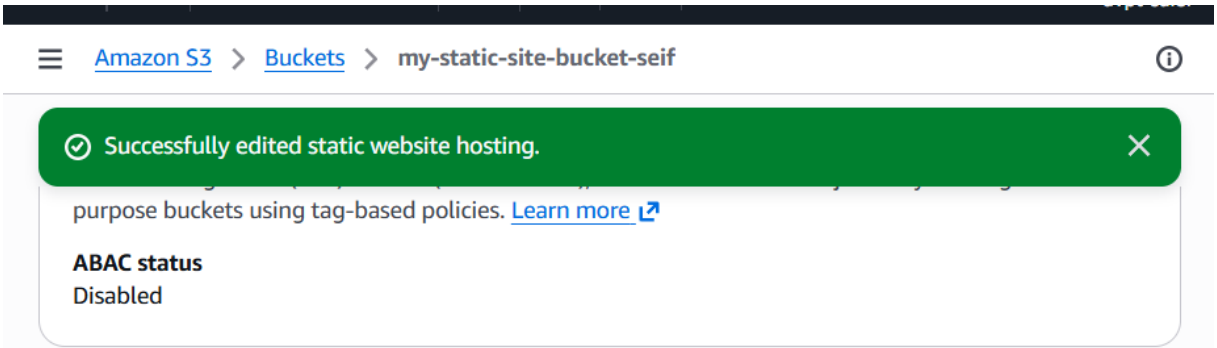
Amazon S3
Buckets
my-static-site-bucket-seif
Successfully edited static website hosting.
purpose buckets using tag-based policies. Learn more
ABAC status
Disabled

Step 4

Amazon S3 > Buckets > my-static-site-bucket-seif

Successfully edited bucket policy.

## Bucket policy

Edit Delete

The bucket policy, written in JSON, provides access to the objects stored in the bucket. Bucket policies don't apply to objects owned by other accounts. Learn more

Copy

```
{
  "Version": "2012-10-17",
  "Statement": [
    {
      "Sid": "PublicReadGetObject",
      "Effect": "Allow",
      "Principal": "*",
      "Action": "s3:GetObject",
      "Resource": "arn:aws:s3:::my-static-site-bucket-seif/*"
    }
  ]
}
```

Step 5

Non sécurisé my-static-site-bucket-seif.s3-website.eu-c...

```
<h1>Updated Version of My Static Website!</h1>
```

Step 6

Non sécurisé my-static-site-bucket-seif.s3-website.eu-c...

```
<h1>This is Seif, and here's the static lab website. TEST, TEST!</h1>
```

Step 7

**Successfully emptied bucket "my-static-site-bucket-seif"**
View details below. If you want to delete this bucket, use the delete bucket configuration.

Amazon S3 > Buckets

Successfully deleted bucket "my-static-site-bucket-seif"