



LAB

```
seife@SeifEddine:~$ ~/projects/ansible-project/  
-bash: /home/seife/projects/ansible-project/: Is a directory  
seife@SeifEddine:~$ mkdir inventory_assignment  
cd inventory_assignment  
touch ansible.cfg hosts  
seife@SeifEddine:~/inventory_assignment$ nano ansible.cfg host  
s  
seife@SeifEddine:~/inventory_assignment$
```

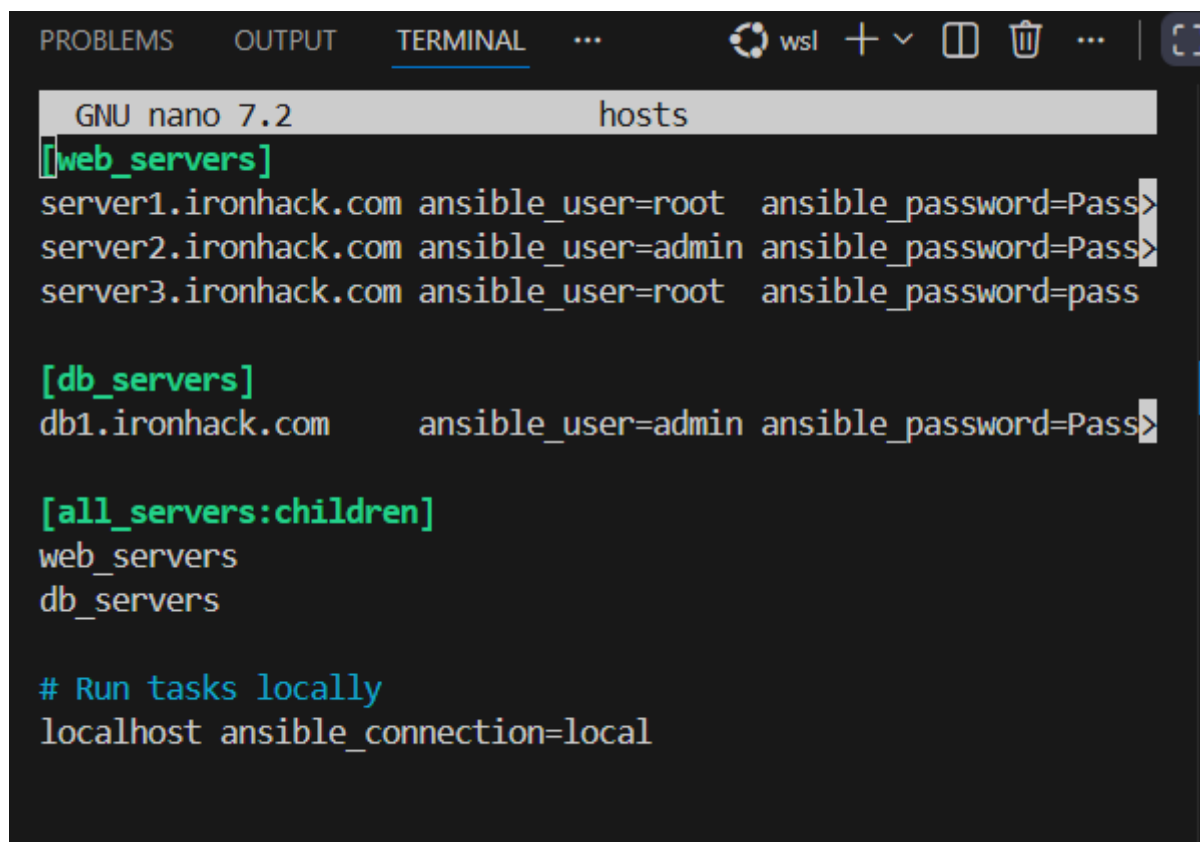

The screenshot shows a terminal window with the 'hosts' file open in nano 7.2. The file contains three groups of servers: 'web_servers' with three entries (server1, server2, server3), 'db_servers' with one entry (db1), and 'all_servers:children' which lists 'web_servers' and 'db_servers'. At the bottom, there is a comment '# Run tasks locally' followed by 'localhost ansible_connection=local'.

```
GNU nano 7.2 hosts  
[web_servers]  
server1.ironhack.com ansible_user=root ansible_password=Pass>  
server2.ironhack.com ansible_user=admin ansible_password=Pass>  
server3.ironhack.com ansible_user=root ansible_password=pass  
  
[db_servers]  
db1.ironhack.com ansible_user=admin ansible_password=Pass>  
  
[all_servers:children]  
web_servers  
db_servers  
  
# Run tasks locally  
localhost ansible_connection=local
```

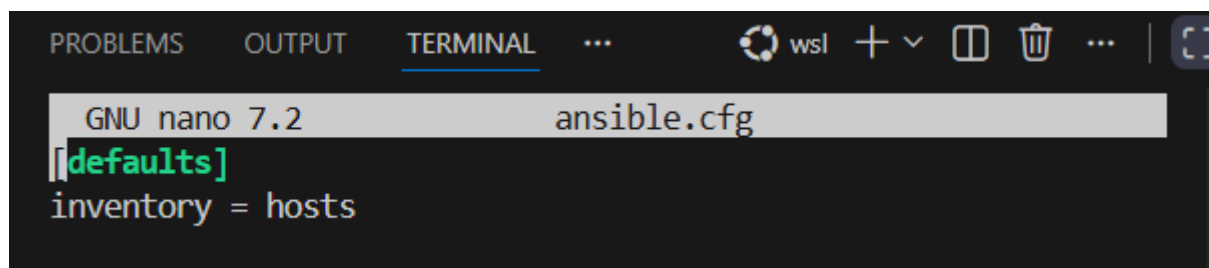

The screenshot shows a terminal window with the 'ansible.cfg' file open in nano 7.2. The file contains a single line: 'inventory = hosts'.

```
GNU nano 7.2 ansible.cfg  
[defaults]  
inventory = hosts
```

PROBLEMS

OUTPUT

TERMINAL

...



wsl



GNU nano 7.2

hosts

[web_servers]

server1.ironhack.com ansible_user=root ansible_password=Pass@>

server2.ironhack.com ansible_user=admin ansible_password=Pass>

server3.ironhack.com ansible_user=root ansible_password=pass

[db_servers]

db1.ironhack.com ansible_user=admin ansible_password=Pass@123

[all_servers:children]

web_servers

db_servers

[local]

localhost ansible_connection=local