module :

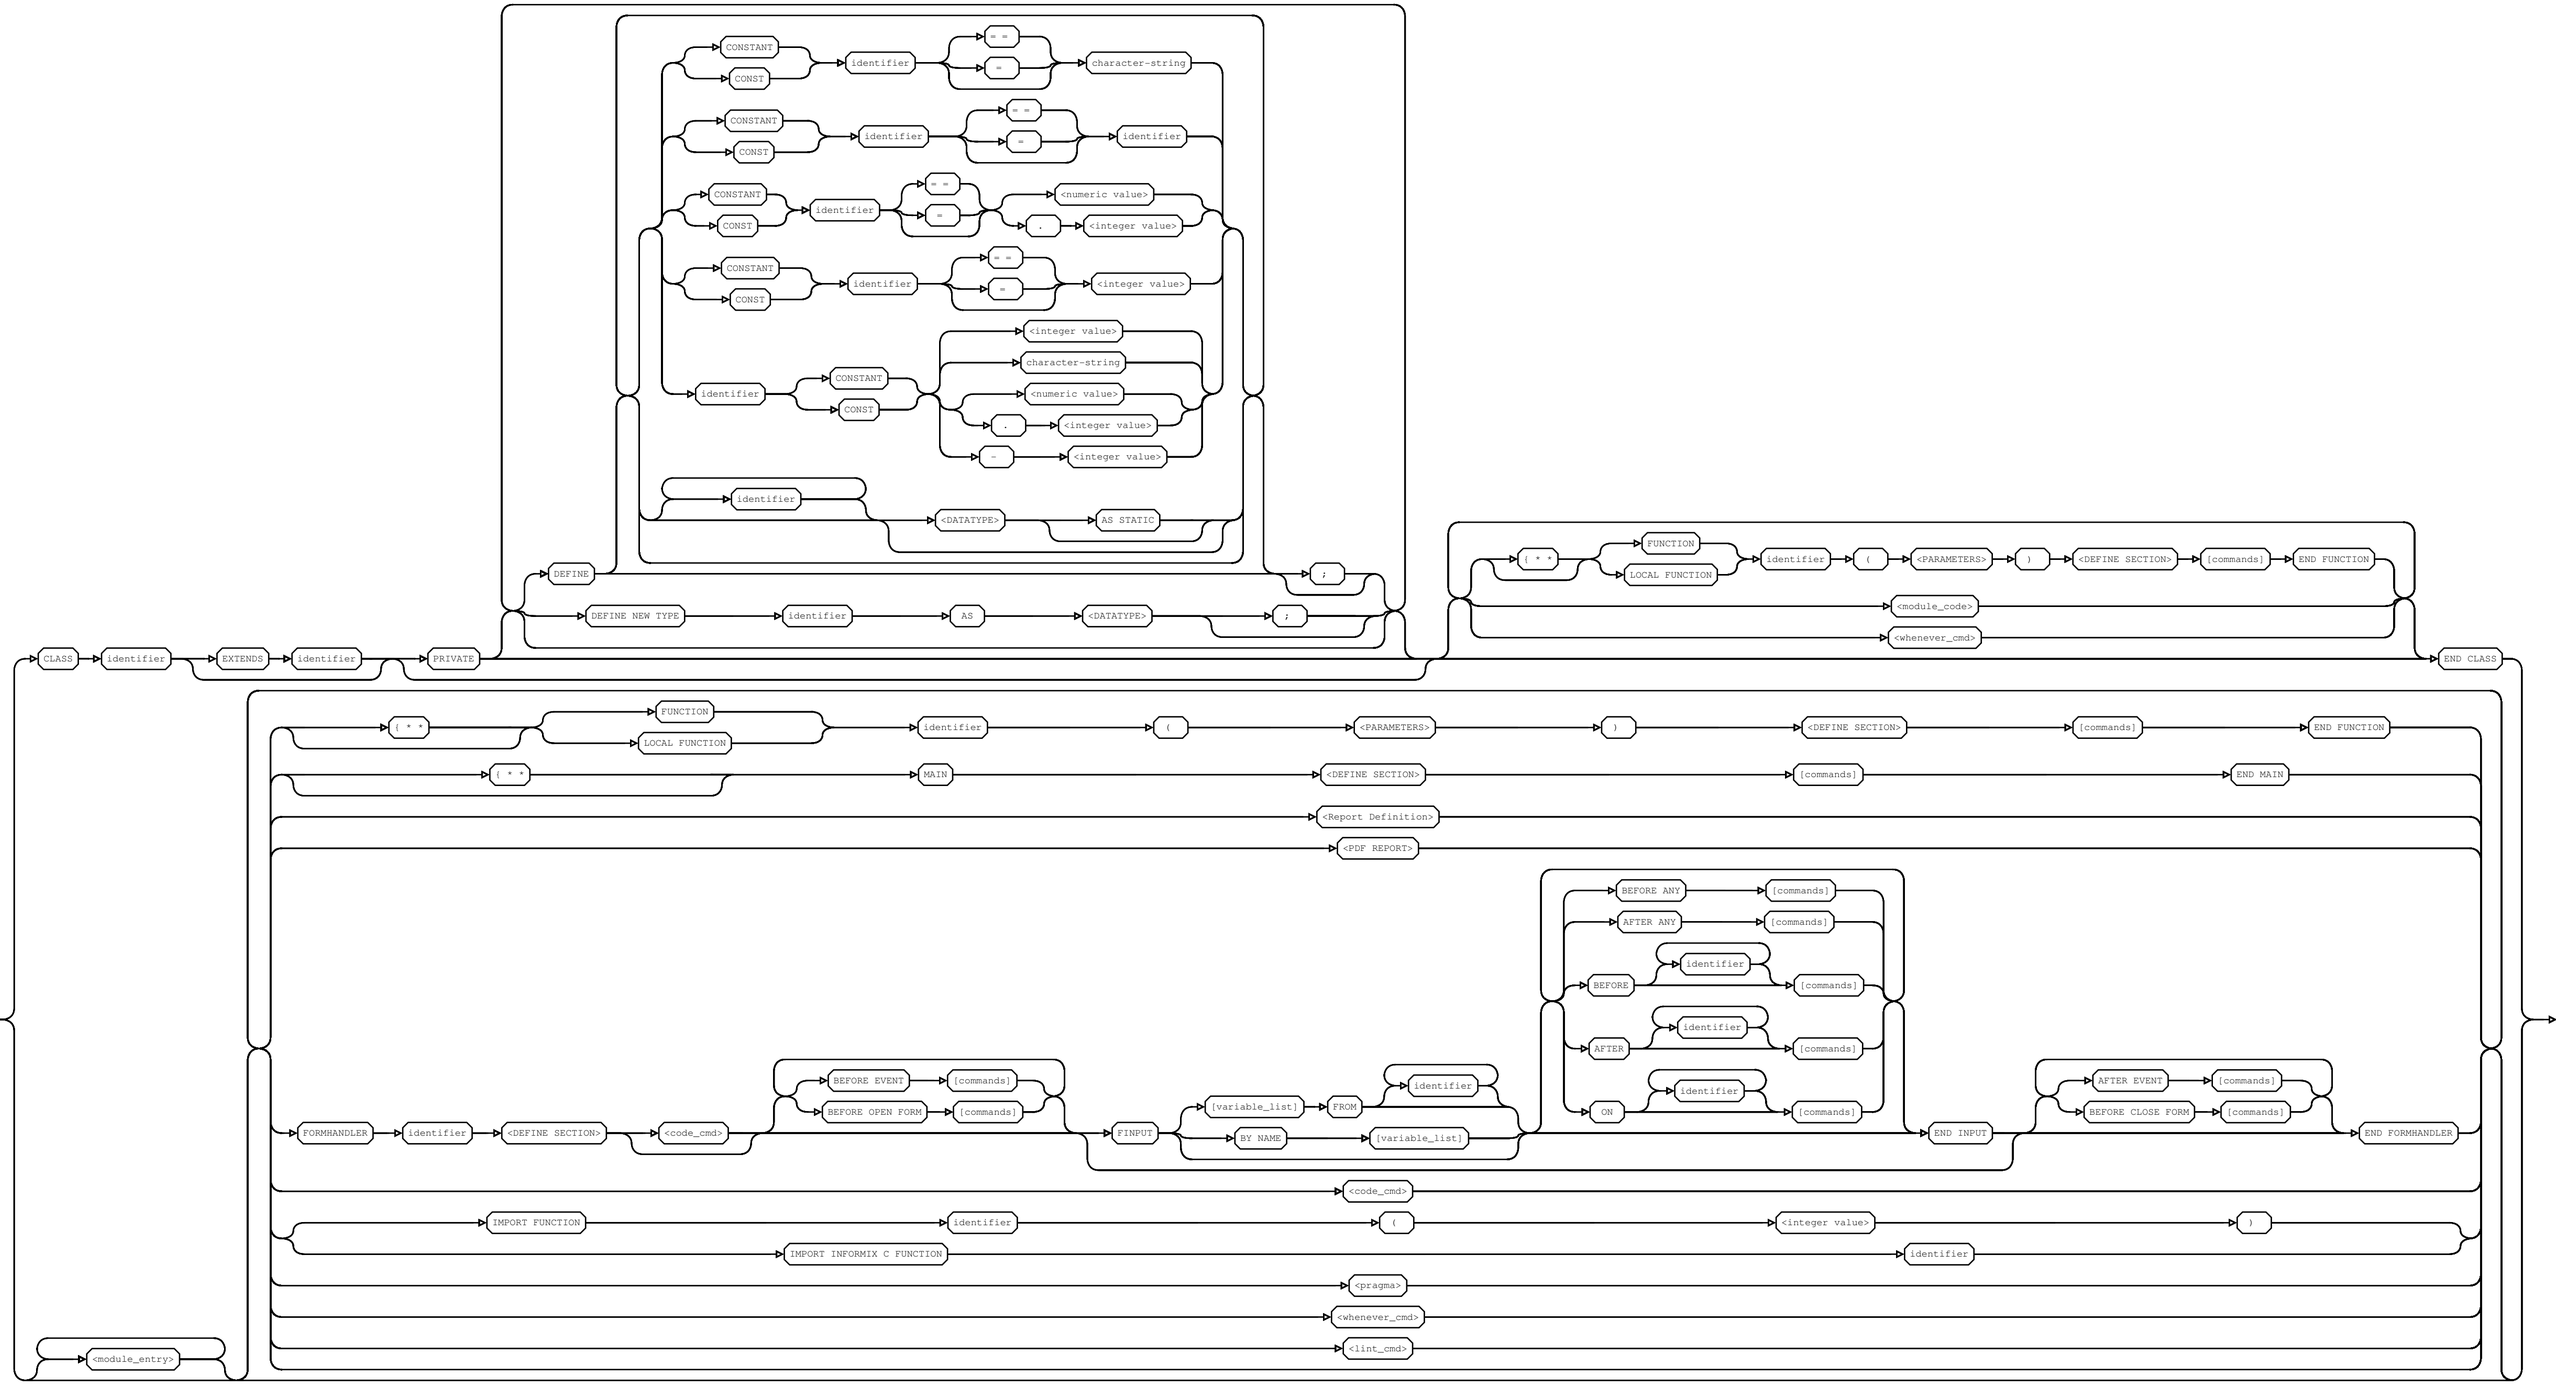
CLASS
identifier
EXTENDS
identifier
PRIVATE
DEFINE
CONSTANT
CONST
identifier
= =
=
character-string
identifier
<numeric value>
.
<integer value>
<DATATYPE>
AS STATIC
;
DEFINE NEW TYPE
AS
{ * *
FUNCTION
LOCAL FUNCTION
(
<PARAMETERS>
)
<DEFINE SECTION>
[commands]
END FUNCTION
<module_code>
<whenever_cmd>
END CLASS
MAIN
END MAIN
<Report Definition>
<PDF REPORT>
BEFORE ANY
AFTER ANY
BEFORE
AFTER
ON
FORMHANDLER
<code_cmd>
BEFORE EVENT
BEFORE OPEN FORM
FINPUT
[variable_list]
FROM
BY NAME
END INPUT
AFTER EVENT
BEFORE CLOSE FORM
END FORMHANDLER
IMPORT FUNCTION
IMPORT INFORMIX C FUNCTION
<pragma>
<lint_cmd>
<module_entry>