input_cmd :

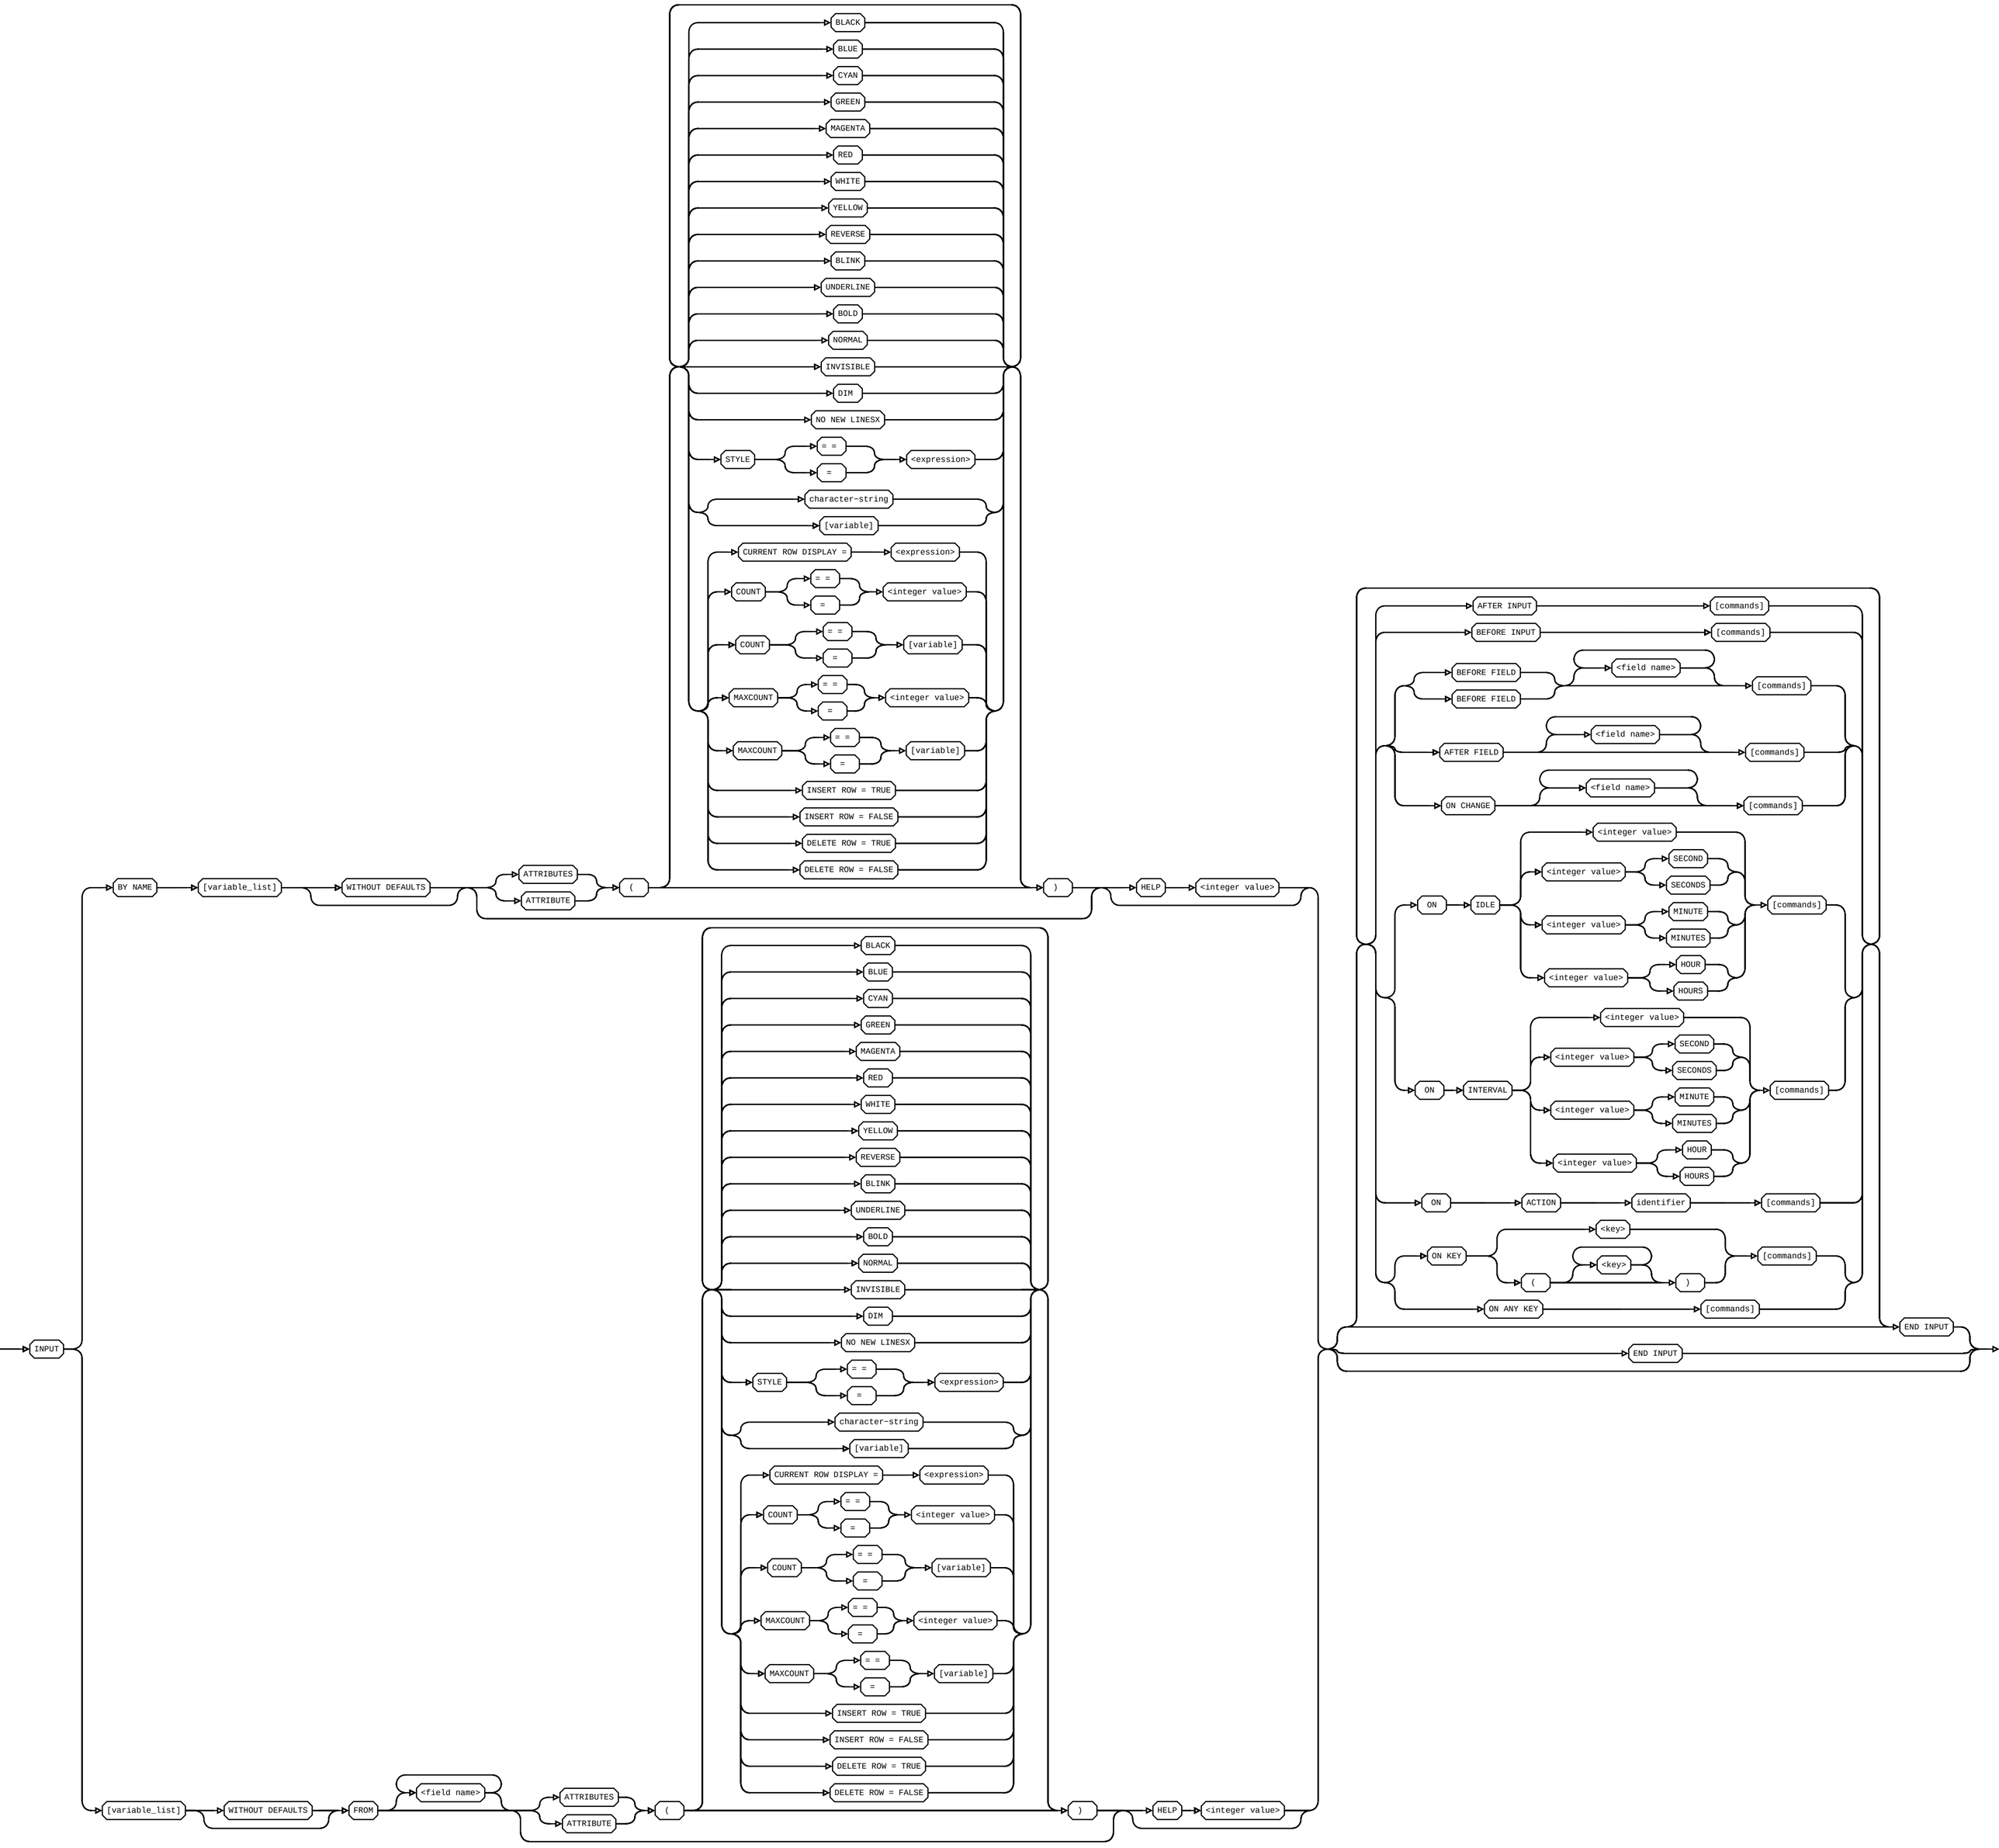
INPUT
BY NAME
[variable_list]
WITHOUT DEFAULTS
ATTRIBUTES
ATTRIBUTE
(
BLACK
BLUE
CYAN
GREEN
MAGENTA
RED
WHITE
YELLOW
REVERSE
BLINK
UNDERLINE
BOLD
NORMAL
INVISIBLE
DIM
NO NEW LINESX
STYLE
= =
=
<expression>
character-string
[variable]
CURRENT ROW DISPLAY =
COUNT
<integer value>
MAXCOUNT
INSERT ROW = TRUE
INSERT ROW = FALSE
DELETE ROW = TRUE
DELETE ROW = FALSE
)
HELP
[variable_list]
WITHOUT DEFAULTS
FROM
<field name>
AFTER INPUT
[commands]
BEFORE INPUT
BEFORE FIELD
AFTER FIELD
ON CHANGE
ON
IDLE
SECOND
SECONDS
MINUTE
MINUTES
HOUR
HOURS
INTERVAL
ACTION
identifier
ON KEY
<key>
ON ANY KEY
END INPUT