YOUR PENTEST. ONE COCKPIT. ONE AGENT.

Kali · Exegol · Terminals · Kill chain

Venator Ops: Chat

VENATOR OPS · ROE Supervised · History · + New

Recon — Analysis — 3 Action — 4 Report

Two exposed services: **SSH and an admin panel**

- /login form has no attempt limit
- The user parameter is echoed in the SQL error

NMAP Copy

```
22/tcp   open  ssh   OpenSSH 9.6p1
8080/tcp open  http  Werkzeug 3.0.1
```

Service	Status
ssh	filtered
http-admin	to test

mcp__kali__execute_comma… ffuf -u htt… running

Authorization required

Execution · Rememberable

TOOL mcp__kali__execute_command

ACTION `sqlmap -u http://10.10.10.14:8080/login --batch`

REASON Confirm the SQL injection on /login (authorized lab).

▶ Details

Allow once · Deny · Always


Waiting for your approval T+00:02

Your prompt…

@ # / Balanced model

Cockpit · Settings · Kill chain ×

Fit · − · + · Export draft · Export image · Replay

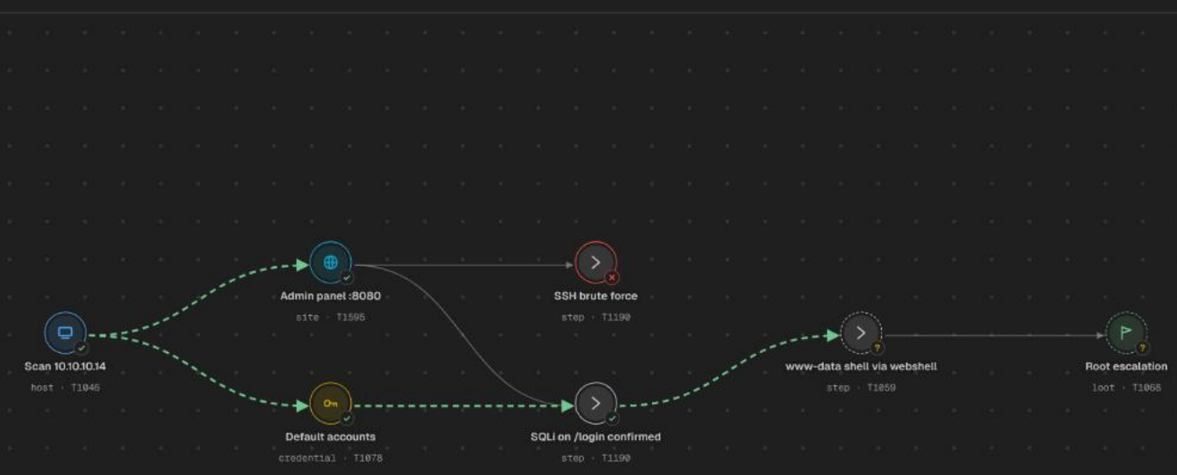

Legend

TYPE: Host · Credential · Site / URL · Step · Loot

STATE: Confirmed · Hypothesis · Failed

Selected path: green lin… by the agent or by you. Se… edit it.

Monitor · kali-1 ×

VENATOR OPS

Monitor 3 commands T+00:02

Live output. Click an entry to follow it read-only. Follow

```
15 users        [Status: 401, Size: 52, Words: 4]
16 reset        [Status: 200, Size: 1290, Words: 301]
17 debug        [Status: 403, Size: 199, Words: 18]
18 metrics      [Status: 401, Size: 52, Words: 4]
19 docs         [Status: 200, Size: 2213, Words: 498]
20 graphql      [Status: 401, Size: 52, Words: 4]
21 status       [Status: 200, Size: 27, Words: 2]
22 config       [Status: 403, Size: 199, Words: 18]
23
24 :: Progress: [4744/4744] :: 312 req/sec :: Errors: 0 ::
```

STUCK ON A BOX?
FEED IT YOUR COURSE.
IT READS YOUR TERMINAL.

Learning mode · Your course · #kali-1 · Hints

Never executes

Venator Ops : kali-1 × | Kill chain

```
┌──(kali㉿kali-1)-[~/lab]
└─$ ssh dev@10.10.10.14
dev@target:~$ id
uid=1001(dev) gid=1001(dev) groups=1001(dev)
dev@target:~$ find / -perm -4000 2>/dev/null
/usr/bin/passwd
/usr/bin/mount
/usr/bin/su
/usr/bin/chsh
/usr/bin/newgrp
dev@target:~$ sudo -l
Matching Defaults entries for dev on target:
    env_reset, secure_path=/usr/local/sbin\:/usr/bin
User dev may run the following commands on target:
    (root) NOPASSWD: /usr/bin/find
dev@target:~$
```

Venator Ops: Chat

VENATOR OPS | ROE Learning | History | + New

I am stuck on privilege escalation. Here is my course `privesc-linux.pdf`. Look at `#kali-1`, I cannot see anything exploitable.

I am reading your `#kali-1` session and chapter 4 of your course. Learning mode: I run nothing.

- Reading terminal `kali-1 · 16 lines` ✓ read
- Reading course `privesc-linux.pdf · chap…` ✓ read

The lead is already in your terminal

Your SUID search only returns standard binaries: nothing unusual there. But your last command, `sudo -l`, shows that **dev can run /usr/bin/find as root without a password**.

- Your course covers it in §4.2, “Binaries allowed through sudo”.
- Check which option of `find` runs a command, then look up `find` on GTFOBins.

Give it a try, and paste the output if you are still stuck.

Your prompt…

@ # / ⌁ ⬡

Balanced model