

REVISED MANUSCRIPT (MARKED-UP VERSION – REVISIONS HIGHLIGHTED IN BLUE)

## ViGATs: Vision Graph Attention Networks for Enhanced Plant Leaf Disease Classification

Anonymous Authors for Double-Blind Review

Manuscript (Ref.: Ms. No. 266350252) submitted to Journal of Information and Telecommunication (JIT)

### ARTICLE HISTORY

Compiled August 29, 2026

### ABSTRACT

Automated plant disease diagnosis is crucial for food security and precision agriculture, yet it faces substantial challenges from irregularly scattered lesions, diverse symptoms, and intricate natural field backgrounds. While Vision Graph Neural Networks (Vision GNNs) mitigate the rigid local receptive fields of conventional Convolutional Neural Networks (CNNs), their standard Max-Relative graph convolution (MRConv) assigns hard, unweighted extreme responses across channels. In this paper, we propose ViGATs (Vision Graph Attention Networks), integrating a novel Edge-Difference Multi-Head Graph Attention Convolution (GATConv) module with grouped linear projections to learn adaptive, context-sensitive attention weights among dynamic image patch neighbors. Operating under a rigorous *train-from-scratch paradigm at low input resolution* ( $64 \times 64$ ), ViGATs is comprehensively evaluated using 5-fold stratified cross-validation across four diverse plant disease benchmarks (PlantVillage, Maize Disease, Rice Leaf V2, and the multicrop in-the-wild PlantRaw), the standard Tiny ImageNet dataset, and an unseen aerial drone cross-domain transfer benchmark (IITDMJ). ViGATs establishes superior performance with an average classification accuracy of 96.09% across all plant benchmarks, notably achieving 86.12% on complex in-field PlantRaw images and outperforming modern CNNs, Vision Transformers, and State Space Models. Requiring only 4.67M parameters and 1.13 GFLOPs, ViGATs provides a balanced and efficient architecture for edge-AI agricultural diagnostic systems.

### KEYWORDS


Graph Attention Networks; Vision GNN; Plant Disease Classification; Stratified Cross-Validation; Cross-Domain Transfer; Smart Agriculture

## 1. Introduction

Plant foliar diseases account for an estimated 20% to 40% loss in global crop production annually (Savary et al., 2019), directly threatening food security and agricultural sustainability. Early, automated, and accurate detection of foliar pathologies from digital imagery is a cornerstone of smart agriculture and intelligent precision farming. Deep learning has fundamentally advanced automated disease diagnosis through three principal visual representation paradigms:

- (1) *Convolutional Neural Networks (CNNs)*: Exploit local spatial correlations over

- rigid, rectangular pixel grids (He et al., 2016; Liu et al., 2022).
- (2) *Vision Transformers (ViTs)*: Utilize multi-head self-attention mechanisms to model global dependencies across sequence patch tokens (Dosovitskiy et al., 2021; Liu et al., 2021).
  - (3) *Vision Graph Neural Networks (Vision GNNs)*: Transform an image into an unstructured, dynamic feature-space graph, flexibly linking scattered and non-contiguous symptoms regardless of spatial distance (Han et al., 2022) (as conceptualized in Figure 1).

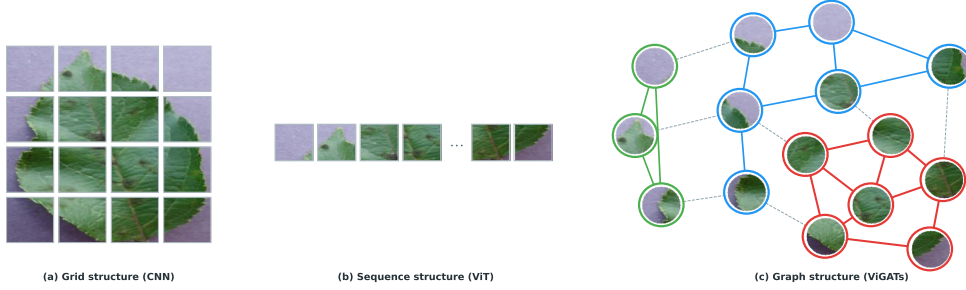

**Figure 1.** Comparison of three visual representation paradigms: (a) regular grid (CNNs); (b) token sequence (ViTs); and (c) dynamic feature-space graph (ViGATs).

Despite notable achievements, existing architectures present fundamental limitations when deployed in practical agricultural scenarios. Standard CNNs are constrained by fixed, local receptive fields, rendering them suboptimal for capturing non-contiguous lesions scattered across irregular leaf surfaces. Vision Transformers impose quadratic computational complexity and frequently suffer from severe over-fitting when trained from scratch on compact domain-specific datasets. Concurrently, original Vision GNNs rely on Max-Relative Convolution (MRConv) (Han et al., 2022; Li et al., 2019), which applies a channel-wise hard maximum operation over neighbor differences. Although MRConv selectively captures peak responses, it treats neighbor contributions rigidly without learning soft contextual importance, making it vulnerable to complex field noise and fluctuating illumination.

To address these challenges, we introduce ViGATs (Vision Graph Attention Networks). Diverging from common approaches that rely on large-scale pre-trained weights at high resolutions ( $224 \times 224$ ), we formulate a challenging yet practical benchmark: *training from scratch at a low input resolution of  $64 \times 64$* . This setting faithfully mirrors the hardware, memory, and bandwidth constraints of real-world edge IoT sensor nodes and unmanned aerial vehicles (UAVs). ViGATs re-engineers the graph convolution layer by introducing a specialized GATConv module. By computing multi-head attention coefficients ( $H = 4$ ) over edge differences ( $\mathbf{x}_j - \mathbf{x}_i$ ) via efficient grouped projections, ViGATs dynamically prioritizes pathological lesion boundaries while effectively suppressing background noise.

The primary contributions of this work are summarized as follows:

- *Edge-Difference GATConv Module*: We design a multi-head edge-difference graph attention convolution combined with node-level grouped projections, resolving both the static attention bottleneck and the excessive computational overhead of GAT and GATv2.
- *Compact Edge-AI Architecture*: ViGATs achieves a highly optimized footprint

with only 4.67M parameters, 1.13 GFLOPs, and 129.8 MB peak VRAM, providing an optimal trade-off for resource-constrained edge computing.

- *Leakage-Free Multi-Dataset Benchmarking:* Through a strict 5-fold stratified cross-validation protocol, ViGATs consistently outperforms CNN, ViT, and SSM baselines across four plant disease datasets (PlantVillage, Maize Disease, Rice Leaf V2, PlantRaw), Tiny ImageNet, and an unseen aerial drone domain transfer scenario (IIITDMJ).
- *Visual Explainability & Diagnostic Insight:* We demonstrate the model’s capability to capture non-local pathological associations through t-SNE manifold projections and attention heatmaps.

## 2. Related Work

### 2.1. CNN-Based Plant Disease Diagnosis

Deep convolutional networks have long dominated automated plant disease recognition (Mohanty et al., 2016). Widely adopted architectures including VGG (Ferentinos, 2018), ResNet (He et al., 2016; Sethy et al., 2020; Singh et al., 2024), EfficientNet (Tan & Le, 2019), and MobileNet (Chen et al., 2021; Too et al., 2019) have achieved classification accuracies surpassing 97% on laboratory benchmarks, even under resource-constrained conditions (Batool et al., 2025). Nevertheless, standard CNNs remain fundamentally constrained by the inductive bias of localized grid convolutions (LeCun et al., 1998), creating difficulties when aggregating spatially disconnected, fine-grained lesion symptoms under natural field conditions. Furthermore, most CNN approaches depend heavily on ImageNet pre-trained representations.

### 2.2. Vision Transformers

Vision Transformers (ViTs) (Dosovitskiy et al., 2021) overcome local spatial limitations by employing global self-attention across image patch tokens. Recent variants such as DeiT (Touvron et al., 2021), Swin Transformer (Liu et al., 2021), and hybrid CNN-ViT architectures (Yu et al., 2025) have improved efficiency and multi-scale feature extraction. However, ViTs require massive training corpora and lack spatial inductive biases, making them prone to severe optimization instability and over-fitting when trained from scratch on agricultural datasets at low resolutions (Borhani et al., 2022).


### 2.3. Vision Graph Neural Networks and Graph Attention

Graph Neural Networks (GNNs) formulate images as unstructured, dynamic feature graphs (Han et al., 2022; Scarselli et al., 2009; Wu et al., 2021; Zhou et al., 2020). Recently, hybrid CNN-GNN frameworks (Singla et al., 2025; Surekha & Subha Mastan Rao, 2026) and sparse attention variants such as MobileViG (Munir et al., 2023) and AttentionViG (Gedik et al., 2025) have emerged. Concurrently, Graph Attention Networks (GAT (Veličković et al., 2018) and GATv2 (Brody et al., 2022)) have demonstrated marked advantages in learning adaptive neighborhood importance. This study bridges the gap by directly integrating an edge-difference multi-head attention mechanism into the isotropic Vision GNN framework, creating an efficient and robust architecture (ViGATs) optimized for botanical pathology diagnosis.

### 3. Proposed Method: ViGATs

#### 3.1. Architecture Overview and Design Rationale


ViGATs follows the isotropic visual graph framework established by ViG (Han et al., 2022): a convolutional stem extracts early visual features, an image-to-graph module constructs a dynamic  $K$ -Nearest Neighbor ( $K$ -NN) graph in metric feature space, and repeated Grapher-FFN blocks iteratively update node representations. Our core architectural innovation is replacing the standard MRConv with the proposed GATConv module (illustrated in Figure 2), enabling adaptive, content-aware attention across neighboring patches.

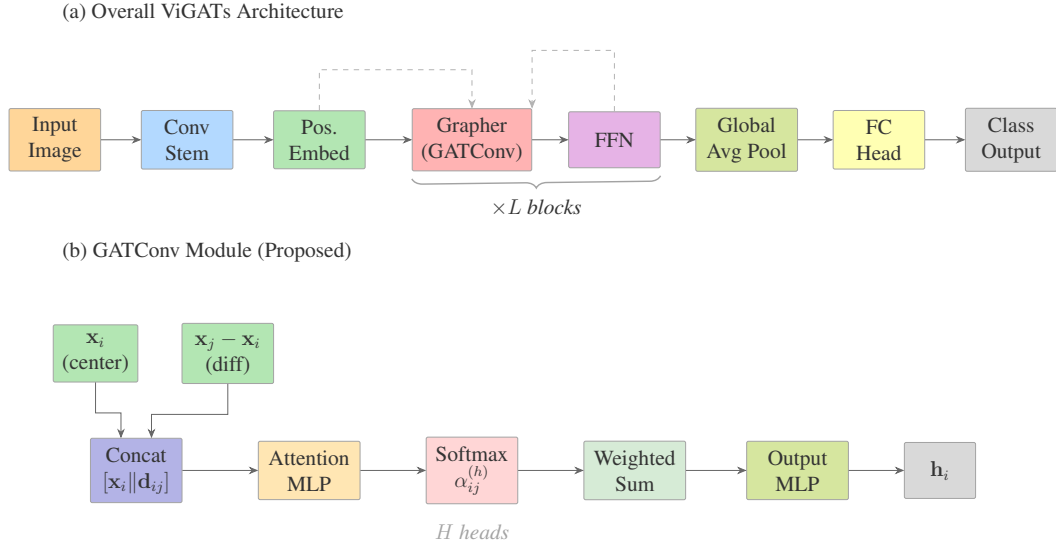

**Figure 2.** Overview of the ViGATs architecture: (a) the complete processing pipeline; and (b) the proposed GATConv module aggregating neighbor differences using multi-head edge attention.

#### 3.2. Image-to-Graph Transformation

The overall pipeline transforming an input image into a dynamic graph within ViGATs is depicted in Figure 3.

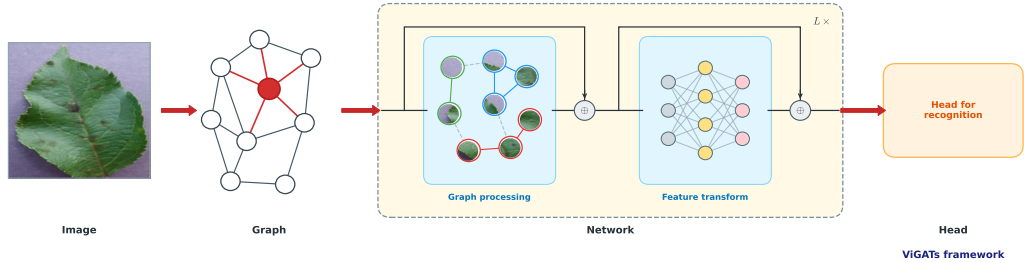

**Figure 3.** ViGATs processing framework from an input image to a dynamic graph, repeated Grapher-FFN blocks, global pooling, and the final classification.

Given an input RGB image  $\mathbf{I} \in \mathbb{R}^{3 \times H \times W}$ , a convolutional stem consisting of three  $3 \times 3$  convolutional layers with Batch Normalization (BN) (Ioffe & Szegedy, 2015) and GELU non-linearities (Hendrycks & Gimpel, 2016) downsamples the spatial dimensions by a factor of 4, producing feature map  $\mathbf{X} \in \mathbb{R}^{C \times H' \times W'}$  where  $H' = H/4, W' = W/4$ :

$$\text{Stem}(\mathbf{I}) = \text{Conv}_{3 \times 3}^{(C \rightarrow C)} \left( \text{GELU} \left( \text{BN} \left( \text{Conv}_{3 \times 3, s=2}^{(C/2 \rightarrow C)} \left( \text{GELU} \left( \text{BN} \left( \text{Conv}_{3 \times 3, s=2}^{(3 \rightarrow C/2)} (\mathbf{I}) \right) \right) \right) \right) \right) \right). \quad (1)$$

Each spatial grid coordinate  $(u, v)$  is treated as an individual node  $i$ , resulting in  $N = H' \times W'$  total nodes  $\mathbf{x}_i \in \mathbb{R}^C$ . A learnable position encoding tensor  $\mathbf{P} \in \mathbb{R}^{1 \times C \times H' \times W'}$  is added to preserve 2D spatial context:

$$\mathbf{X}^{(0)} = \mathbf{X} + \mathbf{P}. \quad (2)$$

### 3.3. Dynamic $K$ -NN Graph Construction

Semantic distance between any pair of node features  $(\mathbf{x}_i, \mathbf{x}_j)$  is measured using normalized  $L_2$  Euclidean distance (Han et al., 2022):

$$d(\mathbf{x}_i, \mathbf{x}_j) = \|\hat{\mathbf{x}}_i - \hat{\mathbf{x}}_j\|_2^2, \quad \text{where } \hat{\mathbf{x}}_i = \frac{\mathbf{x}_i}{\|\mathbf{x}_i\|_2}. \quad (3)$$

For each central node  $i$ , its local neighborhood  $\mathcal{N}_K(i)$  is dynamically constructed by selecting the  $K$  nearest neighbors in feature space:

$$\mathcal{N}_K(i) = \arg \min_{j \in \{1, \dots, N\} \setminus \{i\}}^{(K)} d(\mathbf{x}_i, \mathbf{x}_j). \quad (4)$$

The graph topology  $\mathcal{G}^{(l)} = (\mathcal{V}, \mathcal{E}^{(l)})$  is dynamically recomputed at the entrance of each Grapher block.

### 3.4. Max-Relative Graph Convolution (MRConv Baseline)

In the original ViG (Han et al., 2022), neighborhood aggregation is conducted via MRConv:

$$\mathbf{m}_i = \max_{j \in \mathcal{N}_K(i)} (\mathbf{x}_j - \mathbf{x}_i), \quad \forall i \in \{1, \dots, N\}, \quad (5)$$

$$\mathbf{h}_i = \text{MLP}([\mathbf{x}_i \parallel \mathbf{m}_i]). \quad (6)$$

While the channel-wise maximum retains peak feature activations, it applies a rigid selection policy that discards the nuanced relative semantic contributions of other neighboring patches, making the model sensitive to background clutter.

### 3.5. Edge-Difference Multi-Head Graph Attention Convolution (Proposed GATConv)

To resolve the limitations of MRConv, we propose the GATConv module. Drawing on the foundational principles of GAT (Veličković et al., 2018) and dynamic GATv2 (Brody et al., 2022), GATConv is specifically engineered for visual representations by computing adaptive multi-head attention weights directly on edge-difference vectors ( $\mathbf{x}_j - \mathbf{x}_i$ ) coupled with high-throughput grouped projections.

The message passing procedure within GATConv for each node  $i$  and neighbor  $j \in \mathcal{N}_K(i)$  unfolds in four systematic steps:

*Step 1: Neighbor Edge Difference.*

$$\mathbf{d}_{ij} = \mathbf{x}_j - \mathbf{x}_i \in \mathbb{R}^C, \quad \forall j \in \mathcal{N}_K(i). \quad (7)$$

*Step 2: Multi-Head Attention Coefficients.* A linear projection  $\mathbf{W}_1 = [\mathbf{W}_{1a} \mid \mathbf{W}_{1b}]$  maps node and edge features into a latent space  $D = H \cdot d_k$ :

$$\mathbf{g}_{ij} = \sigma_{\text{LR}}(\mathbf{W}_{1a}\mathbf{x}_i + \mathbf{W}_{1b}\mathbf{d}_{ij} + \mathbf{b}_1) \in \mathbb{R}^D. \quad (8)$$

The latent vector  $\mathbf{g}_{ij}$  is partitioned across  $H$  attention heads. Each head  $h$  evaluates its unnormalized attention score via grouped linear projection  $\mathbf{w}_2^{(h)}$ , followed by Softmax normalization:

$$e_{ij}^{(h)} = \mathbf{w}_2^{(h)\top} \mathbf{g}_{ij}^{(h)} + b_2^{(h)}, \quad h = 1, \dots, H, \quad (9)$$

$$\alpha_{ij}^{(h)} = \frac{\exp(e_{ij}^{(h)})}{\sum_{k \in \mathcal{N}_K(i)} \exp(e_{ik}^{(h)})}. \quad (10)$$

*Step 3: Multi-Head Weighted Aggregation.* The partitioned difference features  $\mathbf{d}_{ij}^{(h)}$  are aggregated across all neighbors according to normalized attention coefficients:

$$\mathbf{m}_i = \left\|_{h=1}^H \sum_{j \in \mathcal{N}_K(i)} \alpha_{ij}^{(h)} \cdot \mathbf{d}_{ij}^{(h)} \right\| \in \mathbb{R}^C. \quad (11)$$

*Step 4: Representation Update.* Node representations are updated via residual concatenation and grouped  $1 \times 1$  linear projection:

$$\mathbf{h}_i = \text{GELU}\left(\text{BN}(\mathbf{W}_{\text{out}}[\mathbf{x}_i \parallel \mathbf{m}_i] + \mathbf{b}_{\text{out}})\right). \quad (12)$$

Algorithm 1 details the complete computation workflow.

---

**Algorithm 1** Message Passing and Attention Computation in GATConv

---

**Require:** Node feature matrix  $\mathbf{X} \in \mathbb{R}^{C \times N}$ , dynamic  $K$ -NN neighborhood  $\mathcal{N}_K$ , number of heads  $H$ , head dimension  $d_k$  ( $D = H \cdot d_k$ ).

**Ensure:** Updated node feature matrix  $\mathbf{H} \in \mathbb{R}^{C \times N}$ .

```
1:  $\mathbf{P}_{\text{src}} = \mathbf{W}_{1a}\mathbf{X}, \quad \mathbf{P}_{\text{dst}} = \mathbf{W}_{1b}\mathbf{X}$  // Step 1: Node-level projections ( $\mathbb{R}^{D \times N}$ )
2: for each node  $i \in \{1, \dots, N\}$  and neighbor  $j \in \mathcal{N}_K(i)$  do
3:    $\mathbf{d}_{ij} = \mathbf{x}_j - \mathbf{x}_i$  // Edge difference vector
4:    $\mathbf{g}_{ij} = \text{LeakyReLU}_{0.2}(\mathbf{P}_{\text{src},i} + \mathbf{P}_{\text{dst},j} - \mathbf{P}_{\text{dst},i})$  // Step 2: Attention logits ( $\mathbb{R}^D$ )
5:   for each attention head  $h \in \{1, \dots, H\}$  do
6:      $e_{ij}^{(h)} = \mathbf{w}_2^{(h)\top} \mathbf{g}_{ij}^{(h)} + b_2^{(h)}$  // Grouped projection (groups =  $H$ )
7:      $\alpha_{ij}^{(h)} = \frac{\exp(e_{ij}^{(h)})}{\sum_{k \in \mathcal{N}_K(i)} \exp(e_{ik}^{(h)})}$  // Softmax normalization
8:   end for
9:    $\mathbf{m}_i = \left\| \sum_{h=1}^H \sum_{j \in \mathcal{N}_K(i)} \alpha_{ij}^{(h)} \cdot \mathbf{d}_{ij}^{(h)} \right\|$  // Step 3: Multi-head aggregation ( $\mathbb{R}^C$ )
10:   $\mathbf{h}_i = \text{GELU}\left(\text{BN}(\mathbf{W}_{\text{out}}[\mathbf{x}_i \parallel \mathbf{m}_i] + \mathbf{b}_{\text{out}})\right)$  // Step 4: Output projection ( $\mathbb{R}^C$ )
11: end for
12: return  $\mathbf{H} = [\mathbf{h}_1, \dots, \mathbf{h}_N]$ 
```

---

### 3.6. Structural Comparison of Graph Operators

We analyze the evolutionary trajectory across four distinct visual graph operators (summarized in Table 1):

*MRConv* (Han et al., 2022): Non-attentive maximum pooling:  $\mathbf{m}_i = \max_{j \in \mathcal{N}_K(i)} (\mathbf{x}_j - \mathbf{x}_i)$ .

*GAT* (Veličković et al., 2018): Static attention scoring  $e_{ij}^{(h)} = \sigma_{\text{LR}}(\mathbf{a}_{\text{src}}^{(h)\top} \mathbf{W} \mathbf{x}_i + \mathbf{a}_{\text{dst}}^{(h)\top} \mathbf{W} \mathbf{x}_j)$ , which suffers from rank collapse in dynamic neighborhoods (Brody et al., 2022).

*GATv2* (Brody et al., 2022): Dynamic edge-concatenation attention  $e_{ij}^{(h)} = \mathbf{a}^{(h)\top} \sigma_{\text{LR}}(\mathbf{W}[\mathbf{x}_i \parallel \mathbf{x}_j])$ , resolving static attention at the expense of high computational complexity (1.81 GFLOPs).

*GATConv* (Proposed): Dynamic edge-difference attention  $e_{ij}^{(h)} = \mathbf{w}_2^{(h)\top} \sigma_{\text{LR}}(\mathbf{W}_{1a}\mathbf{x}_i + \mathbf{W}_{1b}(\mathbf{x}_j - \mathbf{x}_i) + \mathbf{b}_1)$ . GATConv retains the full expressive capacity of dynamic attention while reducing computational cost to 1.13 GFLOPs (a 37.6% savings compared to GATv2).

**Table 1.** Network architecture specifications of evaluated Vision GNN models.

| Stage / Layer      | ViG (Baseline)                                    | ViG+GAT                                                  | ViG+GATv2                                                | ViGATs (Proposed)                                        |
|--------------------|---------------------------------------------------|----------------------------------------------------------|----------------------------------------------------------|----------------------------------------------------------|
| Stem               | Conv $\times$ 3<br>$C = 192$                      | Conv $\times$ 3<br>$C = 192$                             | Conv $\times$ 3<br>$C = 192$                             | Conv $\times$ 3<br>$C = 192$                             |
| Graph              | Node $16 \times 16$<br>KNN ( $K = 7$ )            | Node $16 \times 16$<br>KNN ( $K = 5$ )                   | Node $16 \times 16$<br>KNN ( $K = 5$ )                   | Node $16 \times 16$<br>KNN ( $K = 5$ )                   |
| Graph Operator     | MRCov (Han et al., 2022)                          | GAT (Veličković et al., 2018)                            | GATv2 (Brody et al., 2022)                               | GATConv (Ours)                                           |
| Attention Paradigm | None (Max-Relative)                               | Static Attention                                         | Dynamic (Edge-Concat)                                    | <b>Dynamic (Edge-Diff)</b>                               |
| Projection Level   | Feature Max                                       | Node-level                                               | Edge-level $[2C \cdot K]$                                | <b>Node-level <math>[D + H]</math></b>                   |
| Grapher Blocks     | Grapher $\times 8$<br>FFN $\times 8$<br>$C = 192$ | Grapher $\times 8$<br>FFN $\times 8$<br>$C = 192, H = 4$ | Grapher $\times 8$<br>FFN $\times 8$<br>$C = 192, H = 4$ | Grapher $\times 8$<br>FFN $\times 8$<br>$C = 192, H = 4$ |
| Head               | Pooling & MLP                                     | Pooling & MLP                                            | Pooling & MLP                                            | Pooling & MLP                                            |
| Params             | 4.37M                                             | 4.68M                                                    | 4.97M                                                    | <b>4.67M</b>                                             |
| GFLOPs             | 1.05                                              | 1.82                                                     | 1.81                                                     | <b>1.13</b>                                              |

### 3.7. Parameter and Computational Complexity Analysis

Table 2 summarizes computational complexity measured on an NVIDIA GeForce RTX 5070 Ti GPU with  $64 \times 64$  inputs. ViGATs (38-layer configuration) contains 4.67M parameters, providing an optimal trade-off between feature representation power and physical hardware consumption on edge devices.


**Table 2.** Computational complexity comparison of evaluated models. Blue = best; orange = second best.

| Family      | Model                              | Params (M) | Train (M) | GFLOPs | Mem (MB) | FPS   |
|-------------|------------------------------------|------------|-----------|--------|----------|-------|
| CNN         | ResNet-18 (He et al., 2016)        | 11.20      | 11.20     | 0.15   | 68.0     | 439.9 |
|             | ConvNeXt-Tiny (Liu et al., 2022)   | 27.85      | 27.85     | 0.36   | 169.6    | 218.3 |
|             | EfficientNetV2-S (Tan & Le, 2021)  | 20.23      | 20.23     | 0.24   | 88.5     | 66.5  |
| Transformer | ViT (Dosovitskiy et al., 2021)     | 5.62       | 5.62      | 0.95   | 111.8    | 410.2 |
|             | Swin-T (Liu et al., 2021)          | 27.55      | 27.55     | 0.24   | 217.5    | 101.9 |
| SSM         | MambaOut-Tiny (Yu et al., 2024)    | 24.33      | 24.33     | 0.37   | 197.4    | 168.9 |
| Lightweight | FastViT-T8 (Vasu et al., 2023)     | 3.29       | 3.29      | 0.04   | 121.8    | 129.6 |
|             | RepViT-M1 (Wang et al., 2024)      | 4.74       | 4.74      | 0.07   | 127.5    | 93.1  |
|             | EfficientViT-B1 (Cai et al., 2023) | 7.56       | 7.56      | 0.05   | 137.1    | 64.9  |
| GNN         | ViG (Han et al., 2022)             | 4.37       | 4.37      | 1.05   | 204.6    | 91.4  |
|             | ViG+GAT (Veličković et al., 2018)  | 4.68       | 4.68      | 1.82   | 112.6    | 73.6  |
|             | ViG+GATv2 (Brody et al., 2022)     | 4.97       | 4.97      | 1.81   | 115.6    | 80.1  |
|             | ViGATs (Proposed)                  | 4.67       | 4.67      | 1.13   | 129.8    | 74.0  |

### 3.8. Numerical Walkthrough Workflow

Figure 4 illustrates the step-by-step computational workflow of ViGATs on a representative leaf image through five distinct stages: patch partitioning, dynamic  $K$ -NN graph creation, GATConv edge aggregation, residual updating, and final classification. Concurrently, Table 3 summarizes the default hyperparameters.



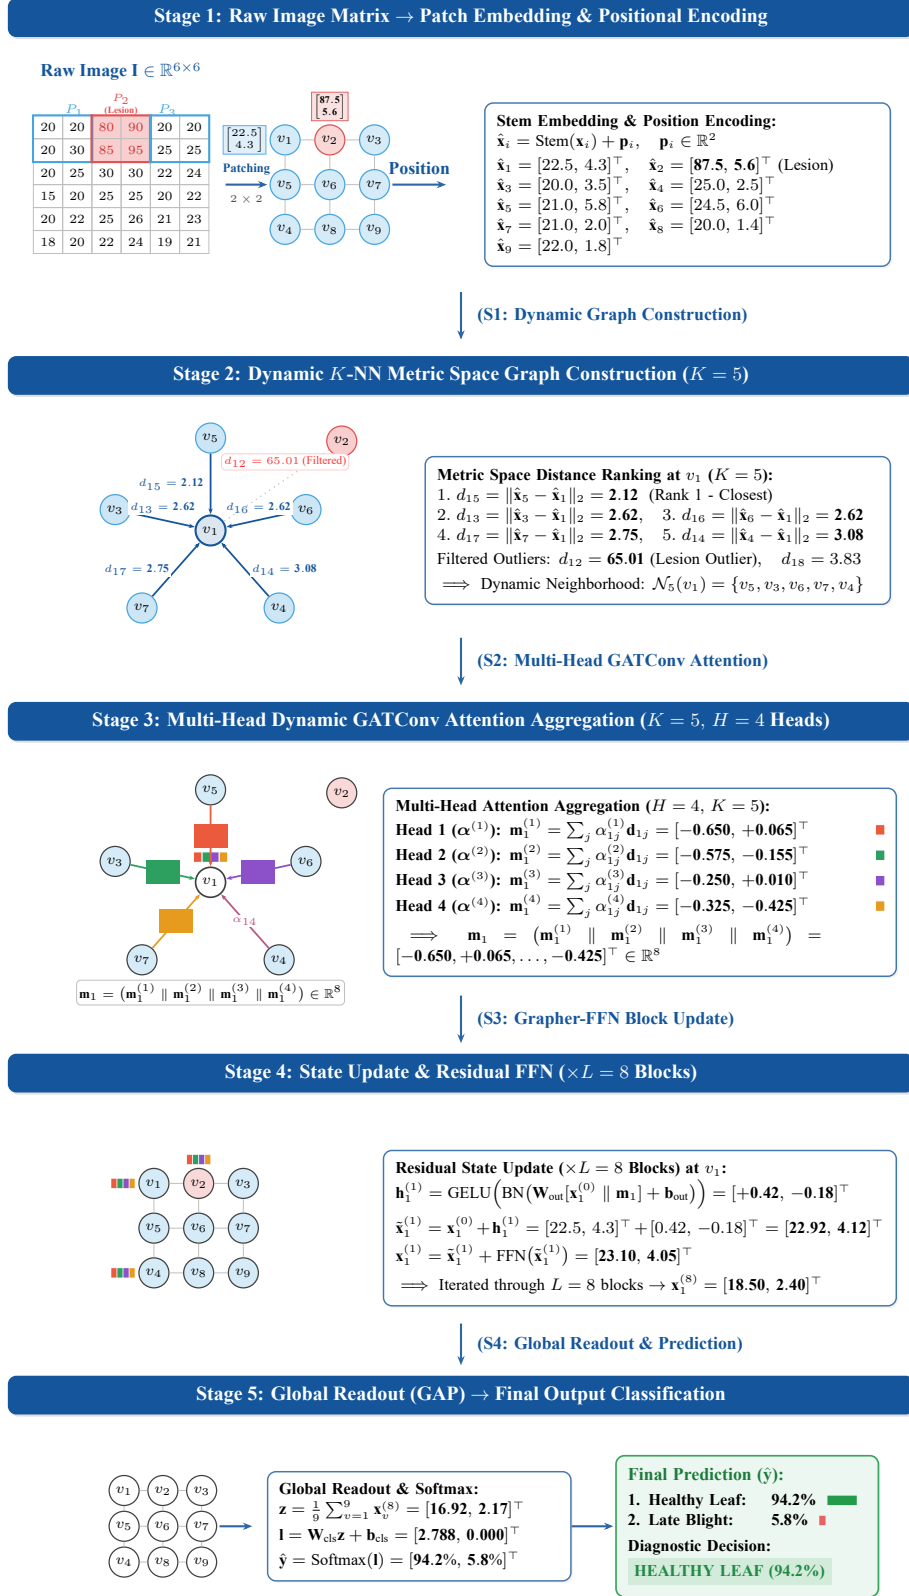

**Figure 4.** Step-by-step numerical calculation flowchart of ViGATs across five stages ( $K = 5$  neighbors,  $H = 4$  attention heads, and  $L = 8$  Grapher blocks): from raw pixel matrix and spatial patching, through dynamic metric space graph construction, multi-head edge-difference attention aggregation, residual state updating, to global average pooling and final disease classification.

**Table 3.** Default hyperparameter configuration of ViGATs.

| Symbol     | Description                   | Value          | Code reference                 |
|------------|-------------------------------|----------------|--------------------------------|
| $C$        | Hidden channels               | 192            | <code>ch=192</code>            |
| $K$        | KNN neighbors                 | 5              | <code>k=5</code>               |
| $L$        | Grapher-FFN blocks            | 8              | <code>nb=8</code>              |
| $H$        | Attention heads               | 4              | <code>heads=4</code>           |
| $d_k$      | Key dim per head              | 24             | <code>head_dim=24</code>       |
| $D$        | Attention hidden dim          | 96             | $H \cdot d_k$                  |
| $N$        | Nodes ( $64 \times 64$ input) | 256            | $(H_0/4)^2$                    |
| FFN exp.   | FFN expansion ratio           | 4              | <code>exp=4</code>             |
| Out groups | Output proj. groups           | 4              | <code>groups=4</code>          |
| $\sigma$   | Attn. activation              | LeakyReLU(0.2) | <code>nn.LeakyReLU(0.2)</code> |

## 4. Experimental Setup

### 4.1. Datasets and Acquisition Conditions

The experimental design encompasses complementary environmental conditions (summarized in Table 4): laboratory-controlled imagery (PlantVillage (Hughes & Salathé, 2015), Rice Leaf Disease V2 (Sethy, 2024)), real-world in-field imagery (Maize Leaf Disease (Mduma & Mayo, 2023)), and an unseen cross-domain target set (IIITDMJ Maize (Thakur et al., 2024)). Tiny ImageNet (Le & Yang, 2015) serves as a general-purpose vision benchmark. All images are standardized to  $64 \times 64$  resolution.

**Table 4.** Summary of the datasets used in the experiments.

| Dataset                                    | Classes  | Images       | Domain / Type                 | Resolution     |
|--------------------------------------------|----------|--------------|-------------------------------|----------------|
| PlantVillage (Hughes & Salathé, 2015)      | 38       | 54,305       | Lab-controlled                | $64 \times 64$ |
| Maize Leaf Disease (Mduma & Mayo, 2023)    | 4        | 15,350       | In-field                      | $64 \times 64$ |
| Rice Leaf Disease V2 (Sethy, 2024)         | 4        | 5,932        | Lab-controlled                | $64 \times 64$ |
| PlantRaw (Tong-Le et al., 2026)            | 35       | 16,165       | In-field multi-crop           | $64 \times 64$ |
| Tiny ImageNet (Le & Yang, 2015)            | 200      | 110,000      | General vision                | $64 \times 64$ |
| <b>IIITDMJ Maize (Thakur et al., 2024)</b> | <b>4</b> | <b>1,432</b> | <b>Cross-domain benchmark</b> | $64 \times 64$ |
| └ Close-up Leaf (Source domain)            | 4        | 416          | In-field close-up leaf        | $64 \times 64$ |
| └ Augmented Leaf (CycleGAN)                | 4        | 816          | Synthetic augmented leaf      | $64 \times 64$ |
| └ Drone Aerial (Target domain)             | 4        | 200          | Unseen aerial drone           | $64 \times 64$ |


#### 4.1.1. PlantRaw: In-the-Wild Multicrop Benchmark

PlantRaw represents a primary dataset contribution of this work, compiled and standardized across 9 open sources (Tong-Le et al., 2026). It comprises 16,165 images across 35 disease classes from 10 distinct crops (Table 5).

**Table 5.** Composition and sources of the PlantRaw benchmark dataset.

| Data Source                                  | Crop            | Classes   | Images        |
|----------------------------------------------|-----------------|-----------|---------------|
| PlantVillage (Hughes & Salathé, 2015)        | Apple, Maize    | 8         | 7,023         |
| iCassava (Mwebaze et al., 2019)              | Cassava         | 5         | 4,000         |
| Ethiopian Coffee Leaf Disease (Yoseph, 2023) | Coffee          | 4         | 1,200         |
| Soybean Diseased Leaf (Mishra, 2023)         | Soybean         | 4         | 445           |
| Sugarcane Leaf Disease (Daphal & Koli, 2022) | Sugarcane       | 5         | 2,521         |
| Wheat Leaf Dataset (Getch, 2021)             | Wheat           | 3         | 407           |
| Cucumber Plant Diseases (Negm, 2021)         | Cucumber        | 2         | 469           |
| Chili Plant Disease (Prakoso, 2021)          | Chili           | 2         | 20            |
| Rice Leaf Diseases (Prajapati et al., 2017)  | Rice            | 2         | 80            |
| <b>Total</b>                                 | <b>10 crops</b> | <b>35</b> | <b>16,165</b> |

Figure 5 illustrates the distribution of images and classes across crops in PlantRaw.

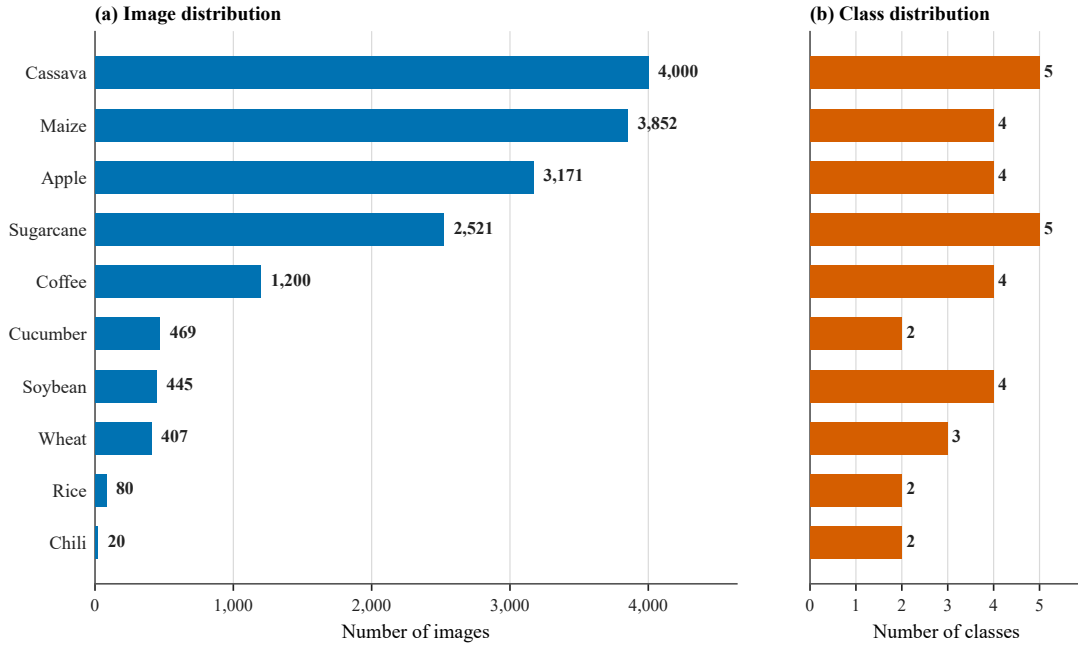**Figure 5.** Distribution of images and classes in PlantRaw. Colored bars indicate image counts, and hatched bars indicate the corresponding number of classes.

#### 4.2. Training Protocol and Experimental Rigor

To ensure complete fairness and eliminate data leakage, all architectures are trained from scratch under identical hyperparameter configurations detailed in Table 6. A strict Stratified 5-Fold Cross-Validation protocol is applied across the five core benchmarks (70% train, 10% validation, 20% test). Model checkpoints are selected strictly based on validation performance before evaluating on held-out test splits.

**Table 6.** Summary of training protocol, data preprocessing, and experimental setup (Part 1).

| Component                                    | Common Configuration                                            | Dataset-Specific Tuning                                                                                     |
|----------------------------------------------|-----------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------|
| <i>A. Training Protocol and Optimization</i> |                                                                 |                                                                                                             |
| Loss function                                | Cross-Entropy Loss                                              | Label smoothing $\epsilon = 0.1$ on Maize, Rice V2, PlantRaw, Tiny ImageNet, IIITDMJ; none on PlantVillage. |
| Optimizer                                    | AdamW ( $\beta_1 = 0.9, \beta_2 = 0.999, \epsilon = 10^{-8}$ )  | Weight decay = 0.05 on PlantVillage; $10^{-4}$ on remaining datasets.                                       |
| Learning rate (LR)                           | Initial $\eta_0 = 10^{-3}$ , no warm-up                         | Cosine Annealing ( $T_{\max} = 100$ ), decaying to $\eta_{\min} = 10^{-6}$ .                                |
| Batch size                                   | Auto-optimized by VRAM ({256, 128, 64, 32, 16})                 | Batch size 256 on 5 main benchmarks; batch size 64 on IIITDMJ and Ablation.                                 |
| Epochs & Early stopping                      | Max 100 epochs; Early stopping on val_acc                       | Patience = 15 epochs (Patience = 20 on IIITDMJ).                                                            |
| Precision                                    | AMP enabled for PlantVillage benchmark and ablation experiments | Standard FP32 precision for remaining benchmarks.                                                           |

**Table 6.** Summary of training protocol, data preprocessing, and experimental setup (Part 2).

| Component                                     | Common Configuration                                                                                          | Dataset-Specific Tuning                                                                                     |
|-----------------------------------------------|---------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------|
| <i>B. Data Preprocessing and Partitioning</i> |                                                                                                               |                                                                                                             |
| Input resolution                              | $64 \times 64 \times 3$ RGB                                                                                   | Fixed resize, ImageNet normalization ( $\mu, \sigma$ ).                                                     |
| Data augmentation                             | Horizontal/vertical flip ( $p = 0.5$ ), rotation $\pm 15^\circ$ , Color Jitter                                | RandomAffine (5%) on PlantVillage; rotation $\pm 30^\circ$ and Grayscale on IIITDMJ.                        |
| Data split                                    | Main benchmarks: Stratified 5-Fold CV (seed = 42), approx. 70% Train / 10% Val / 20% Test                     | Ablation $K$ : 80% Train / 20% Val on fixed split; IIITDMJ: source 80%/20% per fold, drone target held out. |
| Weight initialization                         | Training from scratch                                                                                         | Kaiming Normal (Conv/Linear); Truncated Normal (ViT Pos/Cls).                                               |
| <i>C. Implementation Environment</i>          |                                                                                                               |                                                                                                             |
| Hardware platform                             | Intel Core i5-13400F CPU, 32 GB DDR5 RAM, NVIDIA GeForce RTX 5070 Ti GPU (16 GB VRAM), 500 GB NVMe SSD.       |                                                                                                             |
| Operating system                              | Ubuntu 24.04 LTS, 64-bit.                                                                                     |                                                                                                             |
| Software stack                                | Python 3.12.10, PyTorch with CUDA acceleration, torchvision, Pillow, NumPy, pandas, scikit-learn, thop 0.1.1. |                                                                                                             |

*Note:* AMP: Automatic Mixed Precision; LR: Learning Rate; VRAM: Video Random Access Memory; CV: Cross-Validation. Main benchmarks use `num_workers=4`; IIITDMJ uses `num_workers=0`. `pin_memory=True` is enabled during data loading.

### 4.3. Benchmark Baselines

The benchmark baseline models representing four major architecture families (CNN, ViT, SSM, GNN) and three modern lightweight architectures are detailed in Table 7.

**Table 7.** Benchmark models, roles in experimental design, and evaluation scope. “Four plant datasets” denotes PlantVillage, Maize Disease, Rice Leaf V2, and PlantRaw.

| Family      | Model                              | Benchmark Role                              | Evaluation Scope                    |
|-------------|------------------------------------|---------------------------------------------|-------------------------------------|
| CNN         | ResNet-18 (He et al., 2016)        | Standard residual CNN baseline.             | Four plant datasets + Tiny ImageNet |
|             | ConvNeXt-Tiny (Liu et al., 2022)   | Modernized CNN with next-gen conv design.   | Four plant datasets + Tiny ImageNet |
|             | EfficientNetV2-S (Tan & Le, 2021)  | Efficiency-optimized CNN baseline.          | Four plant datasets + Tiny ImageNet |
| Transformer | ViT (Dosovitskiy et al., 2021)     | Standard ViT with global self-attention.    | Four plant datasets + Tiny ImageNet |
|             | Swin-T (Liu et al., 2021)          | Hierarchical shifted-window Transformer.    | Four plant datasets + Tiny ImageNet |
| SSM         | MambaOut-Tiny (Yu et al., 2024)    | Gated conv model testing vision SSMS.       | Four plant datasets + Tiny ImageNet |
| GNN         | ViG (Han et al., 2022)             | Vision GNN with MRConv (base of ViGATs).    | Four plant datasets + Tiny ImageNet |
|             | ViG+GAT (Velićković et al., 2018)  | Variant replacing MRConv with standard GAT. | Four plant datasets + Tiny ImageNet |
|             | ViG+GATv2 (Brody et al., 2022)     | Variant with dynamic GATv2 attention.       | Four plant datasets + Tiny ImageNet |
| Lightweight | FastViT-T8 (Vasu et al., 2023)     | Structural re-parameterization hybrid.      | Tiny ImageNet                       |
|             | RepViT-M1 (Wang et al., 2024)      | Mobile CNN from a ViT perspective.          | Tiny ImageNet                       |
|             | EfficientViT-B1 (Cai et al., 2023) | Multi-scale efficient attention model.      | Tiny ImageNet                       |

#### 4.4. Evaluation Metrics and Statistical Testing

Performance is quantified via standard confusion matrix metrics (Sokolova & Lapalme, 2009). All 5-fold cross-validation metrics are reported as sample mean and standard deviation ( $\bar{M} \pm s$ ):

$$\bar{M} = \frac{1}{K_{\text{fold}}} \sum_{k=1}^{K_{\text{fold}}} M_k, \quad s = \sqrt{\frac{1}{K_{\text{fold}} - 1} \sum_{k=1}^{K_{\text{fold}}} (M_k - \bar{M})^2}. \quad (13)$$

Statistical significance between ViGATs and baseline models is verified using Holm-adjusted paired  $t$ -tests ( $p_{\text{Holm}}$ ).

## 5. Experimental Results and Analysis

### 5.1. Ablation Studies

We investigate the sensitivity of ViGATs to key architectural hyper-parameters on PlantVillage. Table 8 demonstrates that  $K = 5$  neighbors achieves optimal performance (99.82% accuracy) while maintaining low latency (0.98 ms).

**Table 8.** Validation performance across different numbers of graph neighbors  $K$  on PlantVillage.

| Model                  | $K = 3$ | $K = 5$ (Default) | $K = 7$ | $K = 9$ | Latency (ms) |
|------------------------|---------|-------------------|---------|---------|--------------|
| ViG (Han et al., 2022) | 99.77%  | 99.77%            | 99.82%  | 99.80%  | 0.92         |
| ViGATs (Proposed)      | 99.78%  | 99.82%            | 99.76%  | 99.80%  | 0.98         |

Note: **Green bold** and **orange** values denote the best and second-best result in each column; tied best values are both shown in green. Lower latency is better.

Table 9 presents an extended one-factor-at-a-time ablation on attention heads  $H$ , depth  $L$ , channels  $C$ , and attention activations  $\sigma$ .

**Table 9.** Extended one-factor-at-a-time ablation of GATConv on a fixed PlantVillage split. The final ViGATs configuration selected for subsequent experiments is marked by  $\dagger$ .

| Factor                     | Configuration        | AC (%) | F1 (%) | Params (M) | Epochs | Time/Epoch (s) |
|----------------------------|----------------------|--------|--------|------------|--------|----------------|
| Attention heads ( $H$ )    | $H = 1$              | 99.65  | 99.51  | 4.67       | 90     | 37.1           |
|                            | $H = 2$              | 99.67  | 99.61  | 4.67       | 95     | 36.6           |
|                            | $H = 4^\dagger$      | 99.72  | 99.64  | 4.67       | 98     | 36.6           |
|                            | $H = 8$              | 99.48  | 99.38  | 4.67       | 84     | 36.0           |
| Grapher-FFN blocks ( $L$ ) | $L = 4$              | 99.70  | 99.59  | 2.73       | 96     | 19.7           |
|                            | $L = 6$              | 98.44  | 97.48  | 3.70       | 37     | 27.8           |
|                            | $L = 8^\dagger$      | 99.72  | 99.64  | 4.67       | 98     | 36.6           |
|                            | $L = 12$             | 99.25  | 98.95  | 6.61       | 60     | 53.7           |
| Hidden dimension ( $C$ )   | $C = 96$             | 99.71  | 99.54  | 1.27       | 100    | 3.6            |
|                            | $C = 144$            | 99.74  | 99.68  | 2.70       | 100    | 30.0           |
|                            | $C = 192^\dagger$    | 99.72  | 99.64  | 4.67       | 98     | 36.6           |
|                            | $C = 256$            | 99.76  | 99.67  | 8.14       | 100    | 47.3           |
| Activation                 | LeakyReLU $^\dagger$ | 99.72  | 99.64  | 4.67       | 98     | 36.6           |
|                            | GELU                 | 99.66  | 99.52  | 4.67       | 100    | 39.8           |
|                            | ReLU                 | 99.71  | 99.58  | 4.67       | 100    | 36.1           |

Note: Within each factor group, **green bold** and **orange** values denote the best and second-best AC/F1 result. The  $\dagger$  setting defines the final ViGATs configuration used in the benchmark experiments. Time/Epoch is the recorded training time divided by the number of completed epochs under the identical hardware environment.

## 5.2. Plant Disease Benchmarks

Table 10 reports 5-fold cross-validation performance across PlantVillage, Maize Disease, and Rice Leaf V2.

**Table 10.** Classification performance (mean  $\pm$  sample standard deviation, %) on three plant-disease datasets using 5-Fold CV.

| Approach                                           | AC (%)                             | PR (%)                             | RE (%)                             | F1 (%)                             | $p_{\text{Holm}}$ |
|----------------------------------------------------|------------------------------------|------------------------------------|------------------------------------|------------------------------------|-------------------|
| (a) PlantVillage (38 classes, 54,305 images)       |                                    |                                    |                                    |                                    |                   |
| ResNet-18 (He et al., 2016)                        | 99.39 $\pm$ 0.12                   | 99.17 $\pm$ 0.14                   | 99.09 $\pm$ 0.18                   | 99.13 $\pm$ 0.14                   | 0.007             |
| ConvNeXt-Tiny (Liu et al., 2022)                   | 97.99 $\pm$ 0.23                   | 97.28 $\pm$ 0.39                   | 97.09 $\pm$ 0.32                   | 97.17 $\pm$ 0.34                   | 0.001             |
| EfficientNetV2-S (Tan & Le, 2021)                  | 99.39 $\pm$ 0.12                   | 99.14 $\pm$ 0.23                   | 99.05 $\pm$ 0.25                   | 99.09 $\pm$ 0.24                   | 0.041             |
| ViT (Dosovitskiy et al., 2021)                     | 99.31 $\pm$ 0.12                   | 99.08 $\pm$ 0.15                   | 98.96 $\pm$ 0.21                   | 99.01 $\pm$ 0.18                   | 0.007             |
| Swin-T (Liu et al., 2021)                          | 98.83 $\pm$ 0.19                   | 98.39 $\pm$ 0.26                   | 98.24 $\pm$ 0.24                   | 98.30 $\pm$ 0.23                   | 0.006             |
| MambaOut-Tiny (Yu et al., 2024)                    | 81.28 $\pm$ 39.77                  | 79.01 $\pm$ 44.02                  | 79.41 $\pm$ 42.92                  | 79.01 $\pm$ 43.90                  | 0.701             |
| ViG (Han et al., 2022)                             | <b>99.68 <math>\pm</math> 0.07</b> | <b>99.58 <math>\pm</math> 0.11</b> | <b>99.55 <math>\pm</math> 0.13</b> | <b>99.56 <math>\pm</math> 0.10</b> | 0.701             |
| ViG+GAT (Veličković et al., 2018)                  | 99.60 $\pm$ 0.18                   | 99.48 $\pm$ 0.22                   | 99.41 $\pm$ 0.30                   | 99.44 $\pm$ 0.25                   | 0.273             |
| ViG+GATv2 (Brody et al., 2022)                     | 99.55 $\pm$ 0.38                   | 99.34 $\pm$ 0.51                   | 99.35 $\pm$ 0.51                   | 99.34 $\pm$ 0.51                   | 0.701             |
| ViGATs (Proposed)                                  | <b>99.75 <math>\pm</math> 0.06</b> | <b>99.66 <math>\pm</math> 0.09</b> | <b>99.63 <math>\pm</math> 0.09</b> | <b>99.64 <math>\pm</math> 0.07</b> | — (Ref.)          |
| (b) Maize Leaf Disease (4 classes, 15,350 images)  |                                    |                                    |                                    |                                    |                   |
| ResNet-18 (He et al., 2016)                        | 97.27 $\pm$ 0.34                   | 96.73 $\pm$ 0.39                   | 96.98 $\pm$ 0.47                   | 96.85 $\pm$ 0.40                   | < 0.001           |
| ConvNeXt-Tiny (Liu et al., 2022)                   | 95.77 $\pm$ 0.49                   | 94.98 $\pm$ 0.66                   | 95.15 $\pm$ 0.54                   | 95.05 $\pm$ 0.59                   | < 0.001           |
| EfficientNetV2-S (Tan & Le, 2021)                  | 95.64 $\pm$ 0.38                   | 94.80 $\pm$ 0.50                   | 94.88 $\pm$ 0.55                   | 94.83 $\pm$ 0.48                   | < 0.001           |
| ViT (Dosovitskiy et al., 2021)                     | 93.97 $\pm$ 0.59                   | 93.01 $\pm$ 0.60                   | 92.93 $\pm$ 0.80                   | 92.97 $\pm$ 0.69                   | < 0.001           |
| Swin-T (Liu et al., 2021)                          | 71.03 $\pm$ 23.70                  | 60.15 $\pm$ 35.82                  | 64.01 $\pm$ 31.47                  | 59.23 $\pm$ 36.80                  | 0.183             |
| MambaOut-Tiny (Yu et al., 2024)                    | 59.97 $\pm$ 21.04                  | 32.93 $\pm$ 35.94                  | 46.13 $\pm$ 28.61                  | 37.36 $\pm$ 33.48                  | 0.057             |
| ViG (Han et al., 2022)                             | 98.11 $\pm$ 0.37                   | 97.84 $\pm$ 0.47                   | 97.89 $\pm$ 0.57                   | 97.85 $\pm$ 0.44                   | 0.005             |
| ViG+GAT (Veličković et al., 2018)                  | 98.34 $\pm$ 0.11                   | 98.04 $\pm$ 0.15                   | 98.19 $\pm$ 0.19                   | 98.11 $\pm$ 0.13                   | 0.294             |
| ViG+GATv2 (Brody et al., 2022)                     | <b>98.55 <math>\pm</math> 0.47</b> | <b>98.34 <math>\pm</math> 0.51</b> | <b>98.36 <math>\pm</math> 0.57</b> | <b>98.35 <math>\pm</math> 0.54</b> | 0.841             |
| ViGATs (Proposed)                                  | <b>98.58 <math>\pm</math> 0.39</b> | <b>98.32 <math>\pm</math> 0.48</b> | <b>98.44 <math>\pm</math> 0.42</b> | <b>98.38 <math>\pm</math> 0.45</b> | — (Ref.)          |
| (c) Rice Leaf Disease V2 (4 classes, 5,932 images) |                                    |                                    |                                    |                                    |                   |
| ResNet-18 (He et al., 2016)                        | 99.88 $\pm$ 0.11                   | 99.88 $\pm$ 0.12                   | 99.89 $\pm$ 0.11                   | 99.88 $\pm$ 0.11                   | 1.000             |
| ConvNeXt-Tiny (Liu et al., 2022)                   | 99.81 $\pm$ 0.28                   | 99.82 $\pm$ 0.28                   | 99.82 $\pm$ 0.27                   | 99.82 $\pm$ 0.28                   | 1.000             |
| EfficientNetV2-S (Tan & Le, 2021)                  | 99.70 $\pm$ 0.16                   | 99.70 $\pm$ 0.16                   | 99.70 $\pm$ 0.17                   | 99.70 $\pm$ 0.16                   | 0.561             |
| ViT (Dosovitskiy et al., 2021)                     | 99.29 $\pm$ 0.77                   | 99.32 $\pm$ 0.75                   | 99.30 $\pm$ 0.77                   | 99.31 $\pm$ 0.77                   | 0.711             |
| Swin-T (Liu et al., 2021)                          | 39.09 $\pm$ 3.87                   | 29.38 $\pm$ 6.53                   | 37.86 $\pm$ 4.22                   | 29.26 $\pm$ 4.50                   | < 0.001           |
| MambaOut-Tiny (Yu et al., 2024)                    | 56.15 $\pm$ 39.95                  | 44.01 $\pm$ 51.03                  | 54.97 $\pm$ 41.03                  | 46.34 $\pm$ 48.91                  | 0.561             |
| ViG (Han et al., 2022)                             | 99.88 $\pm$ 0.18                   | 99.89 $\pm$ 0.18                   | 99.88 $\pm$ 0.19                   | 99.88 $\pm$ 0.19                   | 1.000             |
| ViG+GAT (Veličković et al., 2018)                  | 99.76 $\pm$ 0.26                   | 99.78 $\pm$ 0.23                   | 99.76 $\pm$ 0.27                   | 99.77 $\pm$ 0.25                   | 0.561             |
| ViG+GATv2 (Brody et al., 2022)                     | <b>99.92 <math>\pm</math> 0.12</b> | <b>99.92 <math>\pm</math> 0.12</b> | <b>99.92 <math>\pm</math> 0.12</b> | <b>99.92 <math>\pm</math> 0.12</b> | 1.000             |
| ViGATs (Proposed)                                  | <b>99.93 <math>\pm</math> 0.11</b> | <b>99.93 <math>\pm</math> 0.11</b> | <b>99.93 <math>\pm</math> 0.11</b> | <b>99.93 <math>\pm</math> 0.11</b> | — (Ref.)          |

Note: Values are mean  $\pm$  sample standard deviation across five folds. **Green bold** and **orange** values denote the best and second-best result in each metric column. Holm-adjusted paired  $t$ -tests compare each model with ViGATs.

### 5.2.1. PlantRaw: Multicrop Field Benchmark

Table 11 evaluates models on the unconstrained, multicrop PlantRaw dataset. ViGATs maintains the highest accuracy (86.12%), significantly exceeding CNN and Transformer architectures.

**Table 11.** Classification performance (mean  $\pm$  sample standard deviation, %) on PlantRaw (35 classes, 16,165 images) using 5-Fold CV.

| Approach                          | AC (%)                             | PR (%)                             | RE (%)                             | F1 (%)                             | $p_{\text{Holm}}$ |
|-----------------------------------|------------------------------------|------------------------------------|------------------------------------|------------------------------------|-------------------|
| ResNet-18 (He et al., 2016)       | 79.64 $\pm$ 0.94                   | 80.77 $\pm$ 3.26                   | 78.93 $\pm$ 2.30                   | 79.25 $\pm$ 2.79                   | < 0.001           |
| ConvNeXt-Tiny (Liu et al., 2022)  | 72.97 $\pm$ 1.03                   | 72.00 $\pm$ 0.88                   | 71.33 $\pm$ 1.36                   | 71.30 $\pm$ 1.16                   | < 0.001           |
| EfficientNetV2-S (Tan & Le, 2021) | 75.32 $\pm$ 1.14                   | 74.03 $\pm$ 1.97                   | 73.12 $\pm$ 3.32                   | 73.18 $\pm$ 2.75                   | < 0.001           |
| ViT (Dosovitskiy et al., 2021)    | 70.91 $\pm$ 0.80                   | 71.72 $\pm$ 2.21                   | 70.62 $\pm$ 2.26                   | 70.41 $\pm$ 2.49                   | < 0.001           |
| Swin-T (Liu et al., 2021)         | 56.63 $\pm$ 13.07                  | 50.37 $\pm$ 16.55                  | 46.70 $\pm$ 17.11                  | 46.00 $\pm$ 18.02                  | 0.041             |
| MambaOut-Tiny (Yu et al., 2024)   | 63.78 $\pm$ 27.16                  | 59.31 $\pm$ 32.31                  | 59.81 $\pm$ 30.63                  | 58.99 $\pm$ 31.83                  | 0.550             |
| ViG (Han et al., 2022)            | 85.01 $\pm$ 2.00                   | 86.52 $\pm$ 4.58                   | 84.89 $\pm$ 4.29                   | 85.19 $\pm$ 4.46                   | 0.572             |
| ViG+GAT (Veličković et al., 2018) | 85.85 $\pm$ 0.80                   | 87.21 $\pm$ 3.21                   | 86.22 $\pm$ 2.60                   | 86.35 $\pm$ 2.80                   | 0.802             |
| ViG+GATv2 (Brody et al., 2022)    | <b>85.94 <math>\pm</math> 0.79</b> | <b>88.09 <math>\pm</math> 2.21</b> | <b>86.54 <math>\pm</math> 1.70</b> | <b>86.98 <math>\pm</math> 1.81</b> | 0.802             |
| ViGATs (Proposed)                 | <b>86.12 <math>\pm</math> 0.61</b> | <b>87.76 <math>\pm</math> 3.19</b> | <b>86.72 <math>\pm</math> 2.57</b> | <b>86.87 <math>\pm</math> 2.79</b> | — (Ref.)          |

Note: Values are mean  $\pm$  sample standard deviation across five folds. **Green bold** and **orange** values denote the best and second-best result in each metric column.

Figure 6 displays optimization and validation trajectories across models on PlantRaw.

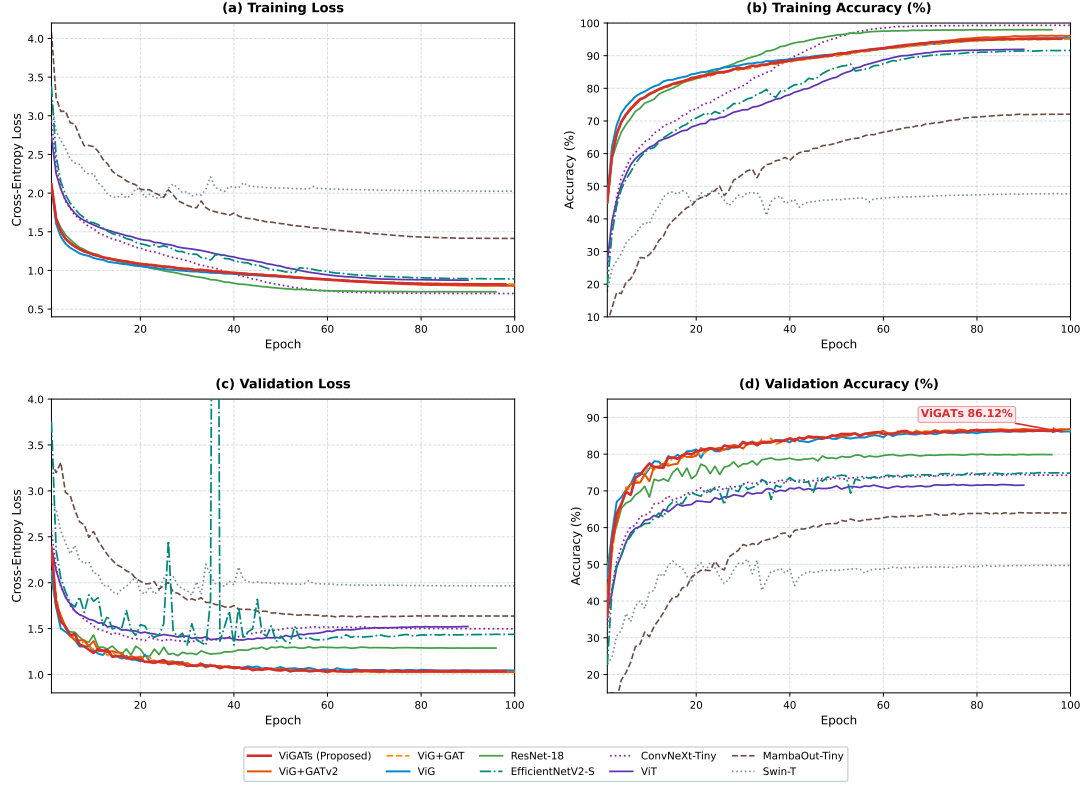


Figure 6. Training and validation curves of the evaluated models on PlantRaw.

### 5.3. Cross-Domain Transfer to Aerial Drone Imagery

Table 12 presents zero-shot transfer performance from close-up field imagery to unseen aerial drone captures on IIITDMJ Maize.

Table 12. Cross-domain evaluation on IIITDMJ. Models were trained on close-up images and evaluated without fine-tuning on 200 aerial images (50 images per class).


| Model                             | Original close-up set |                   |       | Augmented close-up set |                   |       |
|-----------------------------------|-----------------------|-------------------|-------|------------------------|-------------------|-------|
|                                   | Field (%)             | Drone (%)         | Gap   | Field (%)              | Drone (%)         | Gap   |
| ResNet-18 (He et al., 2016)       | 90.62 $\pm$ 5.29      | 66.70 $\pm$ 3.83  | 23.92 | 96.69 $\pm$ 1.27       | 67.10 $\pm$ 1.98  | 29.59 |
| ConvNeXt-Tiny (Liu et al., 2022)  | 85.33 $\pm$ 5.02      | 77.50 $\pm$ 5.86  | 7.83  | 93.62 $\pm$ 1.67       | 77.00 $\pm$ 1.58  | 16.62 |
| EfficientNetV2-S (Tan & Le, 2021) | 77.87 $\pm$ 7.09      | 59.50 $\pm$ 17.91 | 18.37 | 86.64 $\pm$ 3.35       | 58.20 $\pm$ 11.86 | 28.44 |
| ViT (Dosovitskiy et al., 2021)    | 82.93 $\pm$ 3.59      | 70.70 $\pm$ 10.40 | 12.23 | 88.97 $\pm$ 1.16       | 58.00 $\pm$ 4.34  | 30.97 |
| Swin-T (Liu et al., 2021)         | 57.21 $\pm$ 7.19      | 55.10 $\pm$ 6.06  | 2.11  | 51.00 $\pm$ 10.66      | 55.90 $\pm$ 9.96  | -4.90 |
| MambaOut-Tiny (Yu et al., 2024)   | 46.44 $\pm$ 26.30     | 41.60 $\pm$ 23.60 | 4.84  | 50.52 $\pm$ 27.98      | 48.70 $\pm$ 23.54 | 1.82  |
| ViG (Han et al., 2022)            | 93.99 $\pm$ 1.71      | 63.70 $\pm$ 5.25  | 30.29 | 96.81 $\pm$ 1.26       | 64.00 $\pm$ 3.98  | 32.81 |
| ViG+GAT (Veličković et al., 2018) | 90.63 $\pm$ 2.59      | 69.30 $\pm$ 4.60  | 21.33 | 96.93 $\pm$ 1.89       | 67.20 $\pm$ 5.44  | 29.73 |
| ViG+GATv2 (Brody et al., 2022)    | 92.30 $\pm$ 1.40      | 62.80 $\pm$ 4.49  | 29.50 | 96.57 $\pm$ 1.35       | 66.60 $\pm$ 7.87  | 29.97 |
| ViGATs (Proposed)                 | 90.37 $\pm$ 5.79      | 71.30 $\pm$ 4.10  | 19.07 | 97.18 $\pm$ 1.27       | 69.00 $\pm$ 4.49  | 28.18 |

Note: Values are mean  $\pm$  sample standard deviation across five source-domain folds. **Green bold** and **orange** denote the best and second-best Field/Drone accuracy in each scenario; Gap is unranked. Field denotes close-up test accuracy; Drone denotes accuracy on the fixed 200-image target set; Gap = Field – Drone.

Figure 7 displays normalized confusion matrices for representative architectures



under drone domain shift.

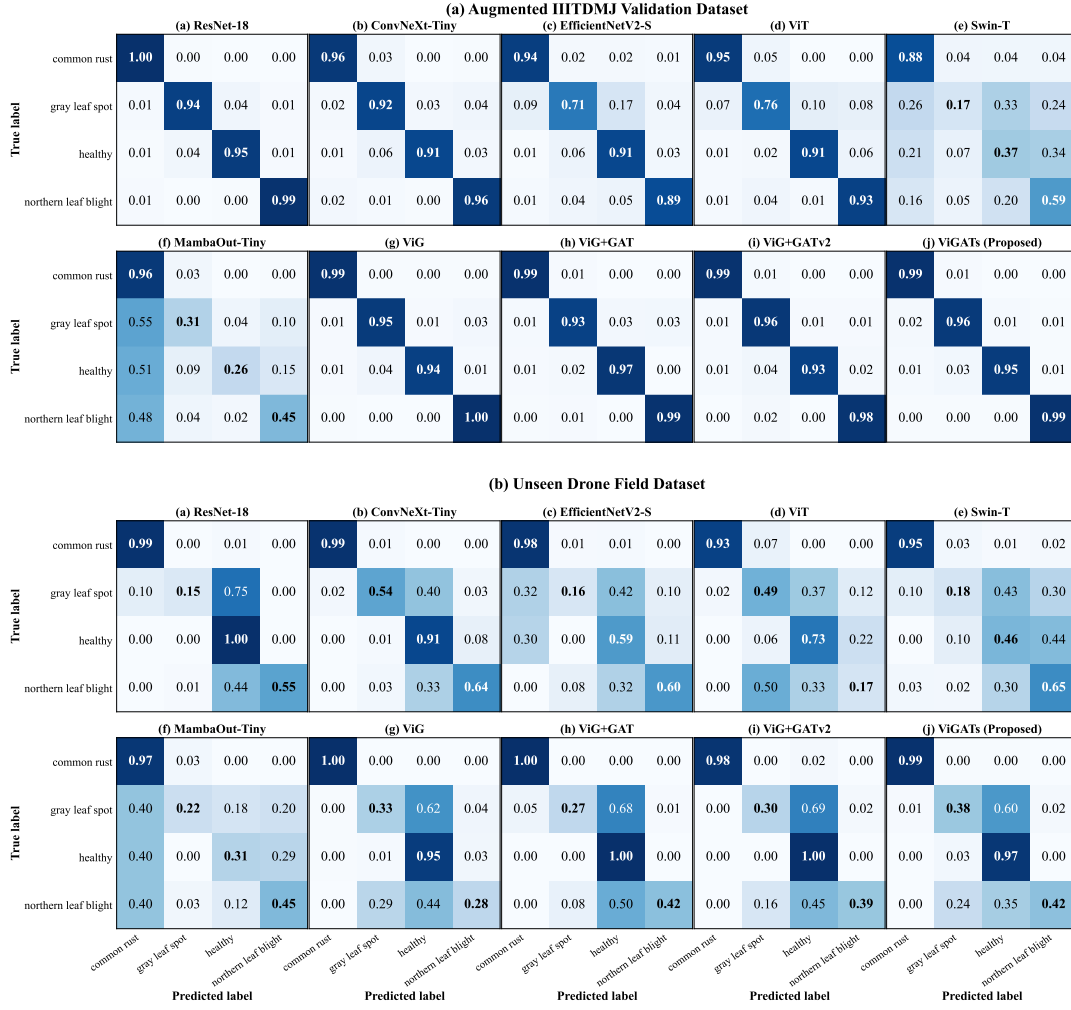

**Figure 7.** Confusion Matrices of benchmark models on two evaluation scenarios: (a) the augmented IIITDMJ validation set and (b) the unseen drone field dataset.

#### 5.4. General Vision Benchmark: Tiny ImageNet

Table 13 evaluates the general-purpose visual representation capacity of ViGATs on Tiny ImageNet when trained from scratch at  $64 \times 64$  resolution. ViGATs achieves 45.73% accuracy, surpassing the best non-GNN baseline (ResNet-18 at 37.50%) and lightweight vision transformers.

**Table 13.** Architectural validation on Tiny ImageNet (200 classes, 110,000 images) using 5-Fold CV and training from scratch at  $64 \times 64$  resolution.

| Approach                           | AC (%)                             | PR (%)                             | RE (%)                             | F1 (%)                             | $p_{\text{Holm}}$ |
|------------------------------------|------------------------------------|------------------------------------|------------------------------------|------------------------------------|-------------------|
| ResNet-18 (He et al., 2016)        | <b>37.50 <math>\pm</math> 1.61</b> | <b>37.72 <math>\pm</math> 0.29</b> | <b>37.50 <math>\pm</math> 1.61</b> | <b>36.88 <math>\pm</math> 1.35</b> | 0.001             |
| ConvNeXt-Tiny (Liu et al., 2022)   | 32.51 $\pm$ 0.33                   | 32.98 $\pm$ 0.25                   | 32.51 $\pm$ 0.33                   | 31.89 $\pm$ 0.30                   | < 0.001           |
| EfficientNetV2-S (Tan & Le, 2021)  | 30.09 $\pm$ 0.59                   | 29.99 $\pm$ 0.95                   | 30.09 $\pm$ 0.59                   | 29.37 $\pm$ 0.85                   | < 0.001           |
| ViT (Dosovitskiy et al., 2021)     | 19.91 $\pm$ 0.44                   | 19.34 $\pm$ 0.29                   | 19.91 $\pm$ 0.44                   | 18.93 $\pm$ 0.32                   | < 0.001           |
| Swin-T (Liu et al., 2021)          | 1.33 $\pm$ 1.71                    | 0.57 $\pm$ 1.15                    | 1.33 $\pm$ 1.71                    | 0.51 $\pm$ 1.03                    | < 0.001           |
| MambaOut-Tiny (Yu et al., 2024)    | 26.07 $\pm$ 14.37                  | 25.79 $\pm$ 14.49                  | 26.07 $\pm$ 14.37                  | 25.47 $\pm$ 14.33                  | 0.075             |
| FastViT-T8 (Vasu et al., 2023)     | 33.62 $\pm$ 0.29                   | 33.92 $\pm$ 0.44                   | 33.62 $\pm$ 0.29                   | 33.00 $\pm$ 0.34                   | < 0.001           |
| RepViT-M1 (Wang et al., 2024)      | 32.71 $\pm$ 0.48                   | 32.62 $\pm$ 0.40                   | 32.71 $\pm$ 0.48                   | 32.00 $\pm$ 0.31                   | < 0.001           |
| EfficientViT-B1 (Cai et al., 2023) | 32.40 $\pm$ 1.45                   | 31.39 $\pm$ 1.59                   | 32.40 $\pm$ 1.45                   | 31.49 $\pm$ 1.56                   | < 0.001           |
| ViGATs (Proposed)                  | <b>45.73 <math>\pm</math> 0.26</b> | <b>46.30 <math>\pm</math> 0.36</b> | <b>45.73 <math>\pm</math> 0.26</b> | <b>45.55 <math>\pm</math> 0.27</b> | — (Ref.)          |

Note: Values are mean  $\pm$  sample standard deviation across five folds. **Green bold** and **orange** values denote the best and second-best result in each metric column.

### 5.5. Cross-Dataset Synthesis

Table 14 summarizes classification performance across all four plant pathology benchmarks.



**Table 14.** Summary of classification accuracy (%) across four plant-disease datasets using 5-Fold CV.

| Model                             | PlantVillage | Maize Disease | Rice Leaf V2 | PlantRaw     | Average      |
|-----------------------------------|--------------|---------------|--------------|--------------|--------------|
| ViGATs (Proposed)                 | <b>99.75</b> | <b>98.58</b>  | <b>99.93</b> | <b>86.12</b> | <b>96.09</b> |
| ViG+GATv2 (Brody et al., 2022)    | 99.55        | <b>98.55</b>  | <b>99.92</b> | <b>85.94</b> | <b>95.99</b> |
| ViG+GAT (Velićković et al., 2018) | 99.60        | 98.34         | 99.76        | 85.85        | 95.89        |
| ViG (Han et al., 2022)            | <b>99.68</b> | 98.11         | 99.88        | 85.01        | 95.67        |
| ResNet-18 (He et al., 2016)       | 99.39        | 97.27         | 99.88        | 79.64        | 94.05        |
| EfficientNetV2-S (Tan & Le, 2021) | 99.39        | 95.64         | 99.70        | 75.32        | 92.51        |
| ConvNeXt-Tiny (Liu et al., 2022)  | 97.99        | 95.77         | 99.81        | 72.97        | 91.63        |
| ViT (Dosovitskiy et al., 2021)    | 99.31        | 93.97         | 99.29        | 70.91        | 90.87        |
| Swin-T (Liu et al., 2021)         | 98.83        | 71.03         | 39.09        | 56.63        | 66.39        |
| MambaOut-Tiny (Yu et al., 2024)   | 81.28        | 59.97         | 56.15        | 63.78        | 65.29        |

Note: Average denotes the unweighted mean accuracy across the four datasets. **Green bold** and **orange** values denote highest and second-highest result in each column.

### 5.6. Feature Space Manifold Projections with t-SNE

Figure 8 presents t-SNE projections of penultimate-layer representations on PlantRaw and Rice Leaf Disease V2, demonstrating well-separated class boundaries.

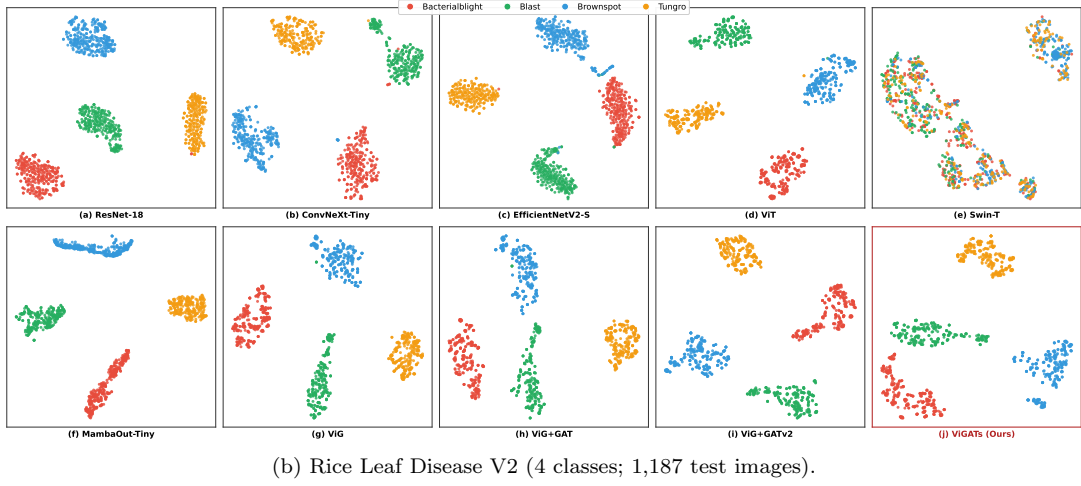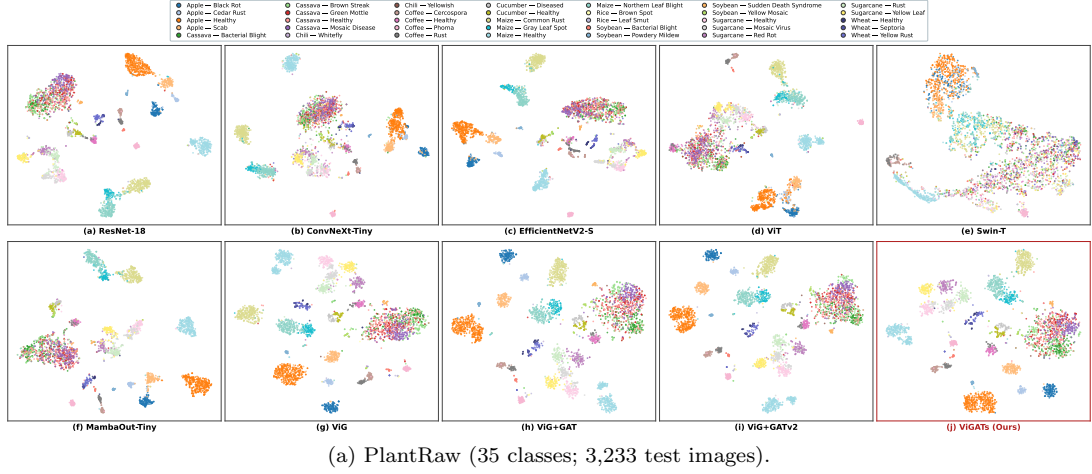

**Figure 8.** Qualitative t-SNE projections of fold-0 penultimate-layer features on (a) PlantRaw and (b) Rice Leaf Disease V2.


## 6. Discussion and Explainability

### 6.1. Efficacy of Edge-Difference Multi-Head Attention

The superior generalization of ViGATs on natural field datasets (PlantRaw 86.12% and Maize 98.58%) is directly attributed to the proposed GATConv operator:

- *Overcoming MRConv Bottlenecks:* Instead of rigid channel-wise max-pooling, GATConv dynamically learns soft attention weights over edge differences, adaptively magnifying pathological lesions while suppressing field background noise.
- *Multi-Head Specialization ( $H = 4$ ):* Multi-head attention enables distinct heads to specialize in different morphological features (e.g., necrosis centers vs. chlorotic halos).
- *Complexity vs. Accuracy Balance:* Grouped linear projections enable ViGATs to operate at only 1.13 GFLOPs and 4.67M parameters, providing an ideal computation profile for agricultural IoT devices.

### 6.2. Visual Interpretability in Graph Feature Space

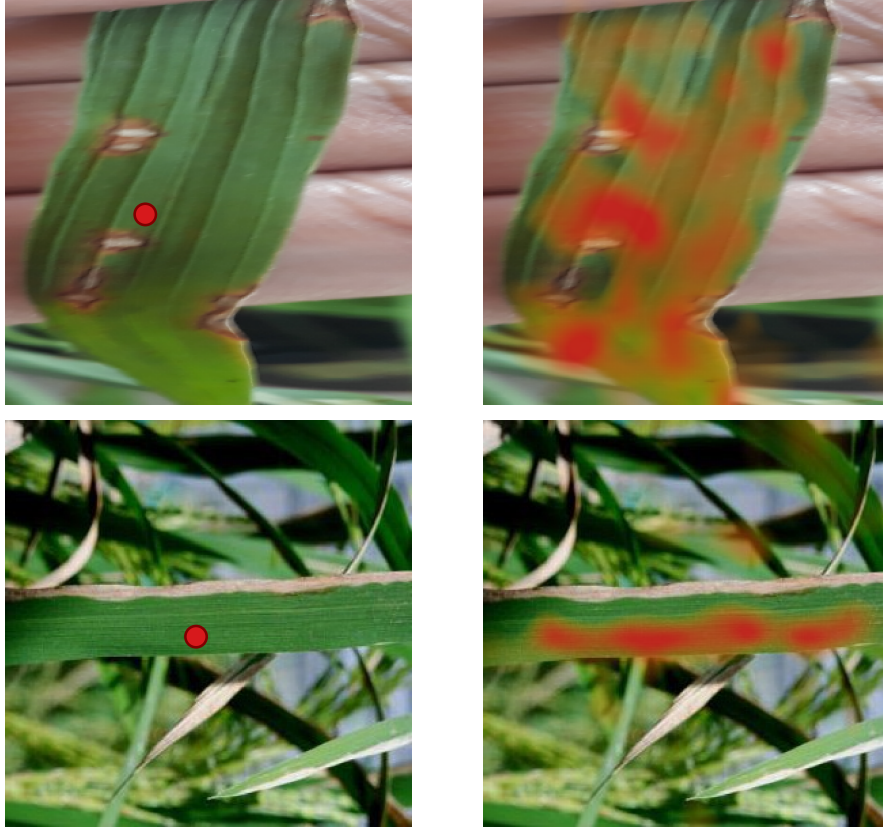

**Figure 9.** Query-key cosine-similarity visualization from Grapher block 1 of the ViGATs fold-4 checkpoint on Rice Blast (top) and Bacterial Blight (bottom).

Figure 9 visualizes query-key cosine similarities in Grapher block 1:

- *Non-Local Association (Top Row):* For a query lesion patch (red), the attention heatmap highlights disconnected lesion spots across the leaf, demonstrating that the dynamic  $K$ -NN graph captures semantic affinity beyond 2D Euclidean proximity.
- *Lesion Stripe Delineation (Bottom Row):* Attention closely tracks linear bacterial blight lesions while sharply ignoring healthy leaf tissues and background clutter.

### 6.3. Practical Deployment Potential and Limitations

Operating at  $64 \times 64$  resolution enables real-time edge processing on modest hardware platforms. While ViGATs achieves a throughput of 74 FPS on modern GPUs (suitable for drone and robotic video feeds), its inference latency is slightly higher than standard CNNs (such as ResNet-18) due to dynamic  $K$ -NN neighbor retrieval. Future optimizations exploring approximate nearest neighbor search and TensorRT engine compilation will further accelerate throughput.

## 7. Conclusion

This study presented ViGATs, an isotropic Vision Graph Attention Network engineered for robust botanical disease diagnosis. By substituting MRConv with the proposed GATConv module featuring multi-head edge-difference attention, ViGATs resolves the challenges of scattered pathological symptoms and complex natural background noise. Rigorous 5-fold stratified cross-validation across four diverse plant disease benchmarks (96.09% average accuracy), PlantRaw (86.12%), and drone transfer scenarios demonstrates that ViGATs delivers state-of-the-art diagnostic accuracy with a compact model footprint (4.67M parameters, 1.13 GFLOPs), paving the way for efficient Edge AI deployment in smart agriculture.

## Declarations

*Acknowledgement(s).* [Anonymized for Double-Blind Peer Review].

*Disclosure statement.* The authors declare that they have no competing financial or non-financial interests to report.

*Use of Generative AI in Writing.* Generative AI (Google Gemini) was employed during manuscript preparation exclusively for grammatical refinements, formatting assistance, and minor script debugging. The AI tool did not contribute to formulating scientific hypotheses, developing research methodologies, interpreting experimental data, or drawing conclusions; all academic concepts and final interpretations remain entirely the authors' own work.

*Funding.* This research received no external funding.

*Author contributions.* [Anonymized for Double-Blind Peer Review].

*ORCID.* [Anonymized for Double-Blind Peer Review].

*Data availability statement.* The datasets analyzed in this study are publicly available and properly cited. The complete PlantRaw dataset, metadata and standardized train/test splits are permanently archived on Zenodo (Tong-Le et al., 2026): <https://doi.org/10.5281/zenodo.21869021>. The experimental logs and best pre-trained ViGATs weights are openly available at <https://github.com/tonglethanhhai/ViGATs.Results>.

*Ethics statement.* This study did not involve human participants or animal experiments (Ethical Approval: Not applicable).

## References

- Atila, Ü., Uçar, M., Akyol, K., & Uçar, E. (2021). Plant leaf disease classification using EfficientNet deep learning model. *Ecological Informatics*, 61, 101182.
- Batool, A., Kim, J., & Byun, Y.-C. (2025). A compact deep learning approach integrating depthwise convolutions and spatial attention for plant disease classification. *Plant Methods*, 21, Article 48. <https://doi.org/10.1186/s13007-025-01325-4>.
- Borhani, Y., Khoramdel, J., & Najafi, E. (2022). A deep learning based approach for automated plant disease classification using vision transformer. *Scientific Reports*, 12, 11554.
- Brody, S., Alon, U., & Yahav, E. (2022). How attentive are graph attention networks? In *Proc. ICLR*.
- Cai, H., Li, J., Hu, M., Gan, C., & Han, S. (2023). EfficientViT: Lightweight multi-scale attention for on-device semantic segmentation. In *Proc. IEEE CVPR* (pp. 13783–13793).
- Chen, J., Zhang, D., Suzauddola, M., Nanekaran, Y., & Sun, Y. (2021). Identification of plant

- disease images via a squeeze-and-excitation MobileNet model and twice transfer learning. *IET Image Processing*, 15(5), 1115–1127.
- Daphal, S., & Koli, S. (2022). Sugarcane leaf disease dataset (Version 1) [Data set]. *Mendeley Data*. <https://doi.org/10.17632/9424skmrk.1>.
- Dosovitskiy, A., Beyer, L., Kolesnikov, A., Weissenborn, D., Zhai, X., Unterthiner, T., Dehghani, M., Minderer, M., Heigold, G., Gelly, S., Uszkoreit, J., & Houshy, N. (2021). An image is worth 16x16 words: Transformers for image recognition at scale. In *Proc. ICLR*.
- Ferentinos, K. P. (2018). Deep learning models for plant disease detection and diagnosis. *Computers and Electronics in Agriculture*, 145, 311–318.
- Gedik, H. E., Martin, A., Munir, M., Baser, O., Marculescu, R., Chinchali, S. P., & Bovik, A. C. (2025). AttentionViG: Cross-attention-based dynamic neighbor aggregation in Vision GNNs. *arXiv preprint arXiv:2509.25570*.
- Getch, O. (2021). Wheat leaf dataset [Data set]. *Kaggle*. <https://www.kaggle.com/datasets/olyadgetch/wheat-leaf-dataset>.
- Han, K., Wang, Y., Guo, J., Tang, Y., & Wu, E. (2022). Vision GNN: An image is worth graph of nodes. In *Proc. NeurIPS* (pp. 8291–8303).
- He, K., Zhang, X., Ren, S., & Sun, J. (2016). Deep residual learning for image recognition. In *Proc. IEEE CVPR* (pp. 770–778).
- Hendrycks, D., & Gimpel, K. (2016). Gaussian error linear units (GELUs). *arXiv preprint arXiv:1606.08415*.
- Hughes, D. P., & Salathé, M. (2015). An open access repository of images on plant health to enable the development of mobile disease diagnostics. *arXiv preprint arXiv:1511.08060*.
- Thakur, P. S., Chaturvedi, S., Khanna, P., Sheorey, T., & Ojha, A. (2024). IIITDMJ\_Maize [Data set]. *IEEE DataPort*. <https://doi.org/10.21227/maize-2024>.
- Ioffe, S., & Szegedy, C. (2015). Batch normalization: Accelerating deep network training by reducing internal covariate shift. In *Proc. ICML* (pp. 448–456).
- Khiem, N. M., Huynh, T. T., & Quyen, N. P. (2026). REBANet: A hybrid deep learning model for rice leaf disease prediction with Grad-CAM explainability. In *Proc. ICCIES, CCIS*, Vol. 2943 (pp. 535–549). Springer.
- Le, Y., & Yang, X. (2015). Tiny ImageNet visual recognition challenge. CS 231N Course Project, Stanford University.
- LeCun, Y., Bottou, L., Bengio, Y., & Haffner, P. (1998). Gradient-based learning applied to document recognition. *Proceedings of the IEEE*, 86(11), 2278–2324.
- LeCun, Y., Bengio, Y., & Hinton, G. (2015). Deep learning. *Nature*, 521(7553), 436–444.
- Li, G., Müller, M., Thabet, A., & Ghanem, B. (2019). DeepGCNs: Can GCNs go as deep as CNNs? In *Proc. IEEE ICCV* (pp. 9267–9276).
- Lin, M., Chen, Q., & Yan, S. (2013). Network in network. In *Proc. ICLR*.
- Liu, Z., Lin, Y., Cao, Y., Hu, H., Wei, Y., Zhang, Z., Lin, S., & Guo, B. (2021). Swin Transformer: Hierarchical vision transformer using shifted windows. In *Proc. IEEE ICCV* (pp. 10012–10022).
- Liu, Z., Mao, H., Wu, C. Y., Feichtenhofer, C., Darrell, T., & Xie, S. (2022). A ConvNet for the 2020s. In *Proc. IEEE CVPR* (pp. 11976–11986).
- Mduma, N., & Mayo, F. (2023). Maize imagery dataset—Tanzania (Version 1) [Data set]. *Mendeley Data*. <https://doi.org/10.17632/fkw49mz3xs.1>.
- Mishra, S. (2023). Soybean diseased leaf dataset [Data set]. *Kaggle*. <https://www.kaggle.com/datasets/sivm205/soybean-diseased-leaf-dataset>.
- Mohanty, S. P., Hughes, D. P., & Salathé, M. (2016). Using deep learning for image-based plant disease detection. *Frontiers in Plant Science*, 7, 1419.
- Munir, M., Avery, W., & Marculescu, R. (2023). MobileViG: Graph-based sparse attention for mobile vision applications. In *Proc. IEEE/CVF CVPR Workshops* (pp. 2211–2219).
- Mwebaze, E., Gebru, T., Frome, A., Nsumba, S., & Tusubira, J. (2019). iCassava 2019 fine-grained visual categorization challenge. *arXiv preprint arXiv:1908.02900*.
- Nagarathna, P., Haroon P. S., A. L., Srinivasalu, G., & Venkata, A. K. P. (2025). Intelligent plant disease detection and classification using HV-GNN with ontology-driven knowledge



- embedding. *ITM Web of Conferences*, 79, 01047.
- Negm, K. (2021). Cucumber plant diseases dataset [Data set]. *Kaggle*. <https://www.kaggle.com/datasets/kareem3egm/cucumber-plant-diseases-dataset>.
- Prajapati, H. B., Shah, J. P., & Dabhi, V. K. (2017). Detection and classification of rice plant diseases. *Intelligent Decision Technologies*, 11(3), 357–373. <https://doi.org/10.3233/IDT-170301>.
- Prakoso, D. D. (2021). Chili plant disease [Data set]. *Kaggle*. <https://www.kaggle.com/datasets/dhenyd/chili-plant-disease>.
- Sethy, P. K. (2024). Rice leaf disease image samples (Version 2) [Data set]. *Mendeley Data*. <https://doi.org/10.17632/fwcj7stb8r.2>.
- Savary, S., Willocquet, L., Pethybridge, S. J., Esker, P., McRoberts, N., & Nelson, A. (2019). The global burden of pathogens and pests on major food crops. *Nature Ecology & Evolution*, 3, 430–439.
- Scarselli, F., Gori, M., Tsoi, A. C., Hagenbuchner, M., & Monfardini, G. (2009). The graph neural network model. *IEEE Transactions on Neural Networks*, 20(1), 61–80.
- Sethy, P. K., Barpanda, N. K., Rath, A. K., & Behera, S. K. (2020). Deep feature based rice leaf disease identification using support vector machine. *Computers and Electronics in Agriculture*, 175, 105527.
- Singh, D., Jain, N., Jain, P., Kayal, P., Kumawat, S., & Batra, N. (2020). PlantDoc: A dataset for visual plant disease detection in the wild. In *Proc. ACM CoDS-COMAD* (pp. 249–253).
- Singh, A., Sharma, R., & Kumar, S. (2024). A comprehensive review of deep learning approaches for plant disease detection. *Crop Science*, 64, 917–940.
- Singla, S., Gupta, A., & Sharma, M. (2025). DenseSwinGNNNet: A novel deep learning framework for accurate turmeric leaf disease classification. *Tech Science*.
- Sokolova, M., & Lapalme, G. (2009). A systematic analysis of performance measures for classification tasks. *Information Processing & Management*, 45(4), 427–437.
- Surekha, B., & Subha Mastan Rao, T. (2026). AdjLeafGNN: A hybrid deep learning and graph neural network framework. *Scientific Reports*, 16, Article 15629.
- Tan, M., & Le, Q. (2019). EfficientNet: Rethinking model scaling for convolutional neural networks. In *Proc. ICML* (pp. 6105–6114).
- Tan, M., & Le, Q. (2021). EfficientNetV2: Smaller models and faster training. In *Proc. ICML* (pp. 10096–10106).
- Thakur, P. S., Sheorey, T., & Ojha, A. (2023). VGG-ICNN: A lightweight CNN model for crop disease identification. *Multimedia Tools and Applications*, 82, 497–520.
- Tong-Le, T.-H., Le, M.-H., & Doan, T.-N. (2026). PlantRaw metadata: A multicrop plant disease benchmark for real-world generalization evaluation [Data set]. *Zenodo*. <https://doi.org/10.5281/zenodo.21869021>.
- Too, E. C., Li, Y., Njuki, S., & Liu, Y. (2019). A comparative study of fine-tuning deep learning models for plant disease identification. *Computers and Electronics in Agriculture*, 161, 272–279.
- Touvron, H., Cord, M., Douze, M., Massa, F., Sablayrolles, A., & Jégou, H. (2021). Training data-efficient image transformers & distillation through attention. In *Proc. ICML*.
- van der Maaten, L., & Hinton, G. (2008). Visualizing data using t-SNE. *Journal of Machine Learning Research*, 9(11), 2579–2605.
- Anasosalu Vasu, P., Gabriel, J., Zhu, J., Tuzel, O., & Ranjan, A. (2023). FastViT: A fast hybrid vision transformer using structural reparameterization. In *Proc. IEEE ICCV*.
- Vaswani, A., Shazeer, N., Parmar, N., Uszkoreit, J., Jones, L., Gomez, A. N., Kaiser, Ł., & Polosukhin, I. (2017). Attention is all you need. In *Proc. NeurIPS* (pp. 5998–6008).
- Veličković, P., Cucurull, G., Casanova, A., Romero, A., Liò, P., & Bengio, Y. (2018). Graph attention networks. In *Proc. ICLR*.
- Vo, H., Thien, N., Mui, K., Le, H., & Tien, P. (2026). Enhanced tomato leaf disease diagnosis: A parameter-efficient approach using hybrid ResNet-KAN architectures. In *Proc. ICCIES, CCIS*, Vol. 2943 (pp. 521–534). Springer.
- Wang, Y., Sun, Y., Liu, Z., Sarma, S. E., Bronstein, M. M., & Solomon, J. M. (2019). Dynamic

- graph CNN for learning on point clouds. *ACM Transactions on Graphics*, 38(5), 1–12.
- Wang, A., Chen, H., Liu, L., Chen, K., Lin, Z., Han, J., & Ding, G. (2024). RepViT: Revisiting mobile CNN from ViT perspective. In *Proc. IEEE CVPR*.
- Wu, Z., Pan, S., Chen, F., Long, G., Zhang, C., & Yu, P. (2021). A comprehensive survey on graph neural networks. *IEEE TNNLS*, 32(1), 4–24.
- Yoseph, B. (2023). Ethiopian coffee leaf disease [Data set]. *Kaggle*. <https://www.kaggle.com/datasets/biniyamyoseph/ethiopian-coffee-leaf-disease>.
- Yu, W. & Wang, X. (2024). MambaOut: Do we really need Mamba for vision? *arXiv preprint arXiv:2405.07992*.
- Yu, S., Xie, L., & Dai, L. (2025). ST-CFI: Swin Transformer with convolutional feature interactions. *Scientific Reports*, 15, Article 25000.
- Zhang, A., Lipton, Z. C., Li, M., & Smola, A. J. (2023). *Dive into deep learning*. Cambridge University Press.
- Zhou, J., Cui, G., Hu, S., Zhang, Z., Yang, C., Liu, Z., Wang, L., Li, C., & Sun, M. (2020). Graph neural networks: A review of methods and applications. *AI Open*, 1, 57–81.