



UNIVERSITAT
Carlemany

Formación europea
para desafíos reales

De:

 Planeta Formación y Universidades

CLOUD

Git

1. Motivation
2. Git architecture
3. Git commands

Origin


1. Team code development
2. Track changes


Predecessors

1. svn (2000)
2. mercurial (2005)
3. cvs (1990)

Key properties

1. Track file changes
2. Branches as main working structure inside a repository
3. Differentiation between local and remote repository

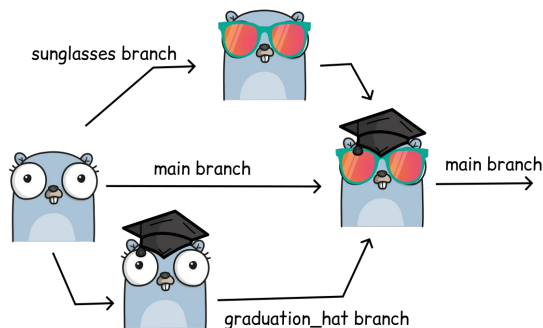

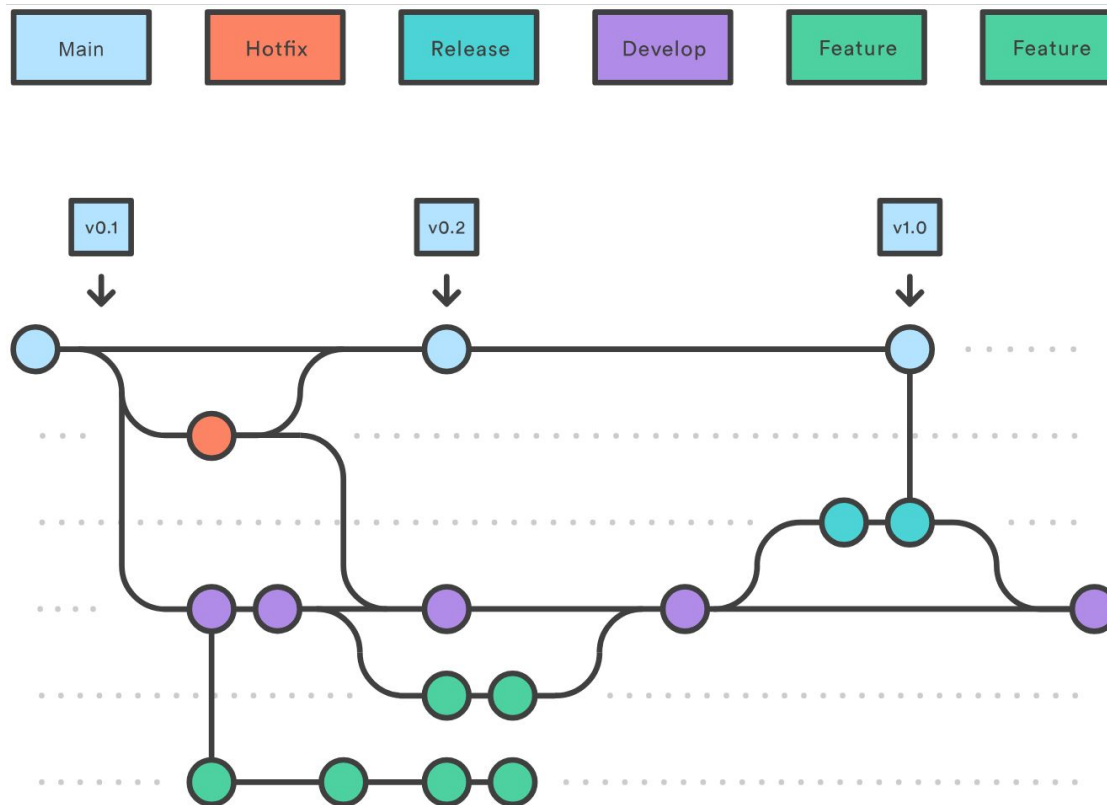

git init

- Initializes a local repository

git remote add {remote_alias} {remote_url}

- Adds a remote repository to the local repository
- `git remote add origin https://github.com/OWNER/REPOSITORY.git`

git status

- Gives the list of modified and untracked files

```
git add {file}
```

- Add the modified file to the staging area

```
git add .
```

- Add all modified and untracked files from the current directory to the staging area

```
git commit -m {commit message}
```

- Record changes in the staging area to the repository in the current branch

`git push {remote_alias} {branch}`

- Push branch from local repository to remote repository
- `git push origin master`

`git checkout {branch_name}`


- Change to branch {branch_name}

`git checkout -b {branch_name}`

- Create new branch from current branch


```
git merge {destination_branch} {origin_branch}
```

- `git merge feature main`

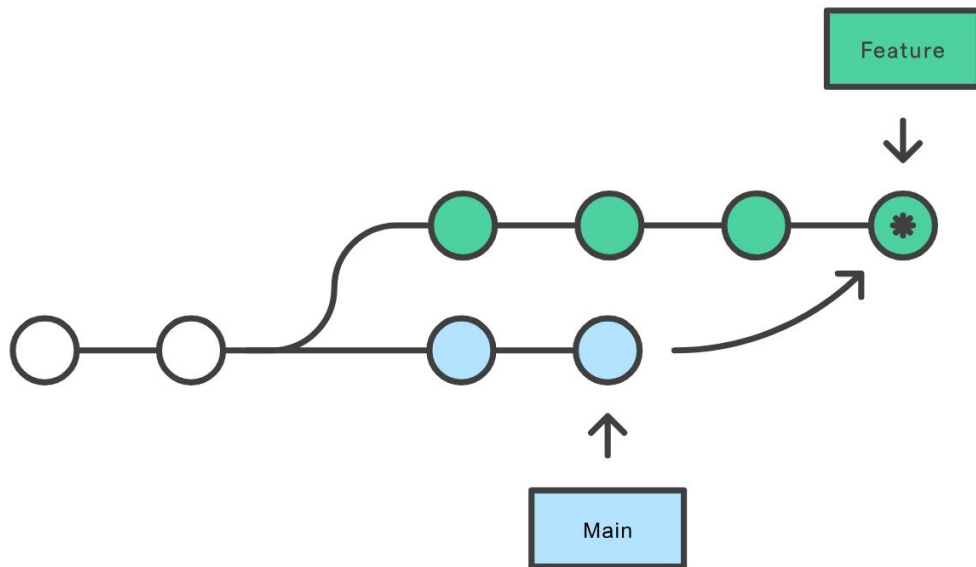

`git rebase {origin_branch}`

- It is applied on the current branch
- `git merge feature main`

