

[Keep learning. Stay alive.]

GET HELP

__ general

c h | (f1>) | C-h

help

<f1> ? | b | f | k

help-for-help | describe-bindings | describe-function | describekey

<f1> m | P | P | v


describe-mode | finder-by-keyword
| describe-package | describevariable

miscellaneous .

apropos-variable | customize | customize-variable | elisp-index-search | list-packages | info | info-display-manual | info-lookup-symbol | menu-bar-open | <mode-name>-mode | search-emacs-glossary

ck custom keybinding



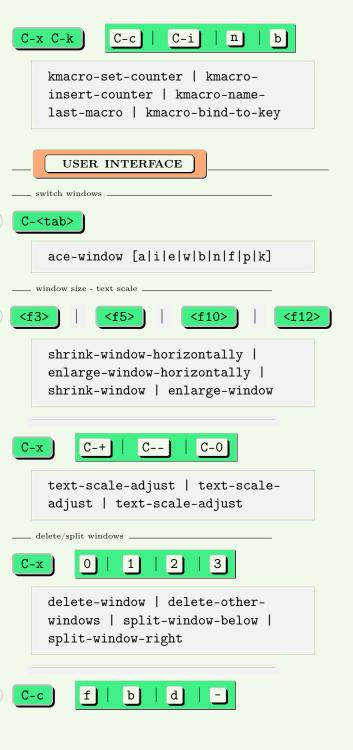

EMACS WORKFLOW (2/5)


[Keep learning. Stay alive.]

ido-find-file-other-window |
ido-switch-buffer-other-window
| delete-other-windows | deletewindow

____ specific interfaces _



ta/modify-ui-window-split-toggle
| ta/modify-ui-shell-window-below
| ta/modify-ui-writing-code



ta/modify-ui-find-file-customemacs | ta/modify-ui-find-filedaily


ck C-c C-u k c d

ta/save-kill-buffer-custom-emacs
| ta/save-kill-buffer-daily

__ switch buffer .

ck C-x b C-b

ido-switch-buffer | ibuffer

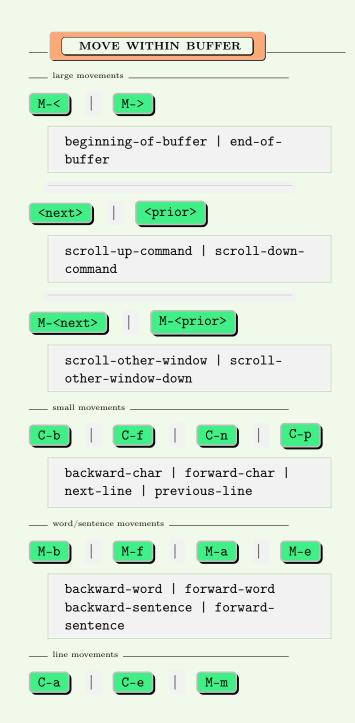

move-beginning-of-line | moveend-of-line | back-to-indentation ____ top/bottom movements __ move-to-window-line-top-bottom | recenter-top-bottom ____ search _ M-p M-n M-g goto-line | next-error | previous-error C-c isearch-forward | isearchbackward isearch-forward | isearchbackward | occur TEXT MANIPULATION ___ miscellaneous

yank | open-line | comment-dwim |

ta/comment-line



C-x C-s

k

M-w



[Keep learning. Stay alive.]

dired-find-file | dired-findfile-other-window | dired-createdirectory

move within dired buffer

dired-mode P | n | < | >

dired-previous-line | dirednext-line | dired-prev-dirline |
dired-next-dirline

dired-mode M-{ M-} ^

dired-prev-marked-file| dirednext-marked-file | dired-updirectory

__ dired user interface ___


dired-mode i | g | \$ | M-\$


dired-maybe-insert-subdir |
revert-buffer | dired-hide-subdir
| dired-hide-all

____ mark and act

dired-mode m | u | U | t

dired-mark | dired-unmark |
dired-unmark-all-marks | diredtoggle-marks

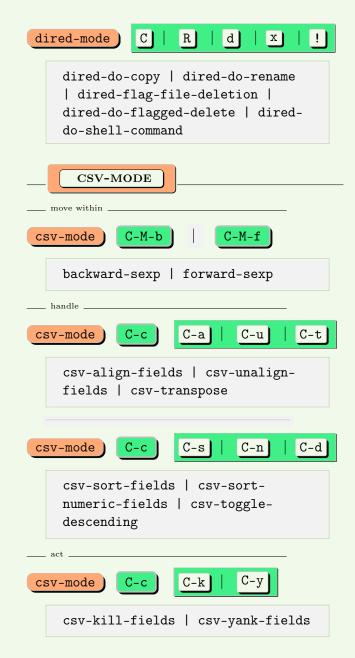

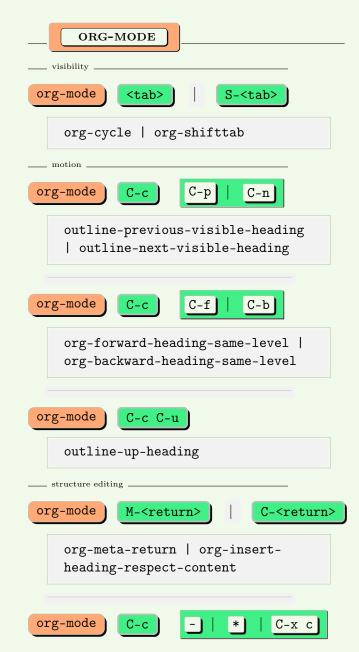

EMACS WORKFLOW (5/5)

[Keep learning. Stay alive.]

org-ctrl-c-minus |
org-ctrl-c-star | org-clonesubtree-with-time-shift

org-mode M-<left>

M-<right>

org-metaleft | org-metaright

_ source code

org-mode C-c



org-edit-special |
org-ctrl-c-ctrl-c

_ miscellaneous

org-mode





org-insert-link | org-open-atpoint

org-mode

С-с С-е

org-export-dispatch

SHELL-MODE

___ retrieve command

shell-mode



M-n

comint-previous-input |
comint-next-input

PACKAGES

_ installed packages

ac-math | ace-window | auctex | auto-complete | avy | bind-key | cl-generic | company | concurrent | csv-mode | ctable | dash | deferred | ein | elpy | epc | ess | eval-in-repl | eval-sexpfu | evil | evil-iedit-state find-file-in-project | goto-chg | highlight | highlight-indentation | iedit | image+ | ivy | jedi | jedi-core | js2-mode | markdownmode | markdown-preview-mode | math-symbol-lists | matlab-mode | multiple-cursors | org-babeleval-in-repl | org-bullets | paredit | php-mode | popup | pyautopep8 | python-environment | pyvenv | rainbow-mode | request | request-deferred | s | simplehttpd | skewer-mode | smartparens | undo-tree | uuidgen | vlf | web-mode | web-server | websocket | yasnippet | yasnippet-snippets

__ built-in packages _

allout | allout-widgets | ansicolor | antlr-mode | artist |
bs | cedet | cfengine | chart
| checkdoc | cl-lib | cwarn |
delim-col | dunnet | ebnf2ps |

ede | ediff | edmacro | eieio | eieio-core | epgerc | eshell | feedmail | find-cmd | finder | flymake | foldout | footnote | gamegrid | gnus | hippie-exp | htmlfontify | icalendar | idlwave | image-dired | info-xref | inversion | isearchbjs | json | linum | master | md4 | meta-mode | mh-e | mixal-mode | newsticker | ntlm | package | printing | ps-mode | ps-printpulse | python | regi | remember | repeat | ruby-mode | ruler-mode | savehist | semantic | sh-script | sql | srecode | tabulated-list | tetris | tildify | timeclock | vera-mode | viper | wdired | whitespace | woman