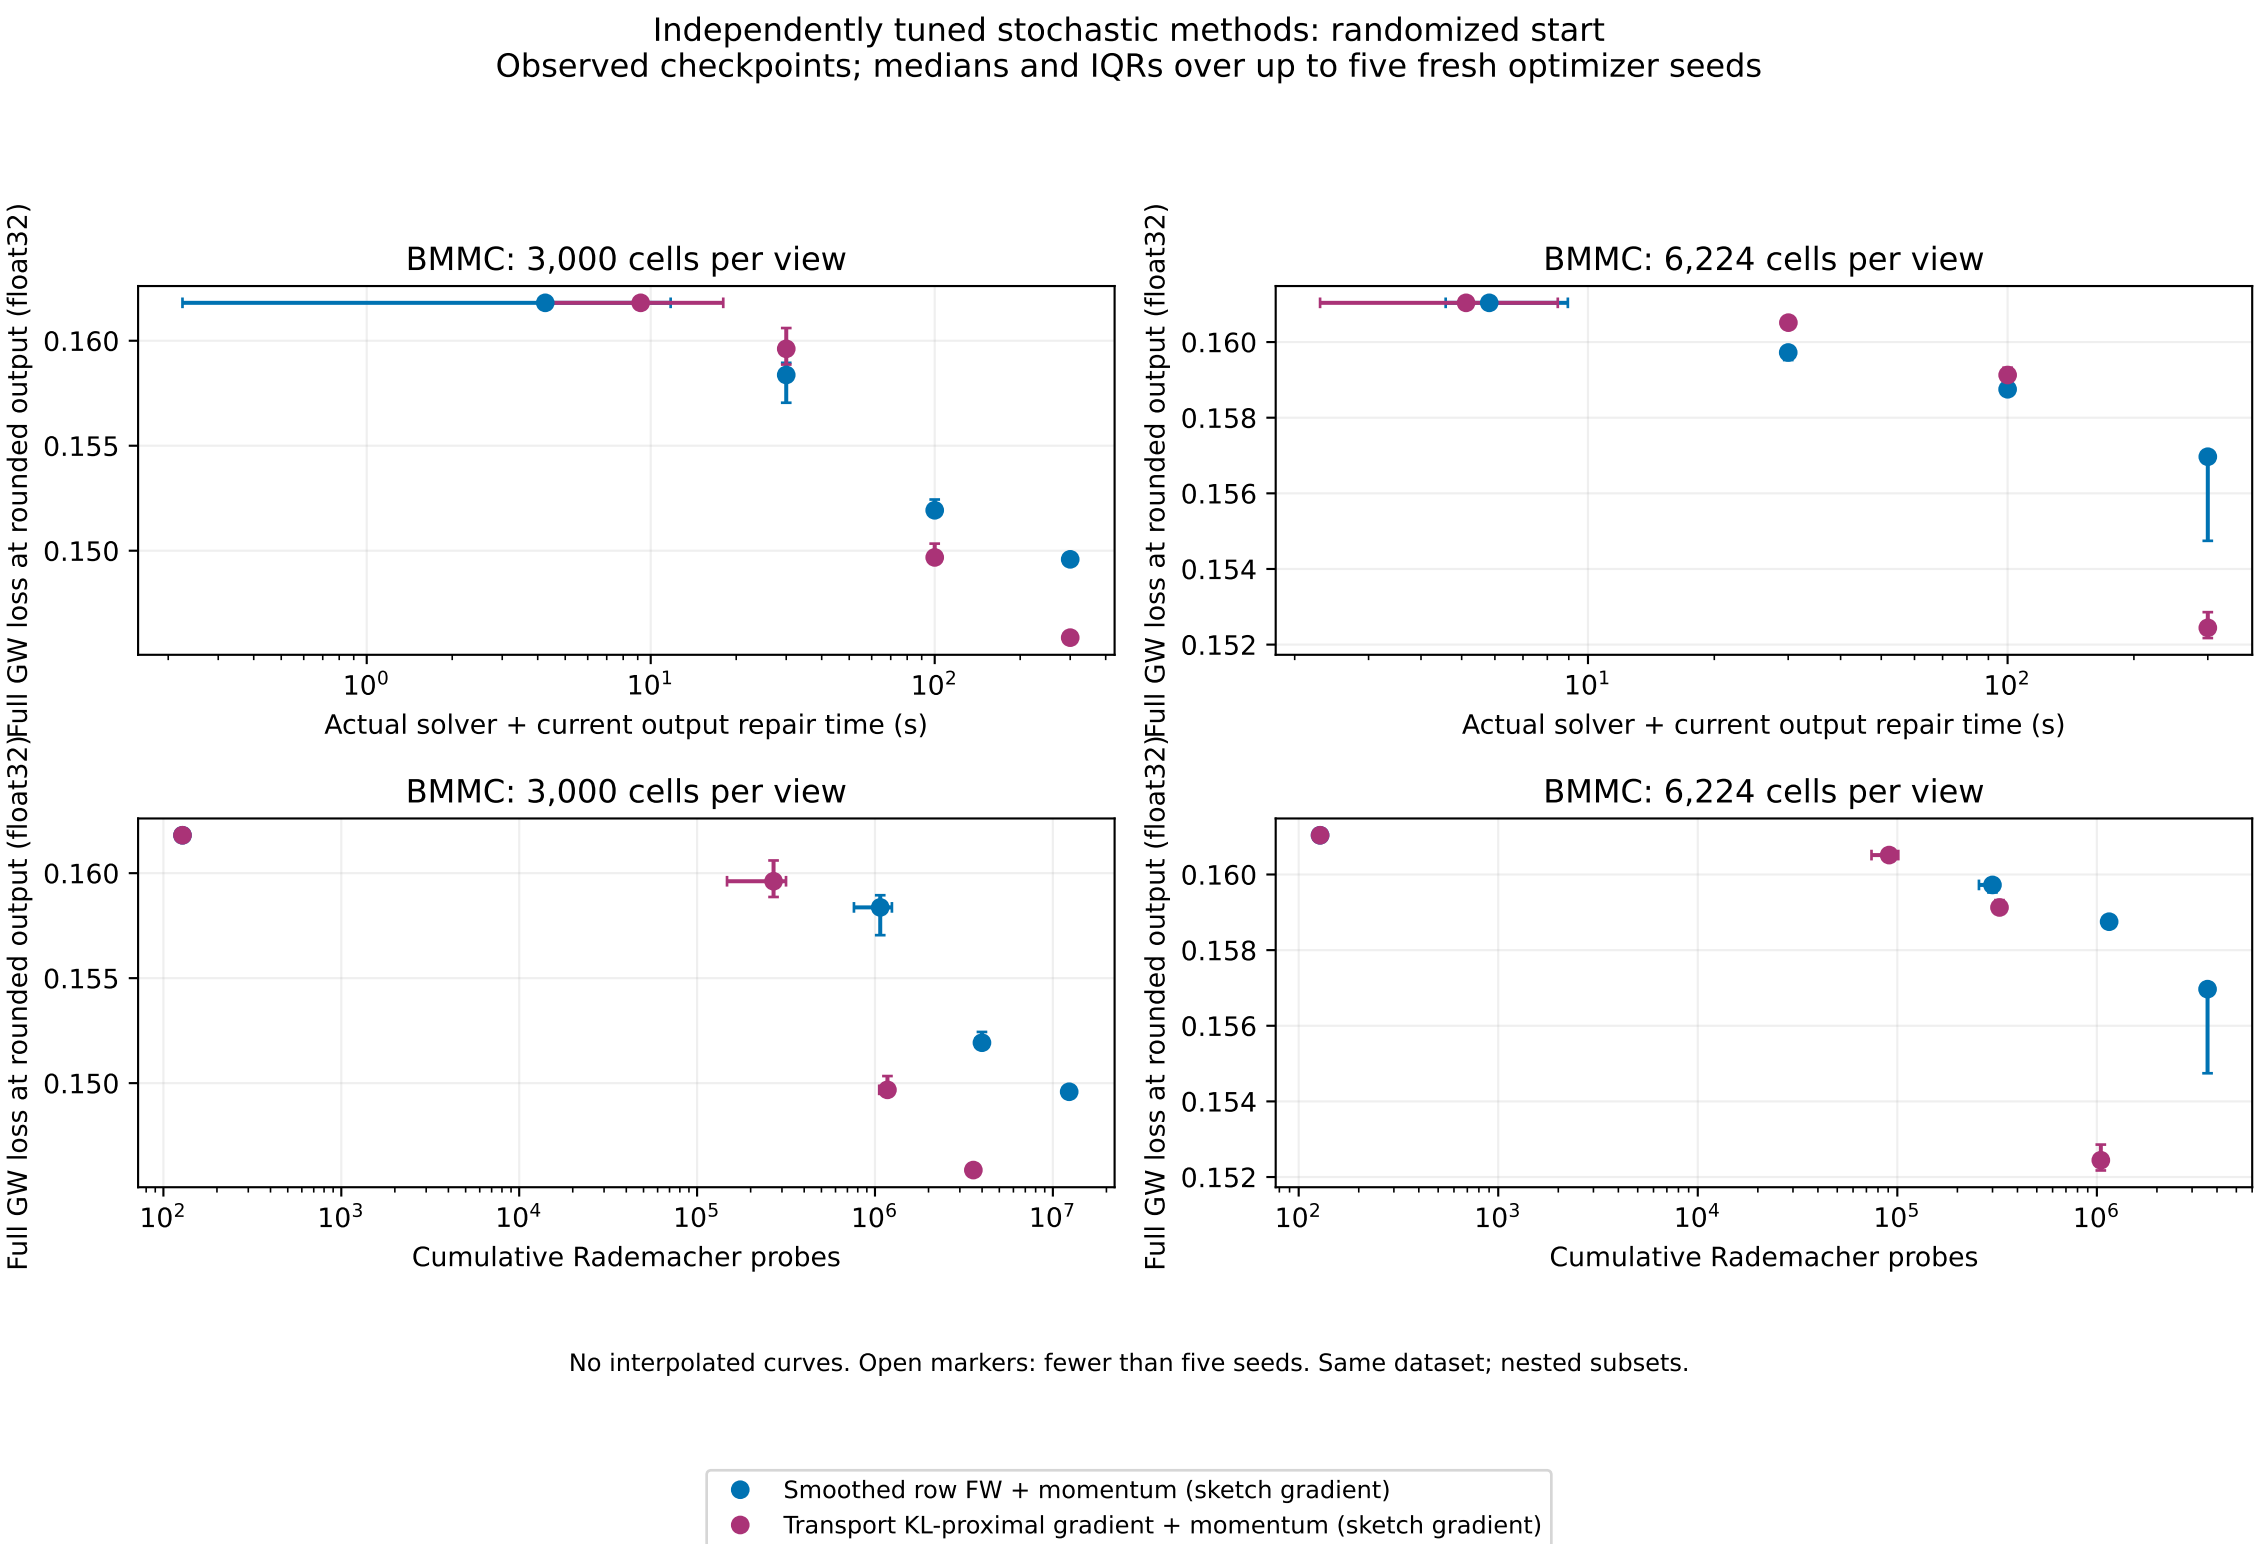
Independently tuned stochastic methods: randomized start
Observed checkpoints; medians and IQRs over up to five fresh optimizer seeds
BMMC: 3,000 cells per view
BMMC: 6,224 cells per view
Full GW loss at rounded output (float32)
Actual solver + current output repair time (s)
Cumulative Rademacher probes
No interpolated curves. Open markers: fewer than five seeds. Same dataset; nested subsets.
Smoothed row FW + momentum (sketch gradient)
Transport KL-proximal gradient + momentum (sketch gradient)