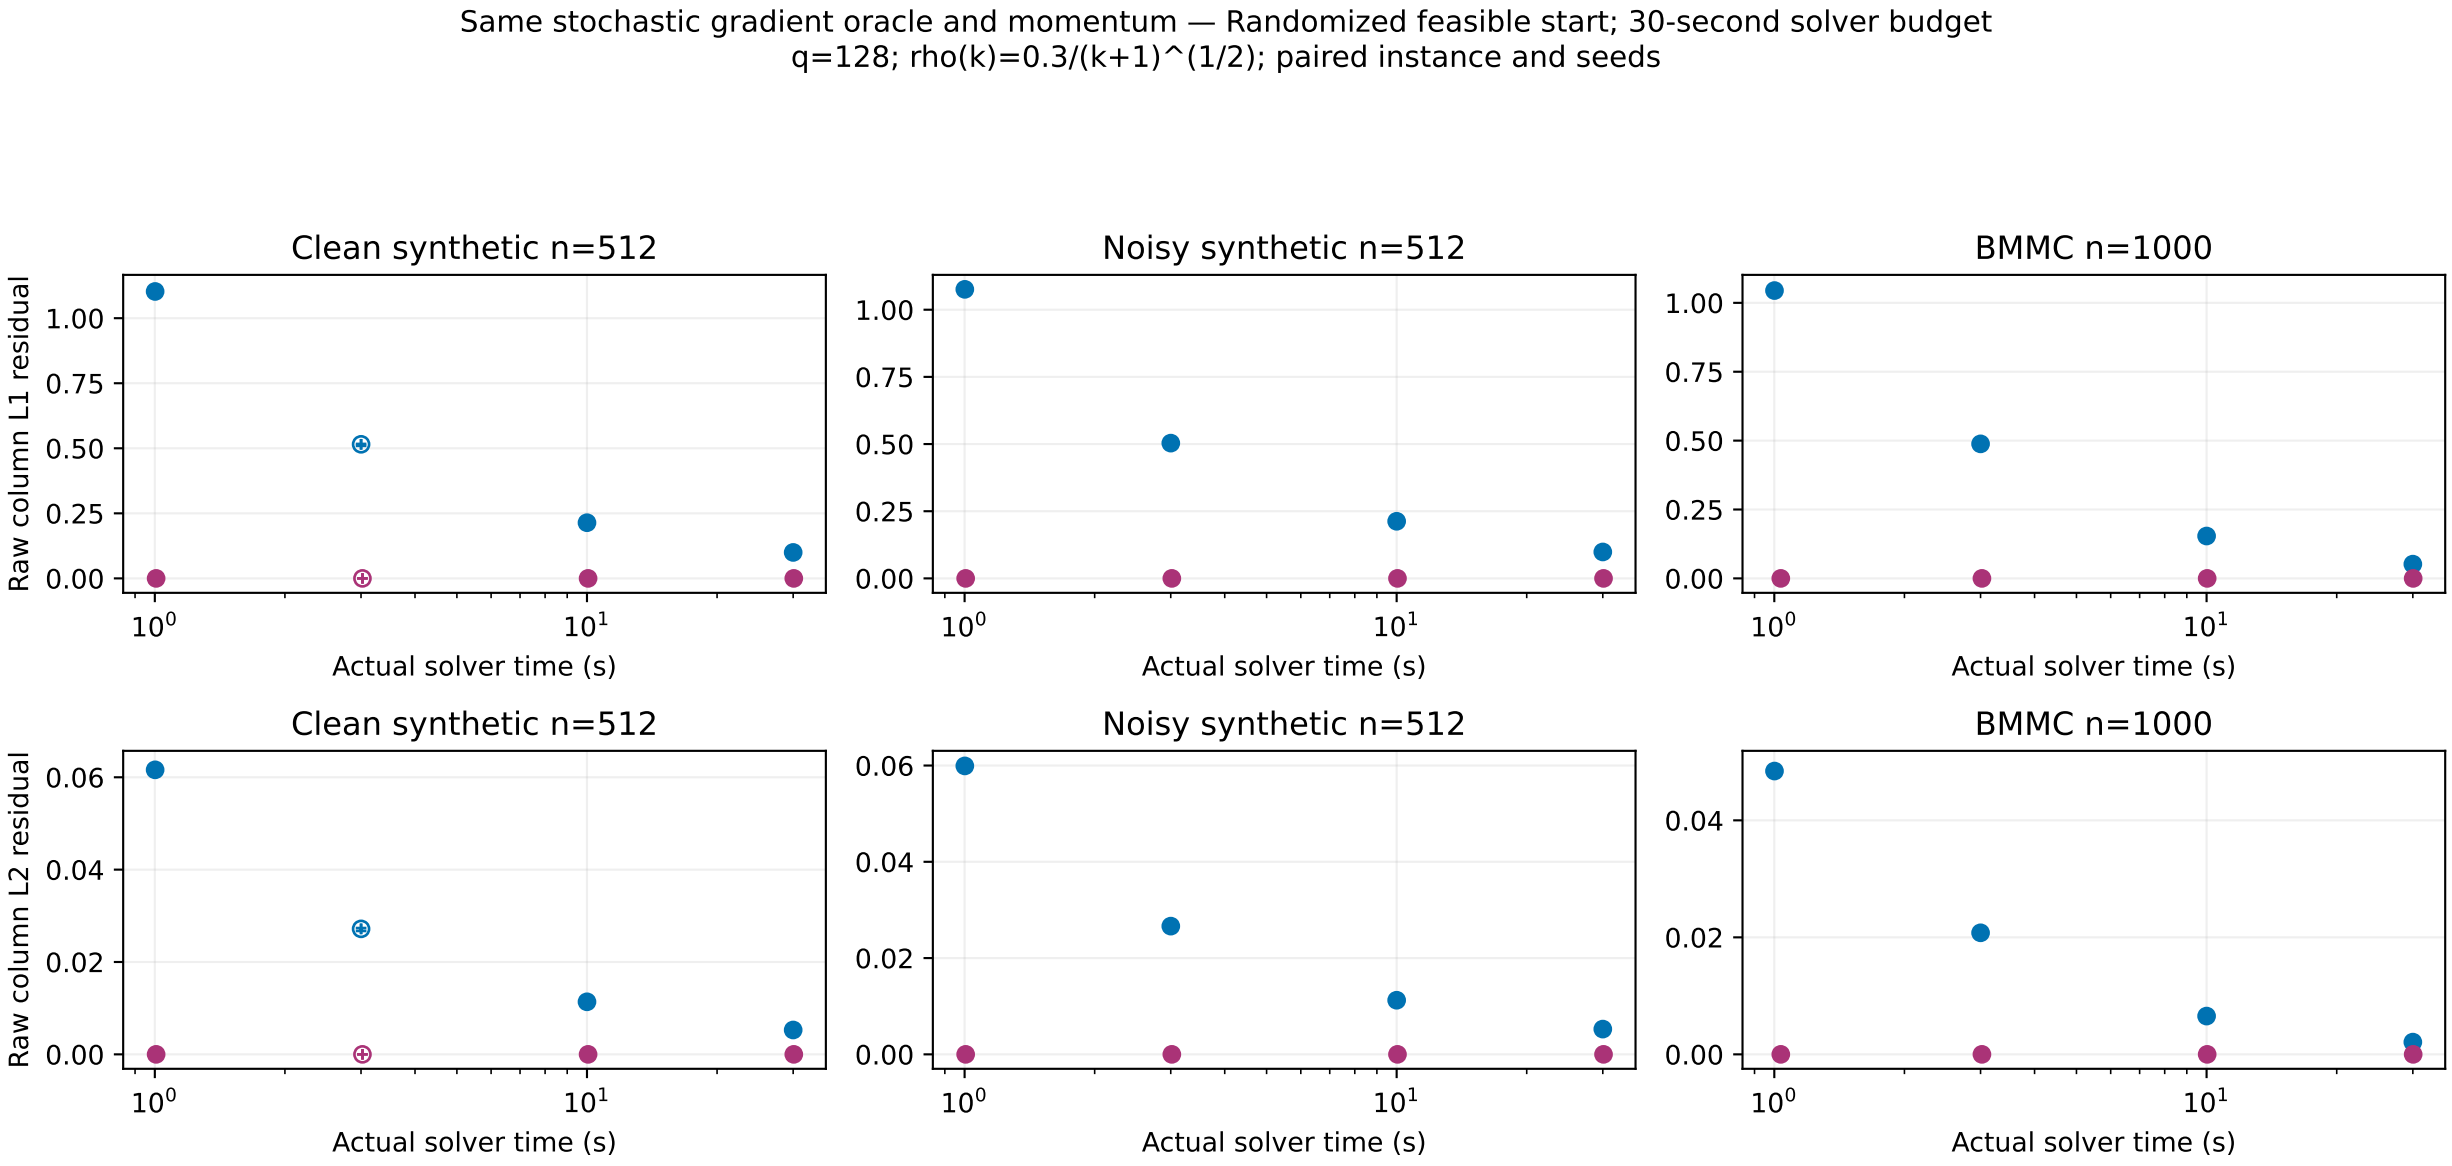
Same stochastic gradient oracle and momentum — Randomized feasible start; 30-second solver budget
q=128; rho(k)=0.3/(k+1)^(1/2); paired instance and seeds
Clean synthetic n=512
Noisy synthetic n=512
BMMC n=1000
Raw column L1 residual
Raw column L2 residual
Actual solver time (s)
Synthetic: across-problem IQR after within-instance medians. BMMC: repeat IQR on one fixed dataset.
Smoothed row FW + momentum (sketch gradient)
Transport KL-proximal gradient + momentum (sketch gradient)