

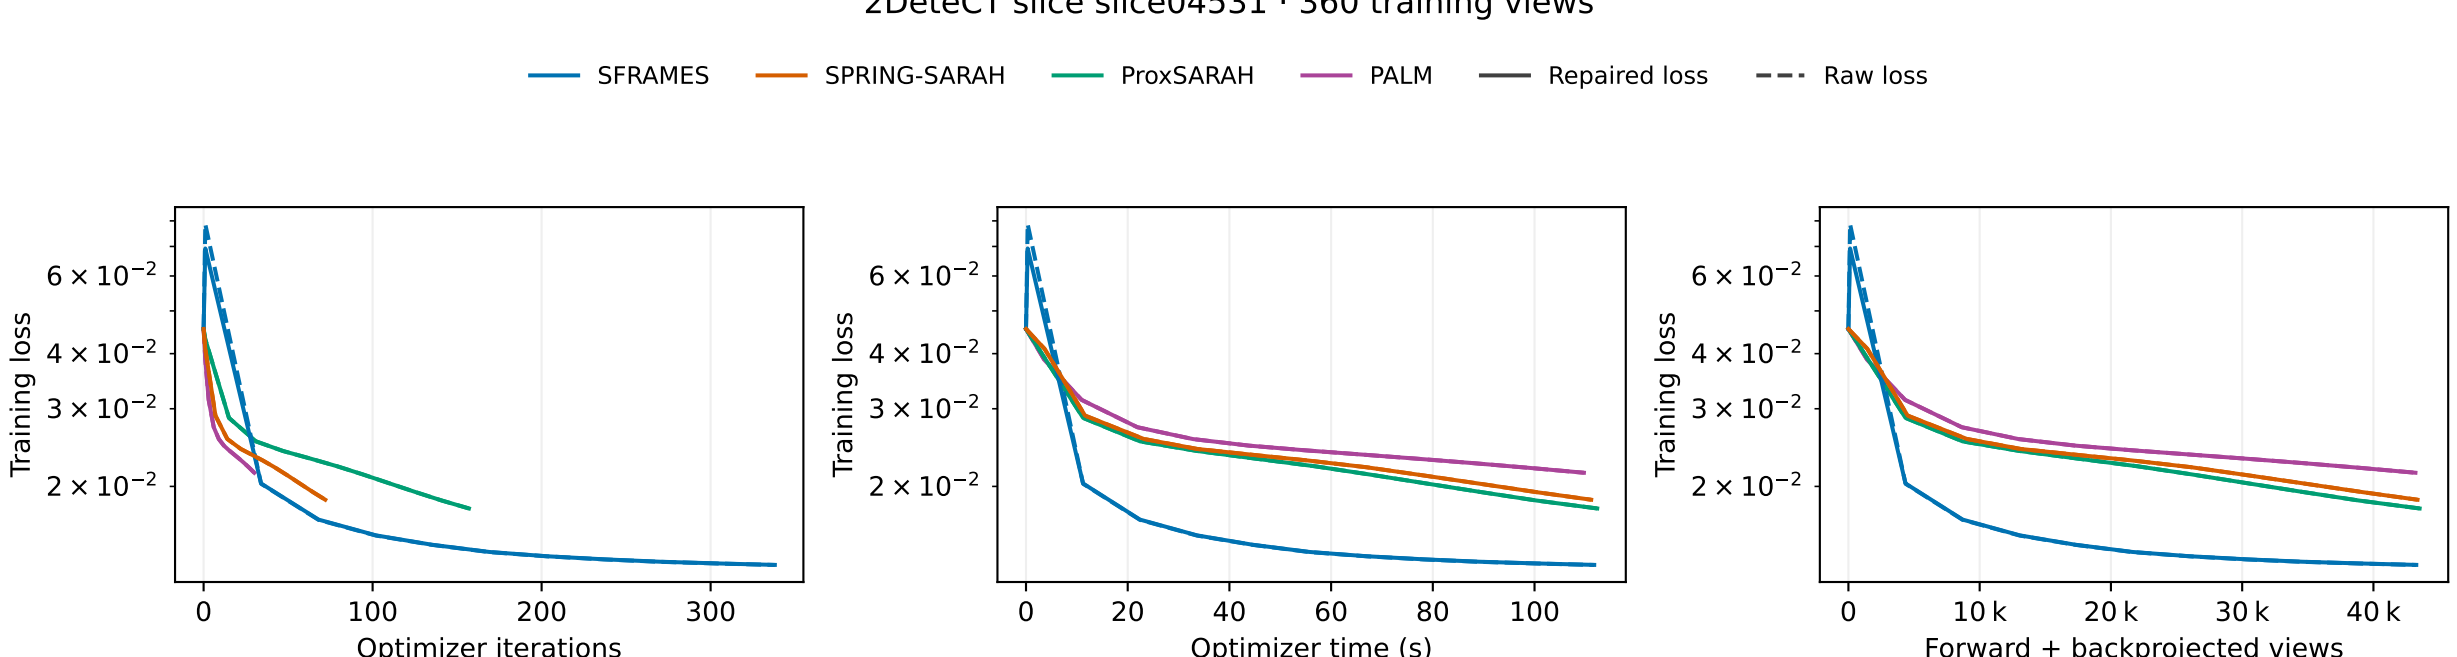



View counts include optimizer refreshes and recursive gradient differences. Timing excludes diagnostic probes and checkpoint I/O.

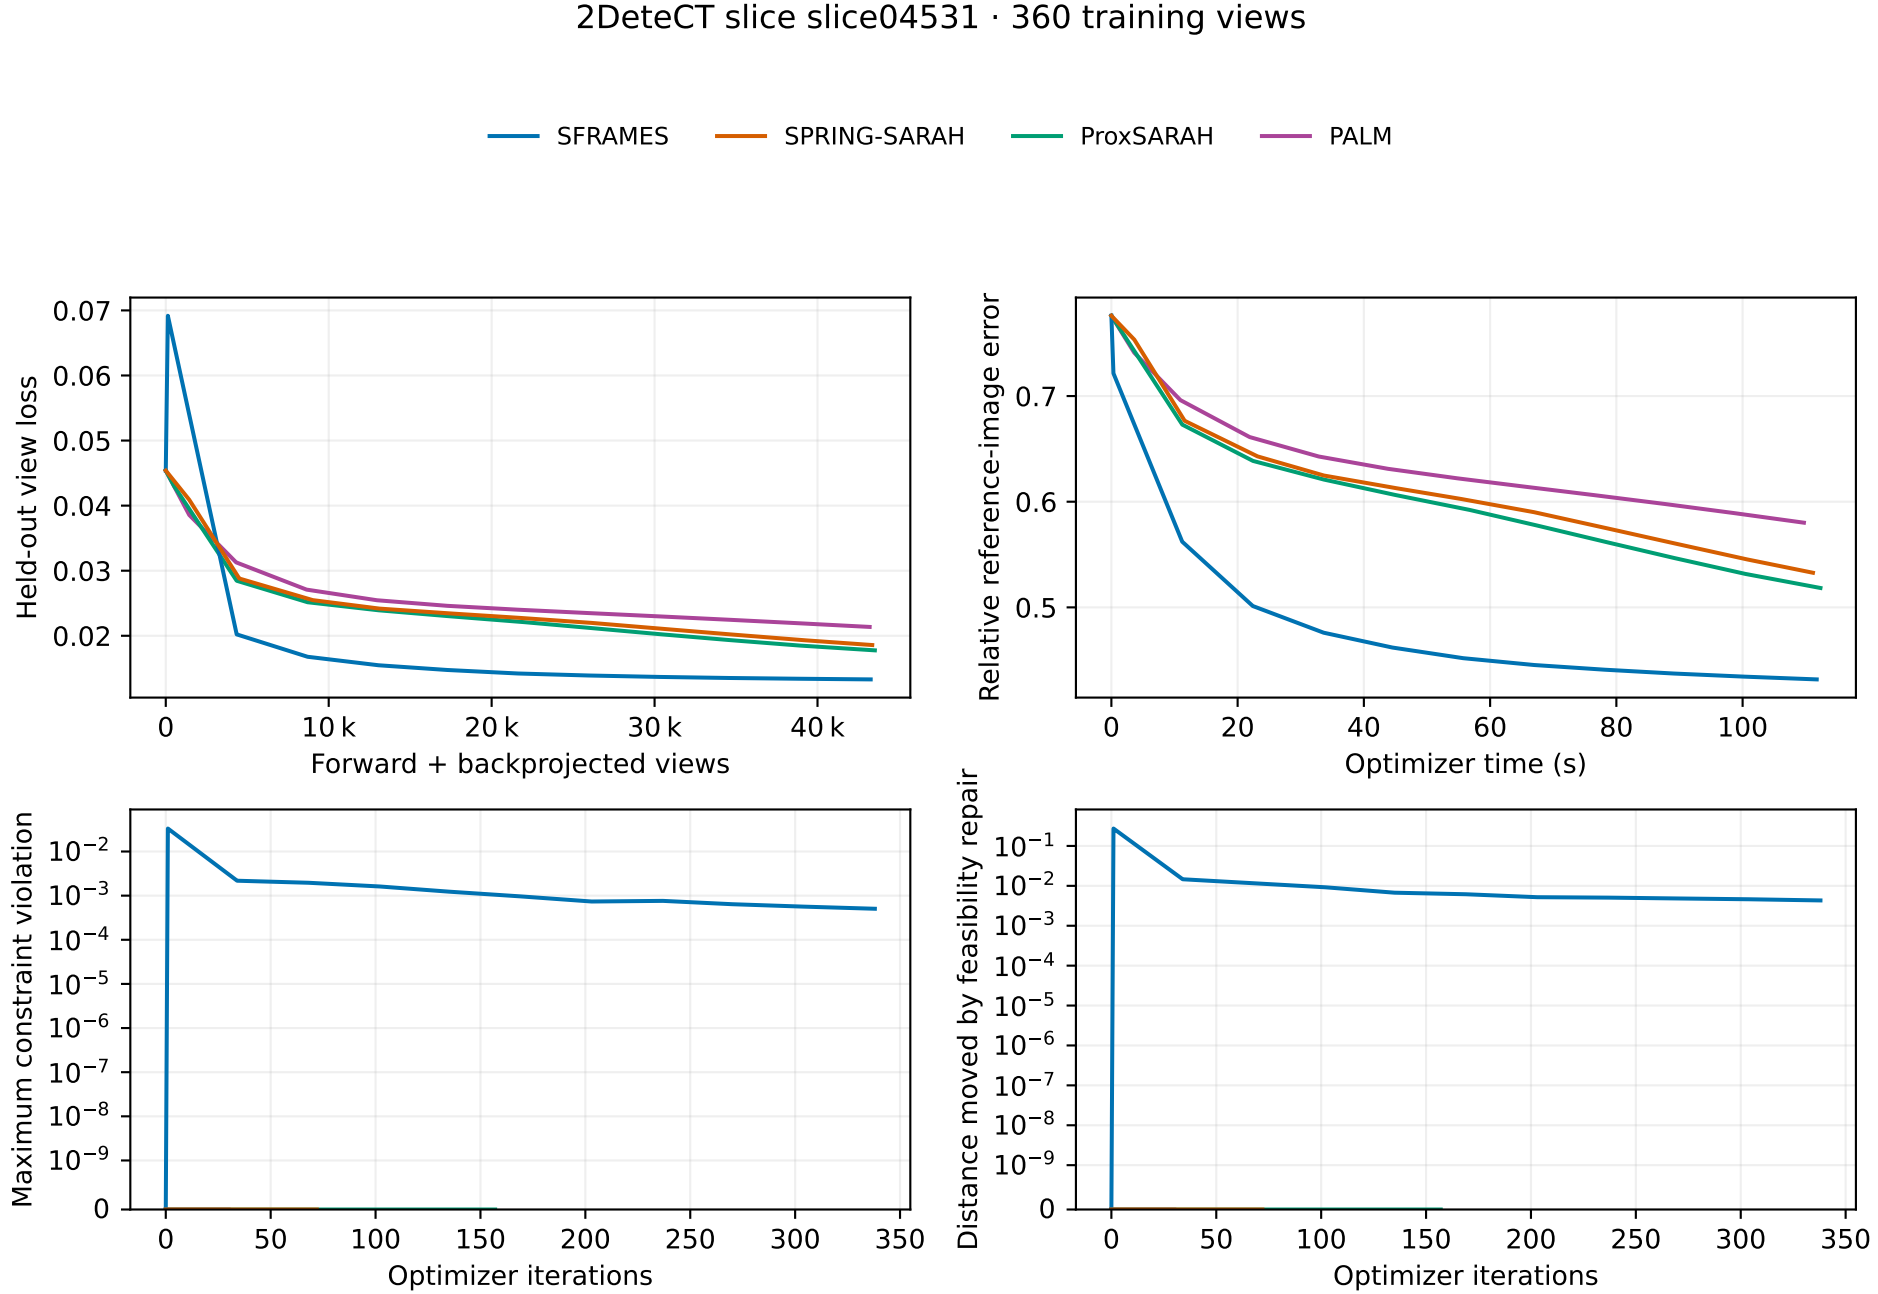


Held-out loss and reference error use repaired factors. Constraint violation and repair distance describe the raw iterate.

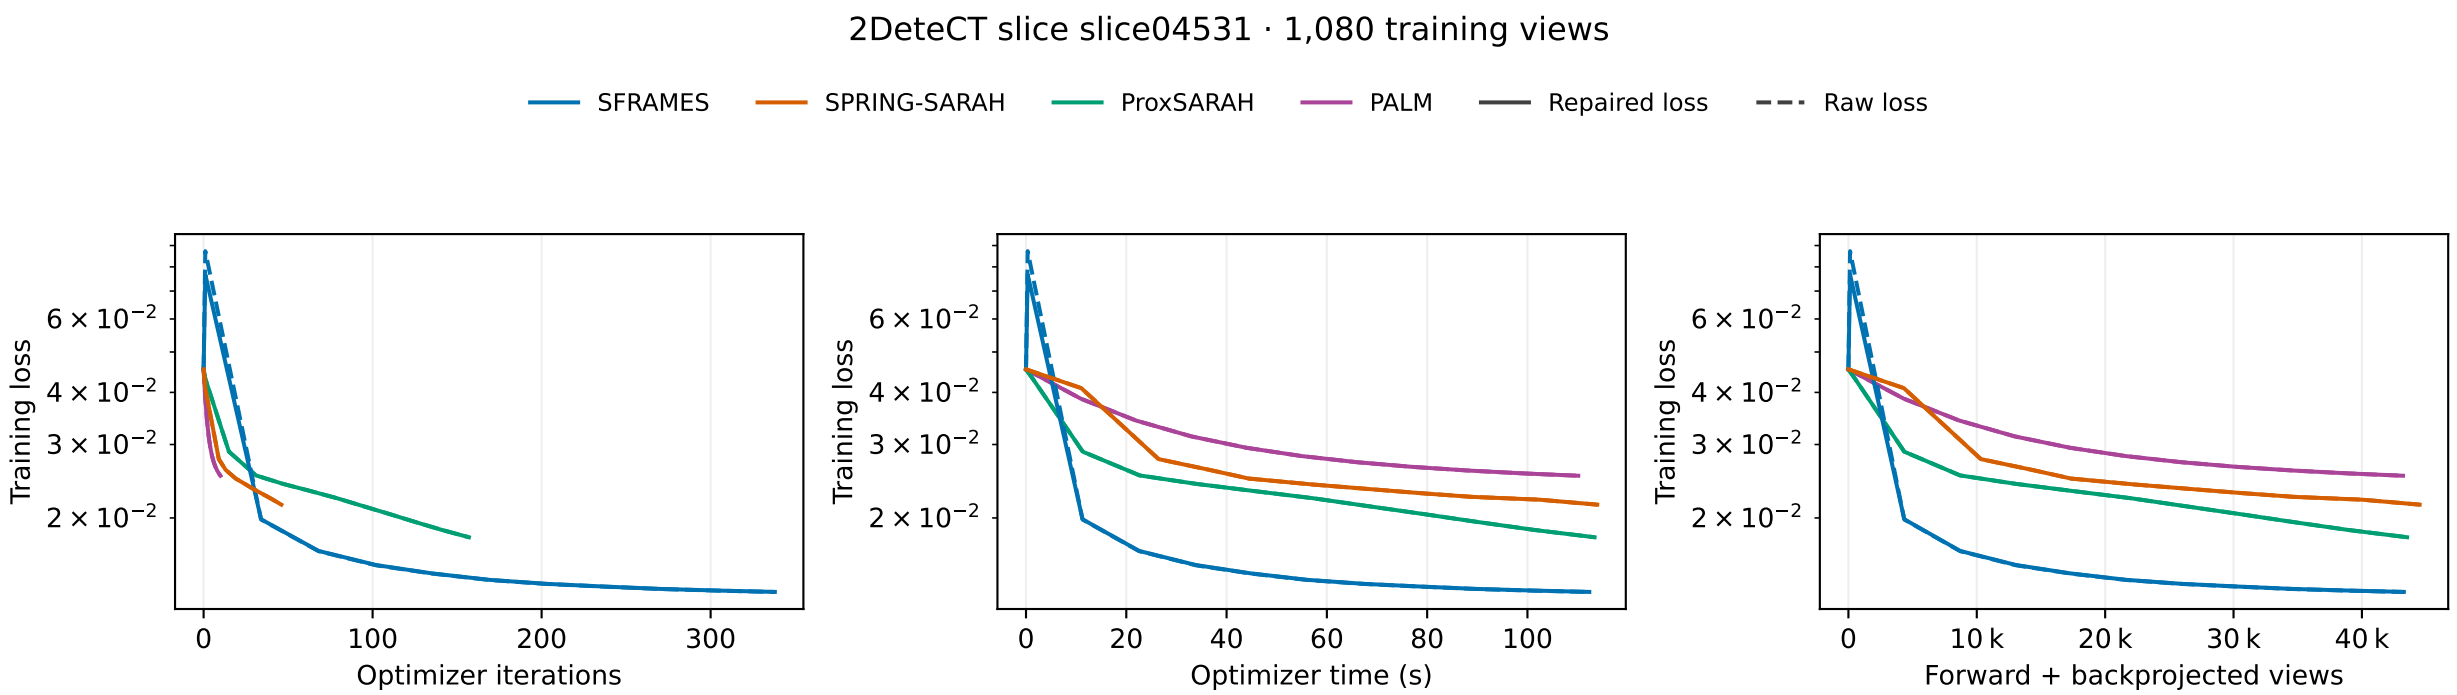


View counts include optimizer refreshes and recursive gradient differences. Timing excludes diagnostic probes and checkpoint I/O.

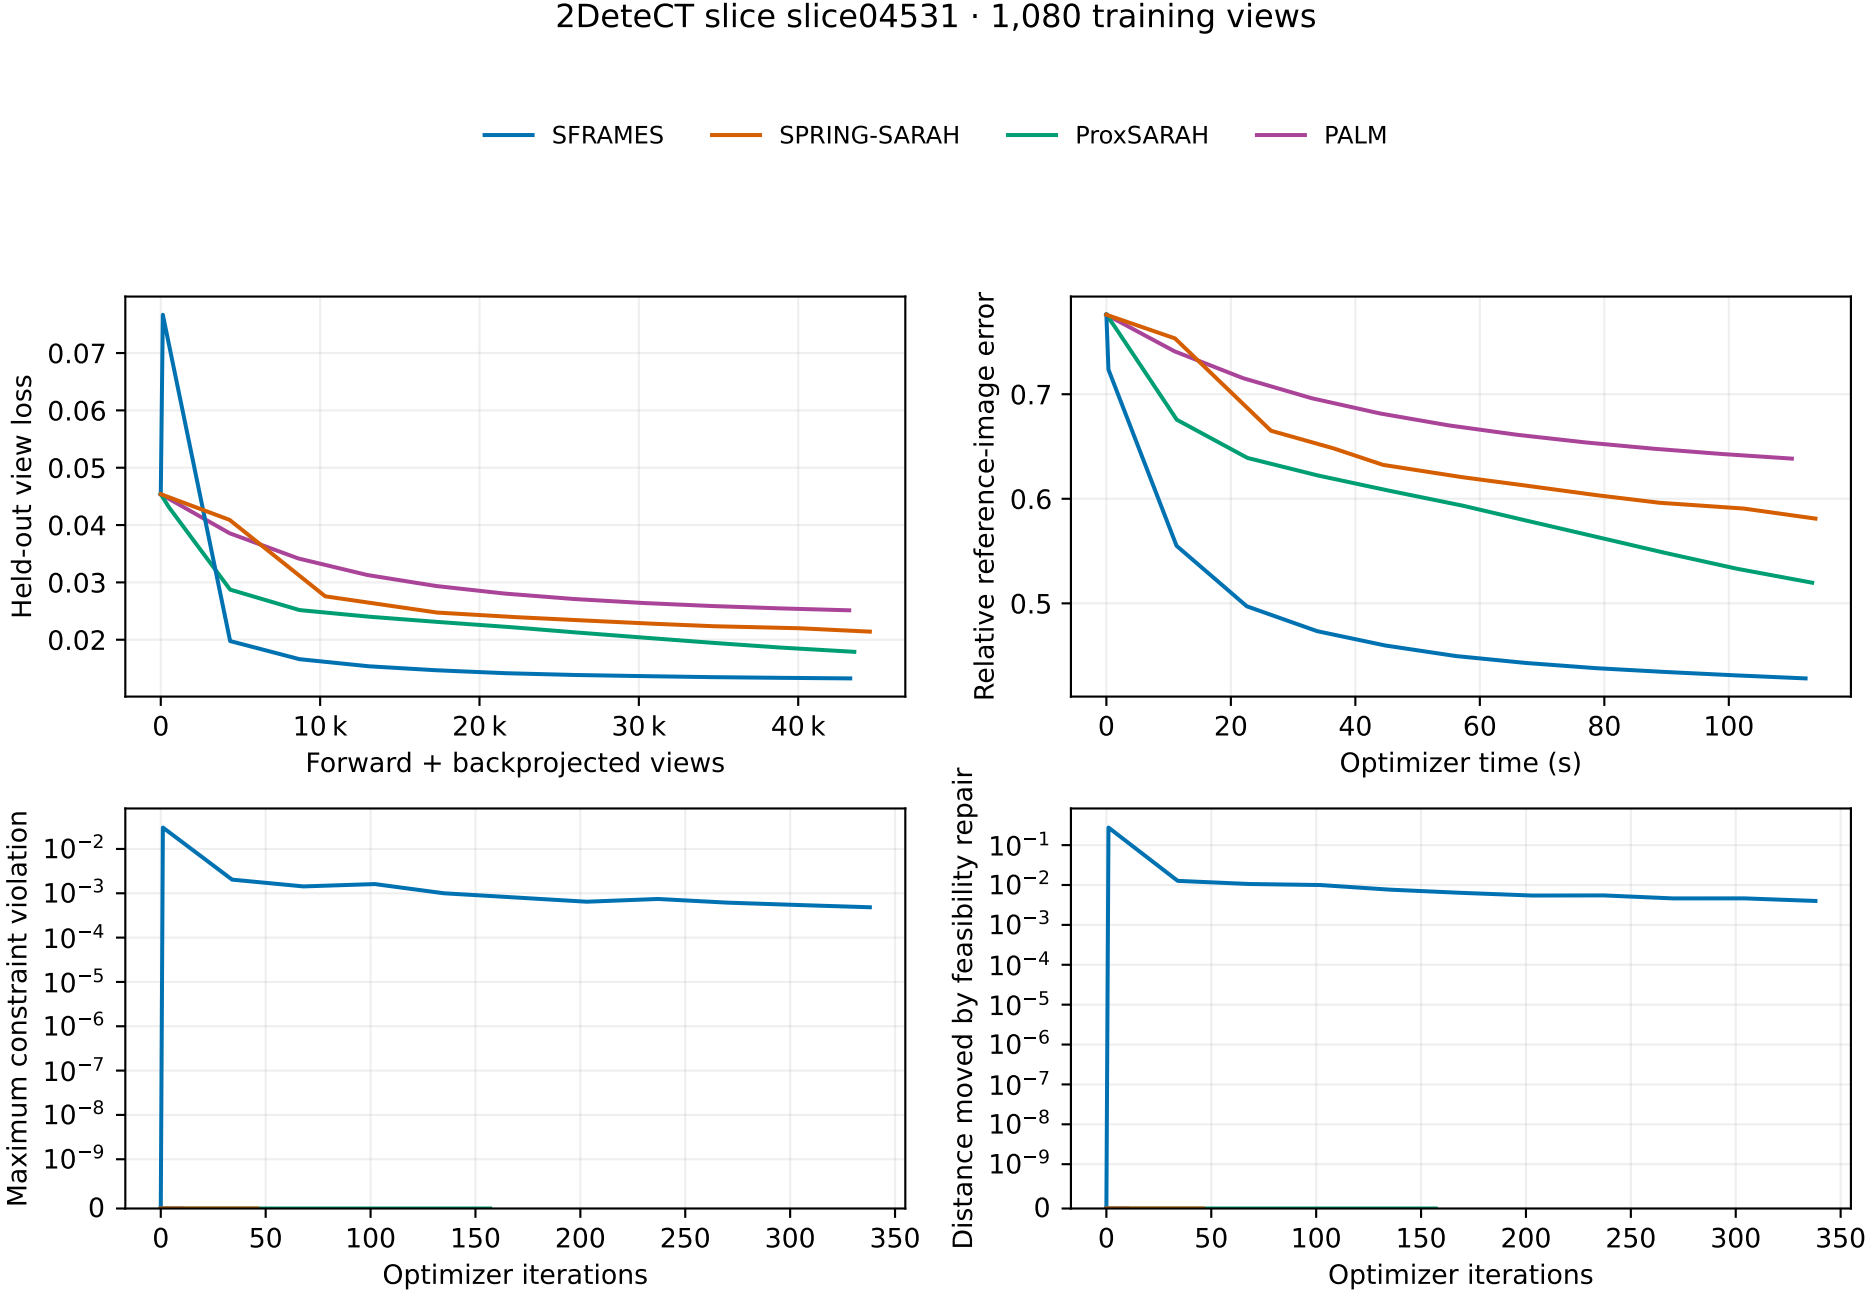


Held-out loss and reference error use repaired factors. Constraint violation and repair distance describe the raw iterate.

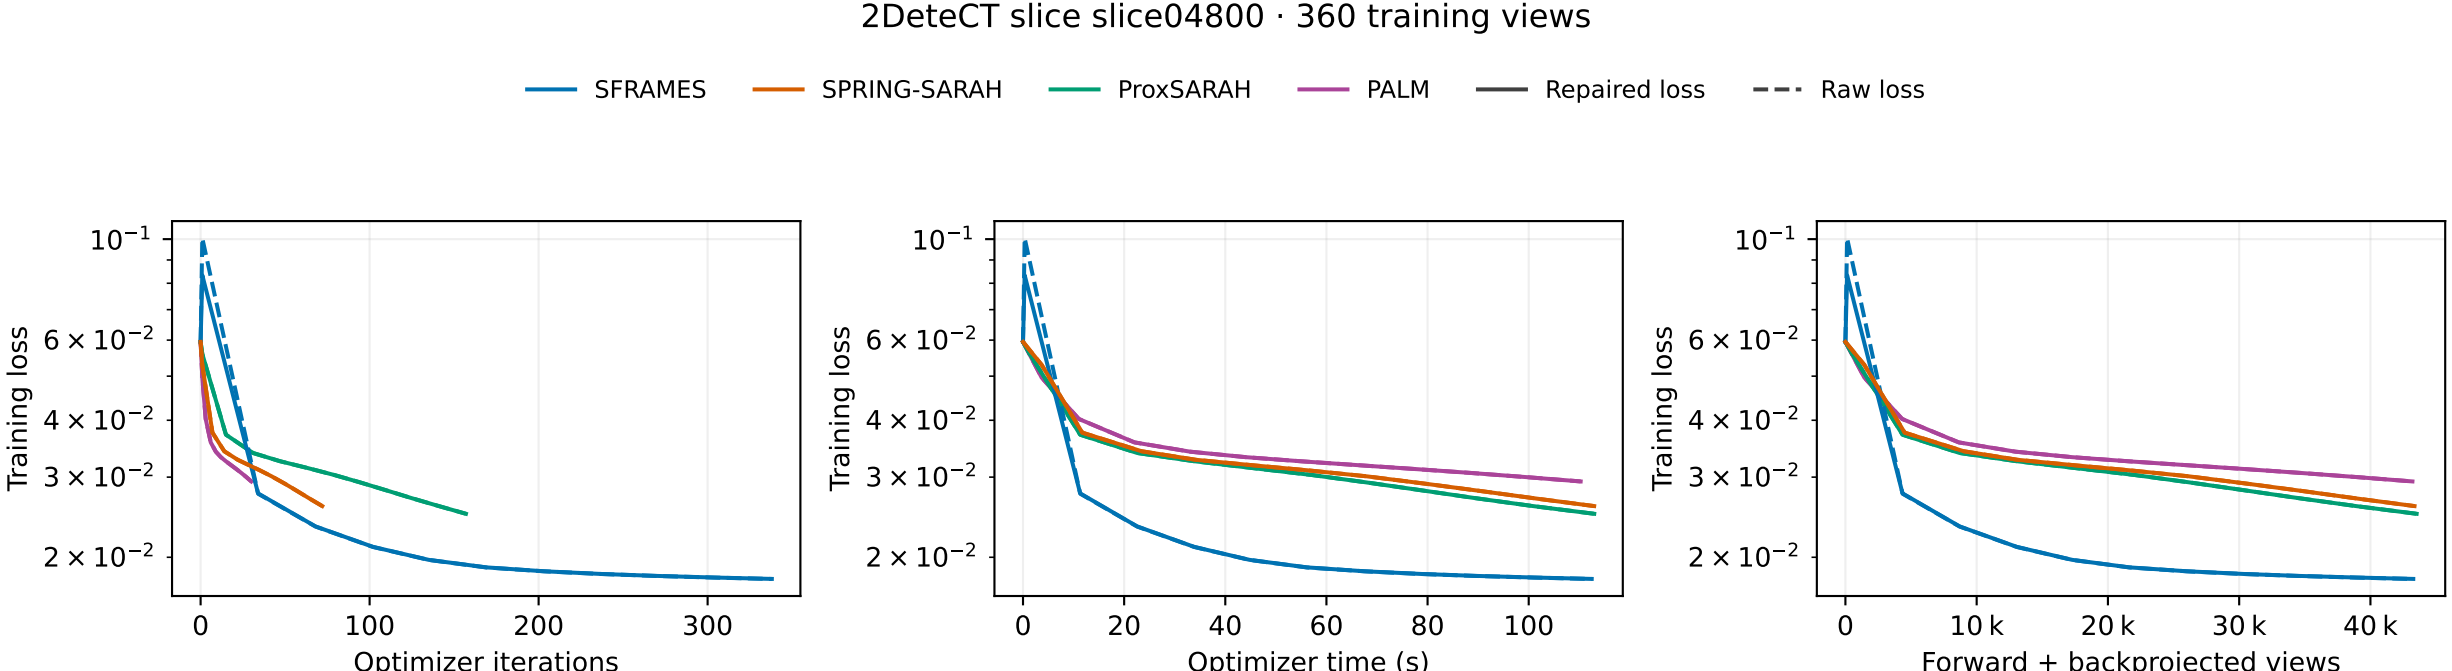


View counts include optimizer refreshes and recursive gradient differences. Timing excludes diagnostic probes and checkpoint I/O.

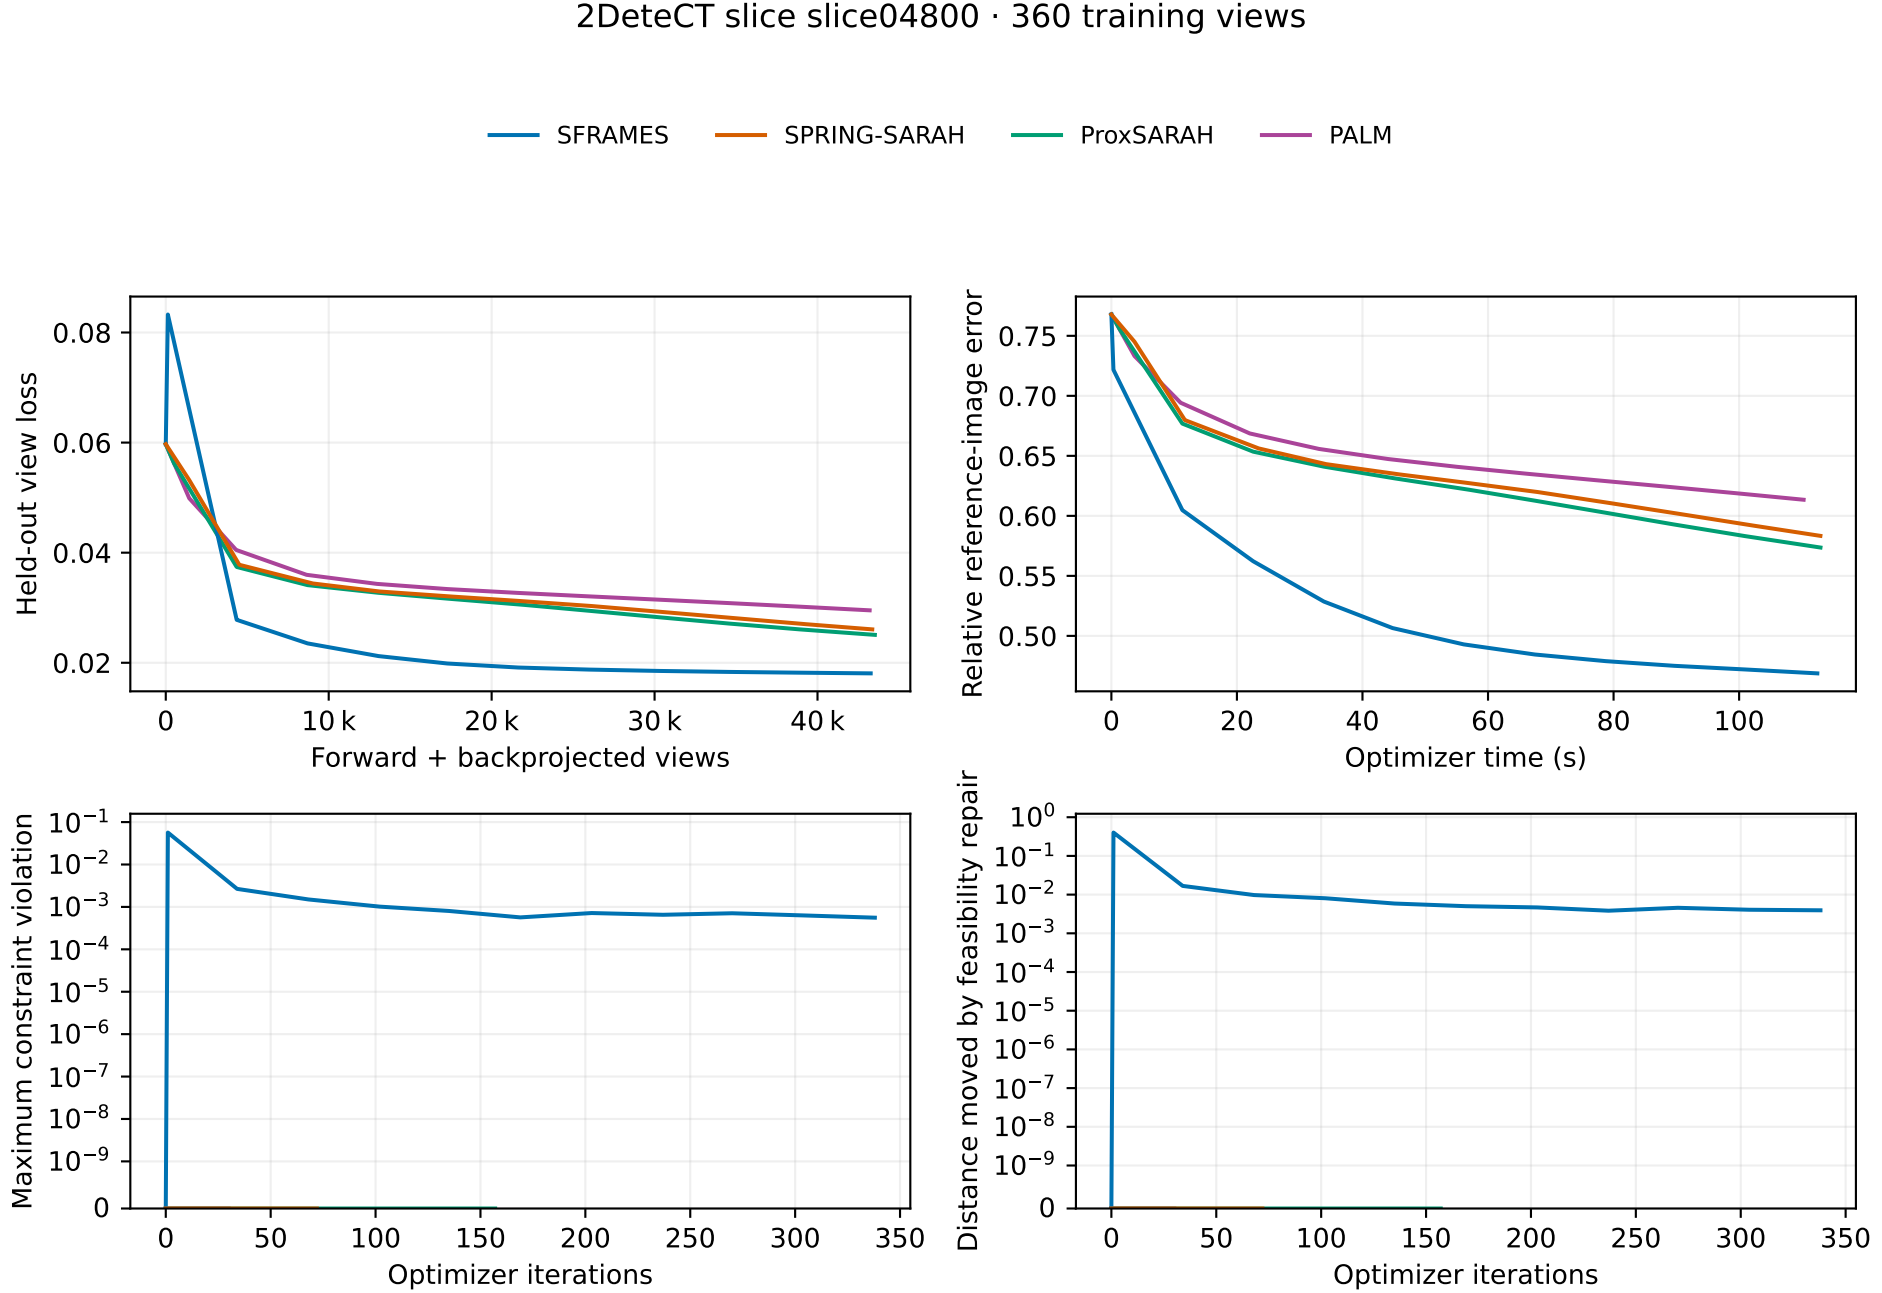
2DeteCT slice slice04800 · 360 training views
SFRAMES
SPRING-SARAH
ProxSARAH
PALM
Held-out view loss
0.08
0.06
0.04
0.02
0
10 k
20 k
30 k
40 k
Forward + backprojected views
Relative reference-image error
0.75
0.70
0.65
0.60
0.55
0.50
0
20
40
60
80
100
Optimizer time (s)
Maximum constraint violation
10^{-1}
10^{-2}
10^{-3}
10^{-4}
10^{-5}
10^{-6}
10^{-7}
10^{-8}
10^{-9}
0
0
50
100
150
200
250
300
350
Optimizer iterations
Distance moved by feasibility repair
10^{0}
10^{-1}
10^{-2}
10^{-3}
10^{-4}
10^{-5}
10^{-6}
10^{-7}
10^{-8}
10^{-9}
0
0
50
100
150
200
250
300
350
Optimizer iterations
Held-out loss and reference error use repaired factors. Constraint violation and repair distance describe the raw iterate.

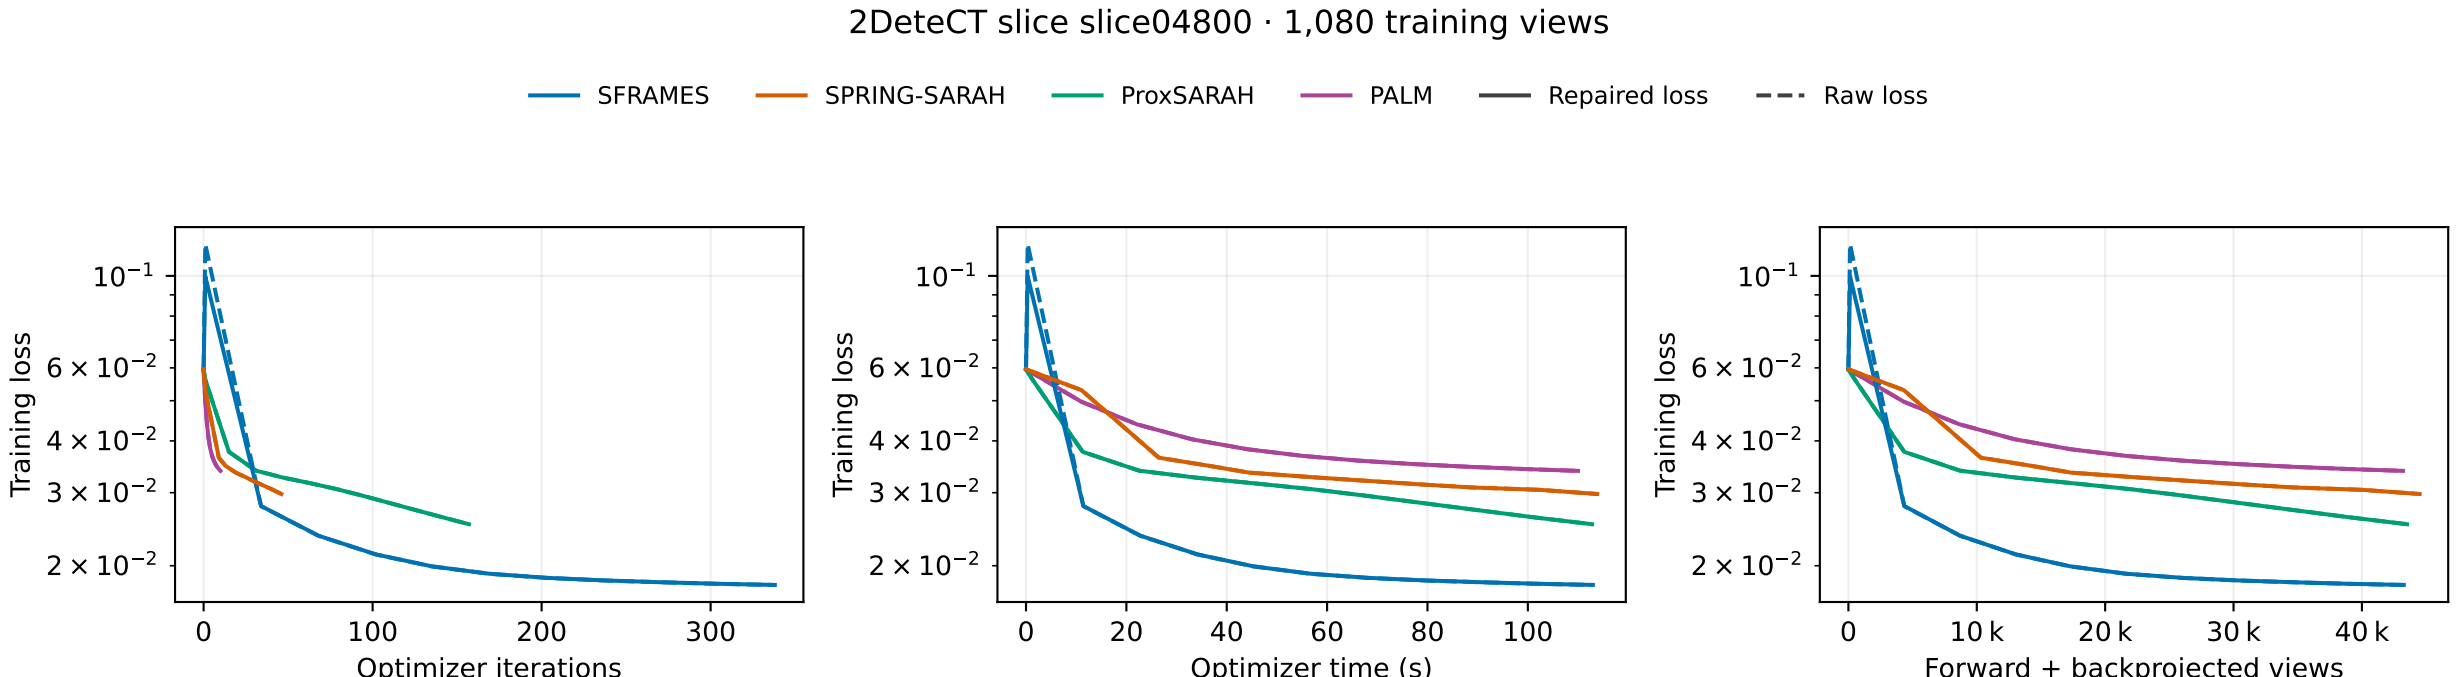

View counts include optimizer refreshes and recursive gradient differences. Timing excludes diagnostic probes and checkpoint I/O.

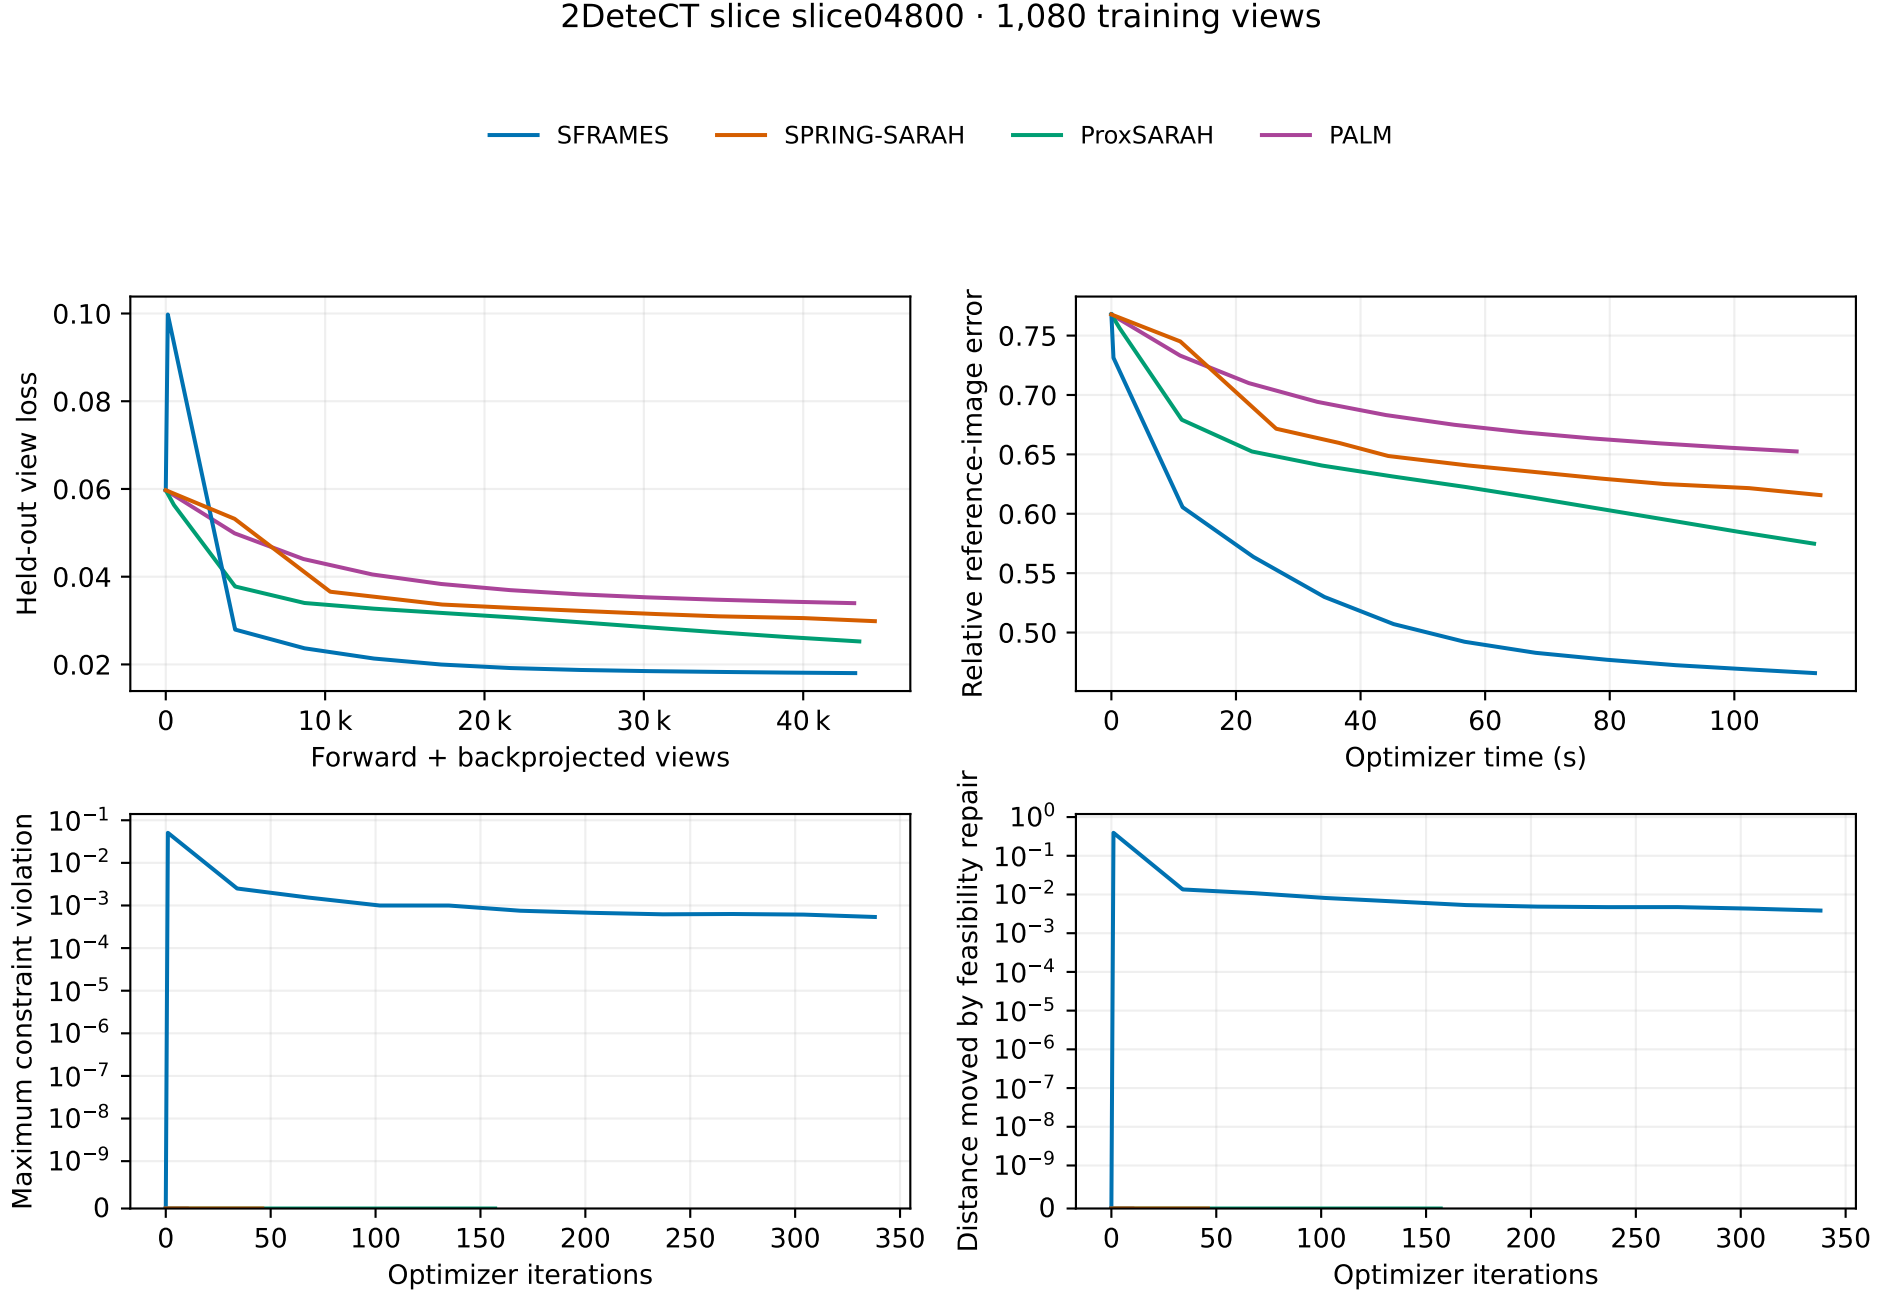

Held-out loss and reference error use repaired factors. Constraint violation and repair distance describe the raw iterate.