

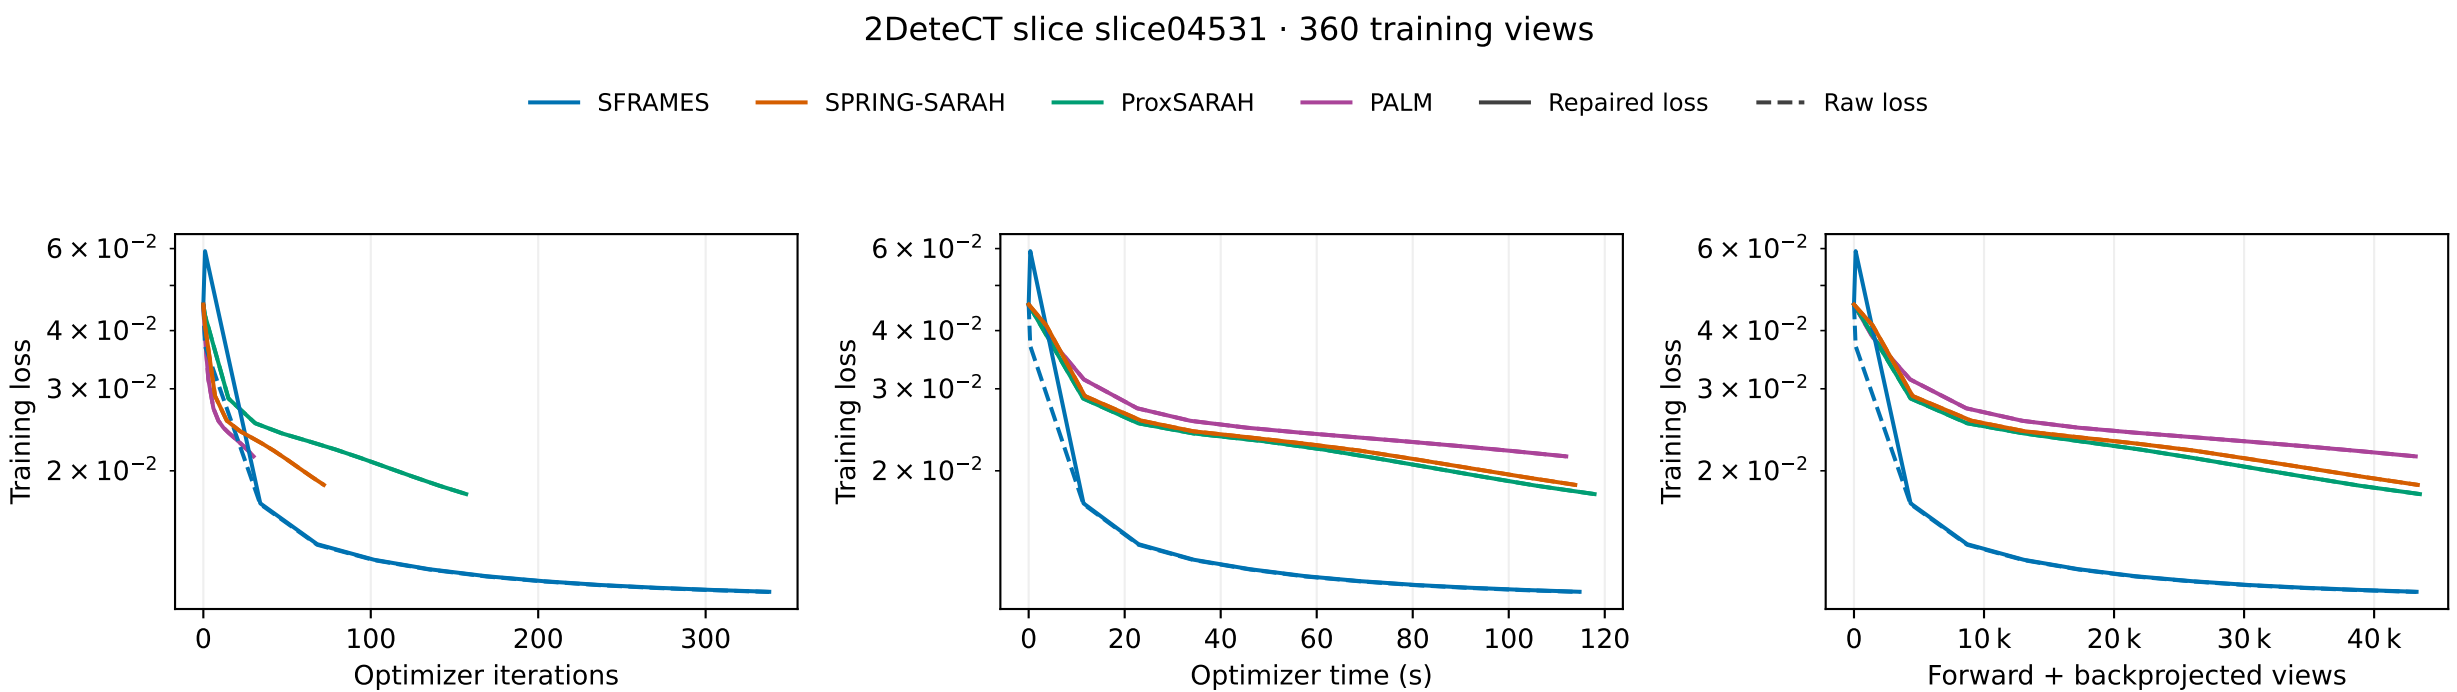



View counts include optimizer refreshes and recursive gradient differences. Timing excludes diagnostic probes and checkpoint I/O.

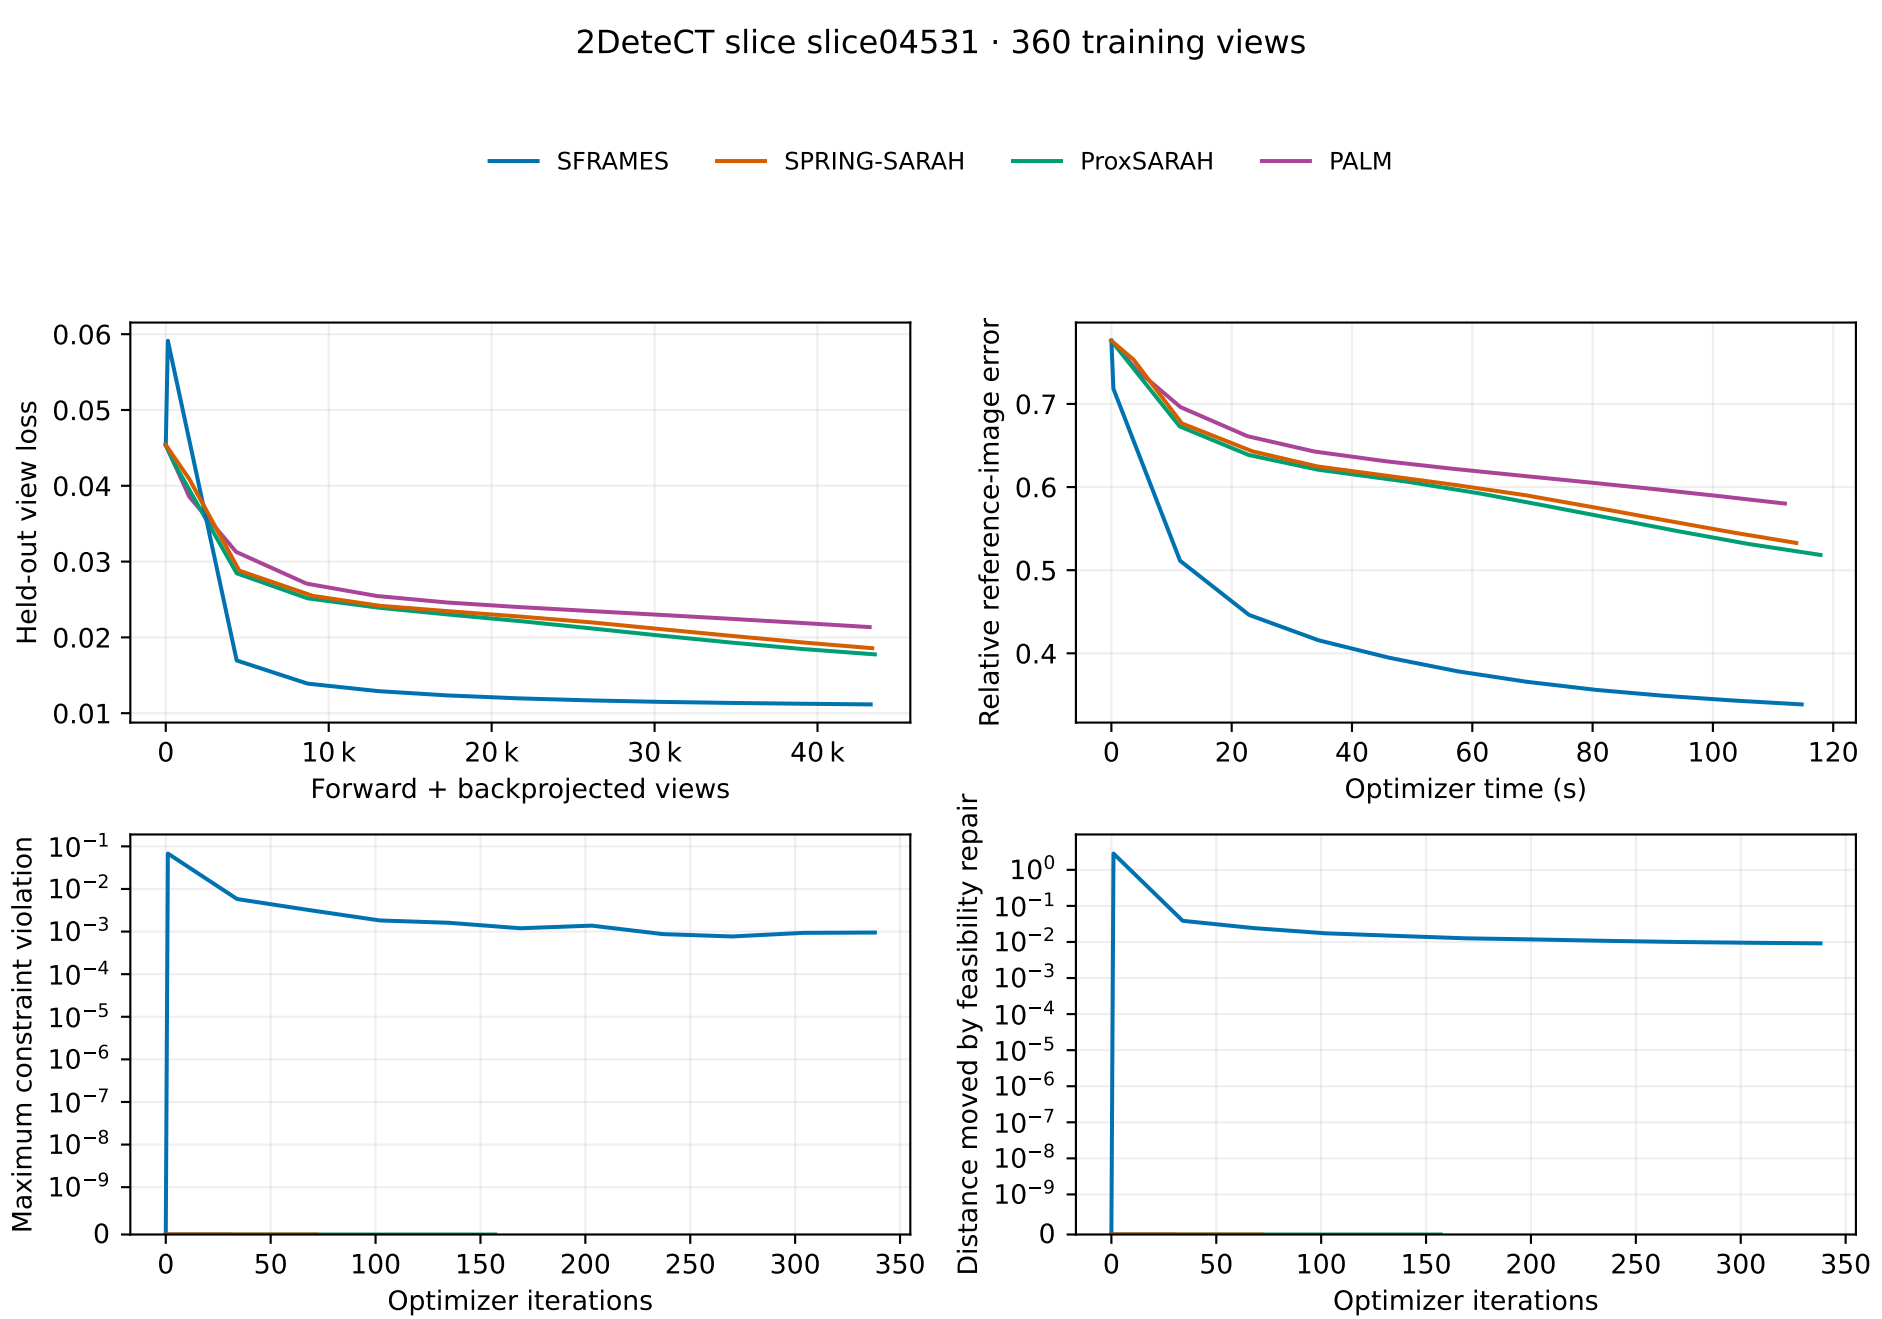


Held-out loss and reference error use repaired factors. Constraint violation and repair distance describe the raw iterate.

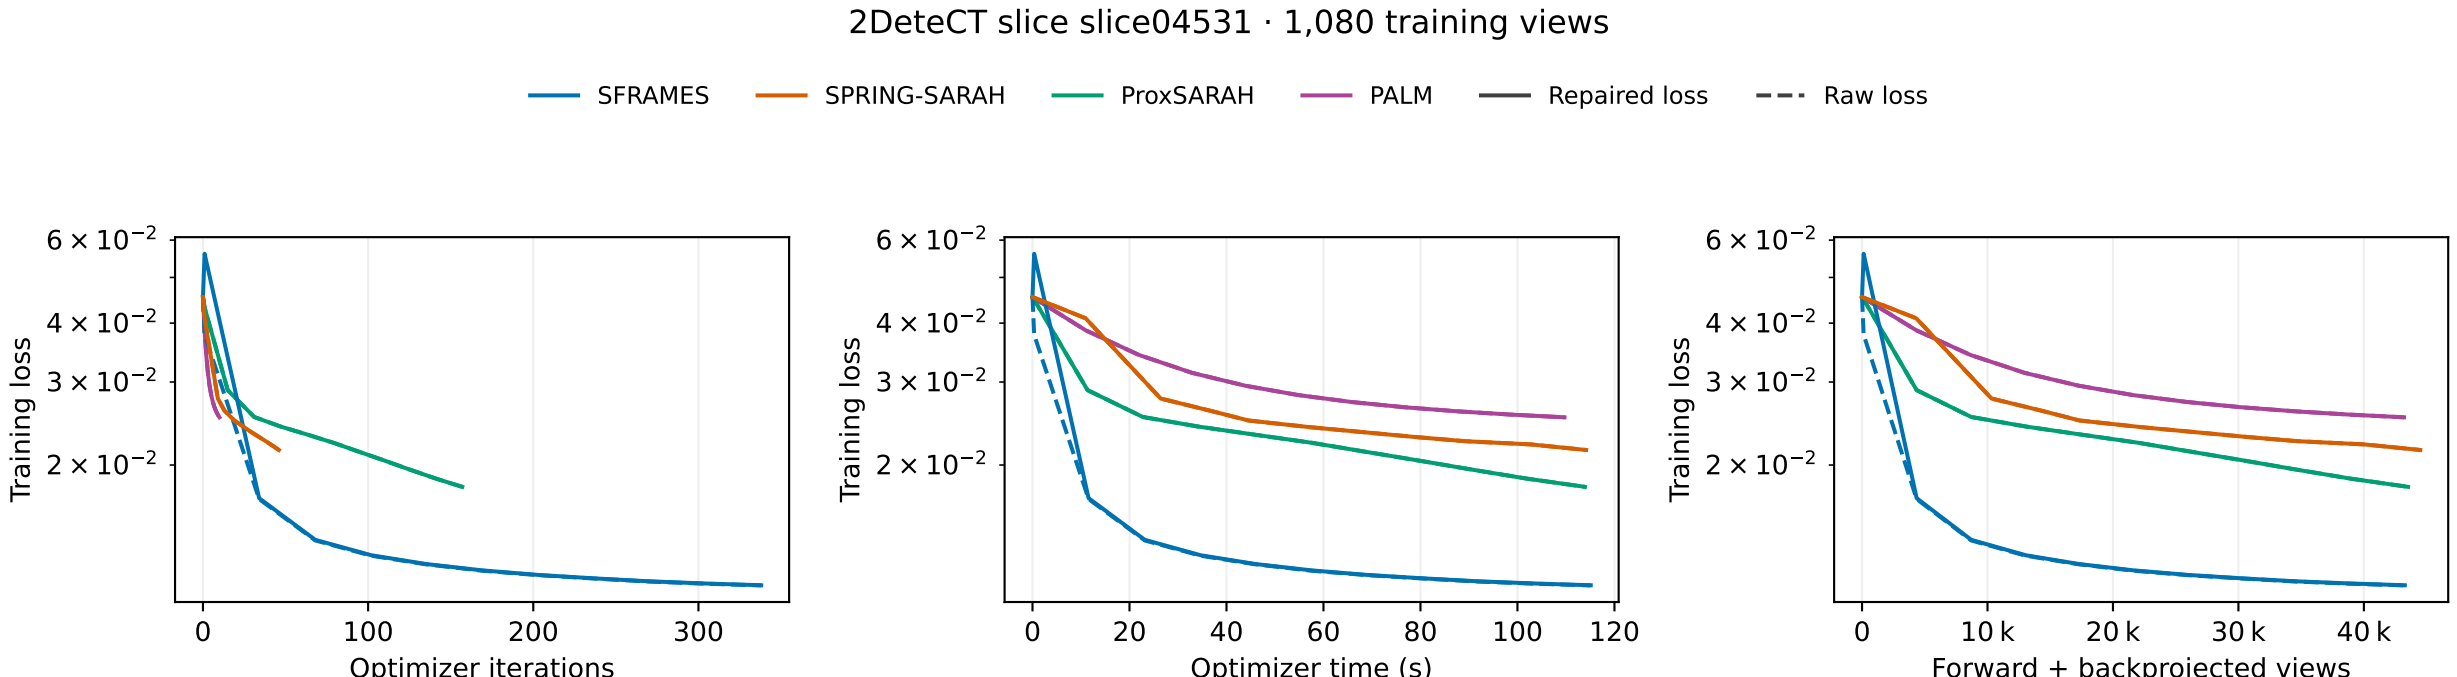


View counts include optimizer refreshes and recursive gradient differences. Timing excludes diagnostic probes and checkpoint I/O.

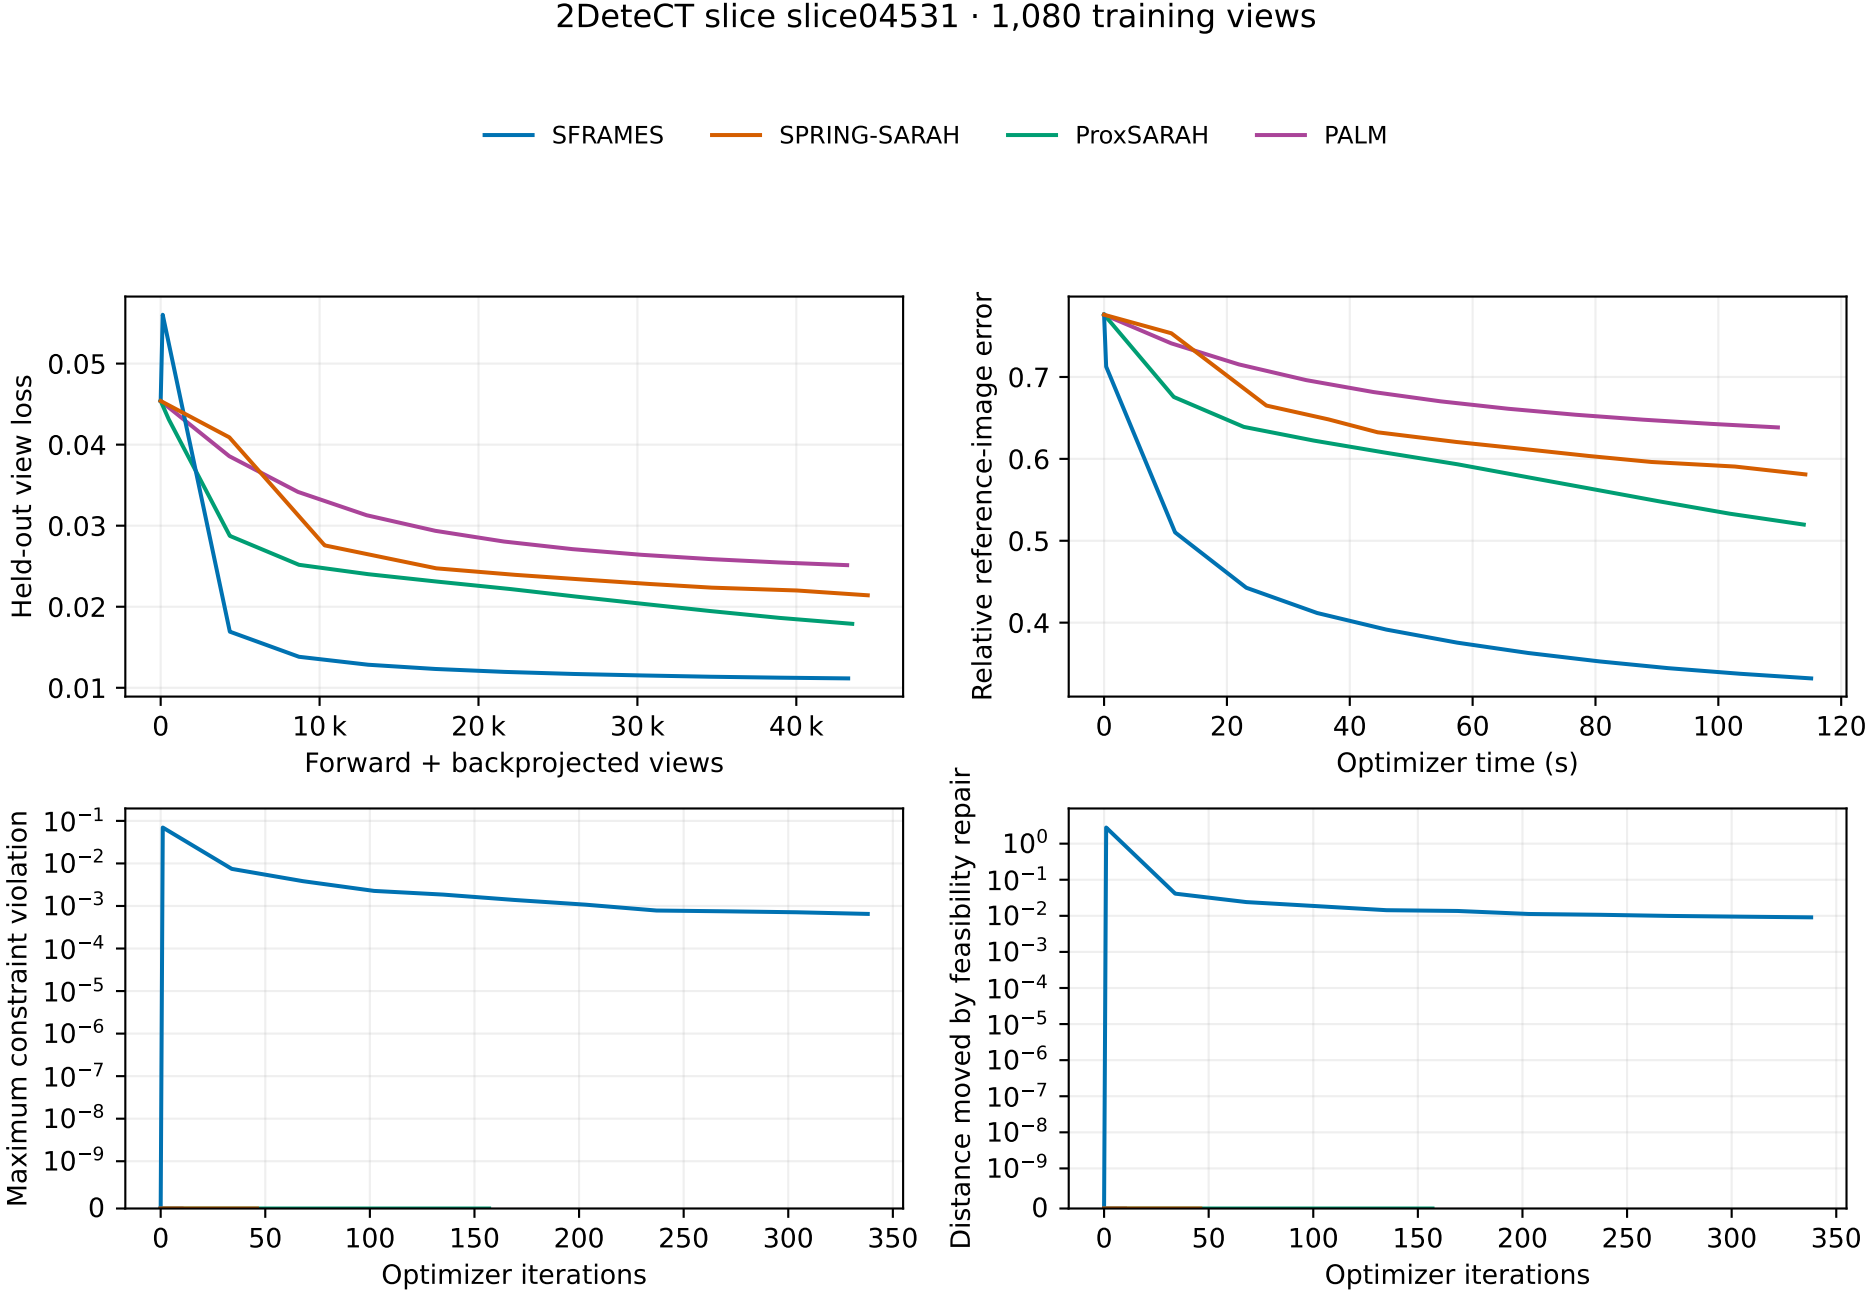


Held-out loss and reference error use repaired factors. Constraint violation and repair distance describe the raw iterate.

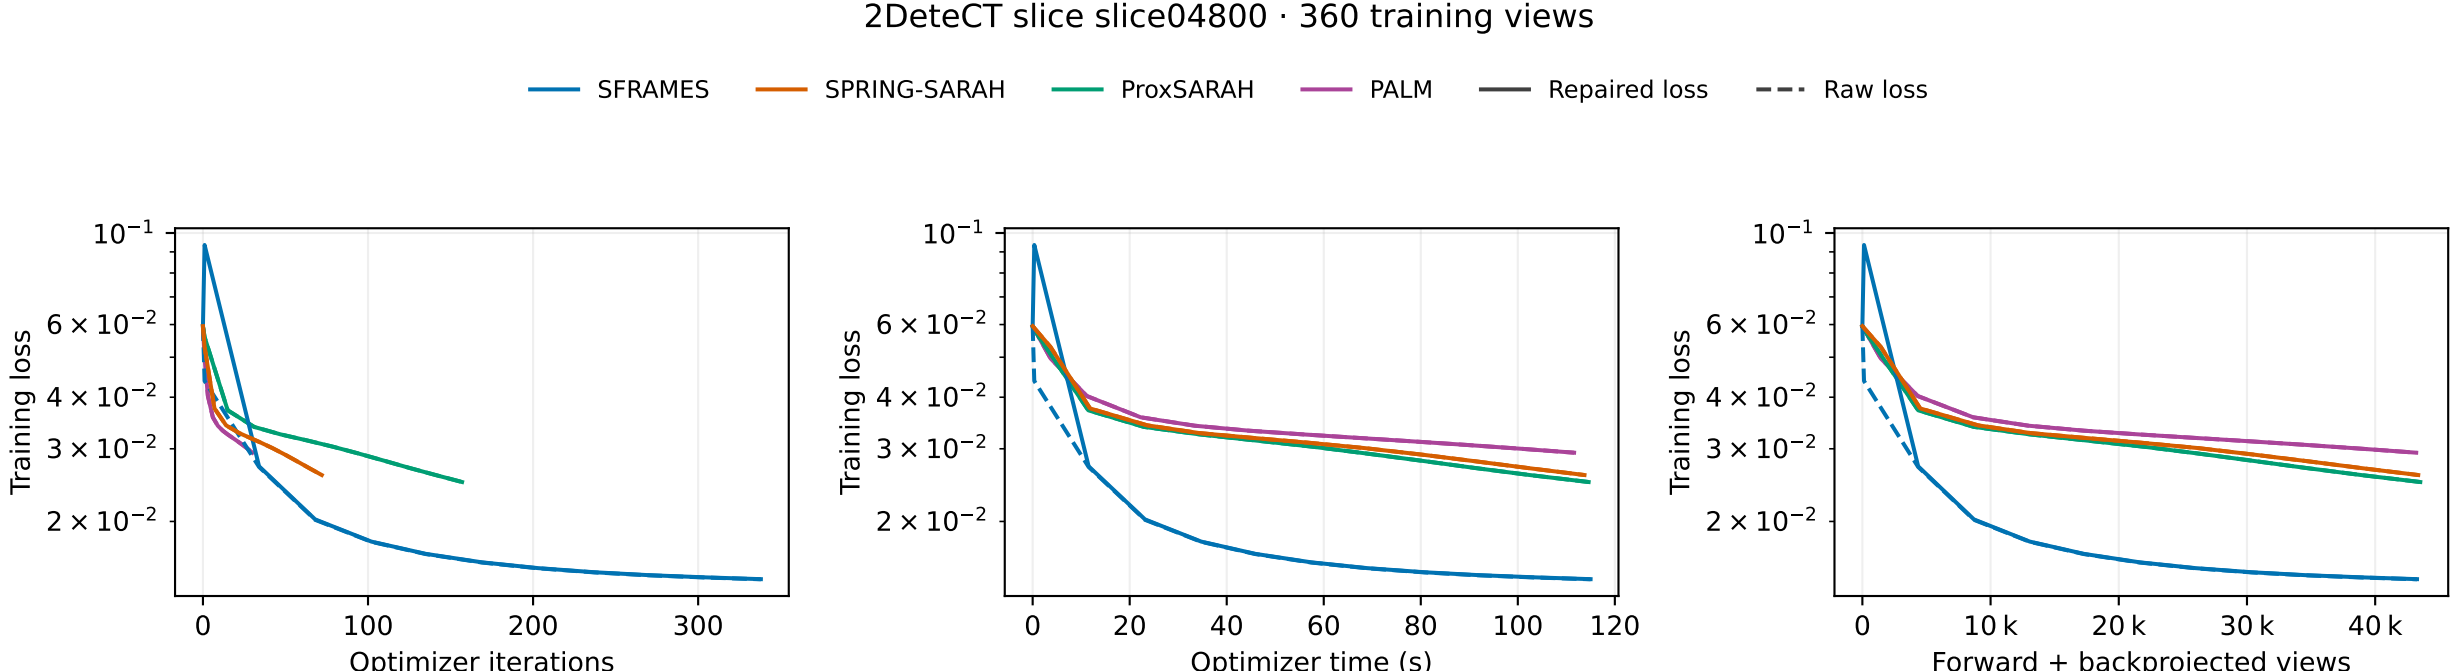


View counts include optimizer refreshes and recursive gradient differences. Timing excludes diagnostic probes and checkpoint I/O.

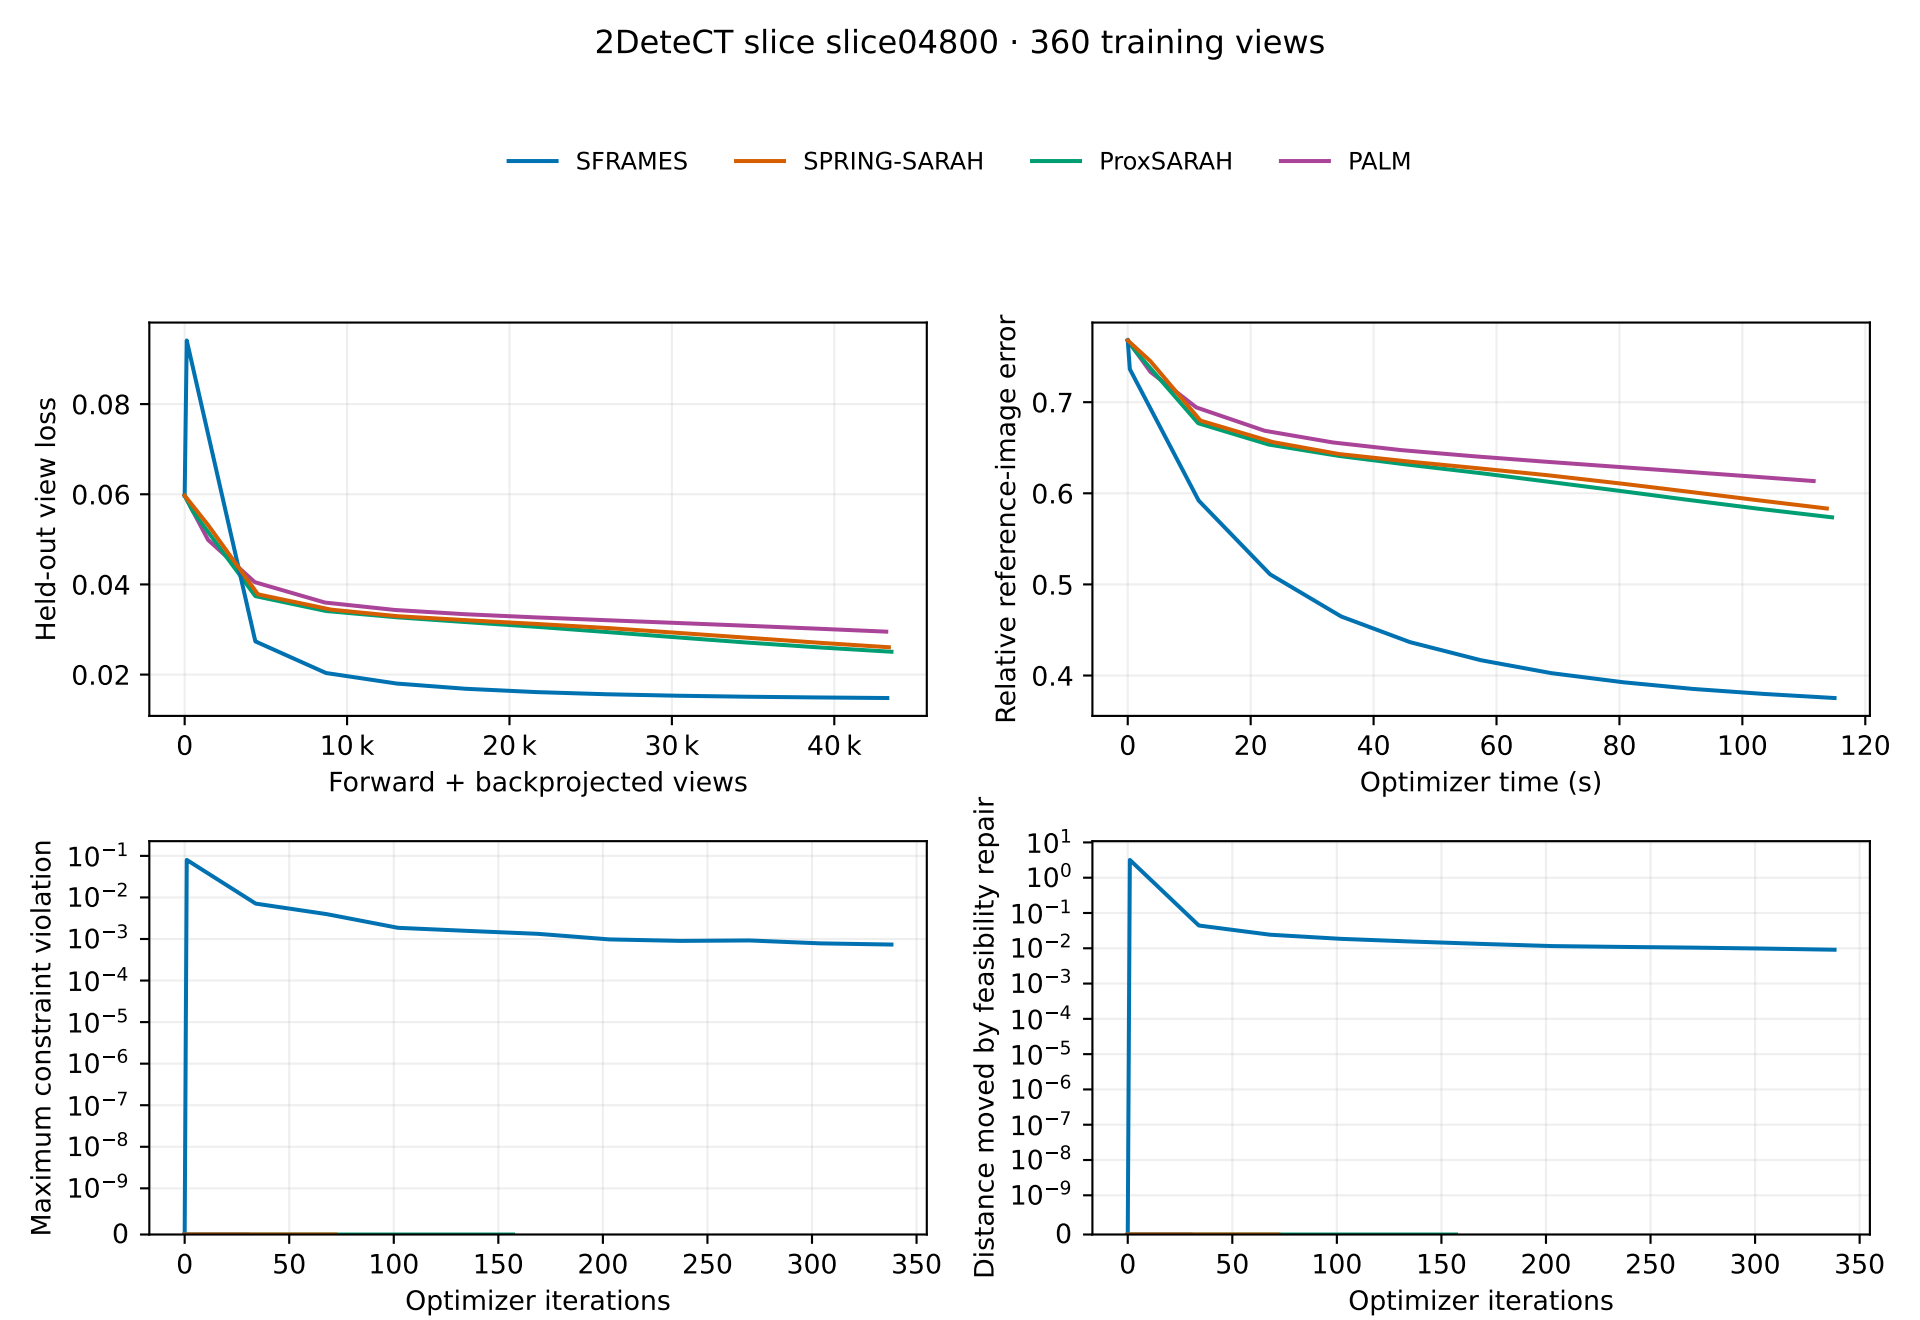

Held-out loss and reference error use repaired factors. Constraint violation and repair distance describe the raw iterate.

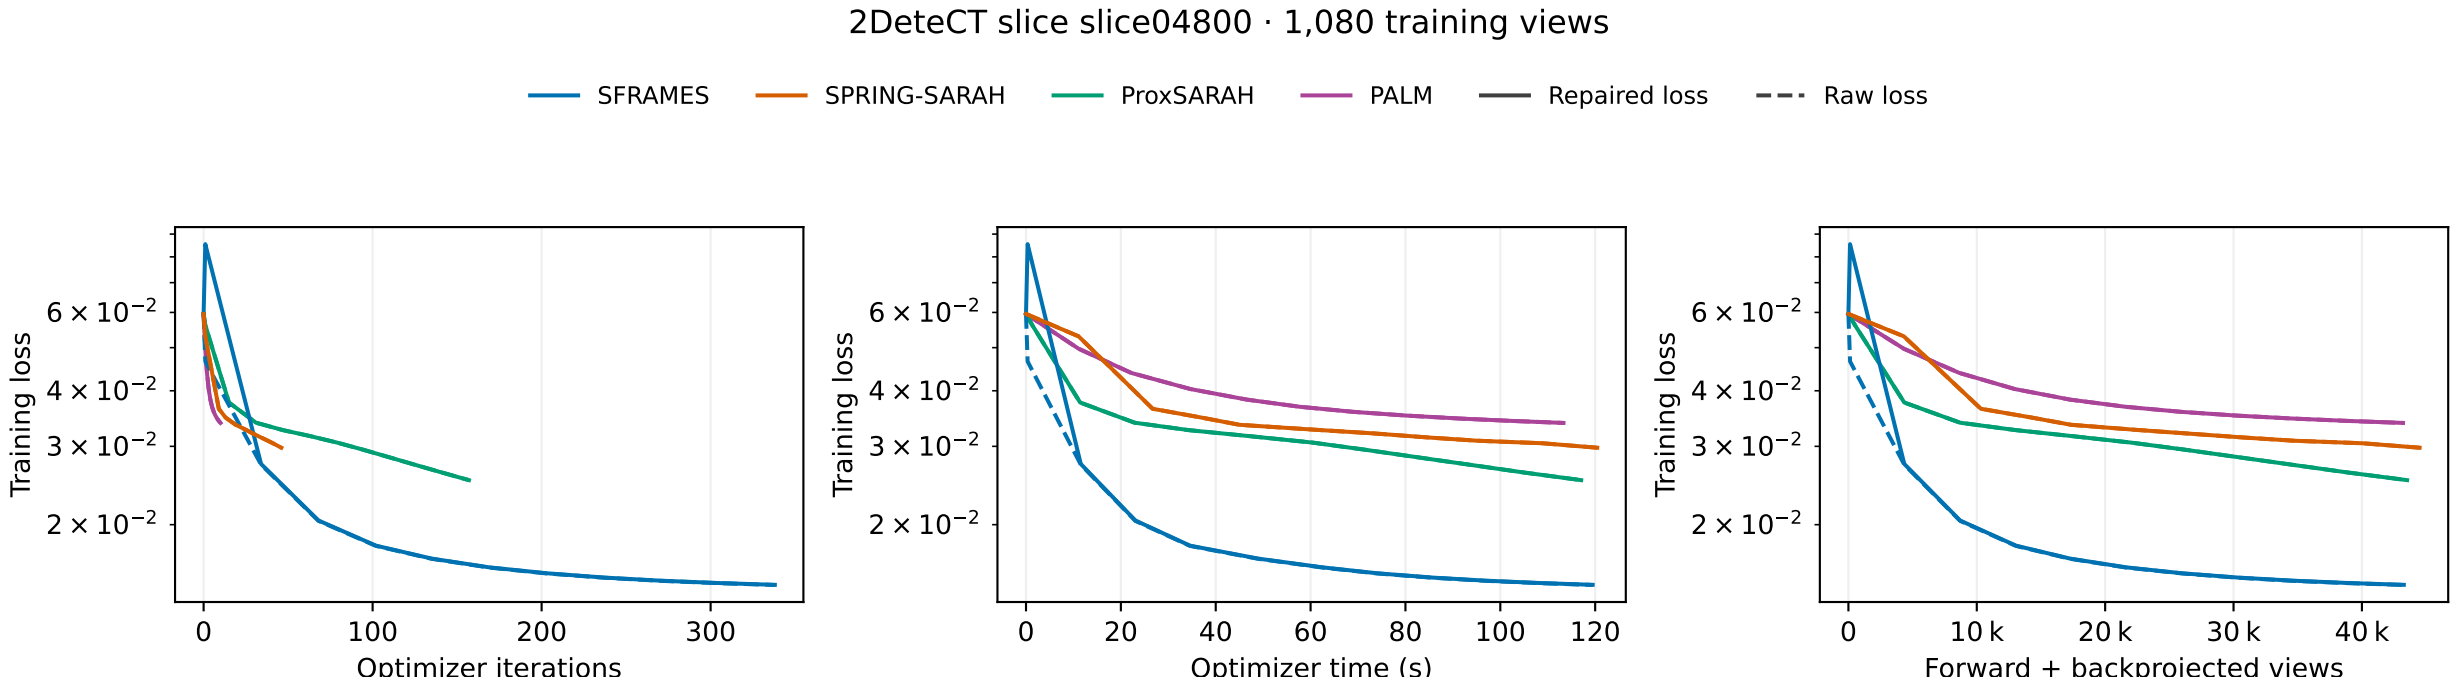

View counts include optimizer refreshes and recursive gradient differences. Timing excludes diagnostic probes and checkpoint I/O.

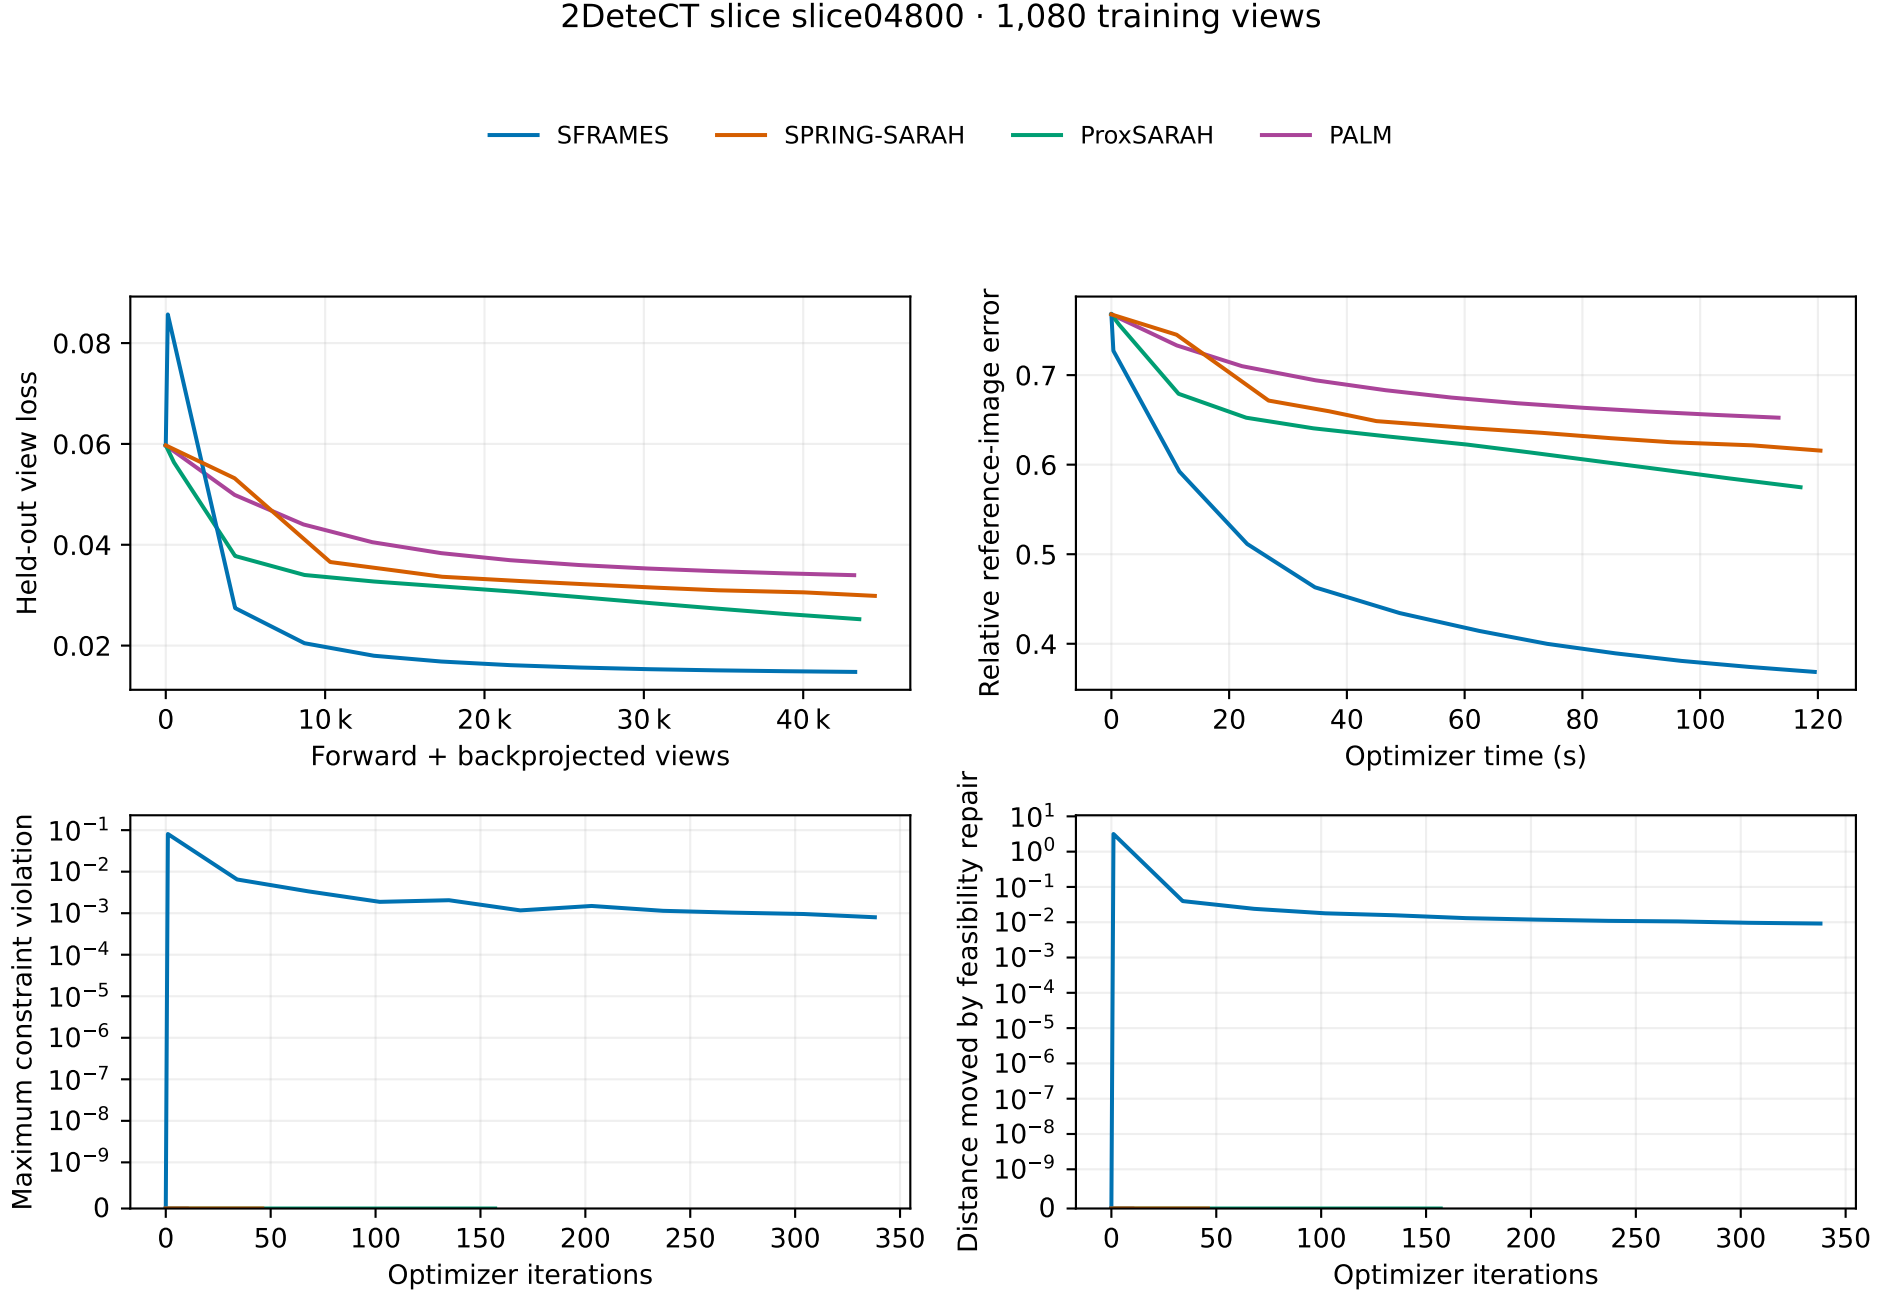

Held-out loss and reference error use repaired factors. Constraint violation and repair distance describe the raw iterate.