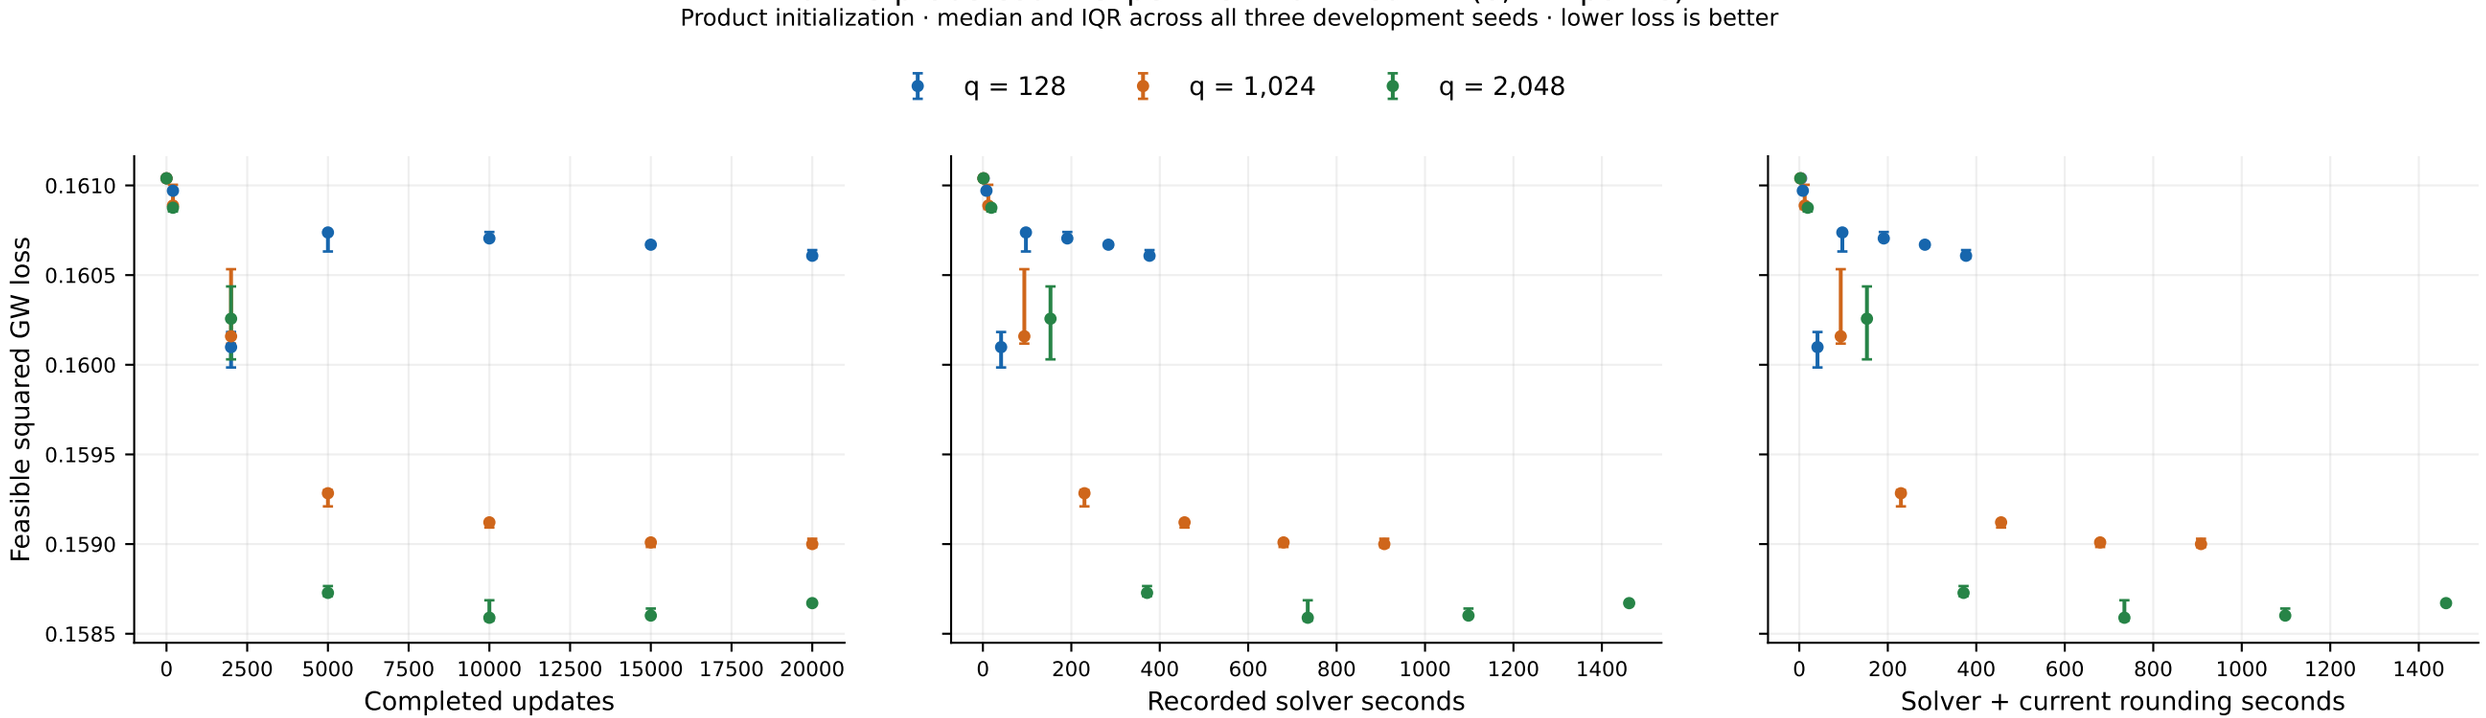
FraMES probe-count experiment: bmmc6224 (6,224 points)
Product initialization · median and IQR across all three development seeds · lower loss is better
q = 128
q = 1,024
q = 2,048
Feasible squared GW loss
0.1610
0.1605
0.1600
0.1595
0.1590
0.1585
0
2500
5000
7500
10000
12500
15000
17500
20000
Completed updates
0
200
400
600
800
1000
1200
1400
Recorded solver seconds
0
200
400
600
800
1000
1200
1400
Solver + current rounding seconds
Markers are saved checkpoints; no interpolated losses. Time panels place each update-count median at its median recorded time.
Final losses: independent FP64 evaluation. Earlier losses: optimizer precision. Time axes exclude exact diagnostics and FP64 validation.