SNARE-seq · 10,000 cells | one 40-GB A100 per run | FP64

Recorded runtime endpoints and loss trajectories over iterations

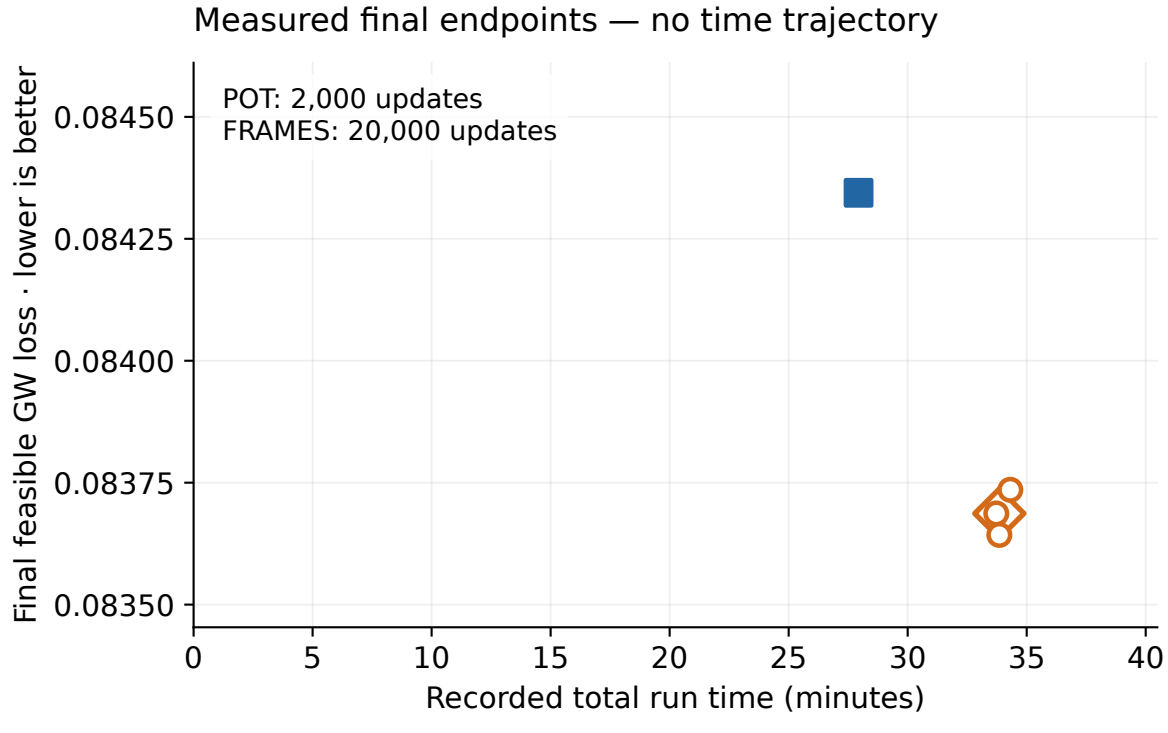

Full-gradient POT ($\varepsilon = 10^{-3}$) · one run

Pair-sampled FRAMES (batch 1,024) · three seeds

FRAMES endpoint: median time and median loss

Endpoint dots only: the original run logs did not record time at each loss diagnostic.

Time includes data loading, loss diagnostics and checkpoints; excludes queue wait and prefactor tuning.

Common metric: unregularized feasible GW loss. Iteration curve: median and observed seed range, not a confidence interval.