

Aviasales Data API

Aviasales Data API — the way to get travel insights for your site or blog. Get flight price trends and find popular destinations for your customers.

Overview

Data is transferred from the cache based on the user's search history from Aviasales websites. The data is stored for 7 days for all types of queries. So it is recommended that you use them to generate static pages.

The data API access provides prices from the cache based on the user's search history.

For developers, [documentation](#) is available with examples of requests and answers in various programming languages, as well as a link to Postman.


Please note, that API methods use limits, which are described in the article [API rate limits](#).

This documentation is for the public Aviasales API of the same name.

Access the API

To access the API, you must pass your token in the X-Access-Token header or in the token parameter.

You can find the API token in your [Profile](#) in the **API token** section.

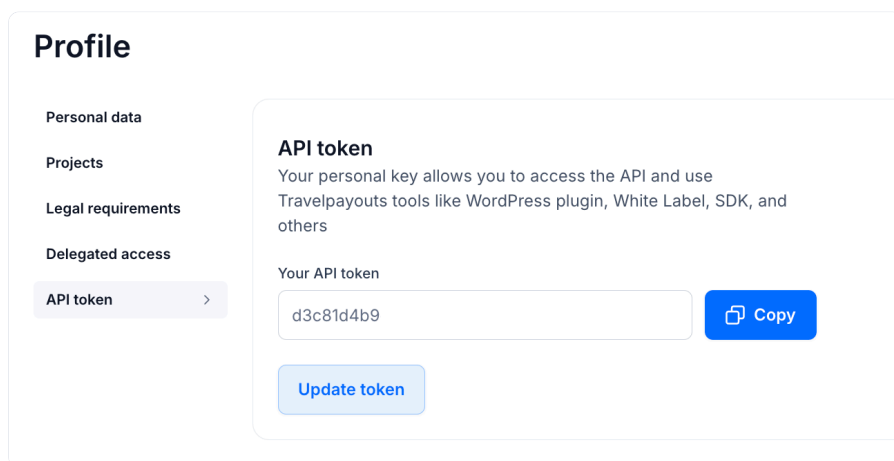

The screenshot shows a 'Profile' page with a sidebar on the left containing links: 'Personal data', 'Projects', 'Legal requirements', 'Delegated access', and 'API token' (which is highlighted with a right-pointing arrow). The main content area is titled 'API token' and includes a description: 'Your personal key allows you to access the API and use Travelpayouts tools like WordPress plugin, White Label, SDK, and others'. Below this, it says 'Your API token' followed by a text input field containing 'd3c81d4b9'. To the right of the input field is a blue 'Copy' button with a clipboard icon. Below the input field is a light blue 'Update token' button.

Date format and response content

Dates are accepted in the formats YYYY-MM and YYYY-MM-DD.

The server response is always sent in JSON format with the following structure:

- **success** — true for a successful request, false in case of errors
- **data** — a result of the request; in case of an error will be empty: "data": {}
- **error** — short description of the error that prevented request completion; for a successful request is equal to null

Dates and times are given in UTC, and formatted according to [ISO 8601](#). Prices are given in rubles as of when the ticket is put in the search results. It is not recommended that you use expired prices (the approximate expiration date is given in the value of the expires_at parameter).

Important. We strongly recommend receiving data in compressed GZIP format, which saves a significant amount of time in receiving the response. To get data in compressed format, send the header Accept-Encoding: gzip, deflate.

To obtain access to the API to search for plane tickets and hotels, [send a request](#).

Data by country (markets)

The API uses such a thing as a market. It depends on various factors, most often it is the language of the Aviasales website where users search for tickets.

Each search is associated with a specific market. This means that if a user searches for something on the aviasales.ru site, then the data in the cache will be only for the ru market and there will be no data for the us market (which, for example, aviasales.com is associated with).

By default, the market is determined by the place of departure (the origin parameter in the API request). If it is not possible to determine the market, then the data for the ru-market will be returned.

In all requests, you can use the market parameter to specify the market you need (for different markets, different agencies can be connected, which means that it is better for partners in America to see the cache for the US market, and not for the RU market).

You can see a list of available markets [here](#).

Flight tickets for specific dates

Returns the cheapest tickets for specific dates found by Aviasales users in the last 48 hours. It is recommended to use instead of methods:

- /v1/city-directions
- /v1/prices/cheap
- /v1/prices/direct
- /v2/prices/latest

Request

[https://api.travelpayouts.com/aviasales/v3/prices_for_dates?
origin=MAD&destination=BCN&departure_at=2023-07&return_at=2023-
08&unique=false&sorting=price&direct=false&cy=usd&limit=30&page=1&one_w
ay=true&token=PutYourTokenHere](https://api.travelpayouts.com/aviasales/v3/prices_for_dates?origin=MAD&destination=BCN&departure_at=2023-07&return_at=2023-08&unique=false&sorting=price&direct=false&cy=usd&limit=30&page=1&one_way=true&token=PutYourTokenHere)

Request parameters

- **currency** — the currency of prices. The default value is RUB
- **origin** — An IATA code of a city or an airport of the origin
- **destination** — An IATA code of a city or an airport of the destination (if you don't specify the origin parameter, you must set the destination)
- **departure_at** — the departure date (YYYY-MM or YYYY-MM-DD)
- **return_at** — the return date. For one-way tickets do not specify it
- **one_way** — one-way tickets, possible values: `true` or `false`. `true` is used by default.
Since the query uses date grouping, only 1 one-way ticket is returned when `true`. To get more offers for round-trip tickets, use `one_way=false`.
- **direct** — non-stop tickets, possible values: `true` or `false`. By default: `false`
- **market** — sets the market of the data source (by default, `ru`)
- **limit** — the total number of records on a page. The default value — 30. The maximum value — 1000
- **page** — a page number, is used to get a limited amount of results. For example, if we want to get the entries from 100 to 150, we need to set `page=3`, and `limit=50`
- **sorting** — the assorting of prices:
 - **price** — by the price (the default value). For the directions, only city — city assorting by the price is possible

- **route** — by the popularity of a route.
- **unique** — returning only unique routes, if only origin specified, true or false. By default: false
- **token** — your API token.

Response example

```
"success": true,
"data": [
{
  "origin": «MAD",
  "destination": "BCN",
  "origin_airport": «MAD",
  "destination_airport": "BCN",
  "price": 5929,
  "airline": "IB",
  "flight_number": «3002",
  "departure_at": "2023-07-28T07:00:00+02:00",
  "return_at": "2023-08-26T14:30:00+02:00",
  "transfers": 0,
  "return_transfers": 0,
  "duration": 165,
  "duration_to": 80,
  "duration_back": 85,
  "link": "/search/MAD2807BCN26081?t=IB16905204001690525200000
080MADBCN16930530001693058100000085BCNMAD_29ee244e5b536fb909
9d8ec2ca842b19_78\u0026search_date=11052023\u0026expected_pr
ice_uuid=7531ddb1-26b4-4df9-891e-81dc54d48b2a\u0026expected_
price_currency=usd»"
}
```

Response data

- **origin** — the point of departure
- **destination** — the point of destination
- **origin_airport** — the IATA of the origin airport
- **destination_airport** — the IATA of the destination airport
- **price** — price of the ticket
- **airline** — the IATA of the airline
- **flight_number** — flight number
- **departure_at** — departure date
- **return_at** — return date
- **transfers** — number of stops on the way to the destination
- **return_transfers** — number of stops on the way back
- **duration** — total round trip duration in minutes
- **duration_to** — duration of the flight to the destination in minutes
- **duration_back** — duration of the return flight in minutes
- **link** — the ticket link. Add the code to the URL <https://www.aviasales.com/> to open the search results on the given route on Aviasales. Use our [deep link creation form](#) to create your partner link out of the resulting link
- **currency** — the currency of prices.

How you can replace the outdated methods with this endpoint:

- `/v1/prices/cheap` — set **direct=false**; **sorting=price**

- `/v1/prices/direct` — set **direct=true**; **sorting=price**
- `/v1/city-directions` — set **sorting=route**; **unique=true**. Pass only the **origin** parameter.

Prices for airline tickets for a period of time

Returns the prices of the airline tickets for a specific period of time.

Request

http://api.travelpayouts.com/aviasales/v3/get_latest_prices

Request parameters

- **currency** — the currency of prices.
- **origin** — IATA code of a city or an airport of the departure.
- **destination** — IATA code of a city or an airport of the destination (if you don't specify the origin parameter, you must set the destination parameter)
- **beginning_of_period** — the beginning of the period, within which the dates of departure fall. Must be specified if **period_type** is equal to a month.
- **period_type** — the period for which the tickets have been found. Allowed values include:
 - **year** — tickets found in the specified year. In **beginning_of_period** the year is specified in YYYY format.
 - month** — tickets found for the specified in the **beginning_of_period** month (use YYYY-MM-DD format).
 - day** — tickets found for the specified in the **beginning_of_period** day (use YYYY-MM-DD format).

If no **period_type** is specified, tickets for flights in the current month are

displayed.

- **group_by** — the rule for grouping:
 - **dates** — by dates (default value).
 - **directions** — by destinations.
- **one_way** — true - one way, false - back-to-back. Default value— true.
- **page** — a page of the result, it's used for chunked reading of a large result. Default value — 1.
- **market** — sets the market of the data source.
- **sorting** — the rule for the sorting of prices:
 - **price** — by the price (default value). For the directions from city to city only sorting by the price is possible.
 - **route** — by the popularity of the route.
 - **distance_unit_price** — by the price for 1 km.
- **trip_duration** — the duration of stay in the destination place in days.
- **trip_class** — the flight class:
 - 0 — the economy class
 - 1 — the business class
 - 2 — the first class

Request example

http://api.travelpayouts.com/aviasales/v3/get_latest_prices?

[currency=rub&period_type=year&page=1&show_to_affiliates=true&sorting=price&token=PutYourTokenHere](http://api.travelpayouts.com/aviasales/v3/get_latest_prices?currency=rub&period_type=year&page=1&show_to_affiliates=true&sorting=price&token=PutYourTokenHere)

Response example

```
{
  "success":true,
  "data":[{"show_to_affiliates":true,
    "origin":"WMI",
    "destination":"WRO",
    "depart_date":"2021-12-07",
    "return_date":"2021-12-13",
    "number_of_changes":0,
    "value":1183,
    "found_at":"2021-09-22T14:08:45+04:00",
    "distance":-1,
    "actual":true
  }]
}
```

Response data

- **success** — the result of the request.
- **data:**
 - **origin** — IATA code of a city of the departure
 - **destination** — IATA code of a city of the destination
 - **depart_date** — the date of the departure
 - **distance** — the flight distance in kilometers
 - **duration** — the flight duration in minutes
 - **return_date** — the date of the return flight

- **number_of_changes** — number of transfers
- **value** — ticket price
- **found_at** — the time and the date, for which a ticket was found
- **trip_class** — the flight class:
 - 0 — the economy class
 - 1 — the business class
 - 2 — the first class

The calendar of prices for a month

Brings back the prices for each day of the month, grouped together by the number of transfers.

Request

<http://api.travelpayouts.com/v2/prices/month-matrix?>

[currency=usd&origin=BCN&destination=HKT&show_to_affiliates=true&token=PutHereYourToken](#)

Request parameters

- **currency** — the airline ticket's The default value — RUB
- **origin** — the point of departure. The IATA city code or the country code. The length — from 2 to 3 symbols
- **destination** — the point of destination. The IATA city code or the country code. The length — from 2 to 3 symbols
- **month** — the beginning of the month in the YYYY-MM-DD format
- **show_to_affiliates** — false — all the prices, true — just the prices, found using the partner marker (recommended). The default value — true

- **market** — sets the market of the data source (by default, ru)
- **token** — the individual affiliate token
- **trip_duration** — the length of stay in weeks. If not specified, the result will be tickets to one-way
- **one_way** — false — returns roundtrip tickets, true — just the one way tickets. The default value — true.
- **limit** — an optional parameter that specifies the number of days in a month. By default, its value is 30, but for months with 31 days, you need to set **limit=31 in the request.**

Response example

```
{  
  {  
    "success":true,  
    "data":[  
      {  
        "show_to_affiliates":true,  
        "trip_class":0,  
        "origin":"BCN",  
        "destination":"HKT",  
        "depart_date":"2021-10-01",  
        "return_date":"",  
        "number_of_changes":1,  
        "value":29127,  
        "found_at":"2021-09-24T00:06:12+04:00",  
        "distance":8015,  
        "actual":true  
      }  
    ]  
  }  
}
```

Response data

- **origin** — the point of departure
- **destination** — the point of destination
- **show_to_affiliates** — false — all the prices, true — just the prices, found using the partner marker (recommended). The default value — true
- **trip_class** — the flight class:
 - 0 — Economy class
 - 1 — Business class
 - 2 — First
- **depart_date** — the date of departure
- **return_date** — the date of return
- **number_of_changes** — the number of transfers
- **value** — the cost of a flight, in the currency specified
- **found_at** — the time and the date at/on which a ticket was found
- **distance** — the distance between the point of departure and the point of destination
- **actual** — the actuality of an offer

The prices for the alternative directions

Returns prices for the directions that include tickets between cities closest to a given origin and destination.

Request

https://api.travelpayouts.com/v2/prices/nearest-places-matrix?currency=usd&origin=BCN&destination=HKT&show_to_affiliates=true&distance=1000&limit=5&token=PutHereYourToken

Request parameters

- **currency** — the airline ticket's The default value — RUB
- **origin** — the point of departure. The IATA city code or the country code. The length — from 2 to 3 symbols
- **destination** — the point of destination. The IATA city code or the country code. The length — from 2 to 3 symbols
- **limit** — the number of variants entered, from 1 to 20, where 1 is just the variant with the specified points of departure and the points of destination
- **show_to_affiliates** — false — all the prices, true — just the prices, found using the partner marker (recommended). The default value — true

...&return_date=2017-01-01 (by default, ru)



Help Center



- **depart_date** (*optional*) — month of departure (yyyy-mm)
- **return_date** (*optional*) — month of return (yyyy-mm)
- **flexibility** — expansion of the range of dates upward or downward. The value may vary from 0 to 7, where 0 shall show the variants for the dates specified and 7 shall show all the variants found for a week prior to the specified dates and a week after
- **distance** — the number of variants entered, from 1 to 20, where 1 is just the variant with the specified points of departure and the points of destination
- **token** — individual affiliate token

Response example

```
{
  "prices": [
    {
      "value": 26000.0,
      "trip_class": 0,
      "show_to_affiliates": true,
      "return_date": "2021-09-18",
      "origin": "BAX",
      "number_of_changes": 0,
      "gate": "AMADEUS",
      "found_at": "2021-07-28T04:57:47Z",
      "duration": null,
      "distance": 3643,
      "destination": "SIP",
      "depart_date": "2021-09-09",
      "actual": true
    }
  ],
  "origins": [
    "BAX"
  ],
  "errors": {
    "amadeus": {
    }
  },
  "destinations": [
    "SIP"
  ]
}
```

Response data

- **origin** — the point of departure
- **destination** — the point of destination
- **show_to_affiliates** — false — all the prices, true — just the prices, found using the partner marker (recommended). The default value — true
- **trip_class** — the flight class:
 - 0 — Economy class
 - 1 — Business class
 - 2 — First
- **depart_date** — the date of departure
- **return_date** — the date of return
- **number_of_changes** — the number of transfers
- **value** — the cost of a flight, in the currency specified
- **found_at** — the time and the date at/on which a ticket was found
- **distance** — the distance between the point of departure and the point of destination.
- **actual** — the actuality of an offer
- **duration** — the flight duration in minutes, taking into account direct and expectations
- **errors** — if the error «Some error occurred» is returned, this area does not have the data in the cache
- **gate** — the agents, which was found on the ticket
- **token** — the individual affiliate token

The calendar of prices for a week

Returns airfare prices for a **7-day period** around the specified departure and return dates provided in the request.

Based on the `depart_date` and `return_date` parameters, the method automatically creates date ranges: **from 3 days before to 4 days after** the selected date — both for departure and return. This allows you to get prices for a **7-day period** around each specified date.

For example, if you set `depart_date = 2025-05-03`, you will receive ticket prices for departures between **2025-05-01 and 2025-05-07**.

Request

*`http://api.travelpayouts.com/v2/prices/week-matrix?
currency=usd&origin=BCN&destination=HKT&show_to_affiliates=true&depart_d
ate=2021-09-04&return_date=2021-09-18&token=PutHereYourToken`*

Request parameters

- **currency** — the airline ticket's The default value — RUB
- **origin** — the point of departure. The IATA city code or the country code. The length — from 2 to 3 symbols
- **destination** — the point of destination. The IATA city code or the country code. The length — from 2 to 3 symbols
- **show_to_affiliates** — false — all the prices, true — just the prices, found using the partner marker (recommended). The default value — true
- **depart_date** (*optional*) — day or month of departure (yyyy-mm-dd or yyyy-mm)
- **return_date** (*optional*) — day or month of return (yyyy-mm-dd or yyyy-mm)
- **market** — sets the market of the data source (by default, ru)

- **token** — individual affiliate token

Response example

```
{
  success:true,
  data:[
    {
      show_to_affiliates:true,
      trip_class:0,
      origin:BCN,
      destination:HKT,
      depart_date:2021-03-01,
      return_date:2021-03-15,
      number_of_changes:1,
      value:71725,
      found_at:2021-02-19T00:04:37+04:00,
      distance:8015,
      actual:true
    }
  ]
}
```

Response data

- **origin** — the point of departure
- **destination** — the point of destination
- **show_to_affiliates** — false — all the prices, true — just the prices, found using the partner marker (recommended). The default value — true
- **trip_class** — the flight class (0 — Economy class)

- **depart_date** — the date of departure
- **return_date** — the date of return
- **number_of_changes** — the number of transfers
- **value** — the cost of a flight, in the currency specified
- **found_at** — the time and the date at/on which a ticket was found
- **distance** — the distance between the point of departure and the point of destination
- **actual** — the actuality of an offer

Cheapest tickets

Returns the cheapest non-stop tickets, as well as tickets with 1 or 2 stops, for the selected route with departure/return date filters.

Request

*`http://api.travelpayouts.com/v1/prices/cheap?
origin=LON&destination=HKT&depart_date=2022-11&return_date=2022-
12&token=PutHereYourToken`*

Important: Old dates may be specified in a query. No error will be generated, but no data will be returned.

Request parameters

- **origin** — [IATA code](#) of the departure city. IATA code is shown by uppercase letters, for example, LON
- **destination** — IATA code of the destination city (for all routes send the empty field). IATA code is shown by uppercase letters, for example, LON

- **depart_date** (*optional*) – month of departure (yyyy-mm)
- **return_date** (*optional*) – month of return (yyyy-mm)
- **page** – optional parameter, is used to display the found data (by default the page displays 100 found prices. If the **destination** isn't selected, there can be more data. In this case, use the **page**, to display the next set of data, for example, **page=2**)
- **market** – sets the market of the data source (by default, ru)
- **token** – individual affiliate token
- **currency** – the currency of prices. The default value is RUB

Response example

```
{
  "success": true,
  "data": {
    "HKT": {
      "0": {
        "price": 35443,
        "airline": "UN",
        "flight_number": 571,
        "departure_at": "2021-06-09T21:20:00Z",
        "return_at": "2021-07-15T12:40:00Z",
        "expires_at": "2021-01-08T18:30:40Z"
      },
      "1": {
        "price": 27506,
        "airline": "CX",
        "flight_number": 204,
        "departure_at": "2021-06-05T16:40:00Z",
        "return_at": "2021-06-22T12:00:00Z",
      }
    }
  }
}
```

```

        "expires_at": "2021-01-08T18:38:45Z"
    },
    "2": {
        "price": 31914,
        "airline": "AB",
        "flight_number": 8113,
        "departure_at": "2021-06-12T13:45:00Z",
        "return_at": "2021-06-24T20:30:00Z",
        "expires_at": "2021-01-08T15:17:42Z"
    }
}
}
}

```

Response data

- 0, 1, 2 — sequence number in the search results
- **price** — ticket price (in the currency specified in the currency parameter)
- **airline** — IATA code of the airline operating the flight
- **flight_number** — flight number
- **departure_at** — departure Date
- **return_at** — return Date
- **expires_at** — date on which the found price expires (UTC+0)
- **token** — individual affiliate token

Cheapest tickets grouped by the specific attribute

Returns the cheapest tickets grouped by the specific attribute found by Aviasales users in the last 48 hours. It is recommended to use instead of

methods:

- `/v1/prices/calendar`
- `/v1/prices/monthly`

Request

https://api.travelpayouts.com/aviasales/v3/grouped_prices

Request parameters

- **currency** — the currency of prices. The default value is RUB
- **origin** — An IATA code of a city or an airport of the origin
- **destination** — An IATA code of a city or an airport of the destination
- **group_by** — grouping parameter:
 - *departure_at* — by the departure date (the default value)
 - *month* — by month.
- **departure_at** — the departure date (YYYY-MM or YYYY-MM-DD)
- **market** — sets the market of the data source (by default, ru)
- **return_at** — the return date. For one-way tickets do not specify it
- **direct** — non-stop tickets, true or false. By default: false
- **min_trip_duration** — minimum length of trip in days (difference between departure and return date).
- **max_trip_duration** — maximum length of trip in days (difference between departure and return date).

Response example

```
{
  "success":true,
  "data":{
    "2022-02-01":{
      "origin":"LON",
      "destination":"BCN",
      "origin_airport":"VKO",
      "destination_airport":"BCN",
      "price":3390,
      "airline":"UT",
      "flight_number":"381",
      "departure_at":"2022-02-01T01:00:00+03:00",
      "return_at":"2022-02-03T06:25:00+03:00",
      "transfers":0,
      "return_transfers":0,
      "duration":175,
      "link":"/search/LON0102BCN03022?t=UT164366640016436718000000
90VK0BCN16438587001643863800000085BCNVK0_3a03a03671180cb6d4d
dc75e3aaf8e0b_6780&search_date=28122021&expected_price_uuid=
b2dcc898-1ba8-4d86-8f9e-b9c0c9bb10c7&expected_price_currency
=rub"
    }
  }
}
```

Response data

- **origin** — the point of departure
- **destination** — the point of destination

- **origin_airport** — the IATA of the origin airport
- **destination_airport** — the IATA of the destination airport
- **price** — the price of the ticket
- **airline** — the IATA of the airline
- **flight_number** — flight number
- **departure_at** — departure date
- **return_at** — return date
- **transfers** — number of stops on the way to the destination
- **return_transfers** — number of stops on the way back
- **duration** — the flight duration in minutes
- **link** — the ticket link. Add the code to the URL <https://www.aviasales.com/search/> to open the search results on the given route on Aviasales. Use our [deep link creation form](#) to create your partner link out of the resulting link
- **currency** — the currency of prices.

How you can replace the outdated methods with this endpoint:

- `/v1/prices/calendar` — pass *departure_at* or *return_at* in **group_by**
- `/v1/prices/monthly` — pass *month* in **group_by**, do not specify **departure_at** and **return_at**.

Non-stop tickets

Returns the cheapest non-stop ticket for the selected route with departure/return date filters.

Request

*http://api.travelpayouts.com/v1/prices/direct?
origin=LON&destination=BCN&depart_date=2022-11&return_date=2022-
12&token=PutHereYourToken*

Request parameters

- **origin** — IATA code of the departure city. The IATA code is shown in uppercase letters
- **destination** — IATA code of the destination city (for all routes, enter -). The IATA code is shown in uppercase letters
- **market** — sets the market of the data source (by default, ru)
- **depart_date** (*optional*) — a month of departure (yyyy-mm)
- **return_date** (*optional*) — a month of return (yyyy-mm)
- **token** — individual affiliate token
- **currency** — the currency of prices. The default value is RUB

Response example

```
{  
  "success": true,  
  "data": {  
    "BCN": {  
      "0": {  
        "price": 4363,  
        "airline": "UT",  
        "flight_number": 369,  
        "departure_at": "2021-06-27T11:35:00Z",  
      }  
    }  
  }  
}
```



```
        "return_at": "2021-07-04T16:00:00Z",
        "expires_at": "2021-01-08T20:21:46Z"
    }
}
}
```

Response data

- **price** — ticket price (in specified currency)
- **airline** — IATA code of airline operating the flight
- **flight_number** — flight
- **departure_at** — departure date
- **return_at** — return date
- **expires_at** — date on which the found price expires (UTC+0)

Flight price trends

Returns the cheapest non-stop, one-stop, and two-stop flights for the selected route for each day of the selected month.

Important: this method has a limit of 10 requests per second.

Request

http://api.travelpayouts.com/v1/prices/calendar?depart_date=2022-11&origin=LON&destination=BCN&calendar_type=departure_date&token=PutHereYourToken

Request parameters

- **origin** — IATA code of the departure city. The IATA code is shown in uppercase letters
- **destination** — IATA code of the destination city. The IATA code is shown in uppercase letters
- **departure_date** (*optional*) — a month of departure (yyyy-mm)
- **return_date** (*optional*) — a month of return (yyyy-mm).
- **calendar_type** — field used to build the calendar. Equal to either: departure_date or return_date
- **length** (*optional*) — a length of stay in the destination city
- **market** — sets the market of the data source (by default, ru)
- **token** — individual affiliate token
- **currency** — the currency of prices. The default value is RUB

Response example

```
{
  "success": true,
  "data": {
    "2021-06-01": {
      "origin": "LON",
      "destination": "BCN",
      "price": 12449,
      "transfers": 1,
      "airline": "PS",
      "flight_number": 576,
      "departure_at": "2021-06-01T06:35:00Z",
```

```

        "return_at": "2021-07-01T13:30:00Z",
        "expires_at": "2021-01-07T12:34:14Z"
    },
    "2021-06-02": {
        "origin": "LON",
        "destination": "BCN",
        "price": 13025,
        "transfers": 1,
        "airline": "PS",
        "flight_number": 578,
        "departure_at": "2021-06-02T17:00:00Z",
        "return_at": "2021-06-11T13:30:00Z",
        "expires_at": "2021-01-06T17:15:47Z"
    },
    ...
    "2021-06-30": {
        "origin": "LON",
        "destination": "BCN",
        "price": 13025,
        "transfers": 1,
        "airline": "PS",
        "flight_number": 578,
        "departure_at": "2021-06-30T17:00:00Z",
        "return_at": "2021-07-23T13:30:00Z",
        "expires_at": "2021-01-07T20:15:34Z"
    }
}

```

Response data

- **origin** — IATA code of the departure city
- **destination** — IATA code of the destination city

- **price** — ticket price in the specified currency
- **transfers** — number of stops
- **airline** — IATA code of airline
- **flight_number** — flight number
- **departure_at** — departure date
- **return_at** — return date
- **expires_at** — when the found price expires (UTC+0)

Popular airline routes

This API method has been deprecated since March 14, 2022. Feel free to use the method named `prices_for_dates`.

Description

Returns routes for which an airline operates flights, sorted by popularity.

Request

*`http://api.travelpayouts.com/v1/airline-directions?
airline_code=SU&limit=10&token=PutHereYourToken`*

Request parameters

- **airline_code** — IATA code of an airline
- **limit** — records limit per page. The default value is 100. Not less than 1000
- **token** — individual affiliate token

Response example

```
{
  "success": true,
  "data": {
    "LON-BKK": 187491,
    "LON-BCN": 113764,
    "LON-PAR": 91889,
    "LON-NYC": 77417,
    "LON-PRG": 71449,
    "LON-ROM": 67190,
    "LON-TLV": 62132,
    "LON-HKT": 58549,
    "LON-GOI": 47341,
    "LON-IST": 45553
  },
  "error": null,
  "currency": "rub"
}
```

Description of response

Returns a list of popular routes of an airline, sorted by popularity.

The popular destinations

Brings back the most popular directions from a specified city.

Request

*http://api.travelpayouts.com/v1/city-directions?
origin=LON¤cy=usd&token=PutHereYourToken*

Request parameters

- **currency** — the airline ticket's The default value — RUB
- **origin** — the point of departure. The IATA city code or the country code. The length — from 2 to 3 symbols
- **token** — the individual affiliate token

Response example

```
{
  "success":true,
  "data":{
    "AER":{
      "origin":"LON",
      "destination":"AER",
      "price":3673,
      "transfers":0,
      "airline":"WZ",
      "flight_number":125,
      "departure_at":"2021-03-08T16:35:00Z",
      "return_at":"2021-03-17T16:05:00Z",
      "expires_at":"2021-02-22T09:32:44Z"
    }
  },
  "error":null,
  "currency":"rub"
}
```

Response data

- **origin** — the point of departure
- **destination** — the point of destination
- **departure_at** — the date of departure
- **return_at** — the date of return
- **expires_at** — the date on which the found price expires (UTC+0)
- **number_of_changes** — the number of transfers
- **price** — the cost of a flight, in the currency specified
- **found_at** — the time and the date at/on which a ticket was found
- **transfers** — the number of direct
- **airline** — the IATA of the airline
- **flight_number** — the flight number
- **currency** — the currency of response

Cheapest tickets to popular destinations

Returns the cheapest tickets to popular destinations. Popular destinations are generated based on data about searches and ticket bookings to the specified destination by other users. The API analyzes statistics and returns a list of departure points from which tickets to this destination are most frequently searched.

Request

http://api.travelpayouts.com/aviasales/v3/get_popular_directions

Request parameters

- **destination** — [IATA code](#) of the destination city. The code must be in

uppercase, for example, JFK.

- **locale** — the language of the returned results.
- **currency** — currency in which ticket prices are displayed.
- **limit** — number of results to display, ranging from 1 to 30.
- **page** — a page number, is used to get a limited amount of results. The response will return tickets within the range: $[(page - 1) * limit; page * limit]$. For example, to get tickets 60 to 90, set page=3 and limit=30.
- **token** — Your personal API token.

Request example

`http://api.travelpayouts.com/aviasales/v3/get_popular_directions?
destination=CDG&locale=ru¤cy=EUR&limit=20&page=1&token=PutYourTo
kenHere`

Response example

```
{  
  "currency": "eur",  
  "data": {  
    "destination": {  
      "city_name": "Paris",  
      "country_name": "France",  
      "declension": ""  
    },  
    "origin": [  
      {  
        "city_name": "New York City",  
        "city_iata": "JFK",  
        "departure_at": "2025-01-15",
```



```
        "return_at": "",
        "price": 1681,
        "declensions": {}
    }
]
},
"success": true
}
```

Response parameters

- **success** — the status of the request.
- **currency** — currency in which ticket prices are displayed.
- **data** — retrieved data:
 - **destination** — information about the destination city:
 - **city_name** — the name of the destination city
 - **country_name** — the name of the destination country
 - **declensions** — declensions of the city name, if available
 - **origin** — information about the departure city:
 - **city_name** — the name of the departure city
 - **city_iata** — IATA code of the departure city
 - **departure_at** — departure date in the format YYYY-MM-DD
 - **return_at** — return date
 - **price** — ticket price in the specified currency
 - **declensions** — declensions of the city name, if available

Flights special offers

Returns abnormally low prices for air tickets to selected destinations.

Request

`https://api.travelpayouts.com/aviasales/v3/get_special_offers`

Request parameters

- **origin** — an IATA code of a city or an airport of the origin
Note: If you don't specify the origin, it will be automatically determined by the IP address.
- **destination** — an IATA code of a city or an airport of the destination
- **locale** — language on which the result will be returned
- **currency** — currency in which prices were given
- **market** — sets the market of the data source (by default, ru)
- **airline** — an airline IATA code
- **token** — individual affiliate token.

Request example

`https://api.travelpayouts.com/aviasales/v3/get_special_offers?
origin=LON&destination=BCN&airline=s7&locale=en&token=PlaceYourTokenHere`

Response

```
{
```

```

"currency": "rub",
"data": [
  {
    "airline": "N4",
    "airline_title": "Nordwind Airlines",
    "color": "CD202C",
    "departure_at": "2021-09-14T08:55:00+03:00",
    "destination": "BCN",
    "destination_airport": "BCN",
    "destination_name": "Saint Petersburg",
    "duration": 85,
    "flight_number": "177",
    "link": "/LON1409BCN1?t=N416315989001631604000000000SV
0BCN_3d507ff71944b34ca6e5016e0c0fce85_1413\u0026search_date=
29072021\u0026expected_price_uuid=9a904680-6d3b-4dee-a361-b8
5da4e63590\u0026expected_price_currency=rub",
    "mini_title": "Flight deals from Moscow",
    "origin": "LON",
    "origin_airport": "SV0",
    "origin_name": "Moscow",
    "price": 1413,
    "search_id": "9a904680-6d3b-4dee-a361-b85da4e63590",
    "signature": "3d507ff71944b34ca6e5016e0c0fce85",
    "title": "Flight deals from Moscow to Saint Petersbur
g"
  }
],
"success": true
}

```

Response data

- **airline** — the code of an airline

- **airline_title** — the name of an airline
- **destination** — an IATA code of a city of the destination
- **destination_airport** — an IATA code of an airport of the destination
- **flight_number** — the number of a flight
- **signature** — the ticket ID (used for building of the deep link)
- **duration** — flight duration in minutes
- **origin_airport** — an IATA code of an airport of the origin
- **price** — a ticket price
- **return_at** — a date of return departure (RFC3339 format)
- **search_id** — the search ID (used for creating a deep link)
- **departure_at** — a date of departure (RFC3339 format)
- **mini_title** — a short title for a special offer
- **origin** — an IATA code of a city of the origin
- **color** — airline's brand color (present as a RGB code)
- **link** — a link to the flight ticket.

Add this code to the address <https://www.aviasales.ru/search/> to open search results for this destination on the Aviasales website (please note, if tickets are sold out, the link will redirect to a new search). Use our [deep link creation form](#) to create your **partner link** out of the resulting link.

- **title** — a title for a special offer

Search flight tickets by price

The endpoint returns flight tickets with specific prices.


Request

`https://api.travelpayouts.com/aviasales/v3/search_by_price_range?
origin=LON&destination=BCN&value_min=100&value_max=500&one_way=true&
direct=false&locale=en¤cy=usd&market=us&limit=30&page=1&token=Put
HereYourToken`

Request parameters

- **origin** — IATA code of the departure city. The IATA code is shown in uppercase letters
- **destination** — IATA code of the destination city (for all routes, enter -). The IATA code is shown in uppercase letters
- **value_min** — minimum price of the ticket
- **value_max** — maximum price of the ticket
- **one_way** — one-way tickets, possible values: **true** or **false**, where true - one way, false - back-to-back
- **direct** — non-stop tickets, possible values: true or false. By default: false.
- **locale** — the language of the returned results
- **currency** — currency in which ticket prices are given
- **market** — sets the market of the data source
- **limit** — the total number of records on a page
- **page** — a page number, is used to get a limited amount of results.the currency of prices
- **token** — your API token

Response example



```
{
  "currency": "eur",
  "data": [
    {
      "departure_at": "2024-11-03",
      "destination_airport": "BCN",
      "destination_code": "BCN",
      "destination_name": "Barcelona",
      "duration": 90,
      "link": "/BCN0311LON1?t=DP16359621001635967500000000LH
RBCN_2560c41c52a83fba3afad4d8770d1ee9_6088\u0026search_date=
28052024\u0026expected_price_uuid=0cd8aa16-9169-4099-9076-57
4fbee7da8a\u0026expected_price_currency=rub",
      "origin_airport": "LHR",
      "origin_code": "LON",
      "origin_name": "London",
      "price": 588,
      "transfers": 0
    }
  ],
  "success": true
}
```

Response data

- **currency** — the currency of prices
- **departure_at** — the date of the departure
- **destination_airport** — the IATA of the destination airport
- **destination_code** — the IATA of the destination city
- **destination_name** — name of the destination city

- **duration** — the flight duration in minutes
- **link** — a link to the flight ticket
Add this code to the address <https://www.aviasales.com/search/> to open search results for this destination on the Aviasales website (please note, if tickets are sold out, the link will redirect to a new search). Use our [deep link creation form](#) to create your partner link out of the resulting link.
- **origin_airport** — the IATA of the departure airport
- **origin_code** — the IATA of the departure city
- **origin_name** — name of the departure city
- **price** — the price of the ticket
- **transfers** — number of stops on the way to the destination.

Logos of airlines

Flight logos are available here: <http://pics.avs.io/width/height/iata.png>

where, **width** — the width of the logo, **height** — the height of the logo, **iata** — IATA airline code. The size of the logo can be anything.

For example <http://pics.avs.io/200/200/UN.png>.

Reduction of prices into the other currency

Brings back the current rate of all popular currencies to RUB.

Request

<http://yasen.aviasales.com/adaptors/currency.json>

Response example

```
{  
  "cny":8.24394,  
  "eur":57.1578,  
  "mzn":1.49643,  
  "nio":1.97342,  
  "usd":51.1388,  
  "hrk":7.48953  
}
```

[countries.json.zip](#)

[country_cases.json](#)

Related articles

Aviasales Flights Search API: old version

How to get access to the Aviasales Search API

API rate limits

Aviasales Flight Search API: real-time and multi-city search

Aviasales search form

Was this article helpful?

✓ Yes

✗ No

Have more questions? [Submit a request](#)

Aviasales Flight Data API

Requirements for Aviasales data API access

Learn when you should use the data access API and where to find a token.

Aviasales Data API

Learn all about the flight data API for popular destinations and flight price trends from Aviasales.

Aviasales GraphQL for access to Flights Data API

This post shares information about GraphQL, including how to work with it.

Flight data by Aviasales

This post shares links to JSON-files with useful data for tourist sites.

Autocomplete API for countries, cities and airports by Aviasales

Use this guide to autocomplete the names of airports, cities, or countries in the search.

Useful additions to work with the Aviasales API

This post contains links to additions from partners to facilitate your work with API.

Base of IATA codes by Aviasales

Use links from this post to upload the relevant database of IATA codes.

Price Map API

This post presents the supported destinations and prices in the price map API.

Airline logos by Aviasales

This post shares information on how to get airlines logos and country flags.

API for mobile apps

We've gathered information about API to use in mobile apps.

Travelpayouts

About us

Events

Tools

White Label

WordPress Plugin

Legal

Terms of Service

Privacy Policy

Cookie Policy

Stats tracking app





© Travelpayouts, 2011 – 2026