

EECFs: Efficient Ensemble Causal Feature Selection for High-dimensional Molecular Data

Supplementary Materials

Chen Ye¹, Ziheng Hong¹, Na Cheng², Junfeng Xia¹, and Di Zhang³

¹Information Materials and Intelligent Sensing Laboratory of Anhui Province and School of Life

Sciences and Medical Engineering, Anhui University, Hefei, Anhui 230601, China

²School of Biomedical Engineering, Anhui Medical University, Hefei, Anhui 230032, China

³College of Information Engineering, Shaoguan University, Shaoguan, Guangdong, 512005, China


*To whom correspondence should be addressed:

Di Zhang, E-mail: zdbbyy@sgu.edu.cn or Junfeng Xia, E-mail: jfxia@ahu.edu.cn

Contents

Supplementary Figures	2
Supplementary Figure S1: Average efficiency comparison on benchmark Bayesian networks using different data sizes.....	2
Supplementary Figure S2: Crucial difference diagram of the Nemenyi test for efficiency in real-world datasets.....	3


Supplementary Figures

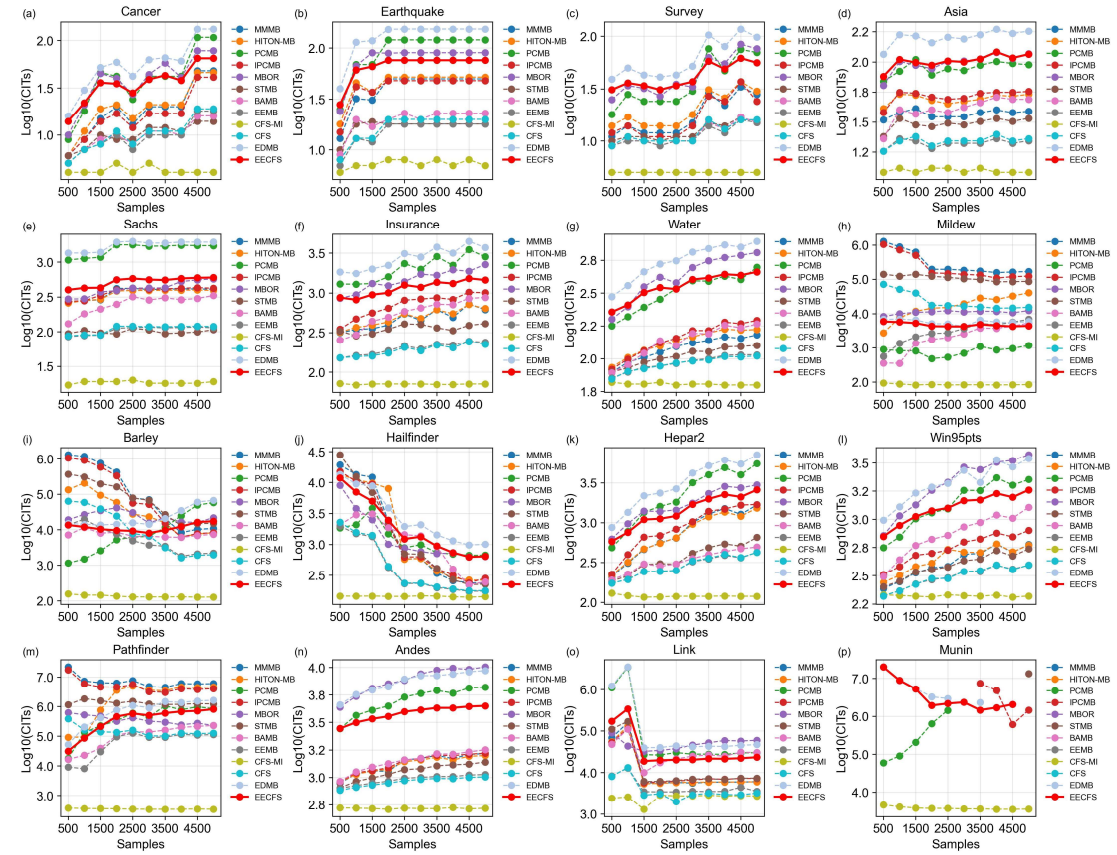

Supplementary Figure S1: Average efficiency comparison on benchmark Bayesian networks using different data sizes.

Efficiency is evaluated by the number of conditional independence tests (CITs) performed by the algorithm. Each panel represents a different dataset, and the x-axis indicates the number of samples.

Nodes that are not plotted indicate that the algorithm failed to produce an output within the specified time limit or encountered memory exhaustion.

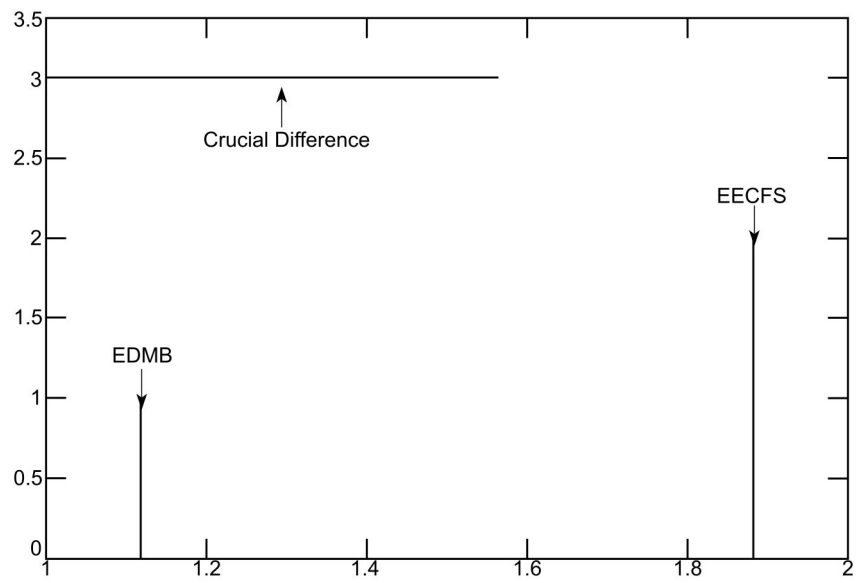

Supplementary Figure S2: Crucial difference diagram of the Nemenyi test for efficiency in real-world datasets.