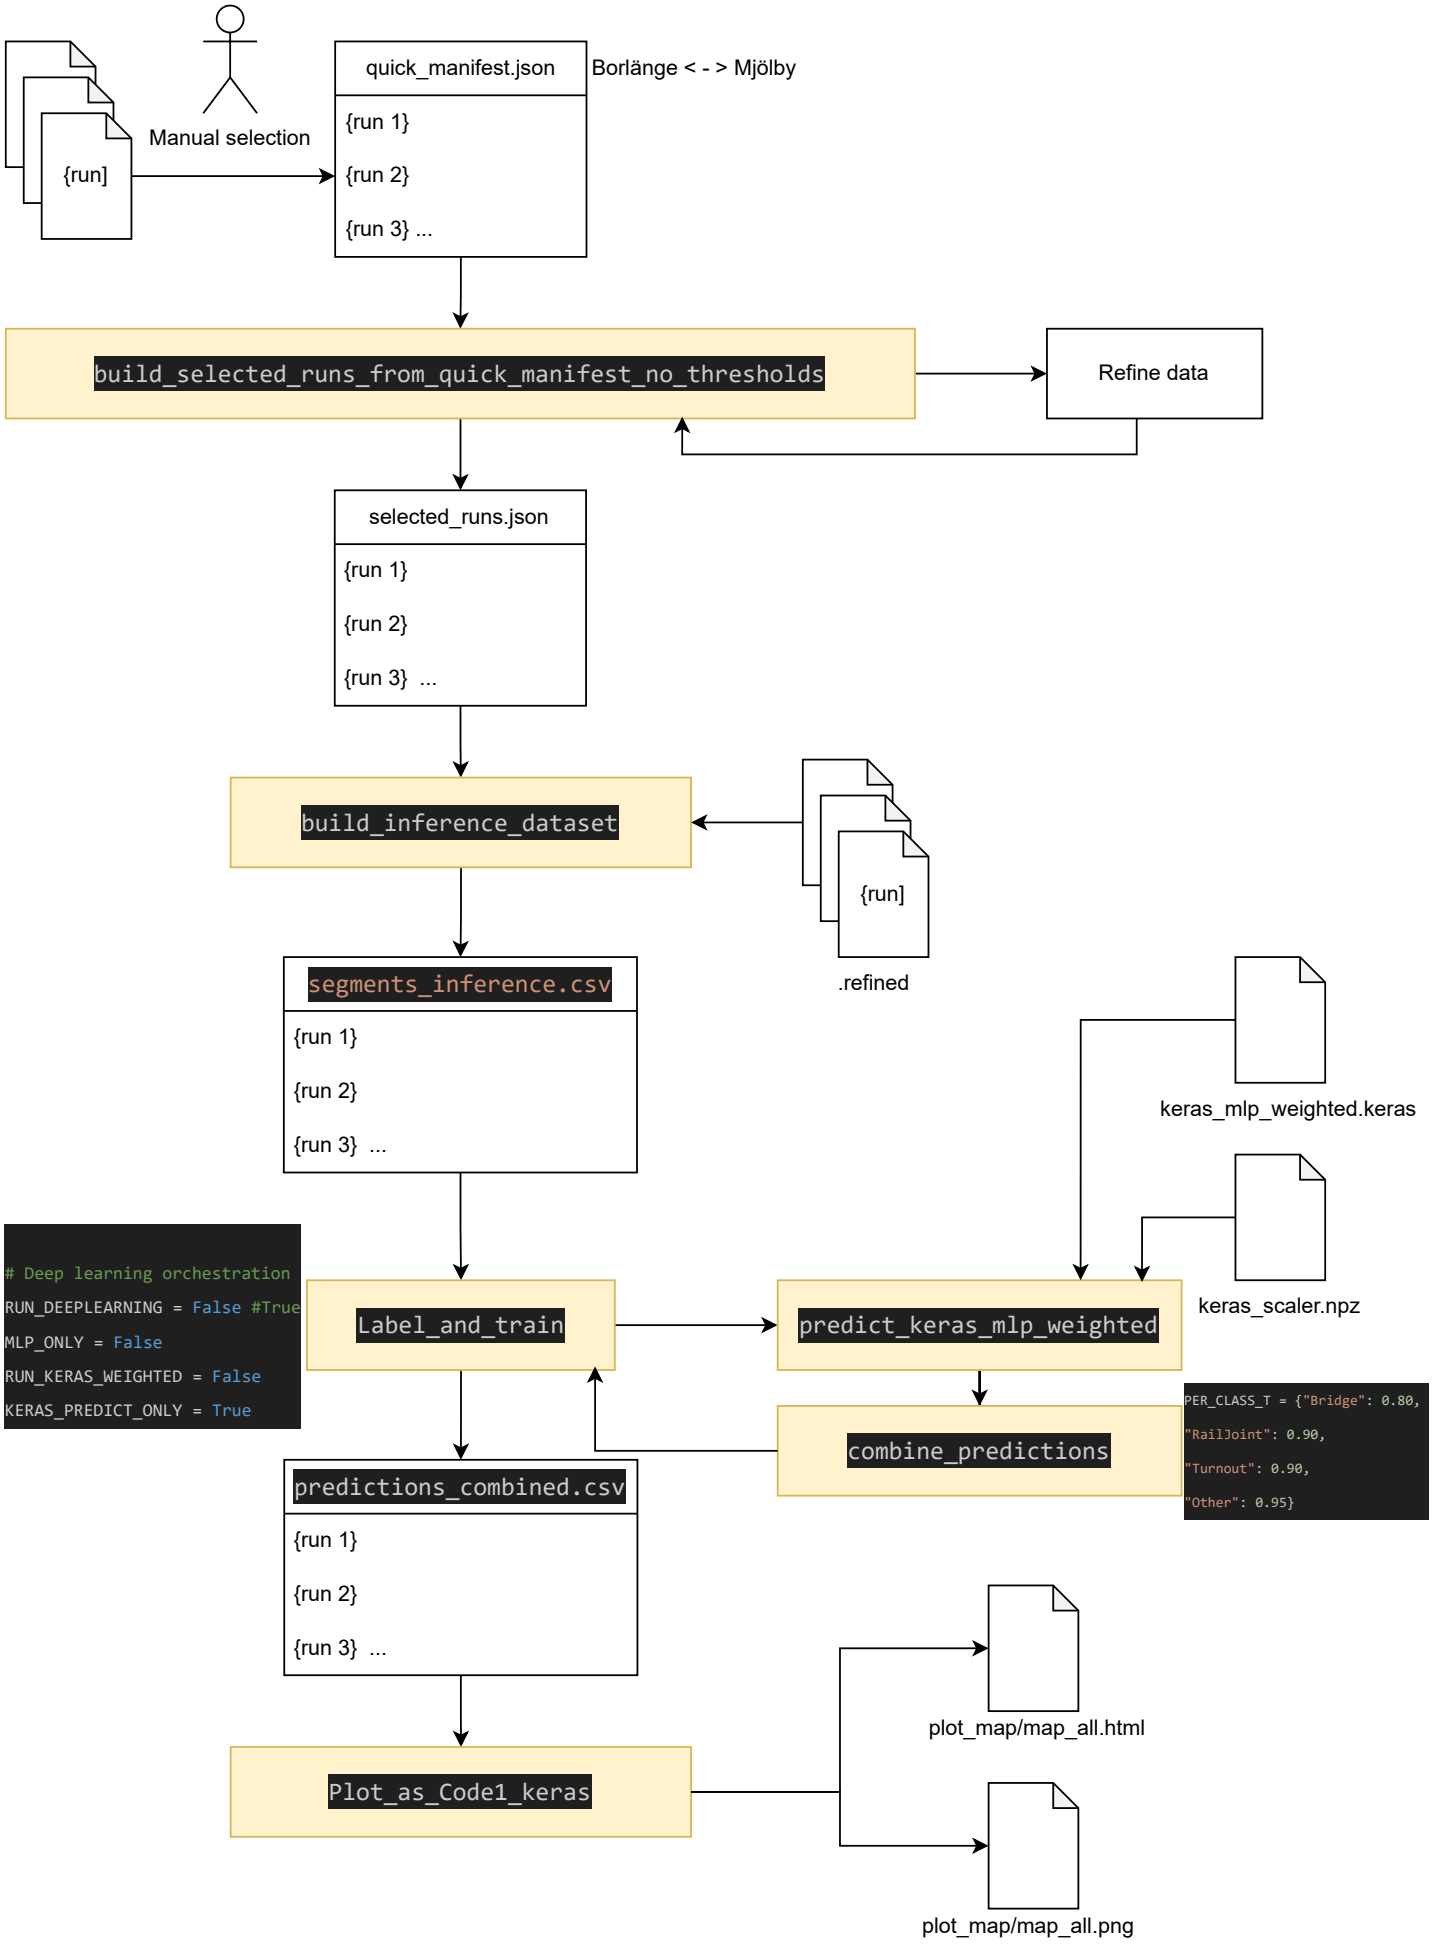
{run]
Manual selection
quick_manifest.json
{run 1}
{run 2}
{run 3} ...
Borlänge < - > Mjölby
build_selected_runs_from_quick_manifest_no_thresholds
Refine data
selected_runs.json
{run 1}
{run 2}
{run 3} ...
build_inference_dataset
{run]
.refined
segments_inference.csv
{run 1}
{run 2}
{run 3} ...
keras_mlp_weighted.keras
keras_scaler.npz
# Deep learning orchestration
RUN_DEEPLEARNING = False #True
MLP_ONLY = False
RUN_KERAS_WEIGHTED = False
KERAS_PREDICT_ONLY = True
Label_and_train
predict_keras_mlp_weighted
combine_predictions
PER_CLASS_T = {"Bridge": 0.80,
"RailJoint": 0.90,
"Turnout": 0.90,
"Other": 0.95}
predictions_combined.csv
{run 1}
{run 2}
{run 3} ...
Plot_as_Code1_keras
plot_map/map_all.html
plot_map/map_all.png