

The Agent Stack

```
<div class="divider"></div>
```

How to build AI agents that actually do work

```
<div class="pill-row"> <span class="pill">AI Agents</span> <span  
class="pill">Automation</span> <span class="pill">2026</span> </div>
```

The difference isn't intelligence — it's autonomy

	CHATBOT	AGENT
Input	You type everything	You give a goal
Tools	<pre><svg width="16" height="16" viewBox="0 0 24 24" fill="none" stroke="#555" stroke-width="2" stroke-linecap="round"><circle cx="12" cy="12" r="10"/><line x1="8"</pre>	<pre><svg width="16" height="16" viewBox="0 0 24 24" fill="none" stroke="#ff6b35" stroke- width="2" stroke-linecap="round"><path d="M14.7 6.3a1 1 0 0 0 0 1.4l1.6 1.6a1 1 0 0 0 1.4 0l3.77-3.77a6 6 0 0 1-7.94 7.94l-6.91 6.91a2.12</pre>

```

<div class="card-row"> <div class="card"> <svg width="44" height="44" viewBox="0 0 24
24" fill="none" stroke="#ff6b35" stroke-width="1.5" stroke-linecap="round" stroke-
linejoin="round"> <circle cx="12" cy="12" r="10"/> <path d="M12 8v4l3 3"/> <circle cx="12"
cy="12" r="3" fill="#ff6b35" opacity="0.2"/> </svg> <h4>Brain</h4> <p>The LLM that
reasons. Picks the right tool, decides the next step.</p> </div> <div class="card"> <svg
width="44" height="44" viewBox="0 0 24 24" fill="none" stroke="#ff6b35" stroke-
width="1.5" stroke-linecap="round" stroke-linejoin="round"> <path d="M14.7 6.3a1 1 0 0
0 0 1.4l1.6 1.6a1 1 0 0 0 1.4 0l3.77-3.77a6 6 0 0 1-7.94 7.94l-6.91 6.91a2.12 2.12 0 0 1-3-
3l6.91-6.91a6 6 0 0 1 7.94-7.94l-3.76 3.76z"/> </svg> <h4>Tools</h4> <p>What the agent
can touch. Files, APIs, databases, browser. No tools = no action.</p> </div> <div
class="card"> <svg width="44" height="44" viewBox="0 0 24 24" fill="none"
stroke="#ff6b35" stroke-width="1.5" stroke-linecap="round" stroke-linejoin="round">
<path d="M4 19.5A2.5 2.5 0 0 1 6.5 17H20"/> <path d="M6.5 2H20v20H6.5A2.5 2.5 0 0 1
4 19.5v-15A2.5 2.5 0 0 1 6.5 2z"/> <line x1="8" y1="7" x2="16" y2="7"/> <line x1="8" y1="11"
x2="13" y2="11"/> </svg> <h4>Memory</h4> <p>What survives between sessions.

```

```

</div> <div style="background: #0a0a0a; border-radius: 8px; height: 14px; border: 1px
solid #1a1a1a; overflow: hidden;"> <div style="background: linear-gradient(90deg,
#ff6b1a, #ff8c4a); width: 95%; height: 100%; border-radius: 8px;"></div> </div> </div>
<div style="margin-top: 16px;"> <div style="display: flex; justify-content: space-between;
font-size: 0.75em; margin-bottom: 4px;"> <span>Tools <span style="color: #ff6b1a;">—
12 connected</span></span> <span style="color: #888;">70%</span> </div> <div
style="background: #0a0a0a; border-radius: 8px; height: 14px; border: 1px solid
#1a1a1a; overflow: hidden;"> <div style="background: linear-gradient(90deg, #ff6b1a,
#ff8c4a); width: 70%; height: 100%; border-radius: 8px;"></div> </div> </div> <div
style="margin-top: 16px;"> <div style="display: flex; justify-content: space-between;
font-size: 0.75em; margin-bottom: 4px;"> <span>Memory <span style="color:
#ff6b1a;">— persistent store</span></span> <span style="color: #888;">40%</span>
</div> <div style="background: #0a0a0a; border-radius: 8px; height: 14px; border: 1px
solid #1a1a1a; overflow: hidden;"> <div style="background: linear-gradient(90deg,
#ff6b1a, #ff8c4a); width: 40%; height: 100%; border-radius: 8px;"></div> </div> </div>

```

4px;">highlights</mark>

Use `<mark style="background: #ff6b1a33; color: #ff8c4a; padding: 2px 8px; border-radius: 4px;">mark</mark>` to draw attention to key concepts inline.

Keyboard shortcuts render as styled keys:

```
<div style="margin-top: 24px; font-size: 0.9em;">
```

```
<kbd style="background: #0a0a0a; border: 1px solid #333; border-radius: 6px; padding: 6px 14px; font-family: 'Outfit', sans-serif; font-size: 0.85em; color: #fff; box-shadow: 0 2px 0 #222;">Ctrl</kbd> + <kbd style="background: #0a0a0a; border: 1px solid #333; border-radius: 6px; padding: 6px 14px; font-family: 'Outfit', sans-serif; font-size: 0.85em; color: #fff; box-shadow: 0 2px 0 #222;">Shift</kbd> + <kbd style="background: #0a0a0a; border: 1px solid #ff6b1a; border-radius: 6px; padding: 6px 14px; font-family: 'Outfit', sans-serif; font-size: 0.85em; color: #ff6b1a; box-shadow: 0 2px 0 #ff6b1a55;">P</kbd> → Open command palette
```

```
<kbd style="background: #0a0a0a; border: 1px solid #333; border-radius: 6px;
```

24" fill="none" stroke="#ff6b1a" stroke-width="2" style="vertical-align: middle; margin-right: 6px;"><circle cx="12" cy="12" r="10"/><line x1="12" y1="8" x2="12" y2="16"/><line x1="8" y1="12" x2="16" y2="12"/></svg> What model should I use? </summary> <p style="color: #888; margin-top: 10px; font-size: 0.85em; line-height: 1.6;">Claude Opus 4 for complex reasoning. Sonnet 4 for speed. Haiku for bulk operations where cost matters more than depth.</p> </details> <details style="background: #0a0a0a; border: 1px solid #1a1a1a; border-radius: 12px; padding: 16px 20px; margin-top: 10px;"> <summary style="color: #ff6b1a; font-weight: 600; cursor: pointer; font-size: 0.95em;"> <svg width="14" height="14" viewBox="0 0 24 24" fill="none" stroke="#ff6b1a" stroke-width="2" style="vertical-align: middle; margin-right: 6px;"><circle cx="12" cy="12" r="10"/><line x1="12" y1="8" x2="12" y2="16"/><line x1="8" y1="12" x2="16" y2="12"/></svg> How much does it cost? </summary> <p style="color: #888; margin-top: 10px; font-size: 0.85em; line-height: 1.6;">Claude Code Max plan: \$200/mo unlimited. Or API usage at ~\$15/M input tokens for Opus.</p> </details> <details style="background: #0a0a0a; border: 1px solid #1a1a1a; border-radius: 12px; padding: 16px 20px; margin-top: 10px;"> <summary style="color: #ff6b1a; font-weight: 600; cursor: pointer; font-size: 0.95em;">

```
<div style="display: flex; gap: 20px; margin-top: 24px;"> <div style="flex: 1; background:
#0a0a0a; border: 1px solid #1a1a1a; border-radius: 16px; padding: 28px 20px; text-
align: center;"> <div style="font-size: 2.8em; font-weight: 800; color: #ff6b1a; line-
height: 1;">25+</div> <div style="color: #888; font-size: 0.75em; margin-top: 8px; text-
transform: uppercase; letter-spacing: 0.1em;">Integrations</div> </div> <div style="flex:
1; background: #0a0a0a; border: 1px solid #1a1a1a; border-radius: 16px; padding: 28px
20px; text-align: center;"> <div style="font-size: 2.8em; font-weight: 800; color:
#ff6b1a; line-height: 1;">1M</div> <div style="color: #888; font-size: 0.75em; margin-
top: 8px; text-transform: uppercase; letter-spacing: 0.1em;">Context Window</div>
</div> <div style="flex: 1; background: #0a0a0a; border: 1px solid #1a1a1a; border-
radius: 16px; padding: 28px 20px; text-align: center;"> <div style="font-size: 2.8em;
font-weight: 800; color: #ff6b1a; line-height: 1;">24/7</div> <div style="color: #888;
font-size: 0.75em; margin-top: 8px; text-transform: uppercase; letter-spacing:
0.1em;">Uptime</div> </div> <div style="flex: 1; background: #0a0a0a; border: 1px solid
#1a1a1a; border-radius: 16px; padding: 28px 20px; text-align: center;"> <div style="font-
```

```
style="position: absolute; left: -35px; top: 2px; width: 12px; height: 12px; background:
#ff6b1a; border-radius: 50%; border: 2px solid #000;"></div> <div style="font-weight:
600; color: #ff6b1a; font-size: 0.8em; letter-spacing: 0.08em;">2024</div> <div
style="color: #fff; font-size: 0.95em; margin-top: 2px;">ChatGPT wrappers everywhere.
Copy-paste workflows.</div> </div> <div style="margin-bottom: 24px; position:
relative;"> <div style="position: absolute; left: -35px; top: 2px; width: 12px; height: 12px;
background: #ff6b1a; border-radius: 50%; border: 2px solid #000;"></div> <div
style="font-weight: 600; color: #ff6b1a; font-size: 0.8em; letter-spacing:
0.08em;">2025</div> <div style="color: #fff; font-size: 0.95em; margin-top:
2px;">Claude Code ships. Agents get tools, memory, autonomy.</div> </div> <div
style="margin-bottom: 24px; position: relative;"> <div style="position: absolute; left:
-35px; top: 2px; width: 12px; height: 12px; background: #ff6b1a; border-radius: 50%;
border: 2px solid #000;"></div> <div style="font-weight: 600; color: #ff6b1a; font-size:
0.8em; letter-spacing: 0.08em;">2026</div> <div style="color: #fff; font-size: 0.95em;
margin-top: 2px;">Multi-agent teams running 24/7. The agent <em>is</em> the
product.</div> </div> <div style="position: relative;"> <div style="position: absolute; left:
```


stroke="#ff6b1a" stroke-width="2" style="vertical-align: middle; margin-right: 6px;">
<path d="M12 2L2 7l10 5 10-5-10-5z"/><path d="M2 17l10 5 10-5"/><path d="M2 12l10 5 10-5"/></svg> MCP (Model Context Protocol) </dt> <dd style="color: #888; font-size: 0.85em; margin-left: 24px; margin-top: 4px; border-left: 2px solid #1a1a1a; padding-left: 12px;">A standard for connecting AI models to external tools and data sources. Think USB for AI.</dd> <dt style="color: #ff6b1a; font-weight: 600; font-size: 1em; margin-top: 16px;"> <svg width="16" height="16" viewBox="0 0 24 24" fill="none" stroke="#ff6b1a" stroke-width="2" style="vertical-align: middle; margin-right: 6px;"> <rect x="2" y="3" width="20" height="14" rx="2"/><line x1="8" y1="21" x2="16" y2="21"/> <line x1="12" y1="17" x2="12" y2="21"/></svg> Claude Code </dt> <dd style="color: #888; font-size: 0.85em; margin-left: 24px; margin-top: 4px; border-left: 2px solid #1a1a1a; padding-left: 12px;">Anthropic's CLI agent. Reads files, writes code, runs commands, manages projects. Your AI teammate in the terminal.</dd> <dt style="color: #ff6b1a; font-weight: 600; font-size: 1em; margin-top: 16px;"> <svg width="16" height="16" viewBox="0 0 24 24" fill="none" stroke="#ff6b1a" stroke-width="2" style="vertical-align: middle; margin-right: 6px;"><circle cx="12" cy="12" r="3"/><path d="M12 1v4M12

What it actually looks like

```
<div class="terminal"> <div class="terminal-bar"> <div class="terminal-dot" style="background: #ff5f57;"></div> <div class="terminal-dot" style="background: #febc2e;"></div> <div class="terminal-dot" style="background: #28c840;"></div> <span style="color: #555; font-size: 0.8em; margin-left: 8px;">~/projects/my-agent</span> </div> <div class="terminal-body"> <span class="prompt">$</span> claude "deploy the new landing page" <span class="output">● Reading project structure...</span> <span class="output">● Building with Vite...</span> <span class="output">● Running tests — 14/14 passed</span> <span class="output">● Pushing to main...</span> <span class="output">● Deploying to Vercel...</span> <span class="success">✓ Live at https://mysite.vercel.app</span> <span class="prompt">$</span> <span style="border-right: 2px solid #ff6b1a;
```

Agents talk back

```
<div style="max-width: 520px; margin: 16px auto 0;"> <div class="chat-bubble"> <div
class="chat-meta">You · 9:41 AM</div> Can you check if the API is still rate limiting us?
</div> <div class="chat-bubble agent"> <div class="chat-meta">Agent · 9:41 AM</div>
Checked the last 500 requests. We're hitting 429s on the <span style="color:
#ff6b1a;">/v2/generate</span> endpoint — 12% failure rate since 8am. The retry logic
backs off but the queue is growing. Want me to switch to the fallback provider? </div>
<div class="chat-bubble"> <div class="chat-meta">You · 9:42 AM</div> Yeah do it. And
log the switch. </div> <div class="chat-bubble agent"> <div class="chat-meta">Agent ·
9:42 AM</div> <span style="color: #22c55e;">✓ </span> Switched to fallback. Logged to
<span style="color: #ff6b1a;">ops/provider-switches.md</span>. Queue clearing now —
ETA 3 min. </div> </div>
```

```
<div class="browser"> <div class="browser-bar"> <div class="terminal-dot" style="background: #ff5f57;"></div> <div class="terminal-dot" style="background: #febc2e;"></div> <div class="terminal-dot" style="background: #28c840;"></div> <div class="browser-url">localhost:5000/dashboard</div> </div> <div style="padding: 24px; display: flex; gap: 16px;"> <div style="flex: 1; background: #111; border-radius: 10px; padding: 16px; border: 1px solid #1a1a1a;"> <div style="font-size: 0.65em; color: #888; text-transform: uppercase; letter-spacing: 0.1em;">Tasks Today</div> <div style="font-size: 2em; font-weight: 800; color: #22c55e; margin-top: 4px;">12</div> <div style="font-size: 0.7em; color: #555; margin-top: 4px;">↑ 3 from yesterday</div> </div> <div style="flex: 1; background: #111; border-radius: 10px; padding: 16px; border: 1px solid #1a1a1a;"> <div style="font-size: 0.65em; color: #888; text-transform: uppercase; letter-spacing: 0.1em;">Agents Online</div> <div style="font-size: 2em; font-weight: 800; color: #ff6b1a; margin-top: 4px;">6/6</div> <div style="font-size: 0.7em; color: #22c55e; margin-top: 4px;">● All healthy</div> </div> <div style="flex: 1; background: #111; border-radius: 10px; padding: 16px; border: 1px solid #1a1a1a;"> <div style="font-size: 0.65em; color: #888; text-transform: uppercase; letter-spacing:
```

```

size="28" font-weight="700">90</text> <text x="60" y="74" text-anchor="middle"
fill="#888" font-family="Outfit" font-size="11">BRAIN</text> </svg> </div> <div
style="text-align: center;"> <svg width="120" height="120" viewBox="0 0 120 120">
<circle cx="60" cy="60" r="50" fill="none" stroke="#1a1a1a" stroke-width="8"/> <circle
cx="60" cy="60" r="50" fill="none" stroke="#ff6b1a" stroke-width="8" stroke-
dasharray="283" stroke-dashoffset="85" stroke-linecap="round" transform="rotate(-90
60 60)"/> <text x="60" y="58" text-anchor="middle" fill="#fff" font-family="Outfit" font-
size="28" font-weight="700">70</text> <text x="60" y="74" text-anchor="middle"
fill="#888" font-family="Outfit" font-size="11">TOOLS</text> </svg> </div> <div
style="text-align: center;"> <svg width="120" height="120" viewBox="0 0 120 120">
<circle cx="60" cy="60" r="50" fill="none" stroke="#1a1a1a" stroke-width="8"/> <circle
cx="60" cy="60" r="50" fill="none" stroke="#ff6b1a" stroke-width="8" stroke-
dasharray="283" stroke-dashoffset="170" stroke-linecap="round"
transform="rotate(-90 60 60)"/> <text x="60" y="58" text-anchor="middle" fill="#fff"
font-family="Outfit" font-size="28" font-weight="700">40</text> <text x="60" y="74"


```

```
<div style="display: flex; gap: 20px; margin-top: 20px;"> <div class="glass" style="flex: 1;
animation: float 4s ease-in-out infinite;"> <svg width="32" height="32" viewBox="0 0 24
24" fill="none" stroke="#ff6b1a" stroke-width="1.5"><path d="M13 2L3 14h9l-1 8 10-12h-
9l1-8z"/></svg> <h4 style="margin: 10px 0 4px; font-weight: 600;">Fast</h4> <p
style="color: #888; font-size: 0.78em; margin: 0;">Opus-level reasoning at sub-second
response times for most tasks.</p> </div> <div class="glass" style="flex: 1; animation:
float 4s ease-in-out 0.5s infinite;"> <svg width="32" height="32" viewBox="0 0 24 24"
fill="none" stroke="#ff6b1a" stroke-width="1.5"><rect x="3" y="11" width="18" height="11"
rx="2"/><path d="M7 11V7a5 5 0 0 1 10 0v4"/></svg> <h4 style="margin: 10px 0 4px;
font-weight: 600;">Secure</h4> <p style="color: #888; font-size: 0.78em; margin:
0;">Local-first. Your data stays on your machine. No cloud required.</p> </div> <div
class="glass" style="flex: 1; animation: float 4s ease-in-out 1s infinite;"> <svg width="32"
height="32" viewBox="0 0 24 24" fill="none" stroke="#ff6b1a" stroke-width="1.5"><circle
cx="12" cy="12" r="10"/><path d="M2 12h20"/><path d="M12 2a15.3 15.3 0 0 1 4 10 15.3
15.3 0 0 1-4 10 15.3 15.3 0 0 1-4-10 15.3 15.3 0 0 1-4-10z"/></svg> <h4 style="margin: 10px
0 4px; font-weight: 600;">Connected</h4> <p style="color: #888; font-size: 0.78em;
```

Unsplash images work natively

MARP supports remote images as backgrounds.

- `![bg](url)` — full bleed
- `![bg right:45%](url)` — split layout
- `![bg left:40%](url)` — image on left
- `brightness`, `blur`, `opacity` filters
- Multiple `![bg]` for side-by-side

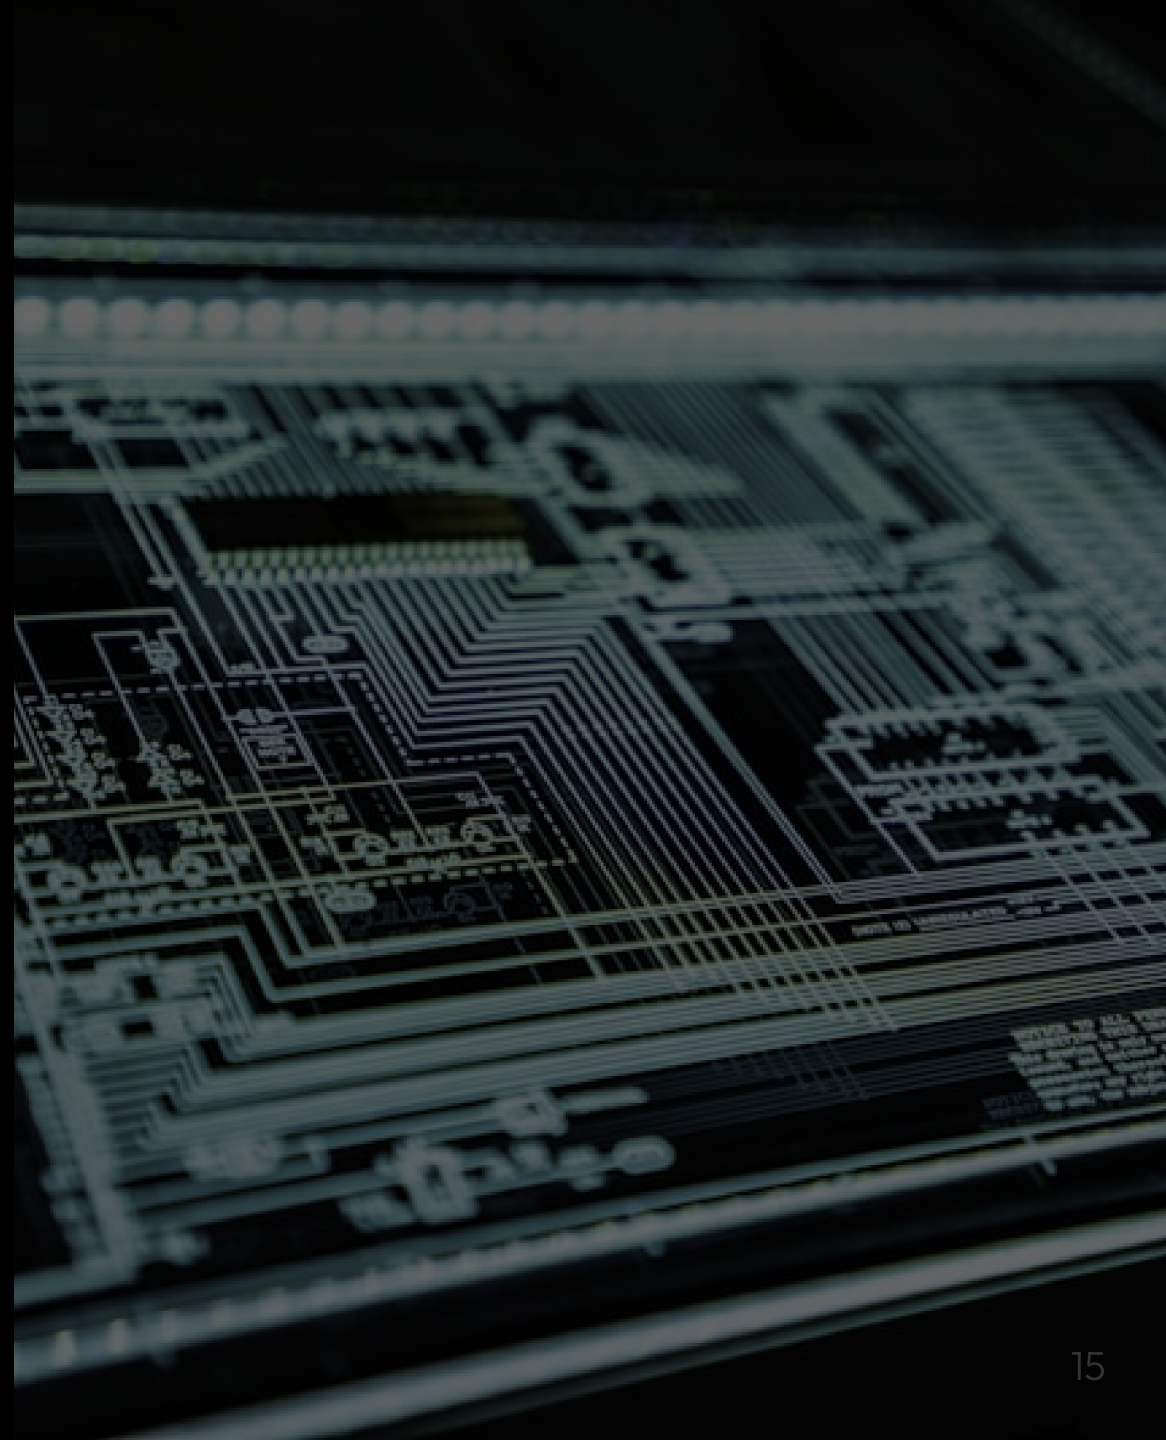



```
<div style="margin-top: 20px;"> <div
style="display: flex; align-items:
center; gap: 12px; margin: 10px 0;">
<div style="width: 8px; height: 8px;
background: #ff6b1a; border-radius:
50;"></div> <span style="font-size:
0.85em;">Creators who use agents
ship 10x faster</span> </div> <div
style="display: flex; align-items:
center; gap: 12px; margin: 10px 0;">
<div style="width: 8px; height: 8px;
background: #ff6b1a; border-radius:
50;"></div> <span style="font-size:
0.85em;">Solo founders are building
what teams couldn't</span> </div>
<div style="display: flex; align-items:
```


glow 3s ease-in-out infinite; text-align: center; > <div style="font-size: 2.4em; margin-bottom: 8px;">📖</div> <h4 style="font-weight: 700; margin: 0 0 6px; color: #fff;">Beginner</h4> <p style="color: #888; font-size: 0.75em; margin: 0 0 12px;">One agent, one task.

Get your first win.</p> <div style="background: #ff6b1a; color: #000; font-weight: 600; padding: 8px 20px; border-radius: 8px; font-size: 0.8em; display: inline-block;">Start here</div> </div> <div style="flex: 1; background: #0a0a0a; border: 1px solid #ff6b1a55; border-radius: 16px; padding: 24px; animation: glow 3s ease-in-out 1s infinite; text-align: center;"> <div style="font-size: 2.4em; margin-bottom: 8px;">⚡</div> <h4 style="font-weight: 700; margin: 0 0 6px; color: #fff;">Builder</h4> <p style="color: #888; font-size: 0.75em; margin: 0 0 12px;">Multi-tool agents.

Memory + crons.</p> <div style="background: #ff6b1a22; color: #ff6b1a; font-weight: 600; padding: 8px 20px; border-radius: 8px; font-size: 0.8em; display: inline-block; border: 1px solid #ff6b1a55;">Level up</div> </div> <div style="flex: 1; background: #0a0a0a; border: 1px solid #ff6b1a77; border-radius: 16px; padding: 24px; animation: glow 3s ease-in-out 2s infinite; text-align: center;"> <div style="font-size: 2.4em;

CODE SHOWCASE

Syntax highlighting is built in

```
// Your first agent – 4 lines of code
import Anthropic from "@anthropic-ai/sdk";

const client = new Anthropic();
const response = await client.messages.create({
  model: "claude-opus-4-6-20250414",
  max_tokens: 1024,
  tools: [readFile, writeFile, runCommand],
  messages: [{ role: "user", content: "Deploy the app" }],
});
```

MARP uses **highlight.js** under the hood — supports 190+ languages.

```

12px; padding: 4px 20px; text-align: center; min-width: 100px; <svg width="20"
height="20" viewBox="0 0 24 24" fill="none" stroke="#ff6b1a" stroke-width="2"><circle
cx="12" cy="12" r="10"/><path d="M12 8v4l3 3"/></svg> <div style="font-size: 0.75em;
font-weight: 600; margin-top: 4px;">REASON</div> </div> <svg width="40"
height="20" viewBox="0 0 40 20"><line x1="0" y1="10" x2="30" y2="10" stroke="#333"
stroke-width="2"/><polygon points="30,5 40,10 30,15" fill="#ff6b1a"/></svg> <div
style="background: #0a0a0a; border: 2px solid #ff6b1a44; border-radius: 12px;
padding: 14px 20px; text-align: center; min-width: 100px;"> <svg width="20"
height="20" viewBox="0 0 24 24" fill="none" stroke="#ff6b1a" stroke-width="2"><path
d="M14.7 6.3a1 1 0 0 0 1.4 1.6 1.6 1 0 0 0 1.4 0 1 3.77-3.77a6 6 0 0 1-7.94 7.94 6.91
6.91a2.12 2.12 0 0 1-3-3 6.91-6.91a6 6 0 0 1 7.94-7.94 3.76 3.76z"/></svg> <div
style="font-size: 0.75em; font-weight: 600; margin-top: 4px;">ACT</div> </div> <svg
width="40" height="20" viewBox="0 0 40 20"><line x1="0" y1="10" x2="30" y2="10"
stroke="#333" stroke-width="2"/><polygon points="30,5 40,10 30,15" fill="#ff6b1a"/>
</svg> <div style="background: #0a0a0a; border: 2px solid #ff6b1a44; border-radius:
12px; padding: 14px 20px; text-align: center; min-width: 100px;"> <svg width="20"

```

```
align: middle; margin-right: 4px;"><circle cx="12" cy="12" r="10"/><line x1="8" y1="12"
x2="16" y2="12"/></svg> Without agents </div> <div style="font-size: 0.82em; color:
#888; line-height: 1.8;"> ■ Research the topic (45 min)
```

```
■ Draft the script (2 hrs)
```

```
■ Create thumbnail (1 hr)
```

```
■ Edit the video (3 hrs)
```

```
■ Write the description (20 min)
```

```
■ Schedule the post (10 min)
```

```
<div style="margin-top: 12px; color: #e00000; font-weight: 600;">Total: ~7 hours</div>
```

```
</div> </div> <div style="flex: 1; background: #0a0a0a; border-radius: 0 12px 12px 0;
padding: 24px; border: 1px solid #ff6b1a33;"> <div style="color: #22c55e; font-weight:
```

```
600; font-size: 0.8em; text-transform: uppercase; letter-spacing: 0.1em; margin-
bottom: 12px;"> <svg width="14" height="14" viewBox="0 0 24 24" fill="none"
```

```
stroke="#22c55e" stroke-width="2" style="vertical-align: middle; margin-right: 4px;">
<circle cx="12" cy="12" r="10"/><polyline points="8 12 11 15 16 9"/></svg> With agents
```

```
</div> <div style="font-size: 0.82em; color: #888; line-height: 1.8;"> ✓ Research + draft
```

Start building.

```
<div class="divider"></div>
```

Pick one task. Give your agent tools. Watch it run.

```
<div class="pill-row"> <span class="pill">antigravity.so</span> <span  
class="pill">@robonuggets</span> </div>
```