

A Capability Proof, by Construction: Structural mining of a mathematical field from arXiv, with graded warrants and a hazard ledger

Joseph Corneli*

August 2026

Abstract

We are extracting the argumentative and expository structure of a mathematical field (**math.CT**, ~4,616 primary papers) from arXiv sources, as gated machine-checkable artifacts plus corpus-level findings. As with the companion APM note, we organise the programme as a *proof by construction* of the claim “the field’s reasoning structure is recoverable at corpus scale”: the constructive content is a twelve-stage pipeline; the claim decomposes into stage-level sub-claims with contracts; and each sub-claim carries a *graded warrant* backed by certificates — gate exits, ledger entries, oracle agreement, census counts — rather than narrative. The pipeline has been executed end-to-end (S1–S12, 12/12 stages ledgered) on a sixteen-paper corpus on an unattended host — the condition under which its characteristic failure modes become observable. Forty such failure modes are enumerated as a hazard ledger, thirty-seven of them closed. The intended contribution is less the corpus coverage than the epistemic form: a mining programme whose own readiness claim is held to the same standard as the structures it extracts, and whose remaining gaps are drawn rather than described.

1 The claim, read constructively

The headline claim — *the reasoning structure of **math.CT** is recoverable* — is not established by having mined some papers. Read constructively, it asserts that a *procedure* exists which, handed any paper in the field, yields (i) a gated structural artifact for each proof and expository region, and (ii) corpus-level findings that accumulate across papers, together with witnesses that each component of the procedure does its job *on a machine other than the one it was written on*.

That last clause carries most of the weight. A pipeline developed where its operator watches the terminal cannot distinguish a stage that works from a stage that prints its findings and persists nothing; the distinction only becomes observable on an unattended host. Executing it under that condition exposes a class of failure invisible to ordinary testing, and the hazard ledger (§6) enumerates forty instances: eight that halt or stall the run outright, ten that cost operator time or mislabel what was measured, five that read the wrong corpus or the wrong inputs, three whose outputs do not survive the run, five that pass one gate and are unreadable by the next, two that silently shrink the corpus, one that only bites at scale, *five that report success without doing the work*, and one that does not point where it claims to.

*Prepared with the futon agent mesh. The mining runs described here were executed on a CPU-only host (“Zone”) against a locally served GLM-4.5-Air; the human’s role was direction, the scoping decisions marked as such, and review.

The emphasised category is the one worth the reader’s attention, because its members are invisible by construction: a stage that fails loudly is a nuisance, whereas a stage that reports PASS while half of it never executed is a false entry in the evidence base. Its worst member does not merely omit work but manufactures output — an LLM pass whose replies used different key names than the prompt requested, so every lookup missed, every question silently fell back to a stock template, and the run emitted a complete set of plausible findings the model had not written. All were found by asking what a green result would look like if the work behind it had not happened.

The corpus percentage is the odometer. The pipeline is the proof object, and the hazard ledger is the record of what must hold for it to be one.

2 Warrants, certificates, hazards

Warrant classes are as in the APM note: *mechanical* (an executed witness — a gate exits 0, a ledger entry is written, an oracle agrees); *replicated* (independent runs agree on the load-bearing quantities); *inductive- $n=K$* (K observed instances, honesty bounds stated); *designed* (contract written, no witnesses yet); *registered* (candidate mechanism, not yet applied); and *refused* — proved-impossible held apart from not-yet-capable.

To these we add a **hazard ledger**, which the APM programme did not need because its pipeline ran in one place. A hazard is a way a stage can appear to succeed while failing, recorded with its detection, its repair, and its measured incidence. Hazards are what convert *designed* into *mechanical*: a stage whose contract is written but whose hazards are unenumerated has not been shown to work, only shown to run. The full ledger is `futon6/holes/excursions/E-superpod-hardening.md`; §6 gives its shape.

Certificates here are cheap and adversarial by construction: every stage gates its own output before the next consumes it, a completeness ledger refuses any stage whose upstream has no passing entry *for this corpus*, and the numbers below were re-derived from the run directory rather than from the logs that produced them.

3 The construction

Twelve stages, each gated before the next consumes it. CPU stages are cheap; the three LLM stages (S3, S4, S7) are the cost pole.

1. **S1 anatomy** — deterministic marks over the $\text{\LaTeX}$ source: symbol typings, scopes, binders, proof-moves, citations. No model.
2. **S2 concept substrate** — the corpus-fresh concept spine, and a *measured* substrate-corpus match (this gate is new; see H1).
3. **S3 IATC** — per proof passage, an argument DAG in EDN with source-anchored nodes, typed inference edges, and explicit `missing-warrant` holes. Self-gated by `iatc_argcheck` and a substance gate, with feedback retry.
4. **S4 expository** — per expository region, a classified scope graph (motivation, heuristic, strategy), capped per paper and self-gated.
5. **S5 comprehension** — R2d noun grounding $\oplus$ rung-3 strategy grounding, verdict separating weak-extraction from weak-proof. S5 now *builds* its rung-3 half from two deterministic producers that were absent from the DAG entirely (H13).
6. **S6 paper-graph** — proofs attach to their statements; orphans flagged.

7. **S7 CLean typing + structure embedding** — box-typing of each argument DAG into a method vocabulary, then a structure embedding, gated for vocabulary conformance and for discriminativeness (entropy gate).
8. **S8 export** — graph JSON, Cypher, pgvector; and, separately, a direct EDN ingest into the XTDB 2.2.0-rc0 bench store.
9. **S9 hole harvest** — the pass-3 hole map and a normalised (**type**, **concept**) hole vocabulary, both run-scoped. The APM structure-match tail that formerly stood here was withdrawn: it consumed scope files this corpus does not produce, and had failed silently on every run since it was written. It belongs to the APM programme, against APM’s own inputs.
10. **S10 lexicon + reground** — harvest the corpus’s own inference and expository move vocabulary; measure the grounding lift obtained by re-grounding the corpus against its own harvested moves.
11. **S11 structural canon + whole-paper signatures** — canonical definition shapes; paper-level archetypes. *Prints; does not persist.*
12. **S12 accretion sweep** — every tier metric checkpointed at log-spaced n , yielding the rising curves that are the sweep’s stated product.

Every stage transition is a ledger record under a corpus id; state is derived by folding the ledger; a stage whose upstream did not run *for this corpus* is refused rather than run on stale inputs. These are requirements extracted from a failure (the mark5 run silently skipped S2 and grounded against a prior corpus), not aspirations — and H19 shows the same failure recurring one level down, inside a stage, where the ledger could not see it.

4 Current warrant state

Corpus **math-ct-e2e-16**: sixteen citation-ranked **math.CT** papers (including *Higher Topos Theory*), twelve mined to completion and four partially, yielding 98 proof graphs and 280 expository regions. Executed on a CPU-only host, GLM-4.5-Air Q4 served locally at ~ 4.2 tok/s single-stream and $1.58\times$ aggregate on two shards (measured, not assumed). Corpus membership is asserted by manifest and checked mechanically (§9, check I1), because a shared output directory otherwise admits artifacts from a neighbouring run.

Sub-claim	Warrant	Key certificates
A1 Anatomy is recoverable from source (S1)	mechanical	16/16 papers emitted, 0 failures; 320,337 marks (1,871 on HTT alone); ledgered for this corpus
A2 The substrate matches the corpus (S2)	mechanical	substrate-corpus match is measured, not assumed: 16/16 run ids present (100%, threshold 95%). The stage <i>checks</i> a shipped substrate rather than rebuilding one per corpus; corpus-fresh rebuild remains H1 tier 2

continued overleaf

Claims table, continued from previous page

Sub-claim	Warrant	Key certificates
A3 Proof arguments reconstruct as gated DAGs (S3)	mechanical	98/98 graphs gated PASS (argcheck + substance) <i>when the finals are selected explicitly</i> ; the stage's directory gate also sees 98 <code>.rung2</code> reports and fails on them. The first-pass retry rate is <i>outstanding, and now instrumented</i> (H37): the attempt directory was not run-scoped, so the previously reported 45.9% is not reproducible from it — reconstructions give 37.8% and 36.7% depending on how one guesses which invocation wrote which file. It is not re-derivable offline, because mtimes cannot say that. <code>.attempts/</code> is now run-scoped and S3 emits <code>retry-rate-\$RUN_ID.json</code> from the loop's own bookkeeping, so the figure becomes a byproduct of the next run rather than a separate study
A3' ... and their anchors are trustworthy	weak	Content faithful (§A), <i>coordinates</i> not: 41% of node anchors cover their own text's line, median drift 3 ($n=290$). Repaired by numbering the prompt window (H21). Validation at volume now runs ($n=98$, up from $n=3$) and is reported in two parts, because the raw figure conflates two different failures. Corpus-wide: 64.3% pass at floor 0.30. But 25 graphs score <i>exactly</i> 0.000, missing 0/3, 0/4, 0/6 and 0/7 key terms simultaneously and concentrated in 4 papers (3 entirely zero), while 32 score exactly 1.000. Drift does not produce that shape; a different line basis does, and does here — the checker resolves a paper to an artifact whose line 379 is blank where the graph anchors into the candidate window (H38). Excluding those 25, the remaining 73 give 86.3% pass, mean 0.729. The honest claim is the second number with its exclusion stated, and the frame repair is open
A4 Expository structure reconstructs (S4)	mechanical	280/280 gated PASS. First pass 238/280; all 42 failures were one serialization defect and <i>all</i> recovered after H18

continued overleaf

Claims table, continued from previous page

Sub-claim	Warrant	Key certificates
A5 Comprehension is measurable (S5)	mechanical	Was degenerate — all 98 proofs <i>no-structure</i> , weak-proof unreachable. Two deterministic producers were missing from the DAG, not from the codebase: strategy moves $0 \rightarrow$ 202 grounded / 564 thin / 52 ungrounded ; verdicts now well-formed 6, partial 82, weak-extraction 10 (H13 closed, no GPU)
A6 Papers assemble into whole-paper objects (S6)	weak	12 paper objects for 16 papers; the producer’s own wellformed field is <i>false</i> for two, and 33 orphan statements are recorded. Output lands in data/paper-graphs while RETRIEVE collects data/iatc-paper-graphs/\$RUN_ID
A7 Proof structure is typable and discriminative (S7)	mechanical	94 typed / 4 cycle-rejected / 0 failed of 98 — complete accounting. Was 88/10: six rejections were a serialisation defect (an edge concluding several claims at once serialised as a Python list repr and failed the <i>readability</i> gate) reported under a guessed cycle reason. The four survivors carry a genuine wire-graph cycle, all four flattened iff -structure. Vocabulary gate PASS. Entropy gate PASS: mean off-diagonal structure cosine 0.02 (ceiling 0.85) — the Mark 1 embedding collapse definitively absent
A8 The result is queryable (S8 + bench)	mechanical (export)	Export re-run against the corrected 94-proof typing (H36): 481 nodes / 304 edges (94 Proof + 387 Step), up from 446/286 (88 + 358). The XTDB ingest (772 nodes / 419 edges, query ladder, integrity census) lives in a separate benchmark artifact and is <i>not</i> re-derivable from this run directory
A9 The field’s move repertoire is harvestable (S10)	inductive- $n=16$	732 distinct entries over 737 moves; 62 relation types with a Zipf head (<i>because</i> 161, <i>implies</i> 69); mean anchor confidence 0.43; now <i>persisted</i> (H15)
A10 Structural archetypes are censusable (S11)	mechanical	structural-canon.json : 5 proof shapes; 9 paper signatures (the papers with ≥ 2 proofs). structural-canon-defs.json : 97 definitions over 77 canonical shapes, 0 SFC coverage gaps. Paper-twin similarity <i>pending recomputation</i>
A11 Metrics rise with corpus size (S12)	mechanical	proof-move grounding $0.118 \rightarrow 0.272$ (+0.154), rising=True ; expository-move recognition $0.033 \rightarrow 0.094$. Both measured on the <i>run’s</i> corpus for the first time (H19)

continued overleaf

Claims table, continued from previous page

Sub-claim	Warrant	Key certificates
A11' Proof moves are recognisable <i>at the pattern level</i>	mechanical	Over the same 818 proof steps, deterministic tactic-gesture recognition reaches 76 moves (9.3%) in 5 classes; LLM pattern verification reaches 478 (58.4%) in 26 , with 95/98 proofs carrying at least one verified match. The gap between them is the size of the residue rung 3 exists for. The 9.3% is <i>not</i> recall — the two instruments look for different objects (Lean-style tactic gestures vs. reasoning patterns)
A11'' ... and the check menu matches the field	weak	It does not. Of 478 verified matches, 157 fire a check, 89 select a menu key whose list is empty, and 232 (48%) name a pattern the menu does not contain. The three keys that never matched once are all analysis (estimate-by-bounding , induction-and-well-ordering , separate-into-independent-pieces); the frequent absentees are all categorical (transport-across-isomorphism 64, find-the-right-abstraction 50, verify-universal-property 43). Shares stable from 72 to 98 proofs, so this is a property of the corpus, not of run length
A12 The pipeline runs untended off the dev box	partial	12/12 stages ledgered; 9 executed under this corpus id and 3 (S3/S4/S7) <i>pending a clean single-corpus rerun</i> . 40 hazards enumerated, 37 closed (open: H1 tier 2, H10's region cap, H38's frame repair); the replay harness re-checks the accounting invariants in 0.5 s (§9)
A12' The extraction answers questions	inductive- $n=16$	12 query forms answerable today over the corpus — 6 read-off, 6 by join or traversal — enumerated with their counts in §11; 4 more named as needing connections not yet made
A13 Capability transports to the full field	designed	stated as a scale-transport claim; no witnesses. See Fig. 1 (right)
A14 Model choice is not load-bearing	registered	the same corpus is now minable by a second model class, and one stage has run end-to-end on it (A11', GLM-4.5-Air Q4 on CPU, 818 calls) — but that is a <i>different task</i> from the mining the claim is about, so it is evidence the apparatus is model-portable, not that mining results are. The comparison remains designed, not run (H8)

Two entries deserve a sentence because they are the ones a reader should distrust. **A3's retry rate** is a first-pass quality bound, not a defect: gates catch, feedback repairs, and the

corpus-level artifact is clean. Its *value*, however, is pending re-derivation (H37) — the attempt directory is shared across runs, so the figure once quoted here cannot now be recovered from it, and reconstructions land between 36.7% and 37.8%. A reader tempted to quote “98/98 gated” as a model-quality figure should quote the retry rate beside it once it is measurable again, and should note what *gated* means here. The verification ladder has four rungs, and S3’s gate is the first two: wiring well-formedness (**argcheck**) and anti-degeneracy (**substance**). Rung 2, which asks the harder questions — are node texts faithful to their cited lines, is every node reachable, are warrants resolved, are concepts defined — passes on 49/98. Closure is the binding constraint at 40 of those 49 failures: claims extracted but never joined to the inference structure, which is the corpus’s 58% **missing-warrant** rate seen from the other side. Rung 2’s one clean sweep should not be read as a result: warrant-resolution’s 98/98 is a configuration rather than a finding, since its floor is 0.0 and no rate can fail it — report-only, by the checker’s own note, until a stricter floor is calibrated, and 31 of those passes are at rate 0. *Gated* in this report therefore means rungs 0–1 corpus-wide and rung 2 on half. And **A9’s 732 entries over 737 moves** means essentially *zero* reuse at $n=16$: the lexicon convergence curve begins at one-distinct-per-move and has nowhere to go but down, if convergence exists at all. That is a starting point, not a finding.

5 The causal layer

“The pipeline works” is a causal claim, and the hazards are what make it one. Three of them are worth reading as causal structure rather than as bugs.

H19 (S10’s reground scripts read hardcoded mark4-era paths) is a *confounded measurement*: the reported lift was a function of the fixture corpus, not of the run. It failed on Zone only because a fixture paper’s source was unstaged; on a host holding all of arXiv math it would have returned a confident number for a corpus nobody ran. The completeness ledger was built to prevent exactly this at the *stage* level after mark5, and could not see it one level down, *inside* a stage.

H20 (a missing cache, $O(\text{scope files})$ rather than $O(\text{papers})$) is the clearest S -dependent hazard: harmless-looking at $n=16$, fatal at $n=4616$. Any readiness claim that does not distinguish scale-invariant hazards from scale-dependent ones is not a readiness claim.

H12/H18 together say that *artifact validity is reader-relative*: a graph can pass a Clojure-side gate and be unreadable by the Python stage that consumes it (unicode in keywords), or carry $\text{\LaTeX}$ that is not legal EDN escaping (all 42 of S4’s first-pass failures). Both were repaired at one shared site only after being patched at two or three independently — the same lesson, twice, that when one reconciliation grows several implementations the abstraction wants to be shared.

6 The hazard ledger, in shape

Forty hazards at the time of writing — H1–H38 with letter variants; H8 is recorded as an asset, not a hazard — thirty-seven closed, three carrying an open remainder. *The ledger file, not this note, is the authority on the count*. Grouped by what they cost, because the groups argue for different remedies:

Class	Hazards	What the class implies
<i>Halts or stalls the run</i>	H1 H2 H3 H9 H10 H14 H24 H26	Missing commands, hardcoded model names, GPU-tuned timeouts, id parsing that breaks one arXiv family; a run-discarding abort on one malformed reply; an uncapped generation on a nine-day trajectory. Loud, cheap to fix, and each would independently have ended a cluster window.
<i>Costs operator time or mislabels what was measured</i>	H4 H5 H6 H7 H17 H23 H30 H32 H36 H37	Window arithmetic $2.5\times$ off; a block-buffered log that reads as a stall; an axis labelled “papers” counting proof-graphs; a venv miss that read as 0/98; empty-candidate calls folded into no-match; a guessed rejection reason that cost a day; a retry rate no longer derivable from its directory.
<i>Reads the wrong corpus or the wrong inputs</i>	H13 H19 H19b H35 H38	Stage inputs and the measurement set defaulting to fixtures or to shared, un-scoped directories. The most dangerous class: it neither crashes nor loses data, it returns plausible numbers.
<i>Outputs do not survive the run</i>	H15 H16 H27	The learning layer printed its results and persisted nothing; the accretion curve wrote to a mark6-named file outside the retrieval manifest; verdicts keyed by paper collapsed 98 proofs to 16 rows. The science, not the artifacts.
<i>Passes one gate, unreadable by the next</i>	H12 H12b H18 H33 H34	Artifact validity is reader-relative: unicode in keywords, L ^A T _E X that is not legal EDN escaping, JSON truncated by an external cap, an extractor that could not parse mathematics.
<i>Silently shrinks the corpus</i> <i>Scale-dependent</i>	H11 H11b H20	A server blip fast-failing a whole batch. These do not fail — they shrink the corpus without saying so. Harmless at pilot size, fatal at field size. The class that a pilot cannot detect by succeeding.
<i>Reports success without doing the work</i>	H22 H25 H28 H29 H31	A stage recording PASS while half of it never executed; a rung whose floor no rate can fail; fabricated template content wearing the model’s voice; prompt-and-hope where constrained decoding was available; authorship recorded but not originality. The class §1 emphasises, and the reason the conformance gate’s negative checks exist.
<i>Unfaithful</i>	H21	Artifacts that do not point where they say they point. The prompt gave the model the passage as bare text, so <code>:source</code> anchors were <i>counted</i> rather than read: 41% cover the line their own text came from, median drift 3 lines. Content faithful, coordinates not. Found only by reading a paper against its source (§A).
<i>Open remainders</i>	H1 H10 H38	Tier-2 corpus-fresh substrate rebuild; the S4 region cap is an out-of-band trim, not a flag; the anchor checker still counts lines in a different frame than the graphs anchor into. S11’s compute-and-discard, formerly listed here, is closed (H22, §7).

7 Honest boundaries and the open gaps

H13 — the expensive-looking gap that was not one. S5’s rung-3 half reads `data/rung3-technique/<pid>.technique.json`, and the obvious reading was that producing it needed a mining run. It did not. Both producers already existed and are explicitly *deterministic* — `cas_segment.py` turns gated graphs into proof steps, `rung3_technique.py` turns those into technique gap maps — and neither appeared in any stage of the stepper. The one real defect was a granularity mismatch: `cas_segment` named its output per *paper* while S5 looked up per *proof*, so every proof of a paper overwrote its siblings and 98 graphs collapsed to 12 files, which S5 then failed to find at all. One line, plus the DAG wiring. Strategy moves went $0 \rightarrow 202$ grounded / 564 thin / 52 ungrounded, and the verdict distribution from uniformly **no-structure** to {well-formed 6, partial 82, weak-extraction 10}. Total cost: two CPU minutes.

The check menu is specified for the wrong mathematics. The cascade’s premise is that each proof gets a menu of checks matched to *its* topology rather than a uniform {R2a,R2b,R2c}. Selection works — 478 verified matches over 95 of 98 proofs. What the selected patterns then meet is a menu built from a different field: 48% of matches name a pattern it does not contain, and every key that never matched once is an analysis pattern while the frequent absentees are categorical.

This gap has a property the others do not: *it was only visible because the component ran*. The deterministic path yields all-thin on arXiv, so the component looked inert, and the economical reading was to retract it. Retracting it would have removed the only instrument able to report that the menu does not fit the corpus — the 232 unmatched patterns are not a failure of the feature but its most informative output. A third gap category therefore has to be named beside *accounting* and *capability*: *built, reviewed, and never run*, which resembles both and is neither.

The generalisable form. Four of this pipeline’s gaps are accounting rather than capability — information already computed and not carried across a seam — as are H15/H16 (computed, printed, discarded) and H19 (computed against the wrong inputs). H22 is the counterexample: its blocker was a dependency absent from the host, which no wiring would have supplied. *Is this a missing capability or a missing connection?* is therefore a productive first question rather than a rule, and the second answer is roughly two orders of magnitude cheaper where it holds.

The original diagnosis, retained: Comprehension is defined as $R2d \oplus \text{rung-3}$, and the rung-3 half reads `data/rung3-technique/<pid>.technique.json`, produced by `rung3_technique.py`, which appears in no stage of the stepper and no entry of the DAG contract. The only such directory present is a mark4-era artifact for a different corpus. Consequence, measured: all 98 proofs score *no-structure* and **weak-proof** is unreachable. This is not a wiring bug — it is a choice between two repairs, and the choice changes what a run *means*: either promote `rung3_technique` to a stage (and trace the producers of its `-steps-dir/-cas-select` inputs), or restate S5’s criterion as what the pipeline can actually compute. Deferred deliberately to the operator.

S11 — a stage that reported success without executing. S11 chains two scripts. The first, `sfc_struct_canon`, canonicalises definition formulae; its input file had no producer anywhere in the pipeline, and the transducer that would build one shells to `latexlm`, which was absent from the host. Because the stage joined its sub-steps with `;`, the resulting `FileNotFoundException` was discarded and the stage recorded PASS on every run while half of it had never executed.

Three repairs, in the order they matter. The stage now joins with `&&`, so a sub-step failure fails the stage. `sfc_struct_canon` records an explicit refusal artifact — `{"measured": false,`

"reason": ...} — when it cannot run, on the principle that a durable statement of what was *not* measured is worth more than an exception nobody reads; this is the *refused* warrant class applied to a stage rather than a claim. And `def_formulae_extract` supplies the missing input from the definition-snippet substrate, scoped to the run manifest. The canon consequently runs: 97 definitions reduce to 77 canonical shapes with no coverage gaps, and the merges are structural rather than lexical — $f:K \rightarrow L$ and $F:D \rightarrow E$ collapse to a single shape under α -renaming.

The dependency was not undocumented. It is recorded in the project’s own readiness dashboard as MARK7-DEPS, marked ready, with an installer written for it and the exact silent-no-op failure mode described in its notes. What was missing was any check that the installer had been applied to *this* host. A setup script states an intention; only a preflight states a fact (§9).

What is not claimed. $n=16$ papers is a pilot; every inductive warrant above is small. The accretion rise is *recognition* lift, not verification — the script says so itself and we repeat it. The mining used one model class, so A14 is registered rather than witnessed. The XTDB bench numbers are at a corpus size where the store is not under load, and the missing-warrant rate (58%, stable from $n=22$ to $n=98$) is a property of *extraction over this literature*, not yet attributable between literature omission and extractor failure — that attribution is what the three-arm exam in `E-mining-qual-loop.md` is designed to provide.

8 What this is for

Two things. First, it is the artifact that lets a cluster window be booked against a tested pipeline rather than a hope: the readiness claim is now “S1–S12 executed end-to-end, gated and ledgered, on a host nobody was watching, with forty hazards enumerated and thirty-seven closed”, which is a different kind of sentence from “the stages exist”.

Second, and more transferable: the hazard ledger is a *form*. The APM note showed a capability claim decomposed into contracted holes with graded warrants. This note adds the observation that for a pipeline, the warrants are not enough — because a stage can satisfy its contract while printing into a void, or while measuring a fixture. What closes that gap is not more testing but a different question, asked stage by stage: *if this stage were silently wrong, what would I see?* Six of the first twenty-two hazards were found by asking it, and the audit’s second wave found the entire reports-success class the same way. Each of the three open remainders now has a visible signal rather than “nothing” — the substrate gate, the plan’s region-cap note, and a frame-mismatch line in the faithfulness report.

There is one further move, which H21 argues for and the annex performs: after asking what a silent failure would look like, *read one artifact against its source*. The census counts many things approximately; a worked example checks a few things exactly. H21 — anchors naming the wrong line while glossing the right text — is invisible to every aggregate check we run, and obvious on the first paper anyone reads.

9 The replay harness: the ledger, made executable

The slow run establishes that the stages *compute*. Almost none of the forty hazards were compute failures — they were accounting and I/O-contract failures, and the accounting half is checkable in half a second against artifacts that already exist. So the ledger is now a regression suite: eleven checks, one per hazard class, asserting *conservation* (every proof has a steps file; every graph is typed or logged-rejected), *identity* (artifacts belong to this corpus; metrics carry its id;

both arXiv id families parse), *shape* (graphs load through the *consuming* reader; refs resolve; anchors sit inside their passage), and *persistence* (the run directory holds what RETRIEVE promises; twelve stages ledgered; the curve rises).

Each check declares the earliest stage at which it is meaningful, which turns the suite into a **mid-run abort gate**. At `--through S3` seven of the eleven apply and four are deferred; the seven include every check that catches a catastrophic hazard. That matters operationally: a cluster window is booked in one large block, but a run producing artifacts that violate these invariants will not repair itself downstream, so the honest move on a failed prefix is to abort and give the remaining hours back. Three severities keep the gate actionable — FAIL (artifacts violate an invariant: abort), WARN (provenance imperfect, artifacts sound: continue), and not-yet-applicable. Provenance noise must never be a reason to abandon a window; artifact corruption must always be.

The harness earns its place on the class of defect it catches rather than the count. Its corpus-identity check (I1) established that 58 of the 98 proof graphs originated from four papers outside the declared manifest — residue of a prior sharded run sharing the output directory, which every downstream stage then consumed. The stage-mechanics claims are unaffected by this, but every corpus-level figure is over a sixteen-paper set rather than the twelve originally declared, and the corpus label is stated accordingly throughout. A directory is not a corpus; only a manifest is, and only a check makes the difference observable.

10 Sixteen papers, by the numbers

Figure 1’s edges say *that* each stage delivers. This section says *how much*, because a witness with no weight behind it is an anecdote. All counts are over `math-ct-e2e-16` and are re-derived from the artifacts rather than taken from the logs that produced them. Reproducing them requires the frozen 16-id manifest: the census reads a mutable output directory by default, which is the corpus-identity hazard the harness checks for (§9).

Stage / witness	count	composition
S1 marks	320,337	over 16/16 papers. <i>classified</i> 89,348 · <i>symbol-grounded</i> 68,484 · <i>math</i> 50,607 · <i>concept</i> 46,001 · <i>symbol</i> 12,499
S1 variable grounding	7,795	bind/typed marks — variables bound to a type. Plus constrain/relation 6,758, let-binder 4,465, definiendum 4,466
S3 argument graphs	98	883 nodes (719 claim, 145 object, 19 ref) and 419 typed inference edges
S3 relation grammar	62 types	heavy-headed: <i>because</i> 161, <i>implies</i> 69, <i>therefore</i> 30, <i>follows-from</i> 23, then a long singleton tail
S3 warrants	383	<i>missing-warrant</i> 222 (58%) · <i>claim</i> 108 · <i>citation</i> 53. Each missing warrant <i>names</i> the elided step
S3 declared holes	410	mirrored into the top-level :holes vector, which is what the gate checks
S4 expository scopes	280	across 20 distinct scope kinds : <i>connection/example-source</i> 112 · <i>connection/literature-gap</i> 39 · <i>auxiliary-construction</i> 24 · <i>connection/transfer</i> 15 · <i>universal-property/characterizes</i> 13 · <i>difficulty-assessment</i> 8
S4 filled slots	222	typed: <i>example</i> 83 · <i>other-structure</i> 34 · <i>prior-result</i> 22 · <i>auxiliary</i> 13 · <i>characterizing-property</i> 11 (163 total); plus 59 carrying the generic slot key
S7 typed boxes	358	over 88 typed proofs, in 8 methods: <i>reduce-to-known-result</i> 204 · <i>construct-auxiliary-object</i> 100 · <i>transport-along-symmetry</i> 16 · <i>quotient-by-irrelevance</i> 13 · <i>compute-invariant</i> 11 · <i>local-to-global</i> 7 · <i>argue-by-contradiction</i> 4 · <i>count-by-decomposition</i> 1
S7 sorry-holes carried	198	IATC holes converted into discharge obligations in the APM vocabulary
S5 strategy moves	818	202 grounded · 564 thin · 52 ungrounded. Verdicts: well-formed 6, partial-comprehension 82, weak-extraction 10
S10 move lexicon	732	distinct entries over 737 moves; mean anchor confidence 0.43 (197 high, 298 low)
S11 canon	5 shapes	9 paper signatures (papers with ≥ 2 proofs); and 97 definitions reducing to 77 canonical shapes with no coverage gaps
S12 curve	9 checkpoints	proof-move grounding 0.118 $\rightarrow$ 0.272, rising

Three of these carry more than their size suggests. The **S7 method distribution** is the archetype census in miniature and is strikingly top-heavy: 85% of typed boxes fall into one of two methods. The 58% **missing-warrant rate** holds from $n=22$ to $n=98$ and is the quantified form of the Lakatos observation — published mathematics deletes its scaffolding, and the IATC layer’s task is to record the deletion rather than repair it. And 97 **definitions reducing to 77 shapes** is a compression ratio of only 1.26 $\times$: at this corpus size definitions almost never repeat structurally. Whether that ratio climbs with scale is the sharpest test of the structural-canon idea (§12).

11 What can be asked of it

A capability proof should terminate in questions answerable, not in an anatomy delivered. The following are grouped by what answering them costs, which is the distinction that matters

operationally: a *read-off* needs one query against the store; a *light inference* needs a join or a traversal; the third requires machinery not yet connected, and is listed to mark the boundary rather than to elide it.

Read-off (one query against the store).

- *Which proofs in this corpus reduce to a known result rather than construct anything?* — 204 boxes, by method.
- *What did this paper’s author consider too obvious to justify?* — the 222 missing-warrants, each naming its elided step, filtered by paper.
- *Where does the literature say it has a gap?* — 39 `connection/literature-gap` scopes.
- *Which results are cited rather than proved here?* — 53 `:citation` warrants with their targets.
- *What examples does the field reach for when motivating a definition?* — 83 filled `:example` slots.
- *Show me every claim anchored to lines 170–180 of this paper* — the standoff anchors, which is the annex’s own query.

Light inference (a join or a traversal).

- *Which two papers argue most alike despite being on different topics?* — nearest neighbour over the S11 structural signatures.
- *Which elided justifications recur across papers?* — group `:wanted` keys across the 410 holes; a recurring hole is a candidate lemma the field keeps assuming.
- *What is this proof’s shape, as a sequence?* — the `:clean/seq` macro sequence, e.g. `[:construct-auxiliary-object :reduce-to-known-result]`.
- *Which proofs are structurally nearest to this one?* — the structure embedding, off-diagonal cosine 0.02, so neighbours are meaningful.
- *Which concepts are used but never defined in the corpus?* — S2 substrate minus S1 `definiendum` marks.
- *Does this paper’s rhetoric match its mathematics?* — join S4 scope kinds against S7 methods per paper; a paper full of `difficulty-assessment` whose proofs are all `reduce-to-known-result` is saying one thing and doing another.

Needs machinery not yet connected (named, not claimed).

- *Has this argument been made before, anywhere in the field?* — needs the full corpus; over a sample the negative answer is worthless (§12).
- *Retrieve the memory most relevant to this proof obligation* — needs the extraction wired to the memory system’s retrieval stage; the store currently has index-reach and not the affordances retrieval expects.
- *Is this sorry dischargeable from what the corpus already knows?* — needs the S7 `:sorry` vocabulary joined to the APM formalisation ledger. The vocabularies already match, which is why this is a connection rather than a capability.
- *Argue with it* — ArSE-style adversarial exchange over a mined argument graph. The graph carries premises, warrants and declared holes, which is the shape such an exchange needs, but nothing consumes it yet.

Each item in the third list is a *connection* between components that exist rather than a capability that is absent — the same distinction that governs four of the six gaps in §7. It is

a claim the next run should be designed to falsify, since the one counterexample there (H22, a missing host dependency) shows the distinction is a useful prior and not a law.

12 Preregistration: what scale is supposed to buy

The operator’s reading, which this section takes as its null hypothesis: 4,616 `math.CT` papers differ from our 16 *in scale, not in kind*, and 500,000 arXiv papers differ again in scale only — so the effect of scale is to put a $\forall$ in front of propositions that currently carry an $\exists$. That is mostly right, and where it is right, preregistration is close to vacuous: nobody learns anything from predicting that a stage which typed 88 graphs will type 8,800.

It is worth separating the propositions by what scale actually does to them, because only one of the three classes is a real bet.

Class A — $\exists \rightarrow \forall$ (**scale is quantifier strength**). Coverage and capability claims: *the pipeline recovers a gated argument DAG for this proof* becomes ... *for every proof*. The mechanism is witnessed; scale extends the domain. Nothing to preregister, and the only threat is engineering (see Class C’).

Class B — $\forall$ -shaped already; **scale buys *estimation***. Distributional facts about the field — the missing-warrant rate, the archetype mix, the Zipf exponent of the relation grammar. These are already universally quantified; our 16-paper values are point estimates with wide, unstated error bars. Scale narrows them. Preregistering an interval here is a genuine, if modest, bet.

Class C — **emergent; *no small-n shadow at all***. The propositions that are not merely imprecise at $n=16$ but *not stateable*. Convergence is the clearest: at our scale the move lexicon holds 732 distinct entries over 737 moves — a distinct-per-move ratio of 0.993, i.e. effectively *zero reuse*. “The field’s reasoning repertoire saturates” has no $\exists$ -form to upgrade; a curve’s shape is the object, and shape needs scale. Likewise cross-paper structure (backbone saturation, variant detection, dependency depth) does not exist in a 16-paper corpus, and retrieval quality cannot be assessed against a store with nothing worth retrieving. This is the class where “scale, not kind” might actually fail, and therefore the only class where being wrong is informative.

Class C’ — **the engineering caveat, which we have already falsified once**. H20 was a defect whose *severity* is scale-dependent: a $23\times$ waste at $n=12$, $\sim 138k$ redundant rebuilds and non-termination at $n=4616$. So the pipeline at field scale is not the pipeline at pilot scale unless the scale-dependent hazard class is empty — and that class is by definition the one a successful pilot cannot detect. This is the *S*-to-outcome path in Figure 1 (right) that does not pass through the pipeline edge.

Preregistered predictions

Stated now, from the 16-paper demo, before any larger run. Each names what would falsify it. Registered prior to any larger run.

#	Prediction at 4,616 papers	Demo value	Falsified if
P1 (B)	Missing-warrant rate on inference edges stays in [50%, 65%]	58%, stable across $n=22 \rightarrow 98$ ($4.5\times$)	outside the interval
P2a (C)	The relation grammar saturates : fewer than 150 distinct relation types	62 types, Zipf head (<i>because</i> 161, <i>implies</i> 69)	≥ 150 types, or no flattening
P2b (C)	The phrase lexicon does <i>not</i> saturate : distinct-per-move ratio stays above 0.5	0.993 (732/737)	ratio falls below 0.5
P3 (B)	Macro archetypes stay under 15, and <i>reduce-to-known</i> remains the plurality ($> 40\%$)	5 macros, 67% reduce-to-known	≥ 15 macros or plurality lost
P4 (C)	Backbone saturation : the citation-ranked top 10% of papers carry $\geq 50\%$ of distinct relation types	<i>not stateable at</i> $n=16$	top decile carries $< 50\%$
P5 (C')	At least one <i>new</i> scale-dependent hazard appears between 100 and 4,616 papers that the prefix gate cannot detect	H20 was one such, found by accident	the full run is hazard-free
P6 (C)	On the three-arm exam, mined-contents (arm 1) beats raw-text retrieval (arm 2) only <i>above</i> some corpus size; at $n \approx 16$ arm 2 ties or wins	<i>not yet run</i>	arm 1 wins at $n=16$, or never wins

P2a/P2b are the pair worth the ink, because together they are a claim about what the lexicon *is*. Our harvest currently records instantiated claims (“*l* is an exact localization functor”), not abstract move types — which is why its reuse is nil. The relation grammar is the move-*type* layer, and it is small and heavy-headed. If P2a and P2b both hold, “the field’s reasoning repertoire” is the grammar, the phrase lexicon is an index rather than a vocabulary, and the S10 metric should be re-read accordingly. If P2b fails — if phrases do start repeating at scale — then mathematical prose is more formulaic than we think, which would be the more interesting result.

P5 is the prediction we would bet on hardest, and it is the one that makes the operator’s null hypothesis conditional rather than free: “scale, not kind” holds for the *claims* and fails intermittently for the *machinery*. That is precisely why the abort gate exists at a prefix, and why it cannot be trusted to catch everything.

What “complete” might change, if anything

One residual possibility deserves naming rather than dismissing. A *complete* field — every `math.CT` paper, not a sample — admits questions a sample cannot answer even in principle: whether a given argument pattern is *unique* to a paper, whether a definition has a first occurrence, whether a proof technique is *absent* from a subfield. These are $\neg\exists$ claims, and negative existentials over a sample are worthless while over a complete corpus they are evidence. If scale changes kind anywhere, it is here: not in what the pipeline extracts, but in which questions the extraction can be asked.

A Annex: one paper, end to end

The warrant table asserts that the stages work. This annex shows one paper’s artifacts against its own source, so the assertion can be checked rather than believed. The paper is `arXiv:2311.05789`,

chosen because it is small enough to display whole and complete across every layer: 2 proof passages, 2 CLean typings, 6 expository scopes. Nothing here is reformatted for presentation — the EDN is as the pipeline emitted it, and the source lines are as `dp_paper_view` numbers them.

A.1 The source, with what each stage took from it

line	source (L ^A T _E X, truncated)	stage annotation
<i>Introduction — expository region, S₄ window L102–120</i>		
104	Monoidal categories were defined in <code>\cite{be}</code> and further studied in ...	S1 citation marks
112	The concept of <code>{\em fusion}</code> ... originated in high energy physics	
114	Currently the largest consumer of fusion categories is condensed matter physics (topological states of matter)	S4 → :connection/application-domain
<i>Definitions — proof passage p₀, S₃ window L170–180</i>		
174	commutes for any $X, Y \in \mathcal{C}$.	
176	Clearly composites of semi-groupal functors and natural transformations are semi-groupal.	S3 node :semi-groupal-composition (<i>anchored</i> 171–172; H21)
179	A semi-groupal category $\mathcal{C}$ is <code>{\em monoidal}</code> if it has an object $I \in \mathcal{C}$...	S3 node :monoidal-category-def (<i>anchored</i> 173–180)
180	<code>\beq\lb{uc}\xygraph{</code>	S3 node :unit-coherence-diagram
<i>Module categories — proof passage p₁, S₃ window L307–331</i>		
307	A <code>{\em pivotal structure}</code> on a rigid monoidal $\mathcal{C}$ is a monoidal isomorphism τ ...	S3 :pivotal-def (307–307 — <i>exact</i>)
308	The group $\text{Aut}_{\otimes}(\text{Id}_{\mathcal{C}})$ acts freely on the set of pivotal structures ...	S3 :aut-action (308–308 — <i>exact</i>)
310	For an endomorphism $f: X \rightarrow X$... $\text{tr}(f) = \text{ev}_{X^*}(\tau_X f \otimes 1) \text{coev}_X$	S3 :trace-def (310–310 — <i>exact</i>)
311	A pivotal category $\mathcal{C}$ is <code>{\em spherical}</code> if $\text{tr}(f^*) = \text{tr}(f)$...	S3 :spherical-def (311–311 — <i>exact</i>)
319	A category $\mathcal{M}$ is a <code>{\em (left) module}</code> category over $\mathcal{C}$...	S3 :module-category-def (<i>exact</i>)
325	A natural transformation $c: F \rightarrow G$ between $\mathcal{C}$ -module functors ...	S3 :module-natural-trans (<i>anchored</i> 327 — <i>off by 2</i>)

Read the third column as the pipeline’s own claim about the second. The *content* is faithful throughout: every node text is a recognisable gloss of the line it names, and none is invented. The *anchors* are exact for five of six nodes in p₁ and drift four to five lines in p₀ — which is H21, visible here in a way no aggregate count reached, and the reason this annex exists.

A.2 What S3 produced (verbatim, passage p0)

```
{:paper/id "2311.05789", :passage/id "2311.05789:monoidal-def:170-180",
 :source {:lines [170 180], :kind :proof},
 :nodes [{:id :semi-groupal-composition, :kind :claim,
 :text "composites of semi-groupal functors and natural transformations are
 semi-groupal",
 :source {:lines [171 172]}}
 {:id :monoidal-category-def, :kind :claim, :text "a semi-groupal category C is
 monoidal if it
 has a monoidal unit I and natural isomorphisms l_X, r_X satisfying the unit
 coherence condition"...}
 {:id :unit-coherence-diagram, :kind :object, ...}],
 :edges [{:id :e-monoidal-def, :kind :infer, :relation :defines,
 :premise :semi-groupal-composition, :conclusion :monoidal-category-def,
 :warrant {:kind :missing-warrant,
 :wanted :semi-groupal-composition-is-closed-under-composition}}
 {:id :e-coherence, :relation :requires, ... :wanted
 :naturality-and-coherence-for-monoidal-structure}],
 :holes [{:kind :missing-warrant, :edge :e-monoidal-def, ...} {...}]}
```

Two things are worth noticing, because they are the whole point of the IATC layer. First, the edge from “composites are semi-groupal” to the monoidal definition is typed `:defines` and carries an explicit `missing-warrant` naming what the prose skipped: `semi-groupal-composition-is-closed-under-composition`. The word *Clearly* in line 176 is exactly the deletion the warrant records. Second, every such hole is mirrored in the top-level `:holes` vector, which is what the gate checks; a graph asserting a hole it does not declare is rejected.

A.3 What S7 made of it, and S4 beside it

```
{:clean/proof "2311.05789__p0"
 :clean/typing-source :llama
 :clean/seq [:construct-auxiliary-object
 :reduce-to-known-result]
 :clean/boxes
 [{:id :e-monoidal-def
 :method :construct-auxiliary-object
 :consumes [:semi-groupal-composition]
 :produces :monoidal-category-def
 :hole {:kind :sorry :discharge
 :sorryProof
 :satiety :payoff
 :wanted "semi-groupal-composition-
 is-closed-under-composition"}}
 {:id :e-coherence
 :method :reduce-to-known-result ...}]}

% S4, leaf-0001 (L102-120)
{:kind :connection/application-domain
 :source {:lines [102 120]}
 :slot-fill {:application "condensed matter
 physics (topological states of matter)"}}

% S4, leaf-0003 (L392-425)
{:kind :connection/example-source
 :source {:lines [392 425]}
 :slot-fill {:example "the category of sets,
 abelian groups, and vector spaces over
 a fixed field k"}}

% S4, leaf-0002 (L225-276)
{:kind :connection
 :slot-fill {:other-structure "braided and
 symmetric monoidal categories"}}
```

S7 types the two inference steps into the method vocabulary (`construct-auxiliary-object` then `reduce-to-known-result`) and carries the IATC hole through as a `:sorry` with a discharge obligation — which is the bridge to the APM formalisation machinery, the same `:sorry` vocabulary on both sides. S4, working the same paper’s prose rather than its proofs, recovers what the introduction is *doing*: naming an application domain, offering an example source, connecting to a neighbouring structure. Neither layer sees the other’s spans.

A.4 The two open gaps, as fixtures

The following are **illustrative fixtures, not measurements** — they show the shape the missing artifacts would take, so that closing H13 and S11 is a matter of producing this rather than of deciding what to produce.

H13 — what an S5 row looks like when rung-3 exists. Today every row reads as the left column: the strategy half is absent, so the verdict cannot discriminate. With `rung3_technique` promoted to a stage, the same rows would carry the right column, and **weak-proof** becomes reachable — distinguishing *we extracted badly* from *the proof is thin*, which is the distinction S5 exists to draw.

	noun	s:r3	s:pr	strat	comp	verdict
<i>today</i> (real)	1.00	-	0.00	0.00	0.00	weak-extraction
<i>today</i> (real)	1.00	-	0.00	0.00	0.00	weak-extraction
<i>fixture</i>	1.00	0.75	0.40	0.62	0.81	comprehended
<i>fixture</i>	1.00	0.20	0.10	0.15	0.34	weak-proof
<i>fixture</i>	0.25	0.60	0.55	0.58	0.31	weak-extraction

S11 — what the structural canon looks like when it persists. S11 computes a canonical-shape census and whole-paper signatures and then discards them. The fixture below is the artifact shape we propose: `<run-dir>/structural-canon.json`, one record per canonical shape with its population and exemplars, plus one signature per paper. The real S7 macro census (5 archetypes, 67% *reduce-to-known*) is the evidence that a census of this shape is computable; what is missing is only that S11 writes it.

```
{
  "run_id": "mark7z", "corpus_id": "math-ct-e2e-12",
  "shapes": [
    {
      "shape": "define-then-verify-coherence", "n": 34,
      "exemplars": ["2311.05789__p0", "0708.1921__p2"]
    },
    {
      "shape": "reduce-to-adjunction", "n": 21, "exemplars": [...]
    }
  ],
  "signatures": [
    {
      "paper": "2311.05789", "archetype": "definitional-survey",
      "seq": [
        :construct-auxiliary-object :reduce-to-known-result
      ]
    }
  ]
}
```

A.5 What this annex is evidence for, and what it is not

It is evidence that the layers do what the warrant table says: S1 marks, S3 recovers a typed argument DAG with declared holes, S4 recovers rhetorical structure from the same paper’s prose, S7 types the argument into a method vocabulary carrying the hole forward as a discharge obligation. All of it is checkable against the source printed beside it.

It is *not* evidence of corpus-scale quality: one paper, chosen for being displayable. Its value is the opposite of the census’s — the census counts many things approximately, the annex checks a few things exactly, and H21 is precisely the defect that only the second can see.

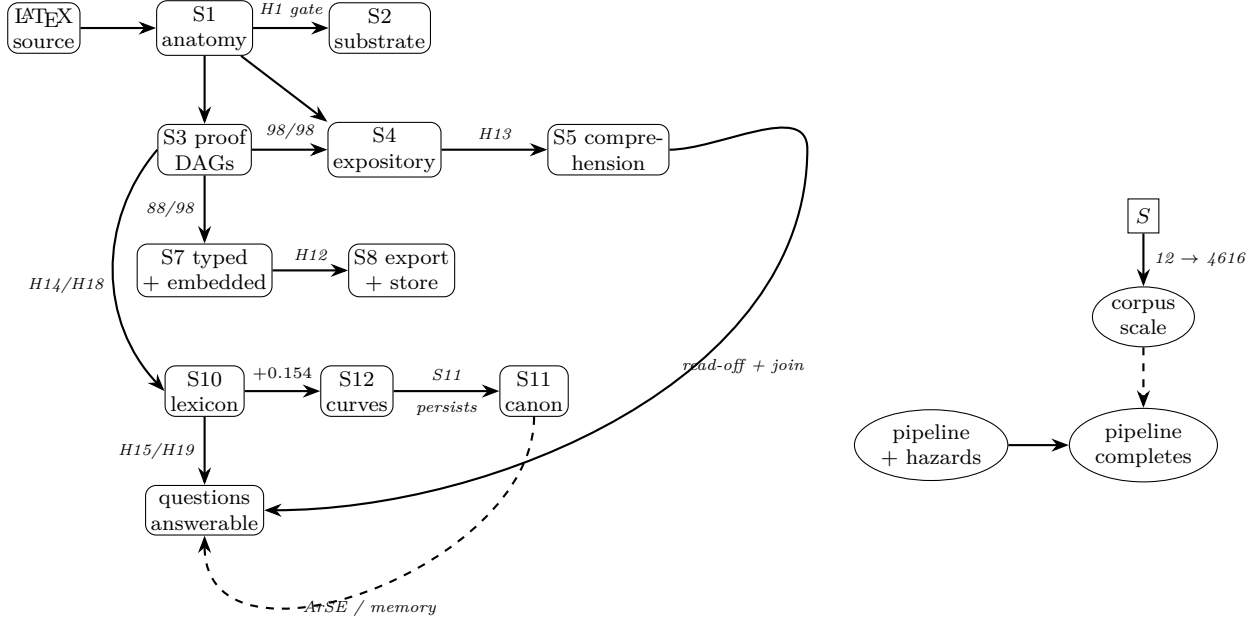


Figure 1: **Left:** the mining mechanism as currently witnessed, terminating in *questions answerable* rather than in an anatomy delivered — a capability claim should end in what the artifacts let you ask. Solid edges carry certificates: the label names the gate, the count, or the hazard class whose closure the edge depends on. *The dashed edge is what is not yet witnessed* — the argument graphs carry premises, warrants and declared holes, which is the shape an adversarial exchange or a retrieval stage requires, but nothing consumes them. The labelled dependencies on the learning path ($S3 \rightarrow S10 \rightarrow S12$) are load-bearing rather than decorative: each names a hazard class whose closure that edge requires, and the three failure modes they represent — aborting on an id family, emitting to stdout only, and measuring a fixture corpus — are silent, so an unlabelled diagram would show this path as sound whether or not it is. **Right:** A13 as a selection diagram. S switches corpus scale (16 papers $\rightarrow$ the full field); “the pipeline completes at field scale” is identified only if the S -dependence can be separated from the pipeline edge. It cannot yet: H20 was a defect whose *severity* is scale-dependent (a $23\times$ waste here, $\sim 138k$ redundant rebuilds and non-termination at field scale), which is precisely an S -to-outcome path that does not pass through the pipeline edge. Scale transport is therefore a derivation obligation, not an extrapolation — see §12.