

A Capability Proof, by Construction: Structural mining of a mathematical field from arXiv, with graded warrants and a hazard ledger

Joseph Corneli*

7 August 2026 — working note, v1

Abstract

We are extracting the argumentative and expository structure of a mathematical field (**math.CT**, ~4,616 primary papers) from arXiv sources, as gated machine-checkable artifacts plus corpus-level findings. As with the companion APM note, we organise the programme as a *proof by construction* of the claim “the field’s reasoning structure is recoverable at corpus scale”: the constructive content is a twelve-stage pipeline; the claim decomposes into stage-level sub-claims with contracts; and each sub-claim carries a *graded warrant* backed by certificates — gate exits, ledger entries, oracle agreement, census counts — rather than narrative. The pipeline has now been executed end-to-end (S1–S12, 12/12 stages ledgered) on a twelve-paper corpus on a host nobody was watching, which is the condition under which its real failure modes appear. Twenty such failures were found and recorded as a hazard ledger (H1–H20); seventeen are closed. The intended contribution is less the corpus coverage than the epistemic form: a mining programme whose own readiness claim is held to the same standard as the structures it extracts, and whose remaining gaps are drawn rather than described.

1 The claim, read constructively

The headline claim — *the reasoning structure of **math.CT** is recoverable* — is not established by having mined some papers. Read constructively, it asserts that a *procedure* exists which, handed any paper in the field, yields (i) a gated structural artifact for each proof and expository region, and (ii) corpus-level findings that accumulate across papers, together with witnesses that each component of the procedure does its job *on a machine other than the one it was written on*.

That last clause is the whole content of this note. Before 6 August 2026 the pipeline had only ever run where its author was watching its terminal. Under that condition a stage that prints its findings and persists nothing is indistinguishable from a stage that works. Running it elsewhere collapses the distinction, and did: of the twenty hazards below, six concern outputs that do not survive the run, four concern parameters that silently default to a different corpus, and three concern artifacts that pass one gate and are then unreadable by the next stage.

The corpus percentage is the odometer. The pipeline is the proof object, and the hazard ledger is the record of what had to be true for it to be one.

*Prepared with the futon agent mesh. The mining runs described here were executed on a CPU-only host (“Zone”) against a locally served GLM-4.5-Air; the human’s role was direction, the scoping decisions marked as such, and review.

2 Warrants, certificates, hazards

Warrant classes are as in the APM note: *mechanical* (an executed witness — a gate exits 0, a ledger entry is written, an oracle agrees); *replicated* (independent runs agree on the load-bearing quantities); *inductive- $n=K$* (K observed instances, honesty bounds stated); *designed* (contract written, no witnesses yet); *registered* (candidate mechanism, not yet applied); and *refused* — proved-impossible held apart from not-yet-capable.

To these we add a **hazard ledger**, which the APM programme did not need because its pipeline ran in one place. A hazard is a way a stage can appear to succeed while failing, recorded with its detection, its repair, and its measured incidence. Hazards are what convert *designed* into *mechanical*: a stage whose contract is written but whose hazards are unenumerated has not been shown to work, only shown to run. The full ledger is `futon6/holes/excursions/E-superpod-hardening.md`; §6 gives its shape.

Certificates here are cheap and adversarial by construction: every stage gates its own output before the next consumes it, a completeness ledger refuses any stage whose upstream has no passing entry *for this corpus*, and the numbers below were re-derived from the run directory rather than from the logs that produced them.

3 The construction

Twelve stages, each gated before the next consumes it. CPU stages are cheap; the three LLM stages (S3, S4, S7) are the cost pole.

1. **S1 anatomy** — deterministic marks over the $\text{\LaTeX}$ source: symbol typings, scopes, binders, proof-moves, citations. No model.
2. **S2 concept substrate** — the corpus-fresh concept spine, and a *measured* substrate-corpus match (this gate is new; see H1).
3. **S3 IATC** — per proof passage, an argument DAG in EDN with source-anchored nodes, typed inference edges, and explicit `missing-warrant` holes. Self-gated by `iatc_argcheck` and a substance gate, with feedback retry.
4. **S4 expository** — per expository region, a classified scope graph (motivation, heuristic, strategy), capped per paper and self-gated.
5. **S5 comprehension** — R2d noun grounding $\oplus$ rung-3 strategy grounding, verdict separating weak-extraction from weak-proof. *See H13: the second half of this is not computable by the pipeline as it stands.*
6. **S6 paper-graph** — proofs attach to their statements; orphans flagged.
7. **S7 CLean typing + structure embedding** — box-typing of each argument DAG into a method vocabulary, then a structure embedding, gated for vocabulary conformance and for discriminativeness (entropy gate).
8. **S8 export** — graph JSON, Cypher, pgvector; and, separately, a direct EDN ingest into the XTDB 2.2.0-rc0 bench store.
9. **S9 APM structure match** — cross-programme coverage tails.
10. **S10 lexicon + reground** — harvest the corpus’s own inference and expository move vocabulary; measure the grounding lift obtained by re-grounding the corpus against its own harvested moves.
11. **S11 structural canon + whole-paper signatures** — canonical definition shapes; paper-level archetypes. *Prints; does not persist.*

12. **S12 accretion sweep** — every tier metric checkpointed at log-spaced n , yielding the rising curves that are the sweep’s stated product.

Every stage transition is a ledger record under a corpus id; state is derived by folding the ledger; a stage whose upstream did not run *for this corpus* is refused rather than run on stale inputs. These are requirements extracted from a failure (the mark5 run silently skipped S2 and grounded against a prior corpus), not aspirations — and H19 shows the same failure recurring one level down, inside a stage, where the ledger could not see it.

4 Current warrant state

Corpus `math-ct-e2e-12`: twelve citation-ranked `math.CT` papers (including *Higher Topos Theory*), 98 proof graphs, 280 expository regions. Executed on Zone (CPU-only, GLM-4.5-Air Q4 at ~ 4.2 tok/s single-stream, $1.58\times$ on two shards — measured, not assumed).

Sub-claim	Warrant	Key certificates
A1 Anatomy is recoverable from source (S1)	mechanical	12/12 papers emitted, 0 failures; 1,871 marks on HTT alone; ledgered for this corpus
A2 The substrate matches the corpus (S2)	mechanical	substrate-corpus match now <i>measured</i> : 12/12 run ids present (100%, threshold 95%); 4,508/4,616 at full scale (H1)
A3 Proof arguments reconstruct as gated DAGs (S3)	mechanical	98/98 graphs gated PASS (argcheck + substance, per graph); 48% needed ≥ 1 retry — honesty bound on first-pass quality
A3' ... and their anchors are trustworthy	weak	Content faithful (§A), <i>coordinates</i> not: 41% of node anchors cover their own text's line, median drift 3. Repaired by numbering the prompt window (H21); re-mine validation in flight
A4 Expository structure reconstructs (S4)	mechanical	280/280 gated PASS. First pass 238/280; all 42 failures were one serialization defect and <i>all</i> recovered after H18
A5 Comprehension is measurable (S5)	weak	98/98 graphs scored, but verdicts are {weak-extraction 97, partial-comprehension 1, no-structure 98}: the strategy half has no producer in the pipeline, so weak-proof is unreachable by construction (H13, OPEN)
A6 Papers assemble into whole-paper objects (S6)	mechanical	ledgered; orphan check clean
A7 Proof structure is typable and <i>discriminative</i> (S7)	mechanical	88 typed / 10 cyclic-rejected / 0 failed of 98 — complete accounting. Vocabulary gate PASS. Entropy gate PASS: mean off-diagonal structure cosine 0.02 (ceiling 0.85) — the Mark 1 embedding collapse definitively absent
A8 The result is queryable (S8 + bench)	mechanical	446 nodes / 286 edges / 95 theorems exported; independently, 98 graphs $\rightarrow$ 772 nodes / 419 edges ingested into XTDB 2.2.0-rc0 with a query ladder and an integrity census
A9 The field's move repertoire is harvestable (S10)	inductive- $n=12$	732 distinct entries over 737 moves; 62 relation types with a Zipf head (<i>because</i> 161, <i>implies</i> 69); mean anchor confidence 0.43; now <i>persisted</i> (H15)
A10 Structural archetypes are censusable (S11)	weak	Runs and prints; persists nothing . The macro census that does survive comes from S7: 5 archetypes, 67% <i>reduce-to-known</i> (OPEN)
A11 Metrics rise with corpus size (S12)	mechanical	proof-move grounding 0.118 $\rightarrow$ 0.272 (+0.154), rising=True ; expository-move recognition 0.033 $\rightarrow$ 0.094. Both measured on the <i>run's</i> corpus for the first time (H19)
A12 The pipeline runs unattended off the dev box	inductive- $n=1$	S1-S12 ledgered 12/12 for math-ct-e2e-12 ; 20 hazards found, 17 closed
A13 Capability transports to the full field	designed	stated as a scale-transport claim; no witnesses. See Fig. 1 (right)
A14 Model choice is not load-bearing	registered	4 the same corpus is now minable by a second model class; comparison designed, not run (H8)

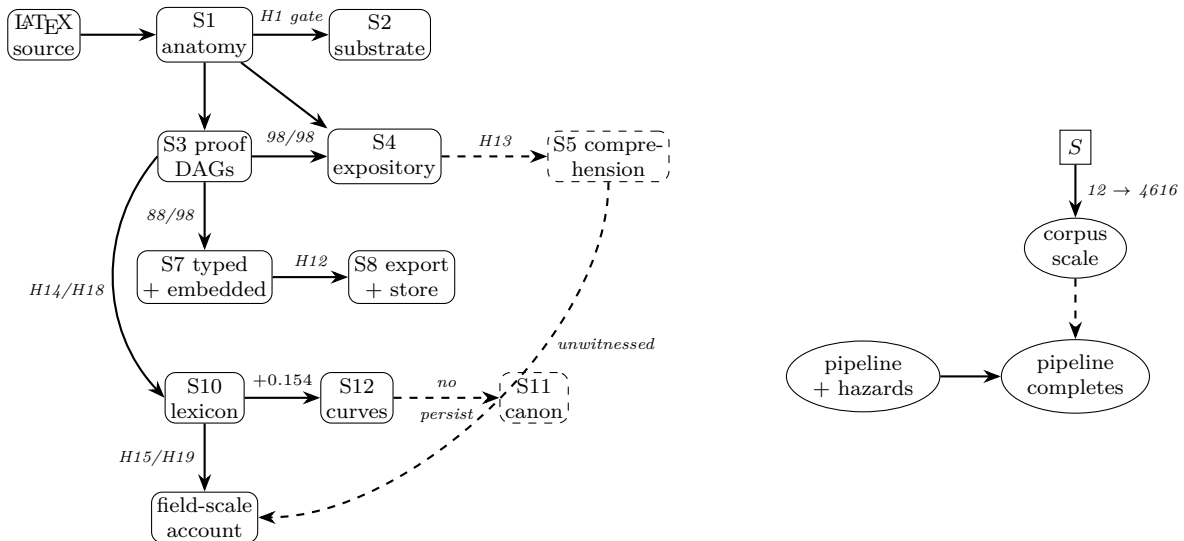


Figure 1: **Left:** the mining mechanism as currently witnessed. Solid edges carry certificates (labels name the gate, the count, or the hazard whose repair the edge depends on). *Dashed nodes and edges are the open gaps.* S5 comprehension is drawn dashed into the field-scale account because its strategy half has no producer in the pipeline (H13), so its verdict cannot discriminate; S11’s canon is dashed because it computes and then discards. Note that the *learning* path (S3 → S10 → S12) became solid only after H14, H15, H18 and H19 were closed — before that it either aborted on an id, printed into a void, or measured a different corpus. **Right:** A13 as a selection diagram. S switches corpus scale (12 papers → the full field); “the pipeline completes at field scale” is identified only if the S -dependence can be separated from the pipeline edge. It cannot yet: H20 was a defect whose *severity* is scale-dependent (a $23\times$ waste here, $\sim 138\text{k}$ redundant rebuilds and non-termination at field scale), which is precisely an S -to-outcome path that does not pass through the pipeline edge. Scale transport is therefore a derivation obligation, not an extrapolation.

Two entries deserve a sentence because they are the ones a reader should distrust. **A3’s 48% retry rate** is a first-pass quality bound, not a defect: gates catch, feedback repairs, and the corpus-level artifact is clean — but a reader tempted to quote “98/98 gated” as a model-quality figure should quote the retry rate beside it. And **A9’s 732 entries over 737 moves** means essentially *zero* reuse at $n=12$: the lexicon convergence curve begins at one-distinct-per-move and has nowhere to go but down, if convergence exists at all. That is a starting point, not a finding.

5 The causal layer

“The pipeline works” is a causal claim, and the hazards are what make it one. Three of them are worth reading as causal structure rather than as bugs.

H19 (S10’s reground scripts read hardcoded mark4-era paths) is a *confounded measurement*: the reported lift was a function of the fixture corpus, not of the run. It failed on Zone only because a fixture paper’s source was unstaged; on a host holding all of arXiv math it would have returned a confident number for a corpus nobody ran. The completeness ledger was built to prevent exactly this at the *stage* level after mark5, and could not see it one level down, *inside* a

stage.

H20 (a missing cache, $O(\text{scope files})$ rather than $O(\text{papers})$) is the clearest S -dependent hazard: harmless-looking at $n=12$, fatal at $n=4616$. Any readiness claim that does not distinguish scale-invariant hazards from scale-dependent ones is not a readiness claim.

H12/H18 together say that *artifact validity is reader-relative*: a graph can pass a Clojure-side gate and be unreadable by the Python stage that consumes it (unicode in keywords), or carry $\text{\LaTeX}$ that is not legal EDN escaping (all 42 of S4’s first-pass failures). Both were repaired at one shared site only after being patched at two or three independently — the same lesson, twice, that when one reconciliation grows several implementations the abstraction wants to be shared.

6 The hazard ledger, in shape

Twenty hazards; seventeen closed. Grouped by what they cost, because the groups argue for different remedies:

Class	Hazards	What the class implies
<i>Stops the run</i>	H1 H2 H3 H9 H10 H14	Missing commands, hardcoded model names, GPU-tuned timeouts, id parsing that breaks one arXiv family. Loud, cheap to fix, and each would independently have ended a cluster window.
<i>Corrupts silently</i>	H12 H12b H18 H11 H11b	Artifacts that pass one reader and fail the next; a server blip fast-failing a whole batch; a region cap that misses an id family. These do not fail — they shrink the corpus without saying so.
<i>Destroys or misstates the findings</i>	H15 H16 H17	The learning layer printed its results and persisted nothing; the accretion curve wrote to a mark6-named file outside the retrieval manifest; its axis was labelled “papers” while counting proof-graphs ($\approx 15\times$). The science, not the artifacts.
<i>Measures the wrong thing</i>	H19 H19b H19c	Stage inputs and the measurement set defaulting to fixtures. The most dangerous class: it neither crashes nor loses data, it returns plausible numbers.
<i>Scale-dependent</i>	H20	Harmless at pilot size, fatal at field size. The class that a pilot cannot detect by succeeding.
<i>Unfaithful</i>	H21	Artifacts that do not point where they say they point. The prompt gave the model the passage as bare text, so <code>:source</code> anchors were <i>counted</i> rather than read: 41% cover the line their own text came from, median drift 3 lines. Content faithful, coordinates not. Found only by reading a paper against its source (§A).
<i>Open</i>	H13 S11	See §7.

7 Honest boundaries and the open gaps

H13 — S5’s criterion is not computable by the pipeline. Comprehension is defined as $\text{R2d} \oplus \text{rung-3}$, and the rung-3 half reads `data/rung3-technique/<pid>.technique.json`, produced by `rung3_technique.py`, which appears in no stage of the stepper and no entry of the DAG contract. The only such directory present is a mark4-era artifact for a different corpus. Consequence, measured: all 98 proofs score *no-structure* and **weak-proof** is unreachable.

This is not a wiring bug — it is a choice between two repairs, and the choice changes what a run *means*: either promote `run3_technique` to a stage (and trace the producers of its `-steps-dir/-cas-select` inputs), or restate S5’s criterion as what the pipeline can actually compute. Deferred deliberately to the operator.

S11 — the structural canon computes and discards. `sfc_struct_canon` and `clean_paper_signature` write no files. Unlike the lexicon (H15) and the curve (H16), where the natural artifact shape was obvious, here it is not: a canonical-shape census and a whole-paper signature set could reasonably be a table, an embedding, or a set of exemplars, and inventing a format that nothing downstream reads would be worse than the gap. Needs a five-minute decision, then the same treatment.

What is not claimed. $n=12$ papers is a pilot; every inductive warrant above is small. The accretion rise is *recognition* lift, not verification — the script says so itself and we repeat it. The mining used one model class, so A14 is registered rather than witnessed. The XTDB bench numbers are at a corpus size where the store is not under load, and the missing-warrant rate (58%, stable from $n=22$ to $n=98$) is a property of *extraction over this literature*, not yet attributable between literature omission and extractor failure — that attribution is what the three-arm exam in `E-mining-qual-loop.md` is designed to provide.

8 What this is for

Two things. First, it is the artifact that lets a cluster window be booked against a tested pipeline rather than a hope: the readiness claim is now “S1–S12 executed end-to-end, gated and ledgered, on a host nobody was watching, with twenty hazards enumerated and seventeen closed”, which is a different kind of sentence from “the stages exist”.

Second, and more transferable: the hazard ledger is a *form*. The APM note showed a capability claim decomposed into contracted holes with graded warrants. This note adds the observation that for a pipeline, the warrants are not enough — because a stage can satisfy its contract while printing into a void, or while measuring a fixture. What closes that gap is not more testing but a different question, asked stage by stage: *if this stage were silently wrong, what would I see?* Six of the twenty-one hazards were found by asking it, and the two open gaps are the places where the answer is still “nothing”.

There is one further move, which H21 argues for and the annex performs: after asking what a silent failure would look like, *read one artifact against its source*. The census counts many things approximately; a worked example checks a few things exactly. H21 — anchors naming the wrong line while glossing the right text — is invisible to every aggregate check we run, and obvious on the first paper anyone reads.

A Annex: one paper, end to end

The warrant table asserts that the stages work. This annex shows one paper’s artifacts against its own source, so the assertion can be checked rather than believed. The paper is `arXiv:2311.05789`, chosen because it is small enough to display whole and complete across every layer: 2 proof passages, 2 CLean typings, 6 expository scopes. Nothing here is reformatted for presentation — the EDN is as the pipeline emitted it, and the source lines are as `dp_paper_view` numbers them.

A.1 The source, with what each stage took from it

line	source ($\text{\LaTeX}$, truncated)	stage annotation
<i>Introduction — expository region, S4 window L102–120</i>		
104	Monoidal categories were defined in <code>\cite{be}</code> and further studied in ...	S1 citation marks
112	The concept of <code>\em fusion</code> ... originated in high energy physics	
114	Currently the largest consumer of fusion categories is condensed matter physics (topological states of matter)	S4 $\rightarrow$:connection/application-domain
<i>Definitions — proof passage p0, S3 window L170–180</i>		
174	commutes for any $X, Y \in \mathcal{C}$.	
176	Clearly composites of semi-groupal functors and natural transformations are semi-groupal.	S3 node :semi-groupal-composition (anchored 171–172; H21)
179	A semi-groupal category $\mathcal{C}$ is <code>\em monoidal</code> if it has an object $I \in \mathcal{C}$...	S3 node :monoidal-category-def (anchored 173–180)
180	<code>\beq\lb{uc}\xygraph{</code>	S3 node :unit-coherence-diagram
<i>Module categories — proof passage p1, S3 window L307–331</i>		
307	A <code>\em pivotal structure</code> on a rigid monoidal $\mathcal{C}$ is a monoidal isomorphism τ ...	S3 :pivotal-def (307–307 — exact)
308	The group $\text{Aut}_{\otimes}(\text{Id}_{\mathcal{C}})$ acts freely on the set of pivotal structures ...	S3 :aut-action (308–308 — exact)
310	For an endomorphism $f: X \rightarrow X$... $\text{tr}(f) = \text{ev}_{X^*}(\tau_X f \otimes 1) \text{coev}_X$	S3 :trace-def (310–310 — exact)
311	A pivotal category $\mathcal{C}$ is <code>\em spherical</code> if $\text{tr}(f^*) = \text{tr}(f)$...	S3 :spherical-def (311–311 — exact)
319	A category $\mathcal{M}$ is a <code>\em (left) module</code> category over $\mathcal{C}$...	S3 :module-category-def (exact)
325	A natural transformation $c: F \rightarrow G$ between $\mathcal{C}$ -module functors ...	S3 :module-natural-trans (anchored 327 — off by 2)

Read the third column as the pipeline’s own claim about the second. The *content* is faithful throughout: every node text is a recognisable gloss of the line it names, and none is invented. The *anchors* are exact for five of six nodes in p1 and drift four to five lines in p0 — which is H21, visible here in a way no aggregate count reached, and the reason this annex exists.

A.2 What S3 produced (verbatim, passage p0)

```
{:paper/id "2311.05789", :passage/id "2311.05789:monoidal-def:170-180",
 :source {:lines [170 180], :kind :proof},
 :nodes [{:id :semi-groupal-composition, :kind :claim,
 :text "composites of semi-groupal functors and natural transformations are
 semi-groupal",
 :source {:lines [171 172]}}
 {:id :monoidal-category-def, :kind :claim, :text "a semi-groupal category C is
 monoidal if it
 has a monoidal unit I and natural isomorphisms l_X, r_X satisfying the unit
 coherence condition"...}
 {:id :unit-coherence-diagram, :kind :object, ...}],
 :edges [{:id :e-monoidal-def, :kind :infer, :relation :defines,
 :premise :semi-groupal-composition, :conclusion :monoidal-category-def,
 :warrant {:kind :missing-warrant,
 :wanted :semi-groupal-composition-is-closed-under-composition}}
 {:id :e-coherence, :relation :requires, ... :wanted
 :naturality-and-coherence-for-monoidal-structure}],
 :holes [{:kind :missing-warrant, :edge :e-monoidal-def, ...} {...}]}
```

Two things are worth noticing, because they are the whole point of the IATC layer. First, the edge from “composites are semi-groupal” to the monoidal definition is typed `:defines` and carries an explicit `missing-warrant` naming what the prose skipped: `semi-groupal-composition-is-closed-under-composition`. The word *Clearly* in line 176 is exactly the deletion the warrant records. Second, every such hole is mirrored in the top-level `:holes` vector, which is what the gate checks; a graph asserting a hole it does not declare is rejected.

A.3 What S7 made of it, and S4 beside it

```
{:clean/proof "2311.05789__p0"
 :clean/typing-source :llama
 :clean/seq [:construct-auxiliary-object
 :reduce-to-known-result]
 :clean/boxes
 [{:id :e-monoidal-def
 :method :construct-auxiliary-object
 :consumes [:semi-groupal-composition]
 :produces :monoidal-category-def
 :hole {:kind :sorry :discharge
 :sorryProof
 :satiety :payoff
 :wanted "semi-groupal-composition-
 is-closed-under-composition"}}
 {:id :e-coherence
 :method :reduce-to-known-result ...}]}

% S4, leaf-0001 (L102-120)
{:kind :connection/application-domain
 :source {:lines [102 120]}
 :slot-fill {:application "condensed matter
 physics (topological states of matter)"}}

% S4, leaf-0003 (L392-425)
{:kind :connection/example-source
 :source {:lines [392 425]}
 :slot-fill {:example "the category of sets,
 abelian groups, and vector spaces over
 a fixed field k"}}

% S4, leaf-0002 (L225-276)
{:kind :connection
 :slot-fill {:other-structure "braided and
 symmetric monoidal categories"}}
```

S7 types the two inference steps into the method vocabulary (`construct-auxiliary-object` then `reduce-to-known-result`) and carries the IATC hole through as a `:sorry` with a discharge obligation — which is the bridge to the APM formalisation machinery, the same `:sorry` vocabulary on both sides. S4, working the same paper’s prose rather than its proofs, recovers what the introduction is *doing*: naming an application domain, offering an example source, connecting to a neighbouring structure. Neither layer sees the other’s spans.

A.4 The two open gaps, as fixtures

The following are **illustrative fixtures, not measurements** — they show the shape the missing artifacts would take, so that closing H13 and S11 is a matter of producing this rather than of deciding what to produce.

H13 — what an S5 row looks like when rung-3 exists. Today every row reads as the left column: the strategy half is absent, so the verdict cannot discriminate. With `rung3_technique` promoted to a stage, the same rows would carry the right column, and **weak-proof** becomes reachable — distinguishing *we extracted badly* from *the proof is thin*, which is the distinction S5 exists to draw.

	noun	s:r3	s:pr	strat	comp	verdict
<i>today</i> (real)	1.00	-	0.00	0.00	0.00	weak-extraction
<i>today</i> (real)	1.00	-	0.00	0.00	0.00	weak-extraction
<i>fixture</i>	1.00	0.75	0.40	0.62	0.81	comprehended
<i>fixture</i>	1.00	0.20	0.10	0.15	0.34	weak-proof
<i>fixture</i>	0.25	0.60	0.55	0.58	0.31	weak-extraction

S11 — what the structural canon looks like when it persists. S11 computes a canonical-shape census and whole-paper signatures and then discards them. The fixture below is the artifact shape we propose: `<run-dir>/structural-canon.json`, one record per canonical shape with its population and exemplars, plus one signature per paper. The real S7 macro census (5 archetypes, 67% *reduce-to-known*) is the evidence that a census of this shape is computable; what is missing is only that S11 writes it.

```
{
  "run_id": "mark7z", "corpus_id": "math-ct-e2e-12",
  "shapes": [
    {
      "shape": "define-then-verify-coherence", "n": 34,
      "exemplars": ["2311.05789__p0", "0708.1921__p2"]
    },
    {
      "shape": "reduce-to-adjunction", "n": 21, "exemplars": [...]
    }
  ],
  "signatures": [
    {
      "paper": "2311.05789", "archetype": "definitional-survey",
      "seq": [
        :construct-auxiliary-object :reduce-to-known-result
      ]
    }
  ]
}
```

A.5 What this annex is evidence for, and what it is not

It is evidence that the layers do what the warrant table says: S1 marks, S3 recovers a typed argument DAG with declared holes, S4 recovers rhetorical structure from the same paper’s prose, S7 types the argument into a method vocabulary carrying the hole forward as a discharge obligation. All of it is checkable against the source printed beside it.

It is *not* evidence of corpus-scale quality: one paper, chosen for being displayable. Its value is the opposite of the census’s — the census counts many things approximately, the annex checks a few things exactly, and H21 is precisely the defect that only the second can see.