

Question


The array A below represents a binary heap implementation of a priority queue of items. Only the integer key values of the items are shown. The priority queue is arranged with the lowest-value key first.

	0	1	2	3	4	5	6	7	8	9
A		3	14	91	76	21	99	110	87	77

- (a) Draw the binary min-heap structure (tree) represented by A.
- (b) Draw the heap structure after the lowest-key item has been removed.
- (c) Draw the heap structure after a new item with key **1** has been added.

Question

(a) Insert 55 in the max-heap below. Show all the changes to the heap.

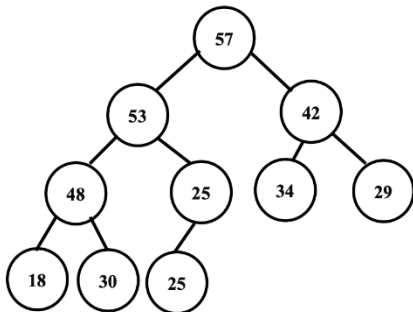

(b) Show the array that stores the above heap. Start at index 1.

(c) Rewrite the array (for the above heap) after each change it goes through during the insert 55 operation.

Question

Given the pseudocode below, use the HeapSort algorithm to sort the array $A=[22,13,17,11,10,14,12,15]$. Show each step of the process, including the building of the heap and each swap operation, until the array is sorted in ascending order.

HeapSort($A[1\dots n]$)

 BuildHeap(A)

 repeat $(n - 1)$ times:
 swap $A[1]$ and $A[\text{size}]$
 $\text{size} \leftarrow \text{size} - 1$
 SiftDown(1)

BuildHeap($A[1\dots n]$)

$\text{size} \leftarrow n$
 for i from $\lfloor n/2 \rfloor$ downto 1:
 SiftDown(i)