


Prosit 2


1-

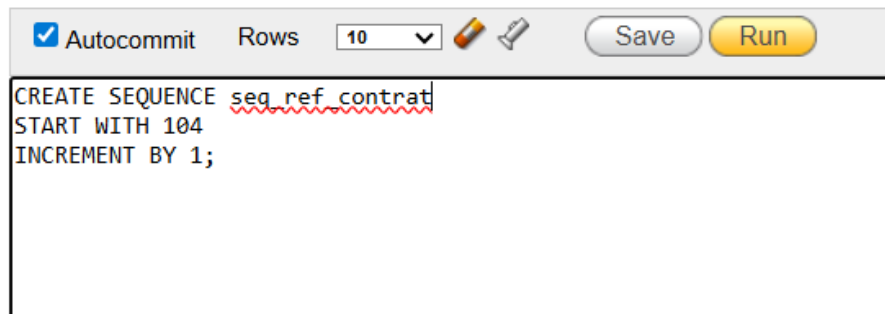

The screenshot shows a SQL IDE window with a toolbar at the top containing a checked 'Autocommit' checkbox, a 'Rows' dropdown set to '10', and 'Save' and 'Run' buttons. The main text area contains the following SQL command:

```
CREATE SEQUENCE seq_ref_contrat  
START WITH 104  
INCREMENT BY 1;
```


2-

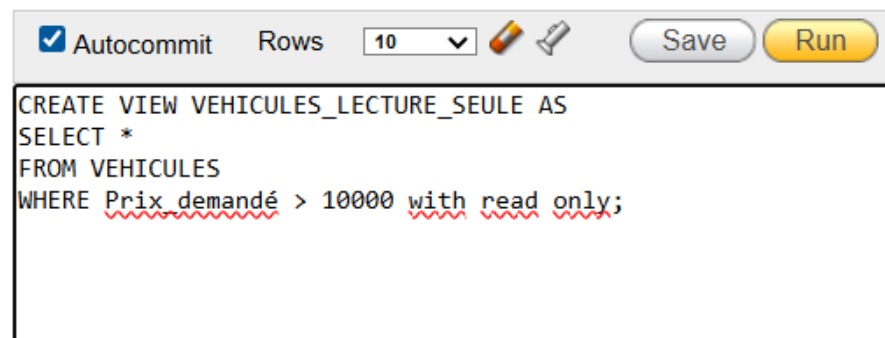

The screenshot shows a SQL IDE window with a toolbar at the top containing a checked 'Autocommit' checkbox, a 'Rows' dropdown set to '10', and 'Save' and 'Run' buttons. The main text area contains the following SQL command:

```
CREATE VIEW VEHICULES_LECTURE_SEULE AS  
SELECT *  
FROM VEHICULES  
WHERE Prix_demandé > 10000 with read only;
```


3-

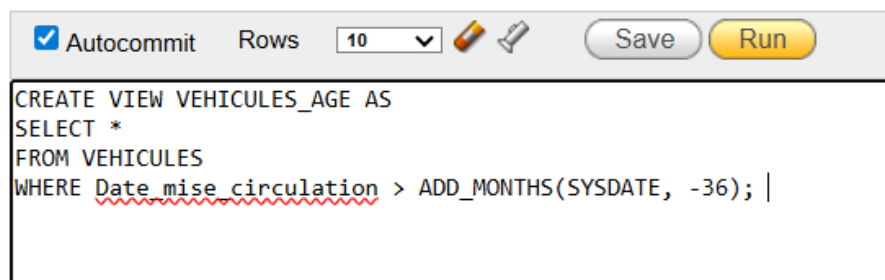

The screenshot shows a SQL IDE window with a toolbar at the top containing a checked 'Autocommit' checkbox, a 'Rows' dropdown set to '10', and 'Save' and 'Run' buttons. The main text area contains the following SQL command:

```
CREATE VIEW VEHICULES_AGE AS  
SELECT *  
FROM VEHICULES  
WHERE Date_mise_circulation > ADD_MONTHS(SYSDATE, -36); |
```

4-

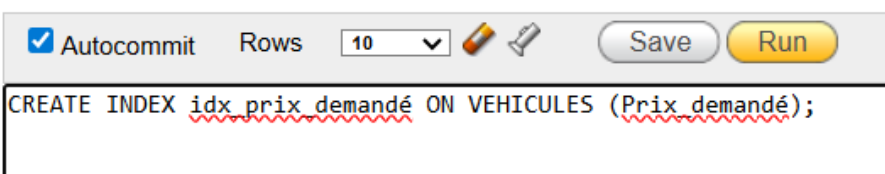

The screenshot shows a SQL IDE window with a toolbar at the top containing a checked 'Autocommit' checkbox, a 'Rows' dropdown set to '10', and 'Save' and 'Run' buttons. The main text area contains the following SQL command:

```
CREATE INDEX idx_prix_demandé ON VEHICULES (Prix_demandé);
```