

Report

Title: Host a Static Website on AWS S3

Setup

- Create AWS S3 Bucket
- Basic HTML Website to Upload

Procedure

aws

Search

[Alt+S]

United States (N. Virginia)

Touseef

Amazon S3

Buckets

Create bucket

Create bucket

info

Buckets are containers for data stored in S3.

General configuration

AWS Region

US East (N. Virginia) us-east-1

Bucket type

info

☒ General purpose

Recommended for most use cases and access patterns. General purpose buckets are the original S3 bucket type. They allow a mix of storage classes that redundantly store objects across multiple Availability Zones.

☐ Directory

Recommended for low-latency use cases. These buckets use only the S3 Express One Zone storage class, which provides faster processing of data within a single Availability Zone.

Bucket name

info

rz.touseef

Bucket names must be 3 to 63 characters and unique within the global namespace. Bucket names must also begin and end with a letter or number. Valid characters are a-z, 0-9, periods (.), and hyphens (-). [Learn More](#)

Copy settings from existing bucket - optional

Only the bucket settings in the following configuration are copied.

Choose bucket

Format: s3://bucket/prefix

Object Ownership

info

Control ownership of objects written to this bucket from other AWS accounts and the use of access control lists (ACLs). Object ownership determines who can specify access to objects.

☒ ACLs disabled (recommended)

All objects in this bucket are owned by this account. Access to this bucket and its objects is specified using only policies.

☐ ACLs enabled

Objects in this bucket can be owned by other AWS accounts. Access to this bucket and its objects can be specified using ACLs.

Object Ownership

Bucket owner enforced

Block Public Access settings for this bucket

Public access is granted to buckets and objects through access control lists (ACLs), bucket policies, access point policies, or all. In order to ensure that public access to this bucket and its objects is blocked, turn on Block all public access. These settings apply only to this bucket and its access points. AWS recommends that you turn on Block all public access, but before applying any of these settings, ensure that your applications will work correctly without public access. If you require some level of public access to this bucket or objects within, you can customize the individual settings below to suit your specific storage use cases. [Learn more](#)

☒ Block all public access

Turning this setting on is the same as turning on all four settings below. Each of the following settings are independent of one another.

CloudShell

Feedback

© 2025, Amazon Web Services, Inc. or its affiliates.

Privacy

Terms

Cookie preferences

S3 will block public access permissions applied to newly added buckets or objects, and prevent the creation of new public access ACLs for existing buckets and objects. This setting doesn't change any existing permissions that allow public access to S3 resources using ACLs.

☒ Block public access to buckets and objects granted through any access control lists (ACLs)

S3 will ignore all ACLs that grant public access to buckets and objects.

☒ Block public access to buckets and objects granted through new public bucket or access point policies

S3 will block new bucket and access point policies that grant public access to buckets and objects. This setting doesn't change any existing policies that allow public access to S3 resources.

☒ Block public and cross-account access to buckets and objects through any public bucket or access point policies

S3 will ignore public and cross-account access for buckets or access points with policies that grant public access to buckets and objects.

Bucket Versioning

Versioning is a means of keeping multiple variants of an object in the same bucket. You can use versioning to preserve, retrieve, and restore every version of every object stored in your Amazon S3 bucket. With versioning, you can easily recover from both unintended user actions and application failures. [Learn more](#)

Bucket Versioning

☒ Disable

☐ Enable

Tags - optional (0)

You can use bucket tags to track storage costs and organize buckets. [Learn more](#)

No tags associated with this bucket.

Add tag

Default encryption

info

Server-side encryption is automatically applied to new objects stored in this bucket.

Encryption type

info

☒ Server-side encryption with Amazon S3 managed keys (SSE-S3)

☐ Server-side encryption with AWS Key Management Service keys (SSE-KMS)

☐ Dual-layer server-side encryption with AWS Key Management Service keys (DSSE-KMS)

Secure your objects with two separate layers of encryption. For details on pricing, see DSSE-KMS pricing on the [Storage](#) tab of the [Amazon S3 pricing page](#).

Bucket Key

Using an S3 Bucket Key for SSE-KMS reduces encryption costs by lowering calls to AWS KMS. S3 Bucket Keys aren't supported for DSSE-KMS. [Learn more](#)

☐ Disable

☒ Enable

Advanced settings

After creating the bucket, you can upload files and folders to the bucket, and configure additional bucket settings.

Cancel

Create bucket

aws

Search

[Alt+S]

United States (N. Virginia)

Touseef

Amazon S3

Buckets

rz.touseef

Upload

Upload

info

Add the files and folders you want to upload to S3. To upload a file larger than 160GB, use the AWS CLI, AWS SDKs or Amazon S3 REST API. [Learn more](#)

Drag and drop files and folders you want to upload here, or choose [Add files](#) or [Add folder](#).

Files and folders (3 total, 124.4 KB)

Remove

Add files

Add folder

All files and folders in this table will be uploaded.

☐	Name	Folder	Type	Size
☐	beach.jpg	-	image/jpeg	60.9 KB
☐	coffee.jpg	-	image/jpeg	63.4 KB
☐	index.html	-	text/html	172.0 B

Destination

info

Destination

s3://rz.touseef

[Destination details](#)

Destination details

Bucket settings that impact new objects stored in the specified destination.

Permissions

Grant public access and access to other AWS accounts.

Properties

Specify storage class, encryption settings, tags, and more.

Cancel

Upload

aws

Search

[Alt+S]

United States (N. Virginia)

Touseef

Amazon S3

Buckets

rz.touseef

Upload succeeded

For more information, see the [Files and folders](#) table.

Close

Upload: status

Close

After you navigate away from this page, the following information is no longer available.

Summary

Destination

s3://rz.touseef

Succeeded

3 files, 124.4 KB (100.00%)

Failed

0 files, 0 B (0%)

Files and folders

Configuration

Files and folders (3 total, 124.4 KB)

Name	Folder	Type	Size	Status	Error
beach.jpg	-	image/jpeg	60.9 KB	Succeeded	-
coffee.jpg	-	image/jpeg	63.4 KB	Succeeded	-
index.html	-	text/html	172.0 B	Succeeded	-

aws

Search

[Alt+S]

United States (N. Virginia)

Touseef

Amazon S3

Buckets

rz.touseef

rz.touseef

info

Objects

Metadata

Properties

Permissions

Metrics

Management

Access Points

Objects (3)

[Copy S3 URL](#)

[Copy URL](#)

[Download](#)

[Open](#)

[Delete](#)




[Actions](#)


[Create folder](#)

[Upload](#)

Objects are the fundamental entities stored in Amazon S3. You can use [Amazon S3 inventory](#) to get a list of all objects in your bucket. For others to access your objects, you'll need to explicitly grant them permissions. [Learn more](#)

☐	Name	Type	Last modified	Size	Storage class
☐	beach.jpg	jpg	April 6, 2025, 10:09:19 (UTC+05:00)	60.9 KB	Standard
☐	coffee.jpg	jpg	April 6, 2025, 10:09:19 (UTC+05:00)	63.4 KB	Standard
☐	index.html	html	April 6, 2025, 10:09:20 (UTC+05:00)	172.0 B	Standard

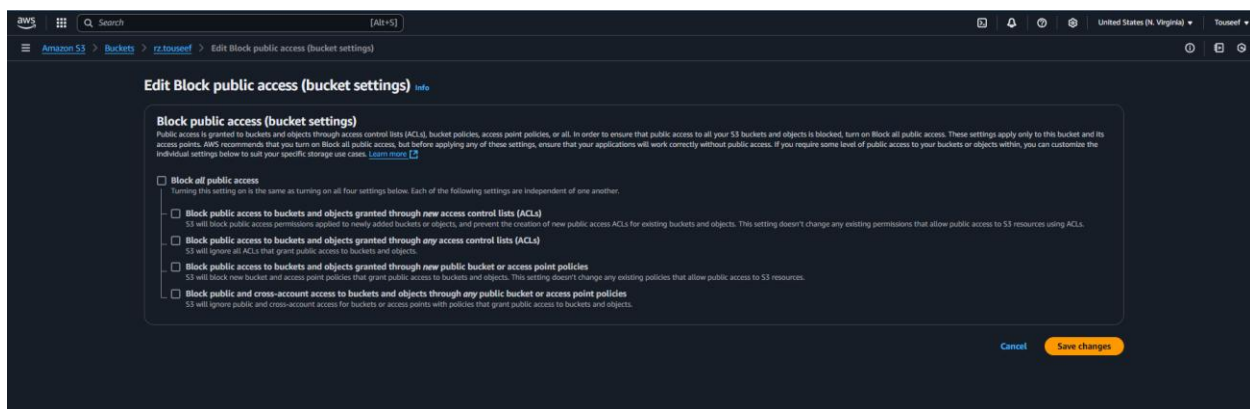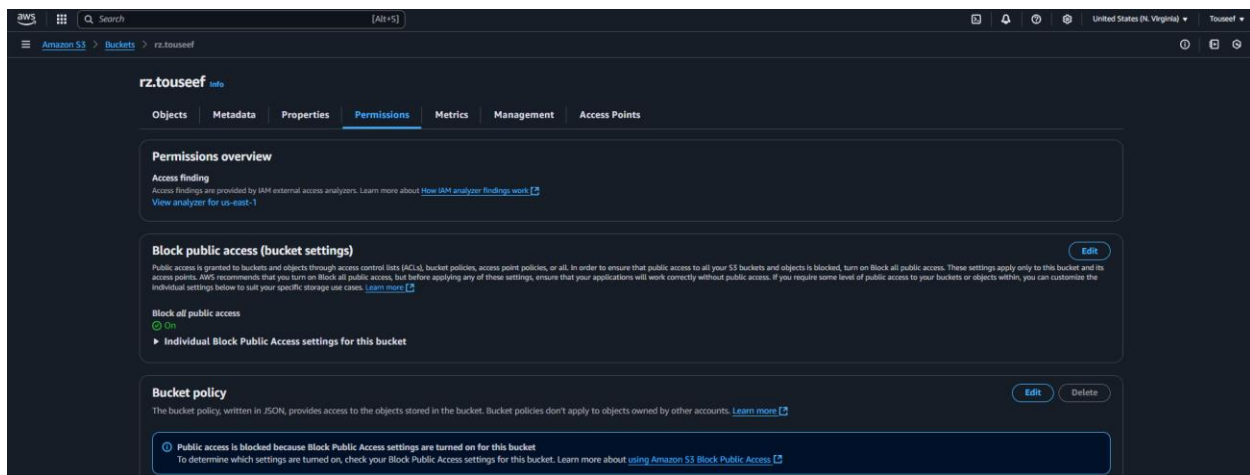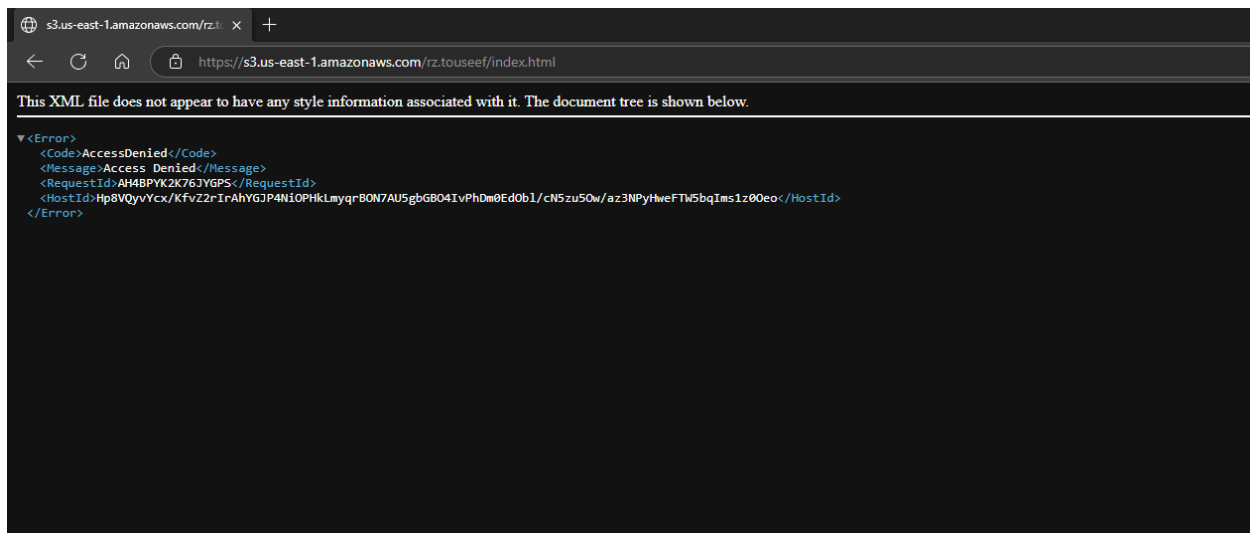

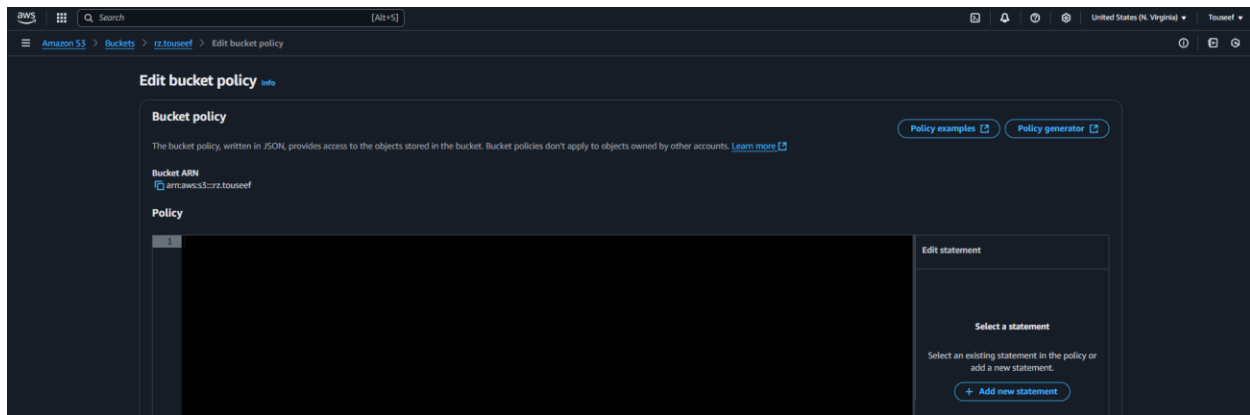

AWS Policy Generator

The AWS Policy Generator is a tool that enables you to create policies that control access to Amazon Web Services (AWS) products and resources. For more information about creating policies, see [key concepts in Using AWS Identity and Access Management](#). Here are [sample policies](#).

Step 1: Select Policy Type

A Policy is a container for permissions. The different types of policies you can create are an IAM Policy, an S3 Bucket Policy, an SNS Topic Policy, a VPC Endpoint Policy, and an SQS Queue Policy.

Select Type of Policy S3 Bucket Policy

Step 2: Add Statement(s)

A statement is the formal description of a single permission. See a [description of elements](#) that you can use in statements.

Effect ☒ Allow ☐ Deny

Principal

Use a comma to separate multiple values.

AWS Service Amazon S3 ☐ All Services ("*")

Use multiple statements to add permissions for more than one service.

Actions -- Select Actions -- ☐ All Actions ("*")

Use multiple statements to add permissions for more than one service.

Amazon Resource Name (ARN)

ARN should follow the following format: arn:aws:s3:::s(BucketName)/s(KeyName).
Use a comma to separate multiple values.

Add Conditions (Optional)

[Add Statement](#)


You added the following statements. Click the button below to Generate a policy.


Principal(s)	Effect	Action	Resource	Conditions
* *	Allow	s3:GetObject	arn:aws:s3:::rz.touseef/*	None

Step 3: Generate Policy

A policy is a document (written in the [Access Policy Language](#)) that acts as a container for one or more statements.


[Generate Policy](#) [Start Over](#)

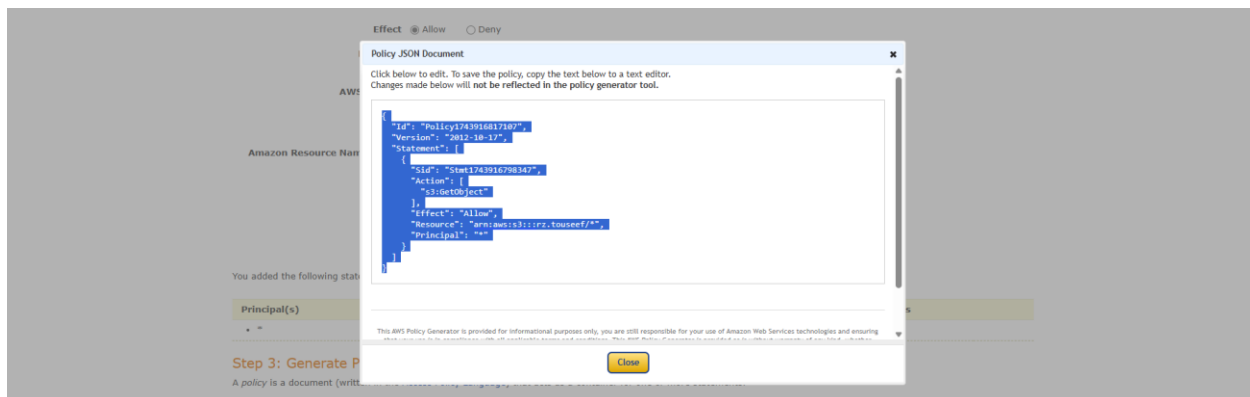

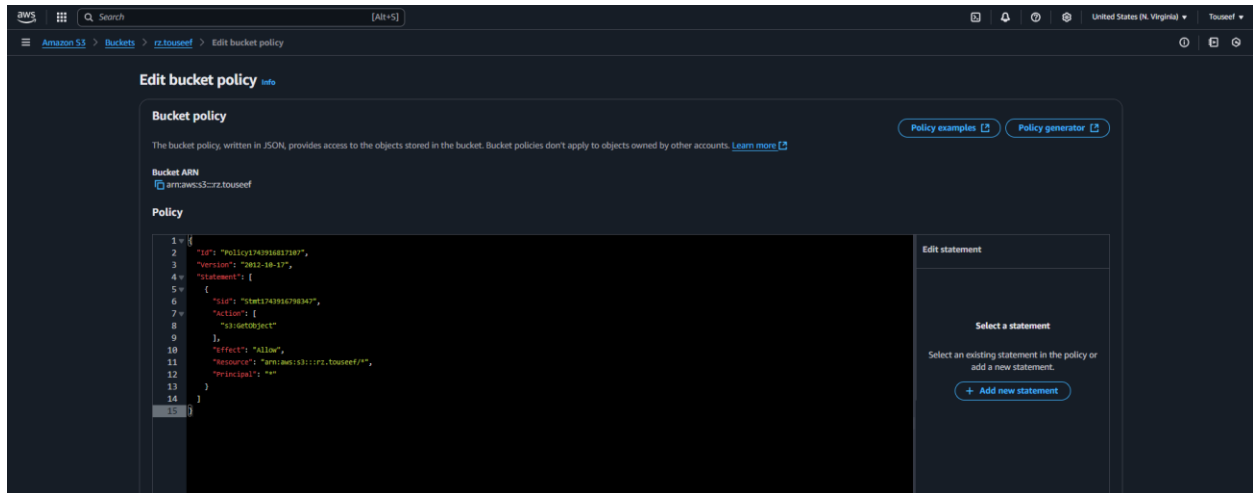


The screenshot shows the 'Edit bucket policy' interface in the AWS console. The breadcrumb trail is 'Amazon S3 > Buckets > rz.touseef > Edit bucket policy'. The page title is 'Edit bucket policy' with an 'info' link. Below the title, there's a 'Bucket policy' section explaining that policies are written in JSON. A 'Policy generator' button is visible. The 'Bucket ARN' is 'arn:aws:s3::rz.touseef'. The 'Policy' section shows a JSON snippet with line numbers 1 through 15. The 'Edit statement' panel on the right prompts the user to 'Select a statement' or '+ Add new statement'.

```
1 {
2   "id": "Policy1743916817887",
3   "version": "2012-10-17",
4   "statement": [
5     {
6       "sid": "Stmt1743916798347",
7       "action": [
8         "s3:GetObject"
9       ],
10      "effect": "Allow",
11      "resource": "arn:aws:s3::rz.touseef/*",
12      "principal": "*"
13    }
14  ]
15 }
```

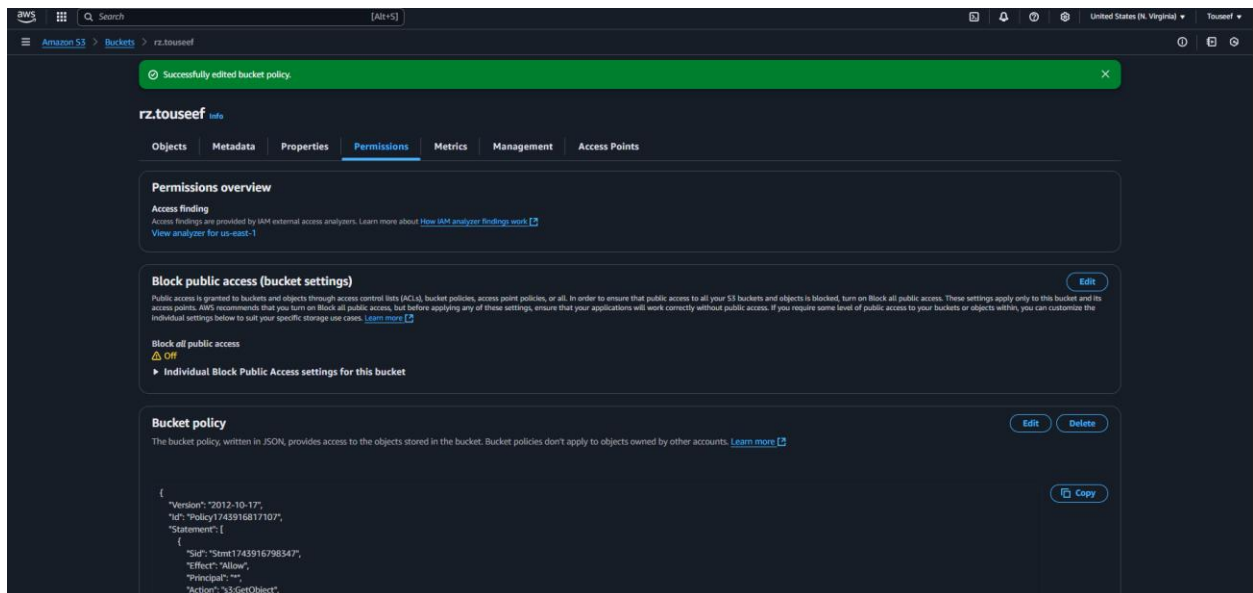

The screenshot shows the 'rz.touseef' bucket page with the 'Permissions' tab selected. A green notification bar at the top says 'Successfully edited bucket policy'. The 'Permissions overview' section includes an 'Access finding' link. The 'Block public access (bucket settings)' section shows 'Block all public access' is set to 'Off'. The 'Bucket policy' section displays the JSON policy and includes 'Edit' and 'Delete' buttons. A 'Copy' button is also present next to the policy JSON.

```
{
  "Version": "2012-10-17",
  "Id": "Policy1743916817707",
  "Statement": [
    {
      "Sid": "Stmt1743916798347",
      "Effect": "Allow",
      "Principal": "*",
      "Action": "s3:GetObject",
```





I love Coffee

Hello world!



Now to go Bucket Properties, and at the very last, you would see;

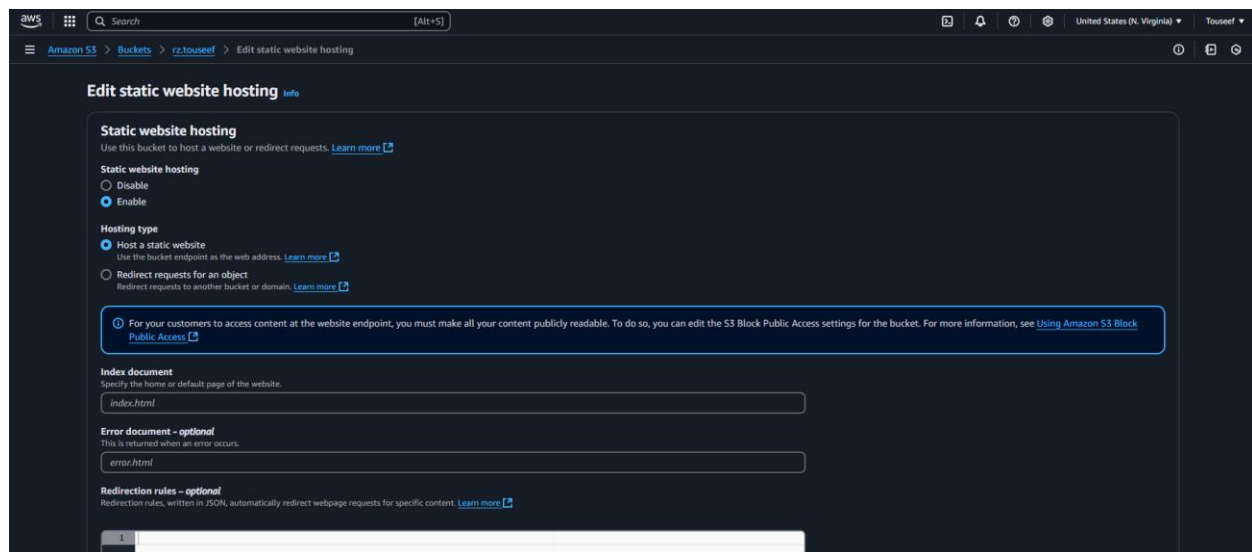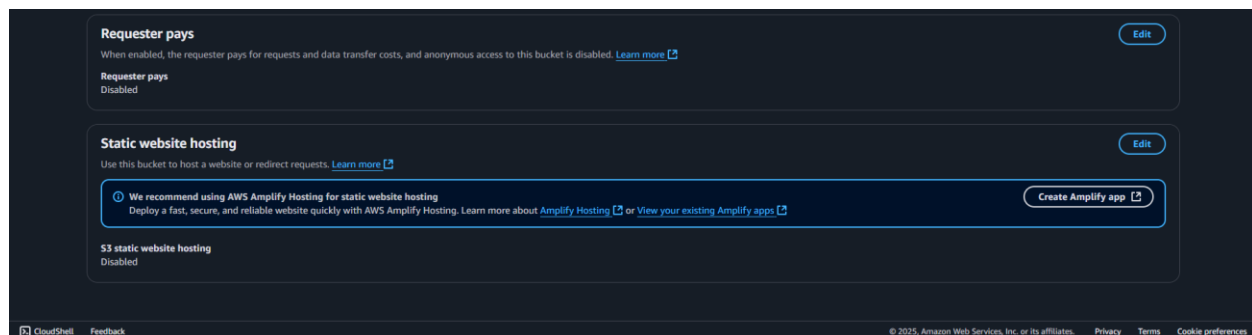

aws Search [Alt+S] United States (N. Virginia) Touseef

Amazon S3 Buckets rz.touseef

Successfully edited static website hosting.

Object Lock [Edit](#)
Store objects using a write-once-read-many (WORM) model to help you prevent objects from being deleted or overwritten for a fixed amount of time or indefinitely. Object Lock works only in versioned buckets. [Learn more](#)
Object Lock
Disabled

Requester pays [Edit](#)
When enabled, the requester pays for requests and data transfer costs, and anonymous access to this bucket is disabled. [Learn more](#)
Requester pays
Disabled

Static website hosting [Edit](#)
Use this bucket to host a website or redirect requests. [Learn more](#)
[We recommend using AWS Amplify Hosting for static website hosting](#)
Deploy a fast, secure, and reliable website quickly with AWS Amplify Hosting. [Learn more about Amplify Hosting](#) or [View your existing Amplify apps](#) [Create Amplify app](#)

S3 static website hosting
Enabled

Hosting type
Bucket hosting

Bucket website endpoint
When you configure your bucket as a static website, the website is available at the AWS Region-specific website endpoint of the bucket. [Learn more](#)
<http://rz.touseef.s3-website-us-east-1.amazonaws.com>

CloudShell Feedback © 2025, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

My First Webpage x +

Not secure | rz.touseef.s3-website-us-east-1.amazonaws.com

I love Coffee

Hello world!



Bucket Versioning [Edit](#)
Versioning is a means of keeping multiple variants of an object in the same bucket. You can use versioning to preserve, retrieve, and restore every version of every object stored in your Amazon S3 bucket. With versioning, you can easily recover from both unintended user actions and application failures. [Learn more](#)

Bucket Versioning
Disabled

Multi-factor authentication (MFA) delete
An additional layer of security that requires multi-factor authentication for changing Bucket Versioning settings and permanently deleting object versions. To modify MFA delete settings, use the AWS CLI, AWS SDK, or the Amazon S3 REST API. [Learn more](#)
Disabled

The screenshot shows the 'Edit Bucket Versioning' page in the AWS console. The breadcrumb trail is 'Amazon S3 > Buckets > rz.touseef > Edit Bucket Versioning'. The page title is 'Edit Bucket Versioning' with an 'Info' link. A section titled 'Bucket Versioning' explains that versioning keeps multiple variants of an object. Below this, the 'Bucket Versioning' section has two radio buttons: 'Suspend' and 'Enable'. The 'Enable' option is selected. A note below states: 'After enabling Bucket Versioning, you might need to update your lifecycle rules to manage previous versions of objects.' At the bottom, there is a 'Multi-factor authentication (MFA) delete' section, which is currently 'Disabled'. 'Cancel' and 'Save changes' buttons are at the bottom right.

The screenshot shows the 'Objects' page for the bucket 'rz.touseef'. The breadcrumb trail is 'Amazon S3 > Buckets > rz.touseef'. The page title is 'rz.touseef' with an 'Info' link. Below the title are tabs for 'Objects', 'Metadata', 'Properties', 'Permissions', 'Metrics', 'Management', and 'Access Points'. The 'Objects' tab is active. It shows a list of 4 objects: 'beach.jpg', 'coffee.jpg', 'index.html', and 'index.html'. Each object row includes a checkbox, name, type, version ID, last modified date, size, and storage class. The 'index.html' objects have version IDs: '.TV2kzRh8j6FIJht3IHRbEt4LDJxHxY' and 'null'. Action buttons like 'Copy S3 URI', 'Copy URL', 'Download', 'Open', 'Delete', 'Actions', 'Create folder', and 'Upload' are at the top. A search bar and 'Show versions' toggle are also present.

	Name	Type	Version ID	Last modified	Size	Storage class
☐	beach.jpg	jpg	null	April 6, 2025, 10:09:19 (UTC+05:00)	60.9 KB	Standard
☐	coffee.jpg	jpg	null	April 6, 2025, 10:09:19 (UTC+05:00)	63.4 KB	Standard
☐	index.html	html	.TV2kzRh8j6FIJht3IHRbEt4LDJxHxY	April 6, 2025, 10:48:07 (UTC+05:00)	170.0 B	Standard
☐	index.html	html	null	April 6, 2025, 10:09:20 (UTC+05:00)	172.0 B	Standard

The screenshot shows the 'Specify user details' page in the AWS console for creating a new IAM user. The breadcrumb trail is 'IAM > Users > Create user'. The page title is 'Specify user details'. On the left, there are three steps: 'Step 1: Specify user details' (selected), 'Step 2: Set permissions', and 'Step 3: Review and create'. The 'User details' section has a 'User name' field with the value 's3-touseef-cli'. A note below states: 'The user name can have up to 64 characters. Valid characters: A-Z, a-z, 0-9, and +, =, ., @, _ - (hyphen)'. There is a checkbox for 'Provide user access to the AWS Management Console - optional', which is currently unchecked. A note below this checkbox states: 'If you're providing console access to a person, it's a best practice to manage their access in IAM Identity Center.' At the bottom, there is a note about generating credentials for programmatic access. 'Cancel' and 'Next' buttons are at the bottom right.

aws [Search] [Alt+S] Global Touseef

IAM > Users > Create user

Step 1 Specify user details
Step 2 **Set permissions**
Step 3 Review and create

Set permissions

Add user to an existing group or create a new one. Using groups is a best-practice way to manage user's permissions by job functions. [Learn more](#)

Permissions options

- ☐ Add user to group
Add user to an existing group, or create a new group. We recommend using groups to manage user permissions by job function.
- ☐ Copy permissions
Copy all group memberships, attached managed policies, and inline policies from an existing user.
- ☒ **Attach policies directly**
Attach a managed policy directly to a user. As a best practice, we recommend attaching policies to a group instead. Then, add the user to the appropriate group.

Permissions policies (1/1336) [Create policy](#)

Choose one or more policies to attach to your new user.

Filter by Type: All types 16 matches

Policy name	Type	Attached entities
☐ AmazonDMSRedshiftS3Role	AWS managed	0
☒ AmazonS3FullAccess	AWS managed	0

aws [Search] [Alt+S] Global Touseef

IAM > Users > Create user

Step 1 Specify user details
Step 2 Set permissions
Step 3 **Review and create**

Review and create

Review your choices. After you create the user, you can view and download the autogenerated password, if enabled.

User details

User name s3-touseef-cli	Console password type None	Require password reset No
-----------------------------	-------------------------------	------------------------------

Permissions summary

Name	Type	Used as
AmazonS3FullAccess	AWS managed	Permissions policy

Tags - optional

Tags are key-value pairs you can add to AWS resources to help identify, organize, or search for resources. Choose any tags you want to associate with this user.

No tags associated with the resource.

[Add new tag](#)

You can add up to 50 more tags.

[Cancel](#) [Previous](#) [Create user](#)

aws [Search] [Alt+S] Global Touseef

Identity and Access Management (IAM)

[Search IAM](#)

Dashboard

Access management

- User groups
- Users**
- Roles
- Policies
- Identity providers
- Account settings

User created successfully

You can view and download the user's password and email instructions for signing in to the AWS Management Console. [View user](#)

Users (1) [Delete](#) [Create user](#)

An IAM user is an identity with long-term credentials that is used to interact with AWS in an account.

[Search](#)

User name	Path	Group	Last activity	MFA	Password age	Console last sign-in	Access key ID
☐ s3-touseef-cli	/	0	-	-	-	-	-

The screenshot shows the AWS IAM console interface. The left sidebar contains navigation links for Identity and Access Management (IAM), Access management, and Access reports. The main content area displays the details for the user **s3-touseef-cli**. The **Summary** tab is active, showing the user's ARN, creation date, and console access status. The **Permissions policies** tab is also visible, showing that the user has the **AmazonS3FullAccess** policy attached.

Summary

ARN: `arn:aws:iam::650946492862:user/s3-touseef-cli`

Created: April 06, 2025, 11:02 (UTC+05:00)

Console access: Disabled

Last console sign-in: -

Access key 1: [Create access key](#)

Permissions policies (1)

Permissions are defined by policies attached to the user directly or through groups.

Policy name	Type	Attached via
AmazonS3FullAccess	AWS managed	Directly

Permissions boundary (not set)

The screenshot shows the 'Create access key' wizard in the AWS IAM console. The current step is 'Access key best practices & alternatives'. The wizard provides guidance on using access keys and lists several use cases. The 'Command Line Interface (CLI)' use case is selected. The wizard also provides recommendations for alternatives to using long-term credentials.

Access key best practices & alternatives

Avoid using long-term credentials like access keys to improve your security. Consider the following use cases and alternatives.

Use case

- ☒ **Command Line Interface (CLI)**
You plan to use this access key to enable the AWS CLI to access your AWS account.
- ☐ **Local code**
You plan to use this access key to enable application code in a local development environment to access your AWS account.
- ☐ **Application running on an AWS compute service**
You plan to use this access key to enable application code running on an AWS compute service like Amazon EC2, Amazon ECS, or AWS Lambda to access your AWS account.
- ☐ **Third-party service**
You plan to use this access key to enable access for a third-party application or service that monitors or manages your AWS resources.
- ☐ **Application running outside AWS**
You plan to use this access key to authenticate workloads running in your data center or other infrastructure outside of AWS that needs to access your AWS resources.
- ☐ **Other**
Your use case is not listed here.

Alternatives recommended

- Use [AWS CloudShell](#), a browser-based CLI, to run commands. [Learn more](#)
- Use the [AWS CLI V2](#) and enable authentication through a user in IAM Identity Center. [Learn more](#)

Confirmation

☒ I understand the above recommendation and want to proceed to create an access key.

[Cancel](#) [Next](#)

The screenshot shows the 'Create access key' wizard in the AWS IAM console. The current step is 'Set description tag - optional'. The wizard prompts the user to provide a description for the access key, which will be used as a tag. The user can either provide a description or skip this step.

Set description tag - optional

The description for this access key will be attached to this user as a tag and shown alongside the access key.

Description tag value

Describe the purpose of this access key and where it will be used. A good description will help you rotate this access key confidently later.

Maximum 256 characters. Allowed characters are letters, numbers, spaces representable in UTF-8, and `._:/+=@`

[Cancel](#) [Previous](#) [Create access key](#)

