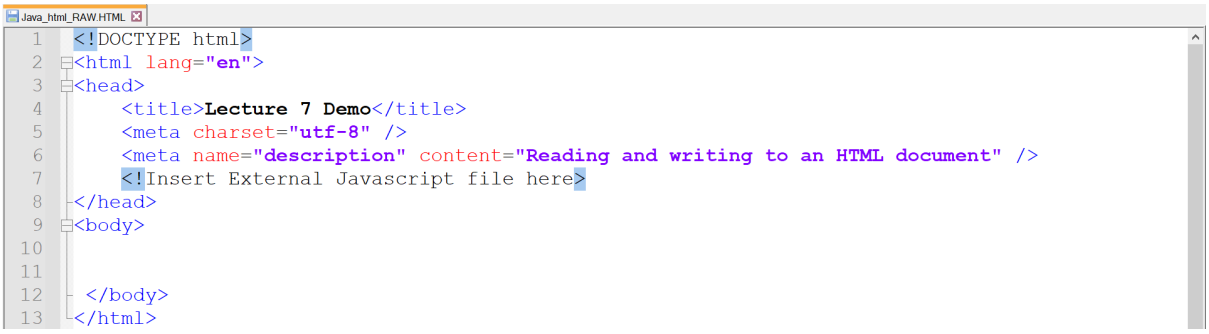
COS10005 – Web Development
Lecture 7 – JavaScript (Basic)

In this session, simple JavaScript will be introduced.
You may follow the instructions below, to format the HTML with the appropriate elements.
Let's start!

1. Please open the prepared HTML file (Java_html_RAW.HTML) in the zip folder.
2. Insert an External JavaScript file link under the comment in HTML:


Java_html_RAW.HTML

```
<!DOCTYPE html>
<html lang="en">
<head>
    <title>Lecture 7 Demo</title>
    <meta charset="utf-8" />
    <meta name="description" content="Reading and writing to an HTML document" />
    <!Insert External Javascript file here>
</head>
<body>


 </body>
</html>
```

External JavaScript file link statement: <script src="lect7_html.js"></script>

3. Now open a new notepad++ and save the file as **"lect7_html.js"**. The file name has to be same as External JavaScript file link statement: <script src="**lect7_html.js**"></script>

HTML

4. Insert a heading style inside the body tag.

```
<h1>Input and Output using JavaScript</h1>
```

5. Working on the first link to JavaScript. This script is to 'activate' the JavaScript to work on the functions.

```
<p>
<strong id="clickme" >Click me</strong> - to run 'prompt' and display 'alert'
</p>
```

6. This statement is to display the message from JavaScript after the process.

```
<p><span id="mymessage"></span></p>
```

JavaScript

7. Following is the comments method used in JavaScript file. Please insert the following comments.

```
/* Filename: lect7_html.js
   Purpose : demonstrate javascript alerts
   Target html: lect5_html_io.htm
   Author: Your Name
   Date written: today date
*/
/* getInputInfo retrieves text from the HTML text box then calls displayAlert */
//"use strict";
```

8. Calling the first function name init() by using window.load.

```
window.onload = init;      //note: no brackets after function name.
```

9. Create the first function name init().

```
function init() {



}
```

10. Inside this function, create a variable (var) which refer to the HTML file (object in HTML).

```
var clickme = document.getElementById("clickme");     //object in HTML
```

11. Response from HTML after visitor click the text 'clickme'. Insie this function, it calls another function by using "clickme.onclick: getInputInfor"

```
clickme.onclick = getInputInfo;
```

12. Create the second function name getInputInfor().

```
function getInputInfo() {




}
```

13. Create a local variable to use inside this function.

```
var myString;     //declare local variables
```


14. The following statement is to prompt a window dialogue for user to key in. The input will be stored in the variable name myString.

```
myString = prompt("Enter the string", "The string");
```

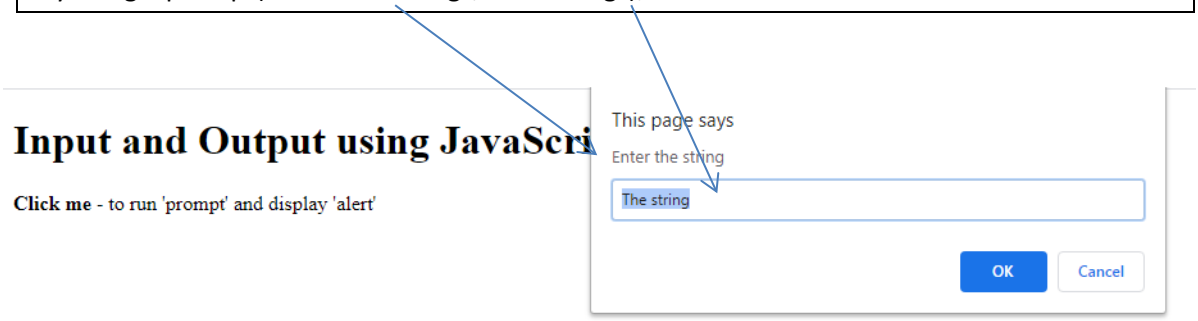

15. Alert statement is used to display an alert box with message and a OK button.

```
alert("Your output: " + myString);
```

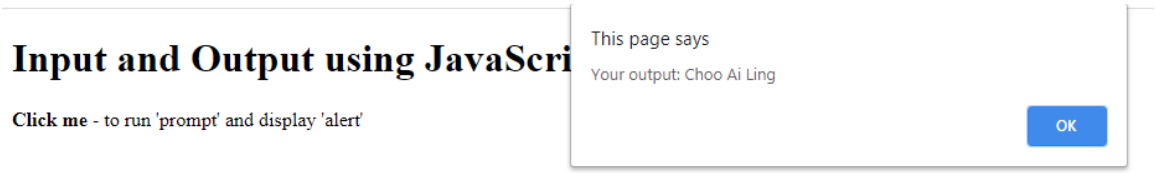

16. Use a DOM method to return the element that has the ID attribute with the specified value.

```
outputMessage = document.getElementById("mymessage"); //placeholder for display text
```

17. Lastly is to write the string to html page.

```
outputMessage.textContent="Your output: " + myString; //write string to html page
```

