

**EXPERIMENT No. 01: Triangle Problem-Boundary value Analysis**

- |                               |                               |
|-------------------------------|-------------------------------|
| 1.1 Objective                 | 1.5 Test cases                |
| 1.2 Requirement specification | 1.6 Execution                 |
| 1.3 Design                    | 1.7 Snapshots                 |
| 1.4 Program Code              | 1.8 Post-Experiment Questions |

**1.1 OBJECTIVE**

Design and develop a program in a language of your choice to solve the triangle problem defined as follows: Accept three integers which are supposed to be the three sides of a triangle and determine if the three values represent an equilateral triangle, isosceles triangle, scalene triangle, or they do not form a triangle at all. Assume that the upper limit for the size of any side is 10. Derive test cases for your program based on boundary-value analysis, execute the test cases and discuss the results.

**1.2 REQUIREMENT SPECIFICATION**

**R1.** The system should accept 3 positive integer numbers (a, b, c) which represents 3 sides of the triangle.

**R2.** Based on the input should determine if a triangle can be formed or not.

**R3.** If the requirement R2 is satisfied then the system should determine the type of the triangle, which can be

- Equilateral (i.e. all the three sides are equal)
- Isosceles (i.e Two sides are equal)
- Scalene (i.e All the three sides are unequal)

**R4.** Upper Limit for the size of any side is 10

**1.3 DESIGN****ALGORITHM:**

Step 1: Input a, b & c i.e three integer values which represent three sides of the triangle.

Step 2: if  $(a < (b + c))$  and  $(b < (a + c))$  and  $(c < (a + b))$  then do step 3

else

print not a triangle. do step 6

**Technique used: Boundary value analysis****1. Test Case design**

For BVA problem the test cases can be generation depends on the output and the constraints on the output. Here we least worried on the constraints on Input domain.

The Triangle problem takes 3 sides as input and checks it for validity, hence  $n = 3$ . Since BVA yields  $(4n + 1)$  test cases according to single fault assumption theory, hence we can say that the total number of test cases will be  $(4*3+1)=12+1=13$ .

The maximum limit of each sides a, b, and c of the triangle is 10 units according to requirement R4. So a, b and c lies between

$0 \leq a \leq 10$  $0 \leq b \leq 10$  $0 \leq c \leq 10$ **Equivalence classes for a:**

E1: Values less than 1.

E2: Values in the range.

E3: Values greater than 10.

**Equivalence classes for b:**

E4: Values less than 1.

E5: Values in the range.

E6: Values greater than 10.

**Equivalence classes for c:**

E7: Values less than 1.

E8: Values in the range.

E9: Values greater than 10.

From the above equivalence classes we can derive the following test cases using boundary value analysis approach.

## 1.4 PROGRAM CODE

```
#include<stdio.h>
#include<stdlib.h>
int main()
{
    int a,b,c;
    printf("Enter the three sides of traingle");
    scanf("%d%d%d",&a,&b,&c);
    if((a<1||a>10)||(b<1||b>10)||(c<1||c>10))
    {
        printf("Out of range values");
        exit(0);
    }
    if((a<b+c)&&(b<a+c)&&(c<a+b))
    {
        if((a==b)&&(b==c))
```

```

printf("Equilateral traingle");
else if((a!=b)&&(b!=c)&&(a!=c))
printf("Scalene traingle");
else
printf("Isosceles traingle");
}
else
printf("Traingle cannot be formed");
return 0;
}

```

## 1.5 TESTCASES

**Table-1: Test case for Triangle Problem**

Test Cases	Description	Inputs			Expected Output	Actual Output	Status
		A	B	C			
<b>BVA 1</b>	a(nom),b(nom) and c(min)	5	5	1	Isosceles		
<b>BVA 2</b>	a(nom),b(nom) and c(min+)	5	5	2	Isosceles		
<b>BVA 3</b>	a(nom),b(nom) and c(nom)	5	5	5	Equilateral		
<b>BVA 4</b>	a(nom),b(nom) and c(max-)	5	5	9	Isosceles		
<b>BVA 5</b>	a(nom),b(nom) and c(max)	5	5	10	Triangle cannot be formed		
<b>BVA 6</b>	a(nom),b(min) and c(nom)	5	1	5	Isosceles		
<b>BVA 7</b>	a(nom),b(min+) and c(nom)	5	2	5	Isosceles		
<b>BVA 8</b>	a(nom),b(max-) and c(nom)	5	9	5	Isosceles		
<b>BVA 9</b>	a(nom),b(max) and c(nom)	5	10	5	Triangle cannot be formed		
<b>BVA 10</b>	a(min),b(nom) and c(nom)	1	5	5	Isosceles		
<b>BVA 11</b>	a(min+),b(nom) and c(nom)	2	5	5	Isosceles		
<b>BVA 12</b>	a(max-),b(nom) and c(nom)	9	5	5	Isosceles		
<b>BVA 13</b>	a(max),b(nom) and c(nom)	10	5	5	Triangle cannot be formed		

## 1.6 EXECUTION:

Execute the program and test the test cases in Table-1 against program and complete the table with for Actual output column and Status column

Test Report:

- 1 No. of test cases Executed:
- 2 No. of Defects Raised:
- 3 No of test cases Passed:
- 4 No of test cases failed:

## 1.7 SNAPSHOTS

```
user@user-Vostro-2520:~/ST$ ./a.out
Enter three sides of the triangle
5 5 10
a=5 ,b=5 ,c=10
triangle cannot be formed
user@user-Vostro-2520:~/ST$ ./a.out
Enter three sides of the triangle
10 11 12
a=10 ,b=11 ,c=12
Out of range
user@user-Vostro-2520:~/ST$ ./a.out
Enter three sides of the triangle
-1 2 3
a=-1 ,b=2 ,c=3
Out of range
user@user-Vostro-2520:~/ST$ █
```

## 1.8 POST-EXPERIMENT QUESTIONS

1. What is an error?
2. What is the use of testing software?
3. What are the types of software testing?
4. What is boundary value analysis?
5. What is white box testing and list the types of white box testing?
6. What is black box testing? What are the different black box testing techniques?

**EXPERIMENT No. 02: Commission Problem-Boundary value Analysis**

2.1 Objective	2.5 Test cases
2.2 Requirement specification	2.6 Execution
2.3 Design	2.7 Snapshots
2.4 Program Code	2.8 Post-Experiment Questions

**2.1 OBJECTIVE**

Design, develop, code and run the program in any suitable language to solve the commission problem. Analyse it from the perspective of boundary value testing, derive different test cases, execute these test cases and discuss the test results.

**2.2 REQUIREMENT SPECIFICATION**

**Problem Definition:** The Commission Problem includes a salesperson in the former Arizona Territory sold rifle locks, stocks and barrels made by a gunsmith in Missouri. Cost includes

Locks- \$45

Stocks- \$30

Barrels- \$25

The salesperson had to sell at least one complete rifle per month and production limits were such that the most the salesperson could sell in a month was 70 locks, 80 stocks and 90 barrels.

After each town visit, the sales person sent a telegram to the Missouri gunsmith with the number of locks, stocks and barrels sold in the town. At the end of the month, the salesperson sent a very short telegram showing --1 lock sold. The gunsmith then knew the sales for the month were complete and computed the sales person's commission as follows:

On sales up to(and including) \$1000= 10% On

the sales up to(and includes) \$1800= 15% On

the sales in excess of \$1800= 20%

The commission program produces a monthly sales report that gave the total number of locks, stocks and barrels sold, the salesperson's total dollar sales and finally the commission

**2.3 DESIGN****ALGORITHM:**

STEP 1: Define lockPrice=45.0, stockPrice=30.0, barrelPrice=25.0

STEP2: Input locks

STEP3: while(locks!= -1) ,,input device uses -1 to indicate end of data goto STEP 12

STEP4:input (stocks, barrels)

STEP5: compute lockSales, stockSales, barrelSales and sales

STEP6: output("Total sales:" sales)

STEP7: if (sales > 1800.0) goto STEP 8 else goto STEP 9

STEP8: commission=0.10\*1000.0; commission=commission+0.15 \* 800.0;

commission =commission + 0.20 \* (sales-1800.0)

STEP9: if (sales > 1000.0) goto STEP 10 else goto STEP 11

STEP10: commission=0.10\* 1000.0; commission=commission + 0.15 \* (sales- 1000.0)

STEP11: Output (“Commission is \$”, commission)

STEP12: exit

## 2.4 PROGRAM CODE

```
#include<stdio.h>

int main()
{
    int locks,stocks,barrels,tlocks,tstocks,tbarrels;
    float lprice,sprice,bprice,sales=0,comm;
    int c1,c2,c3,temp;
    tlocks=0,tstocks=0,tbarrels=0;
    lprice=45.0,sprice=30.0,bprice=25.0;
    printf("Enter the number of locks and to exit the loop press -1\n");
    scanf("%d",&locks);
    while(locks!=-1)
    {
        c1=(locks<=0||locks>70);
        printf("Enter the number of stocks and barrels");
        scanf("%d%d",&stocks,&barrels);
        c2=(stocks<=0||stocks>80); c3=(barrels<=0||barrels>90);
        if(c1)
            printf("Value of locks not in range 1--70");
        else
        {
            temp=locks+tlocks; if(temp>70)
                printf("New value of locks = %d not in range 1--70",temp);
            else
        }
    }
```

```
tlocks=temp;
printf("Total locks = %d\n",tlocks);
if(c2)
printf("Value of stocks not in range 1--80");
else
{
    temp=stocks+tstocks;
    if(temp>80)
    printf("New value of stocks = %d not in range 1--80",temp);
    else
}
tstocks=temp;
printf("Total stocks = %d\n",tstocks);
if(c3)
printf("Value of barrels not in range 1--90");
else
{
    temp=barrels+tbarrels;
    if(temp>90)
    printf("New value of barrels = %d not in range 1--90",temp);
    else
}
tbarrels=temp;
printf("Total barrels = %d\n",tbarrels);
printf("Enter the number of locks and press -1 to exit the loop\n");
scanf("%d",&locks);
}
if(tlocks>0&&tstocks>0&&tbarrels>0)
{
    printf("Total locks = %d\nTotal stocks = %d\nTotal barrels = %d\n",tlocks,tstocks,tbarrels);
    sales=((tlocks*lprice)+(tstocks*sprice)+(tbarrels*bprice));
    printf("Total sales is %f\n",sales); if(sales>0)
```

```

{
    if(sales>1800)
    {
        comm=0.10*1000.0;
        comm=comm+0.15*800.0;
        comm=comm+0.20*(sales-1800);
    }
    else if(sales>1000)
    {
        comm=0.10*1000.0;
        comm=comm+0.15*(sales-1000);
    }
    else
        comm=0.10*sales; printf("Commission is %f \n",comm);
}
}
else
    printf("There is no sales\n");
return 0;
}

```

## 2.5 TESTCASES

Table-1: BVA Test case for Commission Problem

Test cases	Description	Inputs			Expected Output		Actual Output		Status
		Locks	Stocks	Barrels	Sales	Com	Sales	Com	
1	locks(nom), stocks(nom) and barrels(min)	35	40	1	2800	420			
2	locks(nom), stocks(nom) and barrels(min+)	35	40	2	2825	425			
3	locks(nom), stocks(nom) and barrels(nom)	35	40	45	3900	640			



4	locks(nom), stocks(nom) and barrels(max-)	35	40	89	5000	860			
5	locks(nom), stocks(nom) and barrels(max)	35	40	90	5025	865			
6	locks(nom), stocks(min) and barrels(nom)	35	1	45	2730	406			
7	locks(nom), stocks(min+) and barrels(nom)	35	2	45	2760	412			
8	locks(nom), stocks(max-) and barrels(nom)	35	79	45	5070	874			
9	locks(nom), stocks(max) and barrels(nom)	35	80	45	5100	880			
10	locks(min), stocks(nom) and barrels(nom)	1	40	45	2370	334			
11	locks(min+), stocks(nom) and barrels(nom)	2	40	45	2415	343			
12	locks(max-), stocks(nom) and barrels(nom)	69	40	45	5430	946			
13	locks(max), stocks(nom) and barrels(nom)	70	40	45	5475	955			

This is how we can apply BVA technique to create test cases for our Commission Problem.

## 2.6 EXECUTIONS

Execute the program and test the test cases in Table-1 against program and complete the table with for Actual output column and Status column.

### TEST REPORT:

1. No of TC's Executed:
2. No of Defects Raised:
3. No of TC's Pass:
4. No of TC's Failed:

## 2.7 SNAPSHOTS:

```

Enter the total number of locks
-1
values of locks not in the range of 1..70
user@user-Vostro-2520:~/ST$ ./a.out
Enter the total number of locks
1
Enter the total number of stocks
-1
values of stocks not in the range of 1..80
user@user-Vostro-2520:~/ST$ ./a.out
Enter the total number of locks
1
Enter the total number of stocks
1
Enter the total number of barrelss
-1
values of stocks not in the range of 1..80
user@user-Vostro-2520:~/ST$ ./a.out
Enter the total number of locks
80
values of locks not in the range of 1..70
user@user-Vostro-2520:~/ST$ ./a.out
Enter the total number of locks
70
Enter the total number of stocks
80
Enter the total number of barrelss
90
The total sales is 7800
The commission is 1420.000000
user@user-Vostro-2520:~/ST$ ./a.out
Enter the total number of locks
80
values of locks not in the range of 1..70
user@user-Vostro-2520:~/ST$ ./a.out
Enter the total number of locks
70
Enter the total number of stocks
90
values of stocks not in the range of 1..80
user@user-Vostro-2520:~/ST$
user-Vostro-2520: ~/Testing
user@user-Vostro-2520:~/Testing$ cc 2.c
user@user-Vostro-2520:~/Testing$ ./a.out
Enter the total number of locks
1
Enter the total number of stocks
1
Enter the total number of barrelss
1
The total sales is 100
The commission is 10.000000
user@user-Vostro-2520:~/Testing$ cc 2.c
user@user-Vostro-2520:~/Testing$ ./a.out
Enter the total number of locks
1
Enter the total number of stocks
1
Enter the total number of barrelss
2
The total sales is 125
The commission is 12.500000
user@user-Vostro-2520:~/Testing$

```

## 2.8 POST-EXPERIMENT QUESTIONS

1. What is Testing?
2. What is fault? Name types of faults
3. What is commission problem?
4. What is boundary value analysis?
5. What is debugging?

**EXPERIMENT No. 03: Next Date Function-Boundary value Analysis**

3.1 Objective	3.5 Test cases
3.2 Requirement specification	3.6 Execution
3.3 Design	3.7 Snapshots
3.4 Program Code	3.8 Post-experiment questions

**3.1 OBJECTIVE**

Design, develop, code and run the program in any suitable language to implement the NextDate function. Analyze it from the perspective of boundary value testing, derive different test cases, execute these test cases and discuss the test results.

**3.2 REQUIREMENT SPECIFICATION**

Problem Definition: "Next Date" is a function consisting of three variables like: month, date and year. It returns the date of next day as output. It reads current date as input date.

The constraints are

C1:  $1 \leq \text{month} \leq 12$

C2:  $1 \leq \text{day} \leq 31$

C3:  $1812 \leq \text{year} \leq 2012$ .

If any one condition out of C1, C2 or C3 fails, then this function produces an output "value of month not in the range 1...12".

Since many combinations of dates can exist, hence we can simply displays one message for this function: "Invalid Input Date".

A very common and popular problem occurs if the year is a leap year. We have taken into consideration that there are 31 days in a month. But what happens if a month has 30 days or even 29 or 28 days?

A year is called as a leap year if it is divisible by 4, unless it is a century year. Century years are leap years only if they are multiples of 400. So, 1992, 1996 and 2000 are leap years while 1900 is not a leap year.

**3.3 DESIGN****Algorithm**

STEP 1: Input date in format DD.MM.YYYY

STEP2: if MM is 01, 03, 05,07,08,10 do STEP3 else STEP6

STEP3:if DD < 31 then do STEP4 else if DD=31 do STEP5 else output(Invalid Date);

STEP4: tomorrowday=DD+1 goto STEP18

STEP5: tomorrowday=1; tommorowmonth=month + 1 goto STEP18

STEP6: if MM is 04, 06, 09, 11 do STEP7

STEP7: if DD<30 then do STEP4 else if DD=30 do STEP5 else output(Invalid Date);

STEP8: if MM is 12

STEP9: if DD<31 then STEP4 else STEP10

STEP10: tomorrowday=1, tommorowmonth=1, tommorowyear=YYYY+1; goto STEP18

STEP11: if MM is 2

STEP12: if DD<28 do STEP4 else do STEP13

STEP13: if DD=28 & YYYY is a leap do STEP14 else STEP15

STEP14: tomorrowday=29 goto STEP18

STEP15: tomorrowday=1, tommorowmonth=3, goto STEP18;

STEP16: if DD=29 then do STEP15 else STEP17

STEP17: output("Cannot have feb", DD); STEP19

STEP18: output(tomorrowday, tommorowmonth, tommorowyear);

STEP19: exit

### 3.4 PROGRAM CODE:

```
#include<stdio.h>
```

```
int check(int day,int month)
```

```
{
```

```
    if((month==4||month==6||month==9||month==11)&&day==31)
```

```
        return 1;
```

```
    else
```

```
        return 0;
```

```
}
```

```
int isleap(int year)
```

```
{
```

```
    if(((year%4==0)&&(year%100!=0))||(year%400==0))
```

```
        return 1;
```

```
    else
```

```
        return 0;
```

```
}
```

```
int main()
```

```
{
```

```
int day,month,year,tday,tmonth,tyear;
char flag;
do{
    flag='y';
    printf("Enter todays date in ddmmyy format\n");
    scanf("%d%d%d",&day,&month,&year);
    tmonth=month;
    tyear=year;
    if(day<1||day>31)
    {
        printf("Value of day not in range 1--31\n");
        flag='n';
    }
    if(month<1||month>12)
    {
        printf("Value of month not in range 1--12\n");
        flag='n';
    }
    else if(check(day,month))
    {
        printf("Value of day not in range <=30");
        flag='n';
    }
    if(year<1812||year>2018)
    {
        printf("Value of year not in range 1812--2018");
        flag='n';
    }
    if(month==2)
    {
        if(isleap(year)&&day>29)
        {
```

```
        printf("Invalid input for leap year");
        flag='n';
    }
    if(!isleap(year)&&day>28)
    {
        printf("Invalid input date for not a leap year");
        flag='n';
    }
}
}while(flag=='n');
switch(month)
{
    case 1:
    case 3:
    case 5:
    case 7:
    case 8:
    case 10: if(day<31)
        tday=day+1;
        else
        {
            tday=1;
            tmonth=month+1;
        }
        break;
    case 4:
    case 6:
    case 9:
    case 11: if(day<30)
        tday=day+1;
        else
        {
```

```
        tday=1;
        tmonth=month+1;
    }
    break;
case 12:if(day<31)
    tday=day+1;
    else
    {
        tday=1;
        tmonth=1;
        if(year==2018)
        {
            printf("Next year is out of boundary value of year");
        }
        else
        tyear=year+1;
    }
    break;
case 2: if(day<28)
    tday=day+1;
    else if(isleap(year)&&day==28)
    tday=day+1;
    else if(day==28||day==29)
    {
        tday=1;
        tmonth=3;
    }
    break;
}

printf("Next day is %d/%d/%d\n",tday,tmonth,tyear);
return 0;
}
```

### 3.5 TESTCASES

Technique used: Boundary value analysis

Table-1: Test case for Next Date Problem

Test cases	Description	Inputs			Output	Status
		DD	MM	YY		
1	day(nom),month(nom) and year(min)	15	6	1812	16/6/1812	
2	day(nom),month(nom) and year(min+)	15	6	1813	16/6/1813	
3	day(nom),month(min) and year(nom)	15	6	1912	16/6/1912	
4	day(nom),month(nom) and year(max-)	15	6	2011	16/6/2011	
5	day(nom),month(nom) and year(max)	15	6	2012	16/6/2012	
6	day(nom),month(min) and year(nom)	15	1	1912	16/1/1912	
7	day(nom),month(min+) and year(nom)	15	2	1912	16/2/1912	
8	day(nom),month(max-) and year(nom)	15	11	1912	16/11/1912	
9	day(nom),month(max) and year(nom)	15	12	1912	16/12/1912	
10	day(min),month(nom) and year(nom)	1	6	1912	2/6/1912	
11	day(min+),month(nom) and year(nom)	2	6	1912	3/6/1912	
12	day(max-),month(nom) and year(nom)	30	6	1912	1/7/1912	
13	day(max),month(nom) and year(nom)	31	6	1912	Day out of range for the month	

This is how we can apply BA technique to create test cases for our Next Date Problem.

### 3.6 EXECUTIONS



Execute the program and test the test cases in Table-1 against program and complete the table with for Actual output column and Status column

### Test Report:

1. No of TC"s Executed:
2. No of Defects Raised:
3. No of TC"s Pass:
4. No of TC"s Failed:

### 3.7 SNAPSHOTS:

```
File Edit View Search Terminal Help
user@user-Vostro-2520:~/Testing$ cc nextDate3.c
user@user-Vostro-2520:~/Testing$ ./a.out

Enter the today's date in the form of dd mm yyyy
32 03 2000
Value of day, not in the range 1...31

Enter the today's date in the form of dd mm yyyy
15 11 2000
Given date is : 15:11:2000
Next day is : 16:11:2000
user@user-Vostro-2520:~/Testing$ cc nextDate3.c
user@user-Vostro-2520:~/Testing$ ./a.out

Enter the today's date in the form of dd mm yyyy
15 2 2000
Given date is : 15:2:2000
Next day is : 16:2:2000
user@user-Vostro-2520:~/Testing$ █
```

### 3.8 POST-EXPERIMENT QUESTIONS

1. Differentiate between Functional Testing and Structural Testing.
2. What are the conditions for next date problem?
3. What is the test case?
4. What is glass box testing?
5. What is the procedure for manual testing?

**EXPERIMENT No. 04: Triangle Problem-Equivalence Class Partitioning**

- |                               |                               |
|-------------------------------|-------------------------------|
| 4.1 Objective                 | 4.5 Test cases                |
| 4.2 Requirement specification | 4.6 Execution                 |
| 4.3 Design                    | 4.7 Snapshots                 |
| 4.4 Program Code              | 4.8 Post-experiment questions |

**4.1 Objective:**

Design and develop a program in a language of your choice to solve the triangle problem defined as follows: Accept three integers which are supposed to be the three sides of a triangle and determine if the three values represent an equilateral triangle, isosceles triangle, scalene triangle, or they do not form a triangle at all. Assume that the upper limit for the size of any side is 10. Derive test cases for your program based on equivalence class partitioning, execute the test cases and discuss the results.

**4.2 Requirement Specification:**

**R1.** The system should accept 3 positive integer numbers (a, b, c) which represents 3 sides of the triangle.

**R2.** Based on the input should determine if a triangle can be formed or not.

**R3.** If the requirement R2 is satisfied then the system should determine the type of the triangle, which can be

- Equilateral (i.e. all the three sides are equal)
- Isosceles (i.e. two sides are equal)
- Scalene (i.e. All the three sides are unequal)

**R4.** Upper Limit for the size of any side is 10

**4.3 DESIGN**

Form the given requirements we can draw the following conditions:

**C1:**  $a < b + c$ ?

**C2:**  $b < a + c$ ?

**C3:**  $c < a + b$ ?

**C4:**  $a = b$ ?

**C5:**  $a = c$ ?

**C6:**  $b = c$ ?

According to the property of the triangle, if any one of the three conditions C1, C2 and C3 are not satisfied then triangle cannot be constructed. So only when C1, C2 and C3 are true the triangle can be formed, then depending on conditions C4, C5 and C6 we can decide what type of triangle will be formed. (i.e requirement R3).

**ALGORITHM:**

STEP 1: input a, b & c i.e three integer values which represent three sides of the triangle.

STEP 2: if  $(a < (b + c))$  and  $(b < (a + c))$  and  $(c < (a + b))$  then

do STEP 3

else

print not a triangle. Do STEP 6.

STEP 3: if  $(a=b)$  and  $(b=c)$  then

print triangle formed is equilateral. Do STEP 6.

STEP 4: if  $(a \neq b)$  and  $(a \neq c)$  and  $(b \neq c)$  then

print triangle formed is scalene. Do STEP 6.

STEP 5: print triangle formed is isosceles.

STEP 6: stop

**4.4 PROGRAM CODE**

```
#include<stdio.h>
#include<stdlib.h>
int main()
{
    int a,b,c;
    printf("Enter the three sides of traingle");
    scanf("%d%d%d",&a,&b,&c);
    if((a<1||a>10)||(b<1||b>10)||(c<1||c>10))
    {
        printf("Out of range values");
        exit(0);
    }
    if((a<b+c)&&(b<a+c)&&(c<a+b))
    {
        if((a==b)&&(b==c))
            printf("Equilateral traingle");
        else
            if((a!=b)&&(b!=c)&&(a!=c))
                printf("Scalene traingle");
```

```

        else
            printf("Isosceles traingle");
    }
    else
        printf("Traingle cannot be formed");
    return 0;
}

```

## 4.5 TESTCASES

**Table-1:** Weak Normal and Strong normal equivalence Test case for Triangle Problem

TC Id	Test Case Description	Input Data			Expected Output	Actual Output	Status
		A	B	C			
1	Three sides are different	3	4	5	Scalene	Scalene	Pass
2	All Values are same	5	5	5	Equilateral	Equilateral	Pass
3	Two sides are same, one side is different	2	5	5	Isosceles	Isosceles	Pass
4	Value of a=10, b=5, c=5	10	5	5	Triangle cannot be formed	Triangle cannot be formed	Pass

### Second attempt

The strong normal equivalence class test cases can be generated by using following possibilities:

D1 = {<a, b, c>: a=b=c}

D2 = {<a, b, c>: a=b, a≠c}

D3= {<a, b, c>: a=c, a≠b}

D4 = {<a, b, c>: b=c, a≠b}

D5 = {<a, b, c>: a≠b, a≠c, b≠c}

D6 = {<a, b, c>: a≥b+c}

D7 = {<a, b, c>: b≥a+c}

D8 = {<a, b, c>: c≥a+b}

**Table-2** Weak Robust Test case for Triangle Problem

TC Id	Test Case Description	Input Data			Expected Output	Actual Output	Status
		A	B	C			
1	Since $a > 10$ the values of one variable is greater than the range	11	3	2	Out of range	Out of range	Pass
2	Since $b > 10$ the values of one variable is greater than the range	3	11	2	Out of range	Out of range	Pass
3	Since $c > 10$ the values of one variable is greater than 10	3	2	11	Out of range	Out of range	Pass
4	Since $a < 1$ the value of one variable is lesser than the range	0	4	5	Out of range	Out of range	Pass
5	Since $b < 1$ the value of one variable is lesser than the range	4	0	5	Out of range	Out of range	Pass
6	Since $c < 1$ the value of one variable is lesser than the range	4	5	0	Out of range	Out of range	Pass

**Table-3:** Strong Robust Test case for Triangle Problem

TC Id	Test Case Description	Input Data			Expected Output	Actual Output	Status
		A	B	C			
1	Since $a, b > 10$ the values of two variables is greater than the range	11	11	5	Out of range	Out of range	Pass
2	Since $b, c > 10$ the values of two variables is greater than the range	5	11	11	Out of range	Out of range	Pass
3	Since $a, c > 10$ the values of two variables is greater than range	11	5	11	Out of range	Out of range	Pass
4	Since $a, b < 0$ the value of two variables is lesser than the range	0	0	5	Out of range	Out of range	Pass

5	Since b, c < 0 the value of two variables is lesser than the range	5	0	0	Out of range	Out of range	Pass
6	Since a, c < 0 the value of two variables is lesser than the range	0	5	0	Out of range	Out of range	Pass
7	Since all the values greater than 10 i.e greater than the range	11	11	11	Out of range	Out of range	Pass
8	Since all the values lesser than 0 i.e lesser than the range	0	0	0	Out of range	Out of range	Pass

#### 4.6 EXECUTION:

Execute the program and test the test cases in Table-1, Table-2 and Table-3 against program and complete the table with for Actual output column and Status column

##### Test Report

1. No of TC's Executed:
2. No of Defects Raised:
3. No of TC's Pass:
4. No of TC's Failed:

#### 4.7 SNAPSHOTS:

```

user-Vostro-2520: ~/Testing
user@user-Vostro-2520:~/Testing$ cc 4.c
user@user-Vostro-2520:~/Testing$ ./a.out
Enter three sides of the triangle
5 5 5
a=5 ,b=5 ,c=5
Equilateral triangle
user@user-Vostro-2520:~/Testing$ cc 4.c
user@user-Vostro-2520:~/Testing$ ./a.out
Enter three sides of the triangle
2 2 3
a=2 ,b=2 ,c=3
Isosceles triangle
user@user-Vostro-2520:~/Testing$ cc 4.c
user@user-Vostro-2520:~/Testing$ ./a.out
Enter three sides of the triangle
3 4 5
a=3 ,b=4 ,c=5
Scalene triangle
user@user-Vostro-2520:~/Testing$ █

```

## 4.8 POST-EXPERIMENT QUESTIONS

1. What is equivalence partitioning?
2. What is black box testing?
3. What are the different black box testing techniques?
4. What is Non-Functional Testing?
5. What is Functional Testing?

**EXPERIMENT No. 05: Commission Problem-Equivalence Class Partitioning**

- |                               |                               |
|-------------------------------|-------------------------------|
| 5.1 Objective                 | 5.5 Test cases                |
| 5.2 Requirement specification | 5.6 Execution                 |
| 5.3 Design                    | 5.7 Snapshots                 |
| 5.4 Program Code              | 5.8 Post-experiment questions |

**5.1 OBJECTIVES**

Design, develop, code and run the program in any suitable language to solve the commission problem. Analyze it from the perspective of equivalence class testing, derive different test cases, execute these test cases and discuss the test results.

**5.2 REQUIREMENT SPECIFICATION**

**Problem Definition:** The Commission Problem includes a salesperson in the former Arizona Territory sold rifle locks, stocks and barrels made by a gunsmith in Missouri. Cost includes

Locks- \$45

Stocks- \$30

Barrels- \$25

The salesperson had to sell at least one complete rifle per month and production limits were such that the most the salesperson could sell in a month was 70 locks, 80 stocks and 90 barrels.

After each town visit, the sales person sent a telegram to the Missouri gunsmith with the number of locks, stocks and barrels sold in the town. At the end of the month, the salesperson sent a very short telegram showing --1 lock sold. The gunsmith then knew the sales for the month were complete and computed the sales person's commission as follows:

On sales up to(and including) \$1000= 10% On

the sales up to(and includes) \$1800= 15% On

the sales in excess of \$1800= 20%

The commission program produces a monthly sales report that gave the total number of locks, stocks and barrels sold, the sales person's total dollar sales and finally the commission.

**5.3 DESIGN****Algorithm**

STEP 1: Define lockPrice=45.0, stockPrice=30.0, barrelPrice=25.0

STEP2: Input locks

STEP3: while(locks!= -1) „input device uses -1 to indicate end of data goto STEP12

STEP4:input (stocks, barrels)

STEP5: compute lockSales, stockSales, barrelSales and sales

STEP6: output(“Total sales:” sales)



STEP7: if (sales > 1800.0) goto STEP 8 else goto STEP 9

STEP8:commission=0.10\*1000.0;commission=commission+0.15\*800.0;**commissio**=commission+0.20 \* (sales-1800.0)

STEP9: if (sales > 1000.0) goto STEP 10 else goto STEP 11

STEP10: commission=0.10\* 1000.0; commission=commission + 0.15 \* (sales-1000.0)

STEP11: Output("Commission is \$", commission)

STEP12: exit

## 5.4 PROGRAM CODE

```
#include<stdio.h>
```

```
int main()
```

```
{
```

```
    int locks,stocks,barrels,tlocks,tstocks,tbarrels;
```

```
    float lprice,sprice,bprice,sales=0,comm;
```

```
    int c1,c2,c3,temp;
```

```
    tlocks=0,tstocks=0,tbarrels=0;
```

```
    lprice=45.0,sprice=30.0,bprice=25.0;
```

```
    printf("Enter the number of locks and to exit the loop press -1\n");
```

```
    scanf("%d",&locks);
```

```
    while(locks!=-1)
```

```
    {
```

```
        c1=(locks<=0||locks>70);
```

```
        printf("Enter the number of stocks and barrels");
```

```
        scanf("%d%d",&stocks,&barrels);
```

```
        c2=(stocks<=0||stocks>80);
```

```
        c3=(barrels<=0||barrels>90);
```

```
        if(c1)
```

```
            printf("Value of locks not in range 1--70");
```

```
        else
```

```
        {
```

```
            temp=locks+tlocks;
```

```
            if(temp>70)
```

```
                printf("New value of locks = %d not in range 1--70",temp);
```

```
        else
            tlocks=temp;
    }
    printf("Total locks = %d\n",tlocks);
    if(c2)
        printf("Value of stocks not in range 1--80");
    else
    {
        temp=stocks+tstocks;
        if(temp>80)
            printf("New value of stocks = %d not in range 1--80",temp);
        else
            tstocks=temp;
    }
    printf("Total stocks = %d\n",tstocks);
    if(c3)
        printf("Value of barrels not in range 1--90");
    else
    {
        temp=barrels+tbarrels;
        if(temp>90)
            printf("New value of barrels = %d not in range 1--90",temp);
        else
            tbarrels=temp;
    }
    printf("Total barrels = %d\n",tbarrels);
    printf("Enter the number of locks and press -1 to exit the loop\n");
    scanf("%d",&locks);
}
if(tlocks>0&&tstocks>0&&tbarrels>0)
{

    printf("Totallocks=%d\nTotalstocks=%d\nTotalbarrels=%d\n",tlocks,tstocks,tbarrels);
```

```
sales=((tlocks*lprice)+(tstocks*sprice)+(tbarrels*bprice));
printf("Total sales is %f\n",sales);
if(sales>0)
{
    if(sales>1800)
    {
        comm=0.10*1000.0;
        comm=comm+0.15*800.0;
        comm=comm+0.20*(sales-1800);
    }
    else if(sales>1000)
    {
        comm=0.10*1000.0;
        comm=comm+0.15*(sales-1000);
    }
    else
        comm=0.10*sales;
    printf("Commission is %f \n",comm);
}
else
printf("There is no sales\n");
return 0;
}
```

## 5.5 TESTCASES:

**First attempt:**

**Weak robust test cases.**

TC Id	Test Case Description	Input Data			Expected Output		Actual Output		Status
		Locks	Stocks	Barrels	Sales	Commission	Sales	Commission	
1	When lock=-1	-1	40	45	Terminates out of loop				
2	When all values are within range	30	40	45	3675	595			
3	Locks out of range	-2	40	45	No sales	No commission			
4	Stocks out of range	35	-2	45	No sales	No commission			
5	Barrels out of range	35	40	-2	No sales	No commission			
6	Locks out of range	71	40	45	No sales	No commission			
7	Stocks out of range	35	81	45	No sales	No commission			
8	Barrels out of range	35	40	91	No sales	No commission			

**Second attempt:**

**Strong robust equivalence class test cases**

TC Id	Test Case Description	Input Data			Expected Output		Actual Output		Status
		Locks	Stocks	Barrels	Sales	Commission	Sales	Commission	
1	Locks & stocks out of range	-2	-2	45	No sales	No commission			
2	Stocks & barrels out of range	35	-2	-2	No sales	No commission			
3	Locks & Barrels out of range	-2	40	-2	No sales	No commission			

4	Locks & Barrels out of range	71	40	91	No sales	No commission			
5	Stocks & barrels out of range	35	81	91	No sales	No commission			
6	Locks & Stocks out of range	71	81	45	No sales	No commission			
7	Locks , Stocks & barrels out of range	-2	-2	-2	No sales	No commission			
8	Locks , Stocks & barrels out of range	71	81	91	No sales	No commission			

### Weak Normal & Strong Normal

TC Id	Test CaseDescription	Input Data			Expected Output		Actual Output		Status
		Locks	Stocks	Barrels	Sales	Commission	Sales	Commission	
1	All normal values for locks, stocks & barrels	35	40	45	3900	640			

## 5.6 EXECUTION

Execute the program and test the test cases in Table-1 against program and complete the table with for Actual output column and Status column

### Test Report:

1. No of TC"s Executed:
2. No of Defects Raised:
3. No of TC"s Pass:
4. No of TC"s Failed:

## 5.7 SNASHOTS

```

Enter the total number of locks
-1
values of locks not in the range of 1..70
user@user-Vostro-2520:~/ST$ ./a.out
Enter the total number of locks
1
Enter the total number of stocks
-1
values of stocks not in the range of 1..80
user@user-Vostro-2520:~/ST$ ./a.out
Enter the total number of locks
1
Enter the total number of stocks
1
Enter the total number of barrelss
-1
values of stocks not in the range of 1..80
user@user-Vostro-2520:~/ST$ ./a.out
Enter the total number of locks
80
values of locks not in the range of 1..70
user@user-Vostro-2520:~/ST$ ./a.out
Enter the total number of locks
70
Enter the total number of stocks
80
Enter the total number of barrelss
90
The total sales is 7800
The commission is 1420.000000
user@user-Vostro-2520:~/ST$ ./a.out
Enter the total number of locks
80
values of locks not in the range of 1..70
user@user-Vostro-2520:~/ST$ ./a.out
Enter the total number of locks
70
Enter the total number of stocks
90
values of stocks not in the range of 1..80
user@user-Vostro-2520:~/ST$ █

```

## 5.8 POST-EXPERIMENT QUESTIONS

1. What is an error?
2. What is a failure?
3. What is weak robust and strong robust ?
4. What is the difference between weak normal and strong normal?
5. How we perform equivalence class partitioning?

**EXPERIMENT No. 06: NextDate Function-Equivalence Class Value**

- |                               |                               |
|-------------------------------|-------------------------------|
| 6.1 Objective                 | 6.5 Test cases                |
| 6.2 Requirement specification | 6.6 Execution                 |
| 6.3 Design                    | 6.7 Snapshots                 |
| 6.4 Program Code              | 6.8 Post-experiment questions |

**6.1 OBJECTIVES:**

Design, develop, code and run the program in any suitable language to implement the NextDate function. Analyse it from the perspective of equivalence class value testing, derive different test cases, execute these test cases and discuss the test results.

**6.2 REQUIREMENT SPECIFICATION**

**Problem Definition:** "Next Date" is a function consisting of three variables like: month, date and year. It returns the date of next day as output. It reads current date as input date.

The constraints are

C1:  $1 \leq \text{month} \leq 12$

C2:  $1 \leq \text{day} \leq 31$

C3:  $1812 \leq \text{year} \leq 2012$ .

If any one condition out of C1, C2 or C3 fails, then this function produces an output "value of month not in the range 1...12".

Since many combinations of dates can exist, hence we can simply displays one message for this function: "Invalid Input Date".

A very common and popular problem occurs if the year is a leap year. We have taken into consideration that there are 31 days in a month. But what happens if a month has 30 days or even 29 or 28 days ?

A year is called as a leap year if it is divisible by 4, unless it is a century year. Century years are leap years only if they are multiples of 400. So, 1992, 1996 and 2000 are leap years while 1900 is not a leap year.

Furthermore, in this Next Date problem we find examples of Zipf's law also, which states that "**80% of the activity occurs in 20% of the space**". Thus in this case also, much of the source code of Next Date function is devoted to the leap year considerations.

**6.3 DESIGN****Algorithm**

STEP 1: Input date in format DD.MM.YYYY

STEP2: if MM is 01, 03, 05, 07, 08, 10 do STEP3 else STEP6

STEP3: if DD < 31 then do STEP4 else if DD=31 do STEP5 else output(Invalid Date);

STEP4: tomorrowday=DD+1 goto STEP18

STEP5: tomorrowday=1; tomorrowmonth=month + 1 goto STEP18

STEP6: if MM is 04, 06, 09, 11 do STEP7

STEP7: if DD<30 then do STEP4 else if DD=30 do STEP5 else output(Invalid Date);

STEP8: if MM is 12

STEP9: if DD<31 then STEP4 else STEP10

STEP10: tomorrowday=1, tomorrowmonth=1, tomorrowyear=YYYY+1; goto STEP18

STEP11: if MM is 2

STEP12: if DD<28 do STEP4 else do STEP13

STEP13: if DD=28 & YYYY is a leap do STEP14 else STEP15

STEP14: tomorrowday=29 goto STEP18

STEP15: tomorrowday=1, tomorrowmonth=3, goto STEP18;

STEP16: if DD=29 then do STEP15 else STEP17

STEP17: output("Cannot have feb", DD); STEP19

STEP18: output(tomorrowday, tomorrowmonth, tomorrowyear);

STEP19: exit

## 6.4 PROGRAM CODE:

```
#include<stdio.h>

int check(int day,int month)
{
    if((month==4||month==6||month==9||month==11)&&day==31)
        return 1;
    else
        return 0;
}

int isleap(int year)
{
    if(((year%4==0)&&(year%100!=0))||(year%400==0))
        return 1;
    else
        return 0;
}
```



```
}  
int main()  
{  
    int day,month,year,tday,tmonth,tyear;  
    char flag;  
    do{  
        flag='y';  
        printf("Enter todays date in ddmmyy format\n");  
        scanf("%d%d%d",&day,&month,&year);  
        tmonth=month;  
        tyear=year;  
        if(day<1||day>31)  
        {  
            printf("Value of day not in range 1--31\n");  
            flag='n';  
        }  
        if(month<1||month>12)  
        {  
            printf("Value of month not in range 1--12\n");  
            flag='n';  
        }  
        else if(check(day,month))  
        {  
            printf("Value of day not in range <=30");  
            flag='n';  
        }  
        if(year<1812||year>2012)  
        {  
            printf("Value of year not in range 1812--2012");  
            flag='n';  
        }  
        if(month==2)
```

```
        {
            if(isleap(year)&&day>29)
            {
                printf("Invalid input for leap year");
                flag='n';
            }
            if(!isleap(year)&&day>28)
            {
                printf("Invalid input date for not a leap year");
                flag='n';
            }
        }
    }while(flag=='n');
    switch(month)
    {
        case 1:
        case 3:
        case 5:
        case 7:
        case 8:
        case 10: if(day<31)
            tday=day+1;
        else
        {
            tday=1;
            tmonth=month+1;
        }
        break;
        case 4:
        case 6:
        case 9:
        case 11: if(day<30)
```

```
        tday=day+1;
    else
    {
        tday=1;
        tmonth=month+1;
    }
    break;
case 12:if(day<31)
    tday=day+1;
    else
    {
        tday=1;
        tmonth=1;
        if(year==2012)
        {
            printf("Next year is out of boundary value of year");
        }
        else
            tyear=year+1;
    }
    break;
case 2: if(day<28)
    tday=day+1;
    else if(isleap(year)&&day==28)
    tday=day+1;
    else if(day==28||day==29)
    {
        tday=1;
        tmonth=3;
    }
    break;
}
```

```

printf("Next day is %d/%d/%d\n",tday,tmonth,tyear);

return 0;

}

```

## 6.5 TEST CASE

The NextDate function is a function which will take in a date as input and produces as output the next date in the Georgian calendar. It uses three variables (month, day and year) which each have valid and invalid intervals.

**Table 1: Valid Case**

TC Id	Test Case Description	Input Data			ExpectedOutput	Actual Output	Status
		DD	MM	YYYY			
1	Valid case	15	6	1912	16/6/1912		

### Weak Robust

TC Id	Test Case Description	Input Data			Expected Output	ActualOutput	Status
		DD	MM	YYYY			
1	Valid Range	15	6	1912	16/6/1912		
2	Invalid Date	-1	6	1912	Day Not In Range		
3	Invalid Month	15	-1	1912	Month Not InRange		
4	Invalid Year	15	6	1911	Year Not In Range		
5	Invalid Date	32	6	1912	Day Not In Range		
6	Invalid Month	15	13	1912	Month Not InRange		
7	Invalid Year	15	6	2013	year not in range		

**Strong Robust**

TC Id	Test Case Description	Input Data			ExpectedOutput	Actual Output	Status
		DD	MM	YYYY			
1	Invalid date & month	-1	-1	1912	Not in range		
2	Invalid date & year	-1	6	-1	Not in range		
3	Invalid month & year	15	-1	-1	Not in range		
4	Invalid date & month	32	13	1912	Not in range		
5	Invalid date & year	32	6	2013	Not in range		
6	Invalid month & year	15	13	2013	Not in range		
7	Invalid date, month & year	-1	-1	-1	Not in range		
8	Invalid date, month & year	32	13	2013	Not in range		

**Strong Normal**

TC ID	Test Case Description	Input Data			Expected Output	Actual Output	Status
		DD	MM	YYYY			
1	Valid Condition	14	6	2000	15/6/2000		
2	Valid Input	14	6	1996	15/6/1996		
3	Valid Input	15	2	1996	15/2/1996		
4	Valid Input	14	2	2000	15/2/2000		
5	Valid Input	15	6	1912	16/6/1912		

**Weak Normal**

TC Id	Test Case Description	Input Data			Expected Output	ActualOutput	Status
		DD	MM	YYYY			
1	Valid Condition	14	6	2000	15/6/2000		
2	Valid Input	29	7	1996	30/7/1996		
3	Invalid Date	30	2	2002	Not In Range		
4	Invalid date	31	6	2000	Not In Range		

**6.6 EXECUTIONS**

Execute the program and test the test cases in Table-1 against program and complete the table with for Actual output column and Status column

**Test Report:**

1. No of TC's Executed:
2. No of Defects Raised:
3. No of TC's Pass:
4. No of TC's Failed:

**6.7 SNAPSHOTS:**

```
File Edit View Search Terminal Help
user@user-Vostro-2520:~/Testing$ cc nextDate6.c
user@user-Vostro-2520:~/Testing$ ./a.out

Enter the today's date in the form of dd mm yyyy
14 06 2000
Given date is : 14:6:2000
Next day is : 15:6:2000
user@user-Vostro-2520:~/Testing$ cc nextDate6.c
user@user-Vostro-2520:~/Testing$ ./a.out

Enter the today's date in the form of dd mm yyyy
29 07 1996
Given date is : 29:7:1996
Next day is : 30:7:1996
user@user-Vostro-2520:~/Testing$ cc nextDate6.c
user@user-Vostro-2520:~/Testing$ ./a.out

Enter the today's date in the form of dd mm yyyy
31 06 2000
Value of day, not in the range day<=30
Enter the today's date in the form of dd mm yyyy
29 07 2002
Given date is : 29:7:2002
Next day is : 30:7:2002
user@user-Vostro-2520:~/Testing$ █
```

## 6.8 POST-EXPERIMENT QUESTIONS

1. What is equivalence partitioning?
2. What is black box testing?
3. What are the different black box testing techniques?
4. What is Non-Functional Testing?
5. What is Functional Testing?

**EXPERIMENT No. 07: Triangle Problem-Decision Table Approach**

7.1 Objective	7.5 Test cases
7.2 Requirement specification	7.6 Execution
7.3 Design	7.7 Snapshots
7.4 Program Code	7.8 Post-experiment questions

**7.1 OBJECTIVES**

Design and develop a program in a language of your choice to solve the triangle problem defined as follows: Accept three integers which are supposed to be the three sides of a triangle and determine if the three values represent an equilateral triangle, isosceles triangle, scalene triangle, or they do not form a triangle at all. Derive test cases for your program based on decision-table approach, execute the test cases and discuss the results.

**7.2 REQUIREMENT SPECIFICATION**

R1. The system should accept 3 positive integer numbers (a, b, c) which represents 3 sides of the triangle. Based on the input it should determine if a triangle can be formed or not.

R2. If the requirement R1 is satisfied then the system should determine the type of the triangle, which can be

- Equilateral (i.e. all the three sides are equal)
- Isosceles (i.e Two sides are equal)
- Scalene (i.e All the three sides are unequal)

else suitable error message should be displayed. Here we assume that user gives three positive integer numbers as input.

**7.3 DESIGN**

Form the given requirements we can draw the following conditions:

C1:  $a < b + c$ ?

C2:  $b < a + c$ ?

C3:  $c < a + b$ ?

C4:  $a = b$ ?

C5:  $a = c$ ?

C6:  $b = c$ ?

According to the property of the triangle, if any one of the three conditions C1, C2 and C3 are not satisfied then triangle cannot be constructed. So only when C1, C2 and C3 are true the triangle can be formed, then depending on conditions C4, C5 and C6 we can decide what type of triangle will be formed. (i.e requirement R2).



**ALGORITHM:**

STEP 1: Input a, b & c i.e three integer values which represent three sides of the triangle.

STEP 2: if  $(a < (b + c))$  and  $(b < (a + c))$  and  $(c < (a + b))$  then do

    Step 3

    else

    print not a triangle. do STEP 6.

STEP 3: if  $(a=b)$  and  $(b=c)$  then

    Print triangle formed is equilateral. do STEP 6.

STEP 4: if  $(a \neq b)$  and  $(a \neq c)$  and  $(b \neq c)$  then

    Print triangle formed is scalene. do Step 6.

STEP 5: Print triangle formed is Isosceles.

STEP 6: stop

**7.4 PROGRAM CODE**

```
#include<stdio.h>
#include<stdlib.h>
int main()
{
    int a,b,c;
    printf("Enter the three sides of traingle");
    scanf("%d%d%d",&a,&b,&c);
    if((a<1||a>10)||(b<1||b>10)||(c<1||c>10))
    {
        printf("Out of range values");
        exit(0);
    }
    if((a<b+c)&&(b<a+c)&&(c<a+b))
    {
        if((a==b)&&(b==c))
            printf("Equilateral traingle");
        else if((a!=b)&&(b!=c)&&(a!=c))
            printf("Scalene traingle");
    }
```

```

else
    printf("Isosceles traingle");
}
else
    printf("Traingle cannot be formed");
return 0;
}

```

## 7.5 TESTCASES

### Technique Used: Decision Table Approach

Decision Table-Based Testing has been around since the early 1960's; it is used to depict complex logical relationships between input data. A Decision Table is the method used to build a complete set of test cases without using the internal structure of the program in question. In order to create test cases we use a table to contain the input and output values of a program.

The decision table is as given below:

Conditions	Condition Entries (Rules)										
	R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11
C1: $a < b + c$ ?	F	T	T	T	T	T	T	T	T	T	T
C2: $b < a + c$ ?	-	F	T	T	T	T	T	T	T	T	T
C3: $c < a + b$ ?	-	-	F	T	T	T	T	T	T	T	T
C4: $a = b$ ?	-	-	-	F	T	T	T	F	F	F	T
C5: $a = c$ ?	-	-	-	T	F	T	F	T	F	F	T
C6: $b = c$ ?	-	-	-	T	T	F	F	F	T	F	T
Actions	Action Entries										
a1: Not a Triangle	X	X	X								
a2: Scalene										X	
a3: Isosceles							X	X	X		
a4: Equilateral											X
a5: Impossible				X	X	X					

The "--" symbol in the table indicates don't care values. The table shows the six conditions and 5 actions. All the conditions in the decision table are binary; hence, it is called as "Limited Entry decision table". Each column of the decision table represents a test case. That is,

The table is read as follows:

**□□Action: Not a Triangle**

1. When condition C1 is false we can say that with the given a, b and c values it's Not a triangle.
2. Similarly condition C2 and C3, if any one of them are false, we can say that with the given a, b and c values it's Not a triangle.

**□□Action: Impossible**

3. When conditions C1, C2, C3 are true and two conditions among C4, C5, C6 is true, there is no chance of one conditions among C4, C5, C6 failing. So we can neglect these rules.

Example: if condition C4:  $a=b$  is true and C5:  $a=c$  is true

Then it is impossible, that condition C6:  $b=c$  will fail, so the action is Impossible.

**□□Action: Isosceles**

4. When conditions C1, C2, C3 are true and any one condition among C4, C5 and C6 is true with remaining two conditions false then action is Isosceles triangle.

Example: If condition C4:  $a=b$  is true and C5:  $a=c$  and C6:  $b=c$  are false, it means two sides are equal. So the action will be Isosceles triangle.

**□□Action: Equilateral**

5. When conditions C1, C2, C3 are true and also conditions C4, C5 and C6 are true then, the action is Equilateral triangle.

**□□Action: Scalene**

6. When conditions C1, C2, C3 are true and conditions C4, C5 and C6 are false i.e sides a, b and c are different, then action is Scalene triangle.

Number of Test Cases = Number of Rules.

Using the decision table we obtain 11 functional test cases: 3 impossible cases, 3 ways of failing the triangle property, 1 way to get an equilateral triangle, 1 way to get a scalene triangle, and 3 ways to get an isosceles triangle.

**Deriving test cases using Decision Table Approach:**

**Test Cases**

TC ID	Test Case Description	A	B	C	Expected Output	Actual Output	Status
1	Testing for Rule 1	6	4	1	Traingle cannot be formed		
2	Testing for Rule 2	1	5	3	Traingle cannot be formed		
3	Testing for Rule 3	1	2	4	Traingle cannot be formed		

4	Testing for Rule 7	2	2	3	Isosceles		
5	Testing for Rule 8	2	3	2	Isosceles		
6	Testing for Rule 9	3	2	2	Isosceles		
7	Testing for Rule 10	3	4	5	Scalene		
8	Testing for Rule 11	5	5	5	Equilateral		

## 7.6 EXECUTION

Execute the program against the designed test cases and complete the table for Actual output column and status column.

### Test Report:

7.2.1 No of TC's Executed: 08

7.2.2 No of Defects Raised:

7.2.3 No of TC's Pass:

7.2.4 No of TC's Failed:

The decision table technique is indicated for applications characterised by any of the following:

- Prominent if-then-else logic
- Logical relationships among input variables
- Calculations involving subsets of the input variables
- Cause-and-effect relationship between inputs and outputs

The decision table-based testing works well for triangle problem because a lot of decision making i.e if-then-else logic takes place.

## 7.7 SNAPSHOTS:

1. Output screen of Triangle cannot be formed

```

user-Vostro-2520: ~/Testing
user@user-Vostro-2520:~/Testing$ cc 7.c
user@user-Vostro-2520:~/Testing$ ./a.out
Enter 3 integers which are sides of triangle:
4 1 2
a=4      ,b=1      ,c=2
triangle cannot be formed
user@user-Vostro-2520:~/Testing$ cc 7.c
user@user-Vostro-2520:~/Testing$ ./a.out
Enter 3 integers which are sides of triangle:
1 4 2
a=1      ,b=4      ,c=2
triangle cannot be formed
user@user-Vostro-2520:~/Testing$ cc 7.c
user@user-Vostro-2520:~/Testing$ ./a.out
Enter 3 integers which are sides of triangle:
1 2 4
a=1      ,b=2      ,c=4
triangle cannot be formed
user@user-Vostro-2520:~/Testing$ █

```

```
ser-Vostro-2520: ~/Testing
user@user-Vostro-2520:~/Testing$ cc 7.c
user@user-Vostro-2520:~/Testing$ ./a.out
Enter 3 integers which are sides of triangle
5 5 5
a=5      ,b=5      ,c=5
Equilateral triangle
user@user-Vostro-2520:~/Testing$ cc 7.c
user@user-Vostro-2520:~/Testing$ ./a.out
Enter 3 integers which are sides of triangle
2 2 3
a=2      ,b=2      ,c=3
Isosceles triangle
user@user-Vostro-2520:~/Testing$ cc 7.c
user@user-Vostro-2520:~/Testing$ ./a.out
Enter 3 integers which are sides of triangle
2 3 2
a=2      ,b=3      ,c=2
Isosceles triangle
user@user-Vostro-2520:~/Testing$
```

## 7.8 POST-EXPERIMENT QUESTIONS

1. Explain the decision table approach
2. What you mean by don't care values?
3. How many test cases in the decision table approach?
4. What are the differences between boundary value analysis and decision table approach?

**EXPERIMENT No. 08: Login a Specific Web Page**

8.1 Objective	8.5 Program Code
8.2 Software Required	8.6 Snapshots
8.3 Pre-Requisites	8.7 Post-experiment questions
8.4 Introduction	

**8.1 OBJECTIVES**

Write and test a program to login a specific web page using SELENIUM IDE

**8.2 SOFTWARE REQUIRED**

Ubuntu, Terminal, Selenium IDE ,Google Chrome.

**8.3 PRE-REQUISITES**

- Selenium IDE Installation
- Access to the Login Page
- Element Locators for Username, Password, and Login Button
- Test Credentials
- Login Success Indicator

**8.4 INTRODUCTION**

This program automates logging into a website using Selenium WebDriver. It opens a browser, interacts with the webpage to enter a student's admission number and password, and simulates clicking the login button. It's a simple demonstration of how automation can be used to test login functionality on a web page.

**8.5 PROGRAM CODE**

```
from selenium import webdriver
from selenium.webdriver.common.by import By
import time

class Login:
    def setUp(self):
        self.driver = webdriver.Chrome()
        self.driver.get("https://sahyadri.digital/")



    def test_login(self):
        driver = self.driver
        driver.find_element(By.ID, "student-tab").click()
        time.sleep(4)
        driver.find_element(By.NAME, "admission_no").send_keys("admission no")
        time.sleep(2)
        driver.find_element(By.CLASS_NAME, "student_pass").send_keys("password")
```

```
time.sleep(2)
driver.find_element(By.ID, "login-student").click()
time.sleep(1000)

def tearDown(self):
    self.driver.quit()

if __name__ == "__main__":
    test = Login()
    test.setUp()
    test.test_login()
    test.tearDown()
```

## 8.6 SNAPSHOTS:

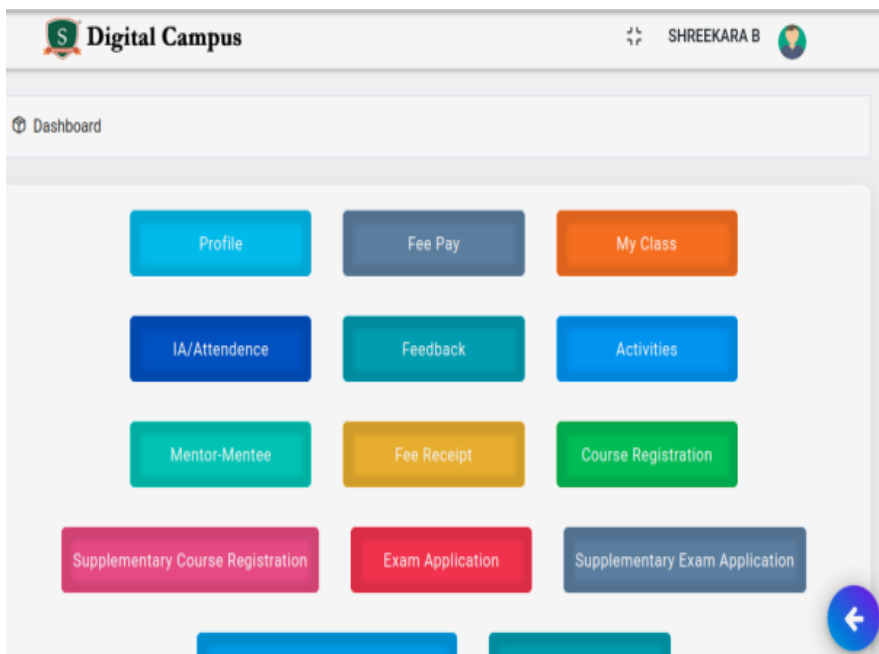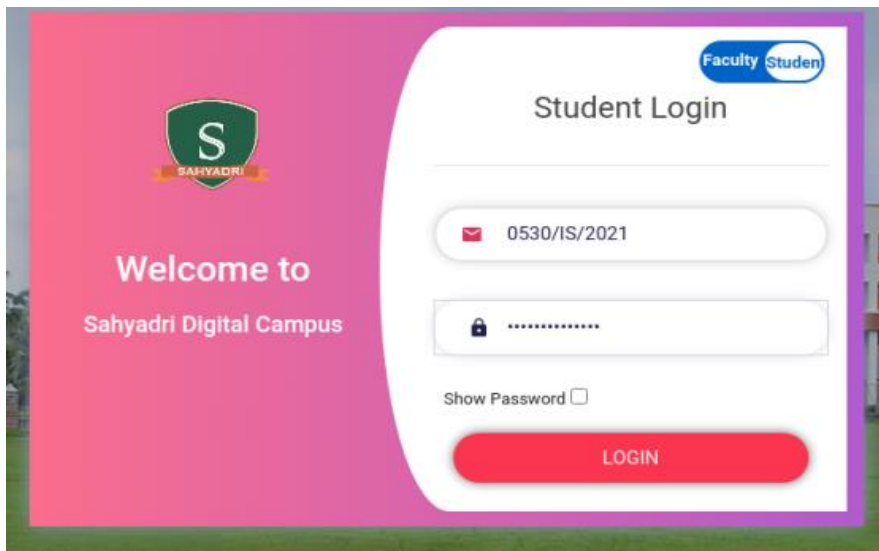

## 8.7 POST-EXPERIMENT QUESTIONS

1. What is Selenium IDE
2. How does it differ from Selenium WebDriver?
3. What are the essential components required to automate a login process using Selenium IDE?



**EXPERIMENT No. 09: Total Number of Objects Present Available**

9.1 Objective	9.5 Program Code
9.2 Software Required	9.6 Snapshots
9.3 Pre-Requisites	9.7 Post-experiment questions
9.4 Introduction	

**9.1 OBJECTIVES:**

Write and test a program to provide total number of objects present available on the page  
SELENIUM IDE:

**9.2 SOFTWARE REQUIRED**

Ubuntu, Terminal, Selenium IDE, Google Chrome.

**9.3 PRE-REQUISITES**

- Selenium IDE for Chrome
- Webpage URL
- Basic Knowledge of Web Elements
- Selenium IDE Commands

**9.4 Introduction**

It is commonly used to automate repetitive tasks, test web applications, and interact with various elements on web pages. Application of Selenium IDE is the ability to interact with and manipulate HTML elements on a webpage. These elements—also referred to as objects—include buttons, links, images, text fields, forms.

**9.5 PROGRAM CODE:**

```
import unittest
from selenium import webdriver
from selenium.webdriver.common.by import By

class Count(unittest.TestCase):

    def setUp(self):
        # Set up the WebDriver for Chrome
        self.driver = webdriver.Chrome() # Make sure to have the ChromeDriver installed
        self.driver.get("http://www.google.co.in")
        self.driver.maximize_window()

    def test_count_elements(self):
        driver = self.driver

        # Get all links on the page
```

```

links = driver.find_elements(By.TAG_NAME, "a")
print(f"TOTAL NO OF LINKS = {len(links)}")

# Get all buttons on the page
buttons = driver.find_elements(By.TAG_NAME, "button")
print(f"TOTAL NO OF BUTTONS = {len(buttons)}")


# Get all input fields on the page
input_fields = driver.find_elements(By.TAG_NAME, "input")
print(f"TOTAL NO OF INPUT FIELDS = {len(input_fields)}")


def tearDown(self):
    # Stop the WebDriver
    self.driver.quit()

if __name__ == "__main__":
    unittest.main()

```

## 9.6 SNAPSHOTS:

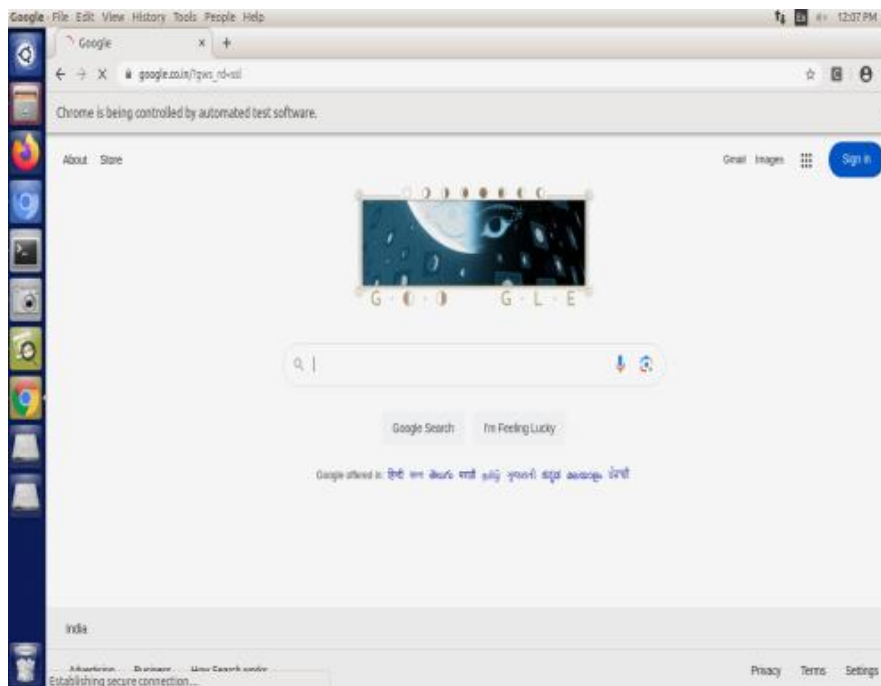

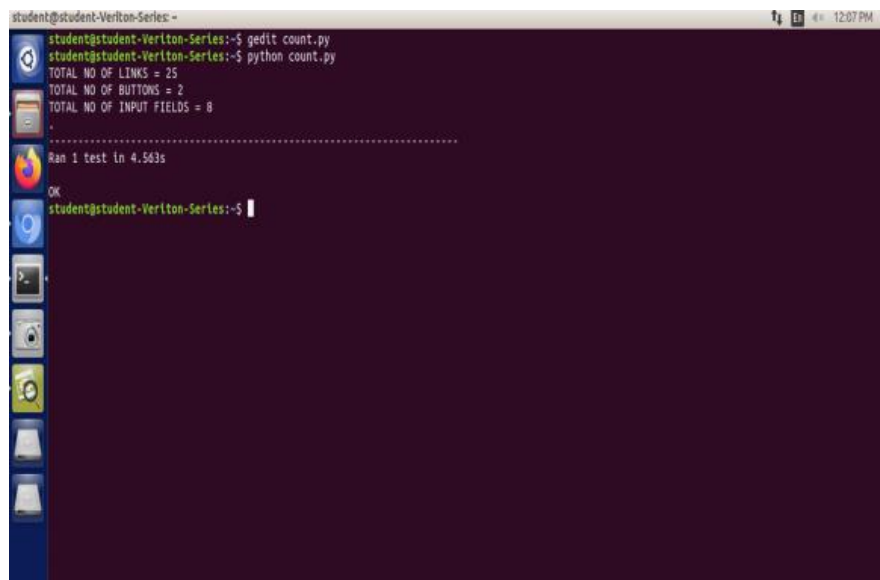

## 9.7 POST-EXPERIMENT QUESTIONS

- 1.
- 2.
- 3.

**EXPERIMENT No. 10: Copy Page Details into Another Page**

10.1 Objective	10.5 Program Code
10.2 Software Required	10.6 Snapshots
10.3 Pre-Requisites	10.7 Post-experiment questions
10.4 Introduction	

**10.1 OBJECTIVES:**

Write and test a program to copy page details into another page using SELENIUM IDE:

**10.2 Software Required**

Ubuntu, Terminal, Selenium IDE, Google Chrome.

**10.3 Pre-Requisites**

- Selenium IDE for Chrome
- Basic understanding of HTML elements
- Access to two webpages:
- Selenium IDE commands

**10.4 Introduction**

The objective of this experiment is to automate the process of copying page details from one webpage and transferring them to another webpage using Selenium IDE. This can be useful in scenarios such as: Data migration, Web scraping and posting, Testing

**10.5 PROGRAM CODE:**

```
#Copy Page Details into another page
from selenium import webdriver
import time

class WebPageFetcher:
    def setUp(self):
        # Initialize the Chrome browser
        self.driver = webdriver.Chrome() # Ensure ChromeDriver is in your PATH

    def fetch_page(self):
        try:
            # Navigate to the URL
            self.driver.get("https://www.btreesystems.com/selenium-with-python-training-in-
chennai/")

            # Wait for the page to load (you can use WebDriverWait for more robust waiting)
            time.sleep(2)
```

```

# Get the page source and encode it as UTF-8
page_source = self.driver.page_source.encode('utf-8')

# Use a with statement to handle file operations
with open('result.html', 'wb') as f:
    f.write(page_source)

except Exception as e:
    print(f"An error occurred: {str(e)}")

def tearDown(self):
    # Make sure to close the browser, even if an exception occurs
    self.driver.quit()

if __name__ == "__main__":
    fetcher = WebPageFetcher()
    fetcher.setUp()
    fetcher.fetch_page()
    fetcher.tearDown()

```

## 10.6 SNAPSHOTS:

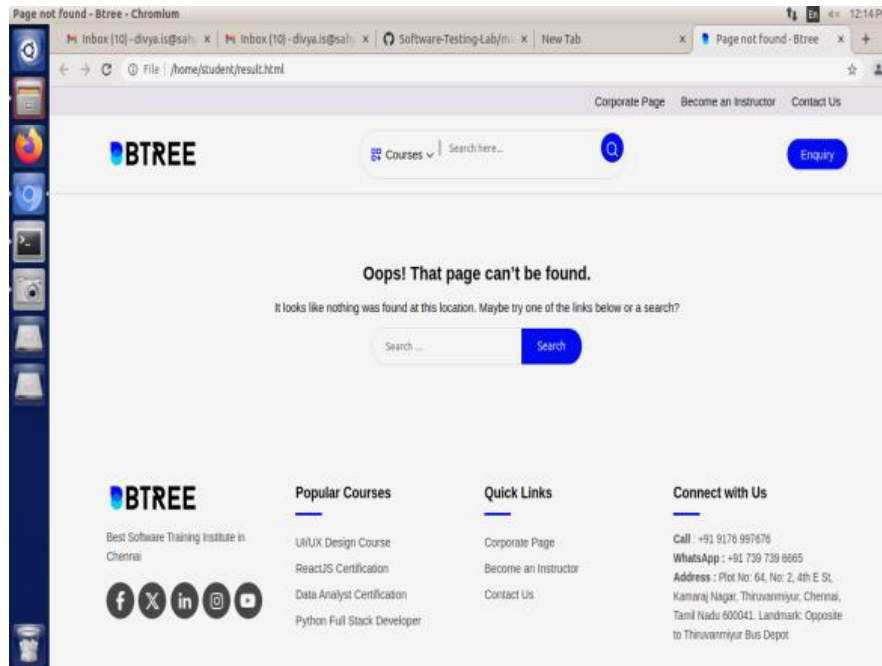


Figure1. Web Page

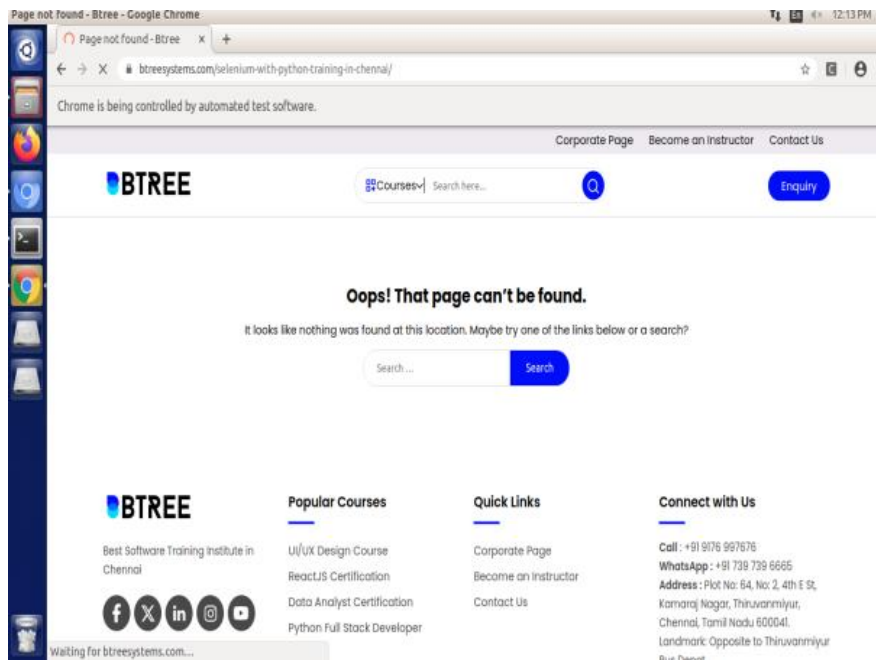


Figure 2. Result.Html

## 10.7 POST-EXPERIMENT QUESTIONS

- 1.
- 2.
- 3.

**EXPERIMENT No. 11: Automatically Browse for Google Maps**

11.1 Objective	11.5 Program Code
11.2 Software Required	11.6 Snapshots
11.3 Pre-Requisites	11.7 Post-experiment questions
11.4 Introduction	

**11.1 OBJECTIVES:**

Write and test a program to automatically browse for google maps using SELENIUM IDE

**11.2 Software Required**

Ubuntu, Terminal, Selenium IDE, Google Chrome.

**11.3 Pre-Requisites**

- Selenium IDE for Chrome
- Basic knowledge of Selenium IDE commands
- An active internet connection

**11.4 Introduction**

This script automates searching for a location on Google Maps using Selenium WebDriver. It demonstrates basic browser automation, including opening a webpage, interacting with elements input fields and buttons and waiting for content to load.

**11.5 PROGRAM CODE:**

```
import time
from selenium import webdriver
from selenium.webdriver.common.by import By

class GoogleMapsAutomation:
    def setUp(self):
        # Initialize the Chrome browser
        self.driver = webdriver.Chrome() # Ensure ChromeDriver is in your PATH

    def search_location(self):
        try:
            g_link = "https://www.google.com/maps"
            ip_link = '//*[@id="searchboxinput"]'
            directions_xpath = '//*[@id="searchbox-searchbutton"]' # Adjusted for the correct XPath
            for the search button
            # Open Google Maps
            self.driver.get(g_link)
            time.sleep(2)

            # Input location from user
```

```

name = str(input("Enter Location: "))
search_input = self.driver.find_element(By.XPATH, ip_link)
search_input.send_keys(name)
time.sleep(1) # Wait briefly to ensure input is registered

# Click on the search button to get directions
directions = self.driver.find_element(By.XPATH, directions_xpath)
directions.click()
time.sleep(5) # Wait for the map and directions to load


except Exception as e:
    print(f"An error occurred: {str(e)}")

def tearDown(self):
    # Close the browser
    self.driver.quit()

if __name__ == "__main__":
    automation = GoogleMapsAutomation()
    automation.setUp()
    automation.search_location()
    automation.tearDown()


```

## 11.6 SNAPSHOTS:

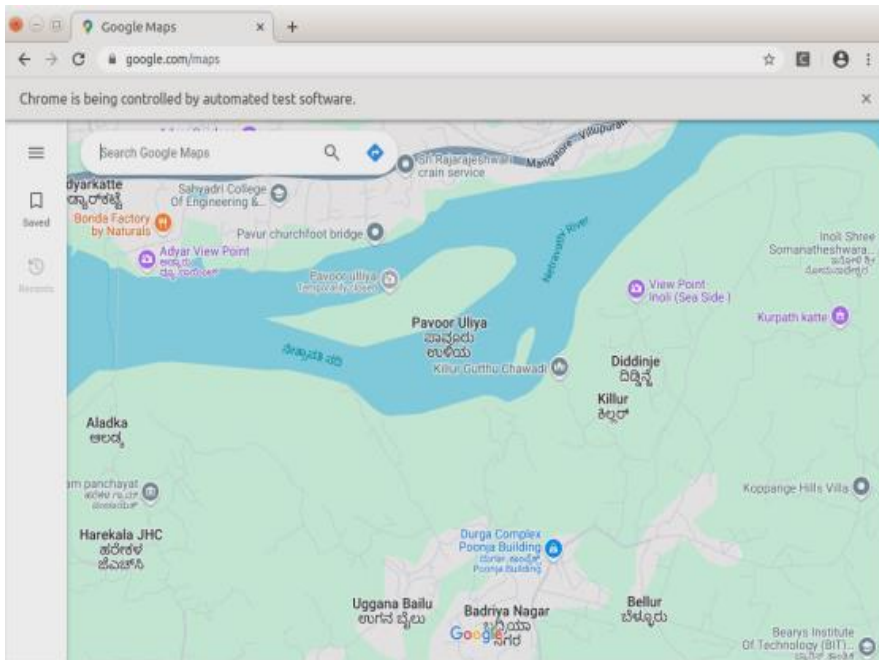



```
student@student-Veriton-Series: ~  
student@student-Veriton-Series:~$ gedit googlemap.py  
student@student-Veriton-Series:~$ python googlemap.py  
Enter Location: mangaluru
```

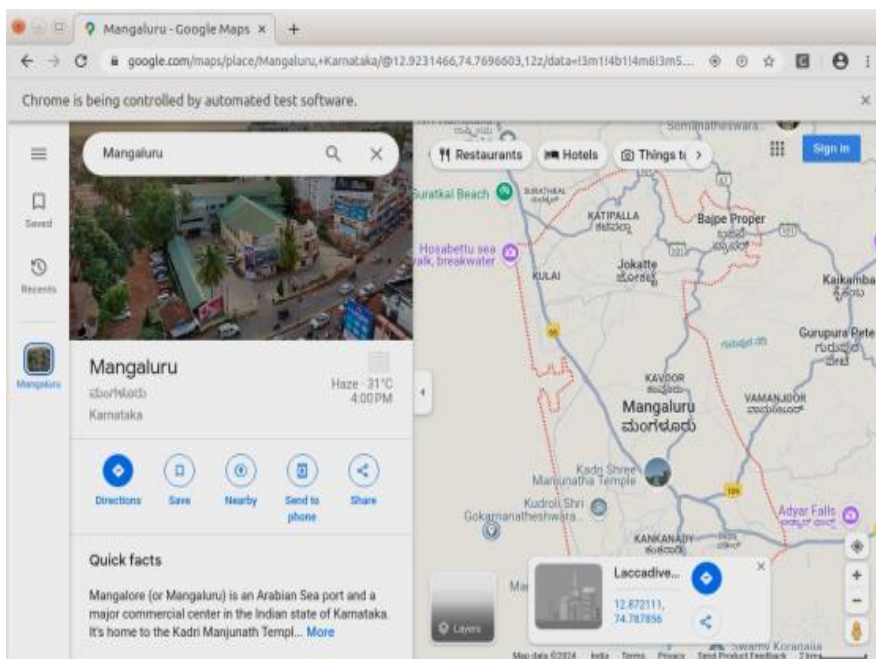

## 11.7 POST-EXPERIMENT QUESTIONS

- 1.
- 2.
- 3.
- 4.
- 5.

## **EXPERIMENT No. 12: Google Form Automation**

12.1 Objective	12.5 Program Code
12.2 Software Required	12.6 Snapshots
12.3 Pre-Requisites	12.7 Post-experiment questions
12.4 Introduction	

### **12.1 OBJECTIVES:**

Write and test a program for Google Form Automation using SELENIUM IDE

### **12.2 Software Required**

Ubuntu, Terminal, Selenium IDE, Google Chrome.

### **12.3 Pre-Requisites**

- Selenium IDE for Chrome
- A Google Form
- Basic knowledge of HTML elements

### **12.4 Introduction**

Google Forms using **Selenium IDE** can be particularly useful for testing purposes, especially when you need to quickly fill out forms multiple times or validate form behavior across different conditions. In this experiment, we will demonstrate how to automate the process of filling out a Google Form using **Selenium IDE**, a browser automation tool. The goal is to automate the entire process of filling in responses to a form's questions and submitting the form.

### **12.5 PROGRAM CODE:**

```
from selenium import webdriver
from selenium.webdriver.common.by import By
import time

class GoogleFormAutomation:
    def setUp(self):
        self.driver = webdriver.Chrome()

    def fill_form(self):
        self.driver.get("https://forms.gle/vDCCNyhkBhBsUCja9")
        time.sleep(2)
        name = "Your Name"
        name_input = self.driver.find_element(By.XPATH, '//input[@aria-labelledby="i1 i4"]')
        name_input.send_keys(name)
```

```

time.sleep(2)


usn = "Your USN"
age_input = self.driver.find_element(By.XPATH, '//input[@aria-labelledby="i6 i9"]')
age_input.send_keys(usn)
time.sleep(2)



submit=self.driver.find_element(By.XPATH, '//*[@id="mG61Hd"]/div[2]/div/div[3]/div[1]/div[1]
]/div/span/span')
submit.click()
time.sleep(2)
def tearDown(self):
    self.driver.quit()

if __name__ == "__main__":
    automation = GoogleFormAutomation()
    automation.setUp()
    automation.fill_form()
    automation.tearDown()

```

## 12.6 SNAPSHOTS:

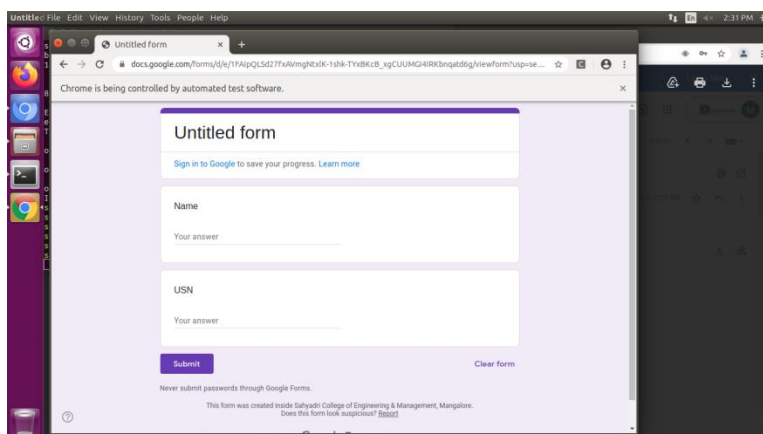

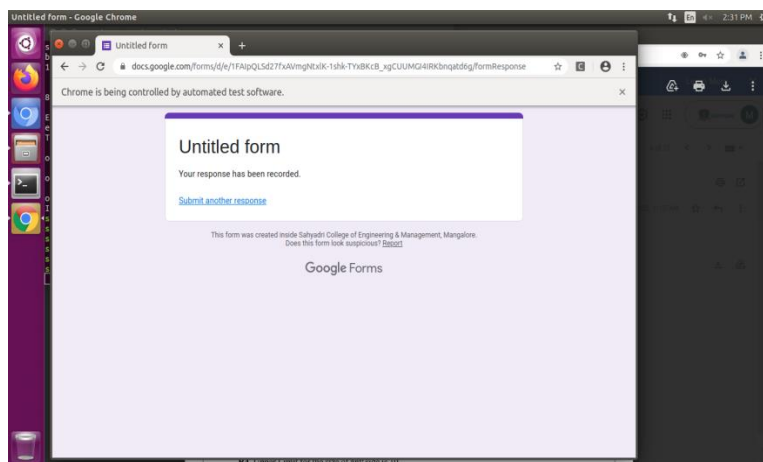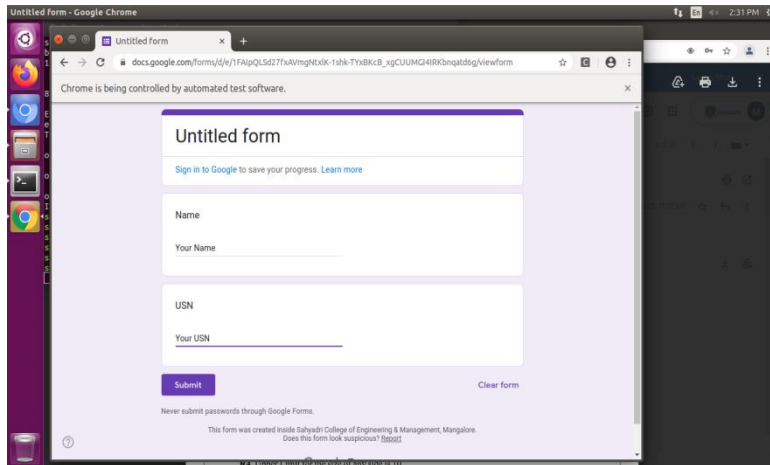

## 12.7 POST-EXPERIMENT QUESTIONS

- 1.
- 2.
- 3.
- 4.
- 5.