

Data Science for Biodiversity Scientists

An introduction to concepts and practices

Timothée Poisot

2023-08-18

Table of contents

Preface	1
1 Introduction	3
1.1 Core concepts in data science	4
1.1.1 EDA	4
1.1.2 Clustering and regression	4
1.1.3 Supervised and unsupervised	4
1.1.4 Training, testing, and validation	4
1.1.5 Transformations and feature engineering	4
1.2 An overview of the content	4
1.3 How to read this book	4
1.4 Some rules about this book	4
1.4.1 No code	4
1.4.2 No simulated data	5
1.4.3 No <code>iris</code>	5
2 The <i>k</i>-means algorithm	7
2.1 A digression: which birds are red?	7
2.2 The problem: classifying pixels from an image	9
2.3 The theory behind <i>k</i> -means clustering	11
2.3.1 Overview of the algorithms	12
2.4 Identification of the optimal number of clusters	12
2.5 Application: optimal clustering of the satellite image data .	12
2.6 Alternatives and improvements	12

Table of contents

3	Gradient descent	19
3.1	A digression: what is a trained model?	19
3.2	The problem: how many interactions in a food web?	19
3.3	Gradient descent	20
3.3.1	Defining the loss function	21
3.3.2	Calculating the gradient	23
3.3.3	Descending the gradient	24
3.3.4	A note on the learning rate	25
3.4	Application: how many links are in a food web?	26
3.5	Notes on regularization	26
4	Testing, training, validating	29
4.1	How can we split a dataset?	29
4.1.1	Training	31
4.1.2	Validating	32
4.1.3	Testing	33
4.2	The problem: phenology of cherry blossom	34
4.3	Strategies to split data	35
4.3.1	Holdout	36
4.3.2	Leave-p-out	36
4.3.3	Leave-one-out	37
4.3.4	k-fold	37
4.3.5	Monte-Carlo	38
4.4	Application: when do cherry blossom bloom?	39
4.4.1	Performance evaluation	39
4.4.2	Model predictions	41
4.4.3	Is our model good, then?	41
5	Data leakage	47
5.1	Consequences of data leakage	47
5.2	Sources of data leakage	48
5.3	Avoiding data leakage	48

Table of contents

6	Supervised classification	49
6.1	The problem: reindeer distribution	49
6.2	What is classification?	50
6.2.1	Separability and the curse of dimensionality	50
6.2.2	The confusion table	51
6.3	The Naive Bayes Classifier	52
6.3.1	Assumptions of the NBC	52
6.3.2	How to train the NBC	54
6.3.3	Decision rule for prediction	54
6.4	Application: a baseline model of reindeer presence	54
6.4.1	Training and validation strategy	54
6.4.2	Performance evaluation of the model	54
6.4.3	What is an acceptable model?	54
7	Learning curves and moving thresholds	55
7.1	Classification based on probabilities	55
7.2	The problem: improving the NBC model	55
7.3	Application: improved reindeer distribution model	55
	References	57

Preface

Data science is now an established methodology to study biodiversity, and this is a problem.

This may be an opportunity when it comes to advancing our knowledge of biodiversity, and in particular when it comes to translating this knowledge into action (Tuia et al. 2022); but make no mistake, this is a problem for us, biodiversity scientists, as we suddenly need to develop competences in an entirely new field. And as luck would have it, there are easier fields to master than data science. The point of this book, therefore, is to provide an introduction to fundamental concepts in data science, from the perspective of a biodiversity scientist, by using examples corresponding to real-world use-cases of these techniques.

But what do we mean by *data science*? Most science, after all, relies on data in some capacity. What falls under the umbrella of data science is, in short, embracing in equal measure quantitative skills (mathematics, machine learning, statistics), programming, and domain expertise, in order to solve well-defined problems. A core tenet of data science is that, when using it, we seek to “deliver actionable insights”, which is MBA-speak for “figuring out what to do next”. One of the ways in which this occurs is by letting the data speak, after they have been, of course, properly cleaned and transformed and engineered beyond recognition. This entire process is driven by (or subject to, even) domain knowledge. There is no such thing as data science, at least not in a vacuum: there is data science as a methodology applied to a specific domain.

Preface

Before we embark into a journey of discovery on the applications of data science to biodiversity, allow me to let you in on a little secret: data *science* is a little bit of a misnomer.

To understand why, it helps to think of science (the application of the scientific method, that is) as cooking. There are general techniques one must master, and specific steps and cultural specifics, and there is a final product. When writing this preface, I turned to my shelf of cookbooks, and picked my two favorites: Robuchon's *The Complete Robuchon* (a nonsense list of hundreds of recipes with no place for improvisation), and Bianco's *Pizza, Pasta, and Other Food I Like* (a short volume with very few pizza and pasta, and wonderful discussions about the importance of humility, creativity, and generosity). Data science, if it were cooking, would feel a lot like the second. Deviation from the rules (they are mostly recommendations, in fact) is often justifiable if you feel like it. But this improvisation requires good skills, a clear mental map of the problem, and a library of patterns that you can draw from.

This book will not get you here. But it will speed up the process, by framing the practice of data science as a natural way to conduct research on biodiversity.

1 Introduction

This book started as a collection of notes from several classes I gave in the Department of Biological Sciences at the Université de Montréal, as well as a few workshops I ran with the Québec Centre for Biodiversity Sciences. In teaching data synthesis, data science, and machine learning to biology students, I realized that the field was missing a stepping stone to proficiency. There are excellent manuals covering the mathematics of data science and machine learning **REFS**; there are many good papers giving overviews of some applications of data science to biological problems **REFS**; and there are, of course, thousands of tutorials about how to write code. But one thing that students commonly called for was an attempt to tie concepts together. This is this attempt.

1 *Introduction*

1.1 Core concepts in data science

1.1.1 EDA

1.1.2 Clustering and regression

1.1.3 Supervised and unsupervised

1.1.4 Training, testing, and validation

1.1.5 Transformations and feature engineering

1.2 An overview of the content

1.3 How to read this book

1.4 Some rules about this book

When I started aggregating these notes, I decided on a series of three rules. No code, no simulated data, and no *iris*. In this section, I will go through *why* I decided to adopt these rules, and how it can change the way you interact with the book.

1.4.1 No code

This is, maybe, the most surprising rule, because data science *is* programming (in a sense). But sometimes there is so much focus on programming that we lose track of the other, important aspects of the practice of data science: abstractions, relationship with data, and domain knowledge.

1.4 Some rules about this book

This book *did* involve a lot of code. Specifically, this book was written using *Julia* (Bezanson et al. 2017), and every figure is generated by a notebook, and they are available online, and used in the classroom. But code is *not* a universal language, and unless you are familiar with the language, code can obfuscate. I had no intention to write a *Julia* book (or an *R* book, or a *Python* book). The point is to think about data science applied to ecological research, and I felt like it would be more inclusive to do this in a language agnostic way.

And finally, code rots. Code with more dependencies rots faster. It takes a single change in the API of a package to break the examples, and then you are left with a very expensive doorstep¹.

1.4.2 No simulated data

1.4.3 No iris

¹Which will not happen with this book! Ever! Not because it will not become obsolete, but because it's online, and free, two severe impediments to being an expensive doorstep.

2 The k -means algorithm

As we mentioned in the introduction, a core idea of data science is that things that look the same (in that, when described with data, they resemble one another) are likely to be the same. Although this sounds like a simplifying assumption, this can provide the basis for a very powerful technique in which we *create* groups in data that have no labels. This task is called unsupervised clustering: we seek to add a *label* to each observation, in order to form groups, and the data we work from do *not* have a label that we can use to train a model.

2.1 A digression: which birds are red?

Before diving in, it is a good idea to ponder a simple case. We can divide everything in just two categories: things with red feathers, and things without red feathers. An example of a thing with red feathers is the Northern Cardinal (*Cardinalis cardinalis*), and things without red feathers are the iMac G3, Haydn's string quartets, and of course the Northern Cardinal (*Cardinalis cardinalis*).

See, biodiversity data science is complicated, because it tends to rely on the assumption that we can categorize the natural world, and the natural world (mostly in response to natural selection) comes up with ways to be, well, diverse. In the Northern Cardinal, this is shown in males having red feathers, and females having mostly brown feathers. Before moving forward, we need to consider ways to solve this issue, as this issue will come up *all the time*.

2 *The k-means algorithm*

The first mistake we have made is that the scope of objects we want to classify, which we will describe as the “domain” of our classification, is much too broad: there are few legitimate applications where we will have a dataset with Northern Cardinals, iMac G3s, and Haydn’s string quartets. Picking a reasonable universe of classes would have solved our problem a little. For example, among the things that do not have red feathers are the Mourning Dove, the Kentucky Warbler, and the House Sparrow.

The second mistake that we have made is improperly defining our classes; bird species exhibit sexual dimorphism (not in an interesting way, like wrasses, but you let’s still give them some credit for trying). Assuming that there is such a thing as a Northern Cardinal is not necessarily a reasonable assumption! And yet, the assumption that a single label is a valid representation of non-monomorphic populations is a surprisingly common one, with actual consequences for the performance of image classification algorithms (Luccioni and Rolnick 2023). This assumption reveals a lot about our biases: male specimens are over-represented in museum collections, for example (Cooper et al. 2019). In a lot of species, we would need to split the taxonomic unit into multiple groups in order to adequately describe them.

The third mistake we have made is using predictors that are too vague. The “presence of red feathers” is not a predictor that can easily discriminate between the Northern Cardinal (yes for males, sometimes for females), the House Finch (a little for males, no for females), and the Red-Winged Black Bird (a little for males, no for females). In fact, it cannot really capture the difference between red feathers for the male House Finch (head and breast) and the male Red Winged Black Bird (wings, as the name suggests).

The final mistake we have made is in assuming that “red” is relevant as a predictor. In a wonderful paper, Cooney et al. (2022) have converted the color of birds into a bird-relevant colorimetric space, revealing a clear latitudinal trend in the ways bird colors, as perceived by other birds, are distributed. This analysis, incidentally, splits all species into males and

2.2 The problem: classifying pixels from an image

females. The use of a color space that accounts for the way colors are perceived is a fantastic example of why data science puts domain knowledge front and center.

Deciding which variables are going to be accounted for, how the labels will be defined, and what is considered to be within or outside the scope of the classification problem is *difficult*. It requires domain knowledge (you must know a few things about birds in order to establish criteria to classify birds), and knowledge of how the classification methods operate (in order to have just the right amount of overlap between features in order to provide meaningful estimates of distance).

2.2 The problem: classifying pixels from an image

Throughout this chapter, we will work on a single image – we may initially balk at the idea that an image is data, but it is! Specifically, an image is a series of instances (the pixels), each described by their position in a multidimensional colorimetric space. Greyscale images have one dimension, and images in color will have three: their red, green, and blue channels. Not only are images data, this specific dataset is going to be far larger than many of the datasets we will work on in practice: the number of pixels we work with is given by the product of the width and height of the image!

In fact, we are going to use an image with a lot more dimensions: the data in this chapter are coming from a Landsat 9 image Vermote et al. (2016), for which we have access to 7 different bands (the full data product has more bands, but we will not use them all).

Band number	Information
1	Aerosol
2	Visible blue
3	Visible red
4	Visible green

2 The k-means algorithm

Band number	Information
5	Near-infrared (NIR)
6	Short wavelength IR (SWIR 1)
7	SWIR 2

From these channels, we can reconstruct an approximation of what the landscape looked like (by using the red, green, and blue channels) – this information is presented in Figure 2.1 . Or is it? If we were to invent a time machine, and go stand directly under Landsat 9 at the exact center of this scene, and look around, what would we see? We would see colors, and they would admit a representation as a three-dimensional vector of red, green, and blue. But we would see so much more than that! And even if we were to stand within a pixel, we would see *a lot* of colors. And texture. And depth. We would see something entirely different from this map; and we would be able to draw a lot more inferences about our surroundings than what is possible by knowing the average color of a 30x30 meters pixel.

But just like we can get more information that Landsat 9, so to can Landsat 9 out-sense us when it comes to getting information. In the same way that we can extract a natural color composite out of the different channels, we can extract a fake color one to highlight differences in the landscape; in Figure 2.2, we show such a fake color composite, that is particularly efficient at drawing our attention to the location of water in this area.

Both Figure 2.2 and Figure 2.1 represent the same physical place at the same moment in time; but through them, we are looking at this place with very different purposes. This is not an idle observation, but a core notion in data science: what we measure defines what we can see. In order to tell something meaningful about this place, we need to look at it in the “right” way.

So far, we have looked at this area by combining the raw data. Depending on the question we have in mind, they may not be the *right* data. In fact,

2.3 The theory behind *k*-means clustering

they may not hold information that is relevant to our question *at all*; or worse, they can hold more noise than signal. Looking at Figure 2.1, we might wonder, “where are the fields?”. And based on our knowledge of what plants do, we can start thinking about this question in a different way. Specifically, “is there a series of features of fields that are not shared by non-fields?”. But this a complicated question to answer, and so we can simplify this by asking, “how can I combine data from the image to know if there is a plant?”.

One way to do this is to calculate the normalized difference vegetation index, or NDVI (Kennedy and Burbach 2020). NDVI is derived from the band data (we will see how in a minute), and is an adequate heuristic to make a difference between vegetation, barren soil, and water. Because we are specifically thinking about fields, we can also consider the NDWI (water) and NDMI (moisture) dimensions: taken together, these information will represent every pixel in a three-dimensional space, telling us whether there are plants (NDVI), whether they are stressed (NDMI), and whether this pixel is a water body (NDWI).

Because there are a few guidelines (educated guesses, in truth, and the jury is still out on the “educated” part) about the values, we can look at the relationship between the NDVI and NDMI data Figure 2.3. For example, NDMI values around -0.1 (note how there is a strong cluster of points here) are low-canopy cover with low water stress; NDVI values from 0.2 to 0.5 are good candidates for moderately dense crops.

By picking these three values, instead of simply looking at the clustering of all the bands in the raw data, we are starting to refine what the algorithm see, through the lens of what we know is important about the system.

2.3 The theory behind *k*-means clustering

In order to understand the theory underlying *k*-means, we will work backwards from its output. As a method for unsupervised clustering, *k*-means

2 The *k*-means algorithm

will return a vector of *class memberships*, which is to say, a list that maps each observation (pixel, in our case) to a class (tentatively, a cohesive landscape unit). What this means is that *k*-means is a transformation, taking as its input a vector with three dimensions (red, green, blue), and returning a scalar (an integer, even!), giving the class to which this pixel belongs. These are the input and output of our blackbox, and now we can start figuring out its internals.

2.3.1 Overview of the algorithms

2.4 Identification of the optimal number of clusters

2.5 Application: optimal clustering of the satellite image data

2.6 Alternatives and improvements

EM

k-median

k-medoids

2.6 Alternatives and improvements

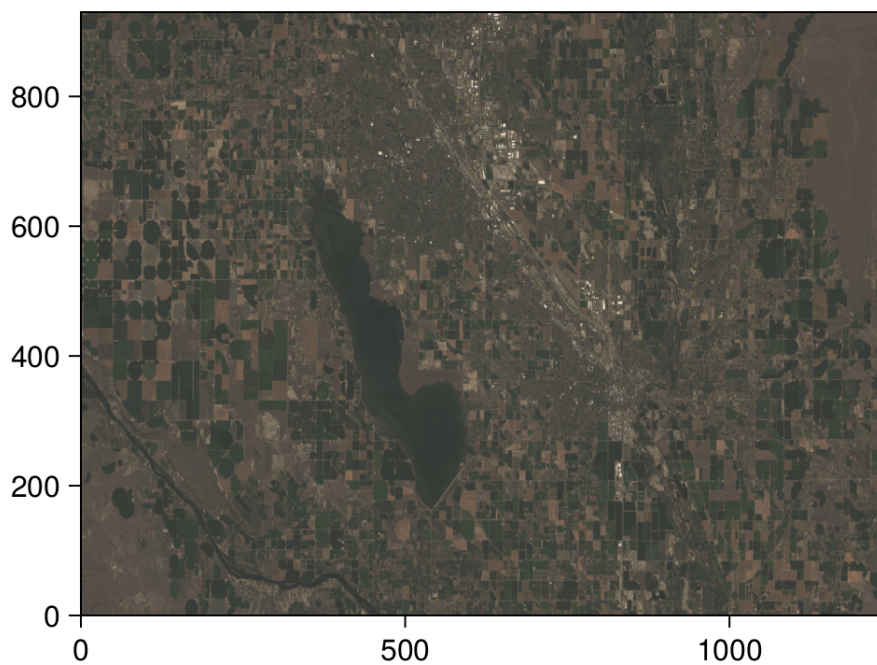


Figure 2.1: The Landsat 9 data are combined into the “Natural Color” image, in which the red, green, and blue bands are mapped to their respective channels. This looks eerily like the way we perceive the landscape. Note how little difference there is between the large body of water and the surrounding crops. This emphasizes that the combination of channels we use will limit our ability to separate the pixels into groups.

2 The k-means algorithm

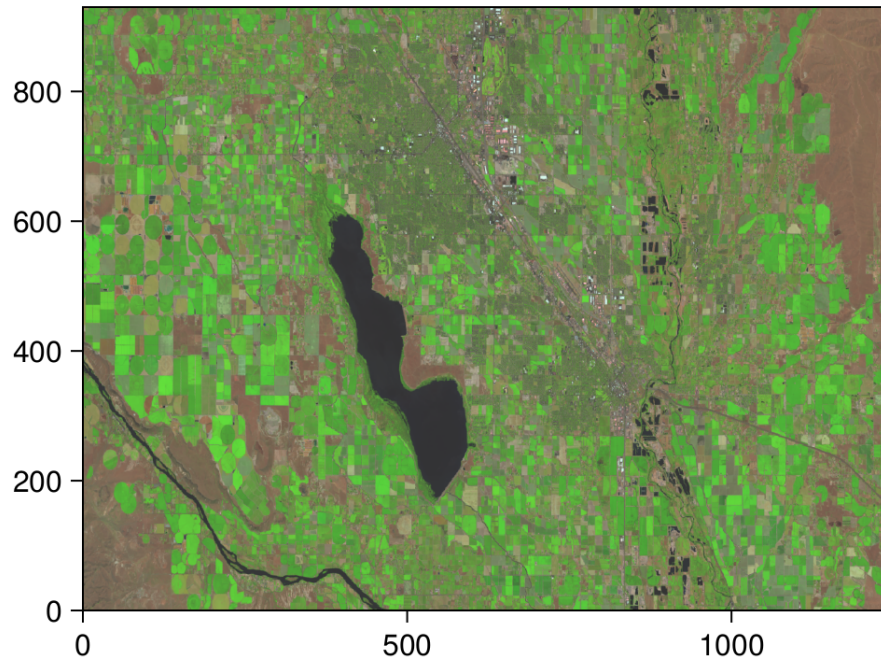


Figure 2.2: The same landscape as above is now presented in a fake color composite, where SWIR is mapped to the red channel, NIR to the green channel, and red to the blue channel. This highlights different values in the landscape, but is no more or less “real” than the true color composite. It is a visualization of the data, that represents different choices, questions, and assumptions. Compared to the Natural Color composite, this version of the data highlights the water, areas with vegetation, and more arid areas.

2.6 Alternatives and improvements

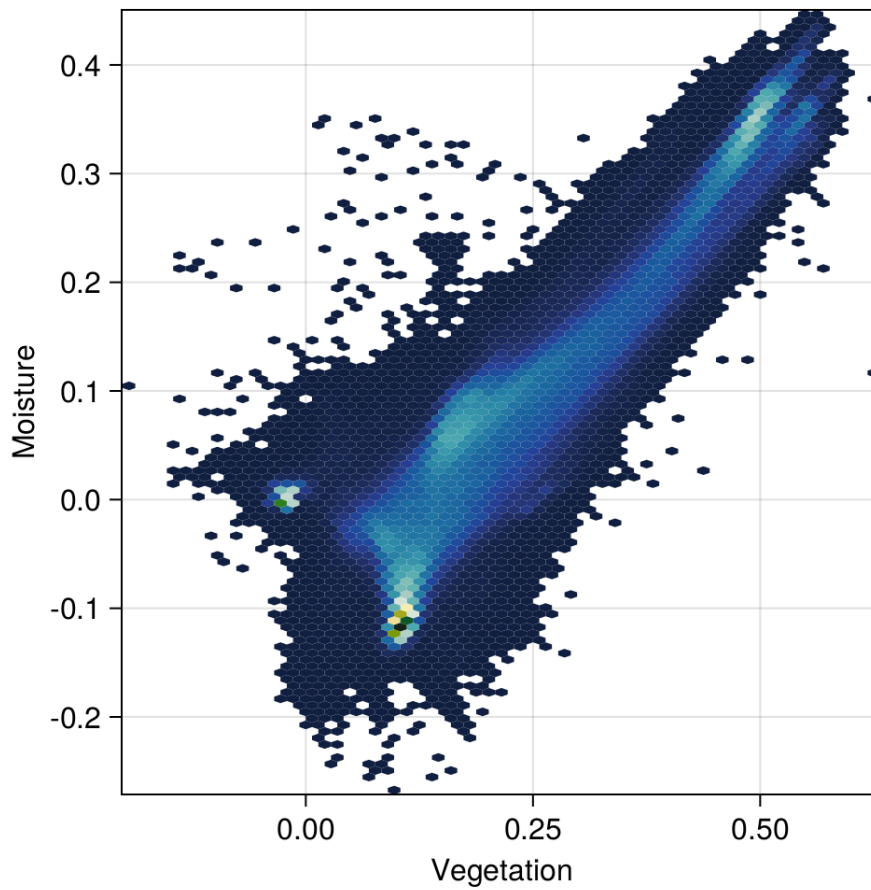


Figure 2.3: The pixels acquired from Landsat 8 exist in a space with many different dimensions (one for each band). Because we are interested in a landscape classification based on water/vegetation data, we use the NDVI, NDMI, and NDWI combinations of bands. These are *derived* data, and represent an instance of feature engineering: we have derived these values from the raw data.

2 The k -means algorithm

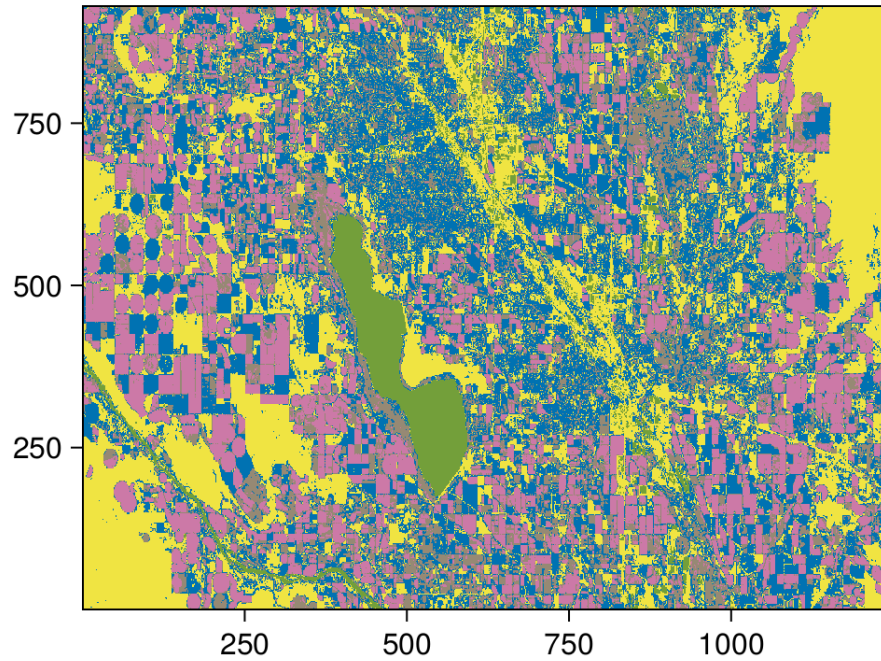


Figure 2.4: After iterating the k -means algorithm, we obtain a classification for every pixel in the landscape. This classification is based on the values of NDVI, NDMI, and NDWI indices, and therefore groups pixels based on a specific hypothesis. This clustering was produced using $k = 5$, *i.e.* we want to see what the landscape would look like when divided into five categories.

2.6 Alternatives and improvements

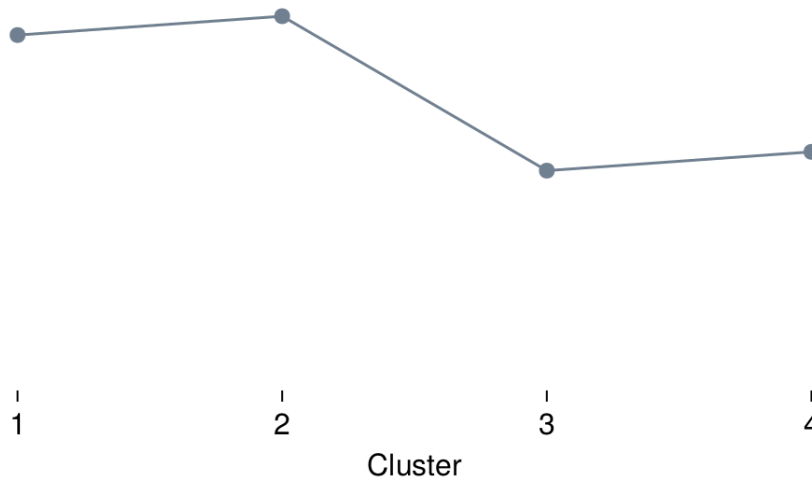


Figure 2.5: Number of pixels assigned to each class in the final landscape classification. In most cases, k -means will create clusters with the same number of points in them. This may be an issue, or this may be a way to ensure that whatever classes are produced will be balanced in terms of their representation.

3 Gradient descent

As we progress into this book, the process of delivering a trained model is going to become increasingly complex. In Chapter 2, we work with a model that did not really require training (but did require to pick the best hyper-parameter). In this chapter, we will only increase complexity very slightly, by considering how we can train a model when we have a reference dataset to compare to.

Doing so will require to introduce several new concepts, and so the “correct” way to read this chapter is to focus on the high-level process. The problem we will try to solve (which is introduced in **the gradient descent problem**) is very simple; in fact, the empirical data looks more fake than many simulated datasets!

3.1 A digression: what is a trained model?

3.2 The problem: how many interactions in a food web?

One of the earliest observation that ecologists made about food webs is that when there are more species, there are more interactions. A remarkably insightful crowd, food web ecologists. Nevertheless, it turns out that this apparently simple question had received a few different answers over the years. In

The initial model was proposed by Cohen and Briand (1984): the number of interactions L scales linearly with the number of species S . After all,

3 Gradient descent

we can assume that when averaging over many consumers, there will be an average diversity of resources they consume, and so the number of interactions could be expressed as $L \approx b \times S$.

Not so fast, said Martinez (1992). When we start looking at food webs with more species, the increase of L with regards to S is superlinear. Thinking in ecological terms, maybe we can argue that consumers are flexible, and that instead of sampling a set number of resources, they will sample a set proportion of the number of consumer-resource combinations (of which there are S^2). In this interpretation, $L \approx b \times S^2$.

But the square term can be relaxed; and there is no reason not to assume a power law, with $L \approx b \times S^a$. This last formulation has long been accepted as the most workable one, because it is possible to approximate values of its parameters using other ecological processes (Brose et al. 2004).

The “reality” (*i.e.* the relationship between S and L that correctly accounts for ecological constraints, and fit the data as closely as possible) is a little bit different than this formula (MacDonald, Banville, and Poisot 2020). But for the purpose of this chapter, figuring out the values of a and b from empirical data is a very instructive exercise.

3.3 Gradient descent

Gradient descent is built around a remarkably simple intuition: knowing the formula that gives rise to our prediction, and the value of the error we made for each point, we can take the derivative of the error with regards to each parameter, and this tells us how much this parameter contributed to the error. Because we are taking the derivative, we can further know whether to increase, or decrease, the value of the parameter in order to make a smaller error next time.

In this section, we will use linear regression as an example, because it is the model we have decided to use when exploring our ecological problem

in **sec-gradientdescent-problem**, and because it is suitably simple to keep track of everything when writing down the gradient by hand.

Before we start assembling the different pieces, we need to decide what our model is. We have settled on a linear model, which will have the form $\hat{y} = m \times x + b$. The little hat on \hat{y} indicates that this is a prediction. The input of this model is x , and its parameters are m (the slope) and b (the intercept). Using the notation we adopted in **sec-gradientdescent-problem**, this would be $\hat{l} = a \times s + b$, with $l = \log L$ and $s = \log S$.

3.3.1 Defining the loss function

The loss function is an important concept for anyone attempting to compare predictions to outcomes: it quantifies how far away an ensemble of predictions is from a benchmark of known cases. There are many loss functions we can use, and we will indeed use a few different ones in this book. But for now, we will start with a very general understanding of what these functions *do*.

Think of prediction as throwing a series of ten darts on ten different boards. In this case, we know what the correct outcome is (the center of the board, I assume, although I can be mistaken since I have only played darts once, and lost). A cost function would be any mathematical function that compares the position of each dart on each board, the position of the correct event, and returns a score that informs us about how poorly our prediction lines up with the reality.

In the above example, you may be tempted to say that we can take the Euclidean distance of each dart to the center of each board, in order to know, for each point, how far away we landed. Because there are several boards, and because we may want to vary the number of boards while still retaining the ability to compare our performances, we would then take the average of these measures.

3 Gradient descent

We will note the position of our dart as being \hat{y} , the position of the center as being y (we will call this the *ground truth*), and the number of attempts n , and so we can write our loss function as

$$\frac{1}{n} \sum_{i=1}^n (y_i - \hat{y}_i)^2 \quad (3.1)$$

This loss function is usually called the MSE (Mean Standard Error), or L2 loss, or the quadratic loss, because the paths to machine learning terminology are many. This is a good example of a loss function for regression (and we will discuss loss functions for classification later in this book). There are alternative loss functions to use for regression problems in Table 3.1.

Table 3.1: List of common loss functions for regression problems

Measure	Expression	Remarks
Mean Squared Error (MSE, L2)	$\frac{1}{n} \sum_{i=1}^n (y_i - \hat{y}_i)^2$	Large errors are (proportionally) more penalized because of the squaring
Mean Absolute Error (MAE, L1)	$\frac{1}{n} \sum_{i=1}^n \ y_i - \hat{y}_i\ $	Error measured in the units of the response variable
Root Mean Square Error (RMSE)	$\sqrt{\text{MSE}}$	Error measured in the units of the response variable
Mean Bias Error	$\frac{1}{n} \sum_{i=1}^n (y_i - \hat{y}_i)$	Errors <i>can</i> cancel out, but this can be used as a measure of positive/negative bias

Throughout this chapter, we will use the L2 loss (Equation 3.1), because it has *really* nice properties when it comes to taking derivatives, which we

3.3 Gradient descent

will do a lot of. In the case of a linear model, we can rewrite Equation 3.1 as

$$f = \frac{1}{n} \sum (y_i - m \times x_i - b)^2 \quad (3.2)$$

There is an important change in Equation 3.2: we have replaced the prediction \hat{y}_i with a term that is a function of the predictor x_i and the model parameters: this means that we can calculate the value of the loss as a function of a pair of values (x_i, y_i) , and the model parameters.

3.3.2 Calculating the gradient

With the loss function corresponding to our problem in hands (Equation 3.2), we can calculate the gradient. Given a function that is scalar-valued (it returns a single value), taking several variables, that is differentiable, the gradient of this function is a vector-valued (it returns a vector) function; when evaluated at a specific point, this vectors indicates both the direction and the rate of fastest increase, which is to say the direction in which the function increases away from the point, and how fast it moves.

We can re-state this definition using the terms of the problem we want to solve. At a point $p = [m \ b]^\top$, the gradient ∇f of f is given by:

$$\nabla f(p) = \begin{bmatrix} \frac{\partial f}{\partial m}(p) \\ \frac{\partial f}{\partial b}(p) \end{bmatrix}. \quad (3.3)$$

This indicates how changes in m and b will *increase* the error. In order to have a more explicit formulation, all we have to do is figure out an expression for both of the partial derivatives. In practice, we can let auto-differentiation software calculate the gradient for us (Innes 2018); these

3 Gradient descent

packages are now advanced enough that they can take the gradient of code directly.

Solving $(\partial f / \partial m)(p)$ and $(\partial f / \partial c)(p)$ is easy enough:

$$\nabla f(p) = \begin{bmatrix} -\frac{2}{n} \sum [x_i \times (y_i - m \times x_i - b)] \\ -\frac{2}{n} \sum (y_i - m \times x_i - b) \end{bmatrix}. \quad (3.4)$$

Note that both of these partial derivatives have a term in $2n^{-1}$. Getting rid of the 2 in front is very straightforward! We can modify Equation 3.2 to divide by $2n$ instead of n . This modified loss function retains the important characteristics: it increases when the prediction gets worse, and it allows comparing the loss with different numbers of points. As with many steps in the model training process, it is important to think about *why* we are doing certain things, as this can enable us to make some slight changes to facilitate the analysis.

With the gradient written down in Equation 3.4, we can now think about what it means to *descend* the gradient.

3.3.3 Descending the gradient

Recall from TK that the gradient measures how far we *increase* the function of which we are taking the gradient. Therefore, it measures how much each parameter contributes to the loss value. Our working definition for a trained model is “one that has little loss”, and so in an ideal world, we could find a point p for which the gradient is as small as feasible.

Because the gradient measures how far away we increase error, and intuitive way to use it is to take steps in the *opposite* direction. In other words, we can update the value of our parameters using $p := p - \nabla f(p)$, meaning that we subtract from the parameter values their contribution to the overall error in the predictions.

But, as we will discuss further in [?@sec-gradientdescent-learningrate](#), there is such a thing as “too much learning”. For this reason, we will usually not move the entire way, and introduce a term to regulate how much of the way we actually want to descend the gradient. Our actual scheme to update the parameters is

$$p := p - \eta \times \nabla f(p).$$

This formula can be *iterated*: with each successive iteration, it will get us closer to the optimal value of p , which is to say the combination of m and b that minimizes the loss.

3.3.4 A note on the learning rate

The error we can make on the first iteration will depend on the value of our initial pick of parameters. If we are *way off*, especially if we did not re-scale our predictors and responses, this error can get very large. And if we make a very large error, we will have a very large gradient, and we will end up making very big steps when we update the parameter values. There is a real risk to end up over-compensating, and correcting the parameters too much.

In order to protect against this, in reality, we update the gradient only a little, where the value of “a little” is determined by an hyper-parameter called the *learning rate*, which we noted η . This value will be very small (much less than one). Picking the correct learning rate is not simply a way to ensure that we get correct results (though that is always a nice bonus), but can be a way to ensure that we get results *at all*. The representation of numbers in a computer’s memory is tricky, and it is possible to create an overflow: a number so large it does not fit within 64 (or 32, or 16, or however many we are using) bits of memory.

3 *Gradient descent*

The conservative solution of using the smallest possible learning rate is not really effective, either. If we almost do not update our parameters at every epoch, then we will take almost forever to converge on the correct parameters. Figuring out the learning rate is an example of hyper-parameter tuning, which we will get back to later in this book.

3.4 Application: how many links are in a food web?

3.5 Notes on regularization

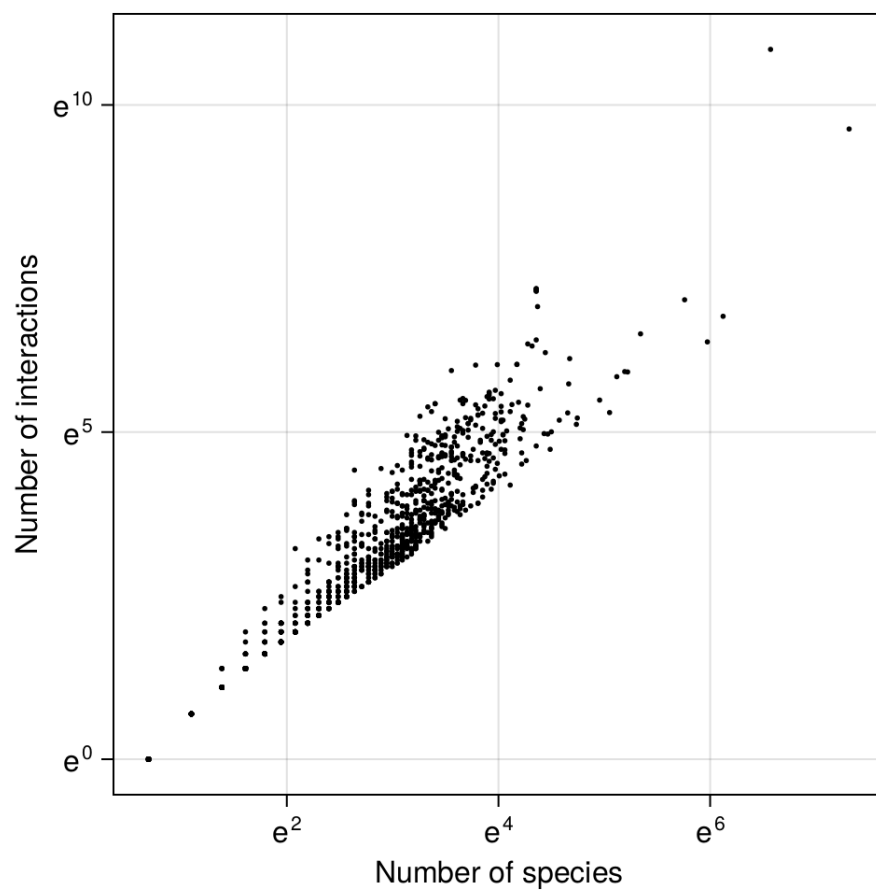


Figure 3.1: ... (todo)

4 Testing, training, validating

In Chapter 2, we were very lucky. Because we applied an unsupervised method, we didn't really have a target to compare to the output. Whatever classification we got, we had to live with it. It was incredibly freeing. Sadly, in most applications, we will have to compare our predictions to data, and data are incredibly vexatious. In this chapter, we will develop intuitions on the notions of training, testing, and validation; we will further think about data leakage, why it is somehow worse than it sounds, and how to protect against it.

In a sense, we started thinking about these concepts in `sgd`; specifically, we came up with a way to optimize the parameters of our model (*i.e.* of *training* our model) based on a series of empirical observations, and a criteria for what a “good fit” is. We further appraised the performance of our model by measuring the loss (our measure of how good the fit is) on a dataset that was not accessible during training.

4.1 How can we split a dataset?

There is a much more important question to ask first: *why* do we split a dataset? In a sense, answering this question echoes the discussion we started in `REG MOD`, because the purpose of splitting a dataset is to ensure we can train and evaluate it properly, in order to deliver the best possible model.

4 Testing, training, validating

When a model is trained, it has learned from the data, we have tuned its hyper-parameters to ensure that it learned with the best possible conditions, and we have applied a measure of performance after the entire process to communicate how well our model works. These three tasks require three different datasets, and this is the purpose of splitting our data into groups.

One of the issues when reading about splitting data is that the terminology can be muddy. For example, what constitutes a testing and validation set can largely be a matter of perspective. In many instances, testing and validation are used interchangeably, and this book is no exception. Nevertheless, it helps to settle on a few guidelines here, before going into the details of what each dataset constitutes and how to assemble it.

The training data are examples that are given to the model during the training process. This one has no ambiguities. aside from the fact that it is defined by subtraction, in a sense, as whatever is left of the original data after we set aside testing and validation sets.

The testing data are used at the end of the process, to measure the performance of a trained model with tuned hyper-parameters. If the training data are the lectures, testing data are the final exam: we can measure the performance of the model on this dataset and report it as the model performance we can expect when applying the model to new data. There is a very important, chapter-long, caveat about this last point, related to the potential of information leak between datasets, which is covered in **TODO LEAKAGE**.

The validation data are used in-between, as part of the training process. They are (possibly) a subset of the training data that we use internally to check the performance of the model, often in order to tune its hyper-parameters, or as a way to report on the over-fitting of the model during the training process.

The difference between testing and validation is largely a difference of *intent*. When we want to provide an a posteriori assessment of the model

4.1 How can we split a dataset?

performance, the dataset we use to determine this performance is a testing dataset. When we want to optimize some aspect of the model, the data we use for this are the validation data. With this high-level perspective in mind, let's look at each of these datasets in turn. The differences between these three datasets are summarized in Table 4.1.

Table 4.1: Information in the “Data used for training” column refer to the data that have been used to train the model when calculating its performance.

Dataset	Trains	Purpose	Data for performance
Training	yes	train model	
Validation		validate during training	training data only
Testing		estimates of future performance	all except testing

4.1.1 Training

In data science (in applied machine learning in particular), we do *fit* models. We *train* them. This is an important difference: training is an iterative process, that we can repeat, optimize, and tweak. The outcome of training and the outcome of fitting are essentially the same (a model that is parameterized to work as well as possible on a given dataset), but it is good practice to adopt the language of a field, and the language of data science emphasizes the different practices in model training.

Training, to provide a general definition, is the action of modifying the parameters of a model, based on knowledge of the data, and the error that results from using the current parameter values. In **sec-gradientdescent**, for example, we will see how to train a linear model using the technique of gradient descent. Our focus in this chapter is not on the methods we use for training, but on the data that are required to train a model.

4 Testing, training, validating

Training a model is a process akin to rote learning: we will present the same input, and the same expected responses, many times over, and we will find ways for the error on each response to decrease.

In order to initiate this process, we need an untrained model. Untrained, in this context, refers to a model that has not been trained *on the specific problem* we are addressing; the model may have been trained on a different problem (for example, we want to predict the distribution of a species based on a GLM trained on a phylogenetically related species). It is important to note that by “training the model”, what we really mean is “change the structure of the parameters until the output looks right”. For example, assuming a simple linear model like $c(X) = \beta_0 + \beta_1 X_1 + \beta_2 X_2$, training this model would lead to changes in the values of β , but not to the consideration of a new model $c(X) = \beta_0 + \beta_1 X_1 + \beta_2 X_2 + \beta_3 X_1 X_2$. Comparing models is (often) the point of validation, which we will address later on in the book.

4.1.2 Validating

The easiest way to think about the validation dataset is by thinking about what it is *not* used for: training the model (this is the training set), and giving a final overview of the model expected performance (this is the testing set). The validation set is used for everything else (model selection, cross-validation, hyper-parameters tuning), albeit in a specific way. With the training set, we communicate the predictors and the labels to the model, and update the weights of the model in response. With the validation set, we communicate the predictors and the labels to the model, but we do *not* update the weights in response. All we care about during validation is the performance of the model on a problem it has not yet encountered during training. If the training set is like attending a lecture, the validation set is like formative feedback.

Of course, one issue with the creation of a validation set is that it needs to resemble the problem the model will have to solve in practice. We will

4.1 How can we split a dataset?

discuss this more in depth in the following sections, but it is worth thinking about an example. Assume a model that classifies a picture as having either a black bear, or no black bear. Now, we can train this model using, for example, images from 10 camera traps that are situated in a forest. And we might want to validate with a camera trap that is in a zoo. In one of the enclosures. The one with a bear. A polar one.

The issue with this dataset as a validation dataset is that it does not match the problem we try to solve in many different ways. First, we will have an excess of images with bears compared to our problem environment. Second, the data will come from very different environments (forest v. zoo). Finally, we are attempting to validate on something that is an entirely different species of bear. This sounds like an egregious case (it is), but it is easy to commit this type of mistake when our data get more complex than black bear, polar bear, no bear.

Validation is, in particular, very difficult when the dataset we use for training has extreme events (Bellocchi et al. 2010). Similarly, the efficiency of validation datasets can be limited if it reflects the same biases as the training data (Martinez-Meyer 2005). Recall that this validation dataset is used to decide on the ideal conditions to train the final model before testing (and eventually, deployment); it is, therefore, extremely important to get it right. A large number of techniques to split data **REF TK** use heuristics to minimize the risk of picking the wrong validation data.

4.1.3 Testing

The testing dataset is special. The model has *never* touched it. Not during training, and not for validation. For this reason, we can give it a very unique status: it is an analogue to data that are newly collected, and ready to be passed through the trained model in order to make a prediction. The only difference between the testing set and actual new data is that, for the testing set, we know the labels. In other words, we can compare the

4 Testing, training, validating

model output to these labels, and this gives us an estimate of the model performance on future data.

But this requires a trained model, and we sort of glossed over this step. In order to come up with a trained model, it would be a strange idea not to use the validation data – they are, after all, holding information about the data we want to model! Once we have evaluated our model on the validation set, we can start the last round of training to produce the final model. We do this by training the model using everything *except* the testing data.

4.2 The problem: phenology of cherry blossom

The cherry blossom tree (*Prunus*) is ...

Long-term time series of the date of first bloom in Japan reveal that in the last decades, cherry blossom blooms earlier, which has been linked to, possibly, climate change and urbanization. The suspected causal mechanism is as follows: both global warming and urbanization lead to higher temperatures, which means a faster accumulation of degree days over the growing season, leading to an earlier bloom. Indeed, the raw data presented in Figure 4.1 show that trees bloom early when the temperatures are higher.

With these data in hand (day of year with the first bloom, and smoothed reconstructed temperature in March), we can start thinking about this hypothesis. But by contrast with our simple strategy in **GRADIENT**, this time, we will split our dataset into training, validation, and testing sets, as we discussed in the previous section. Yet there are many ways to split a dataset, and therefore before starting the analysis, we will have a look at a few of them.

4.3 Strategies to split data

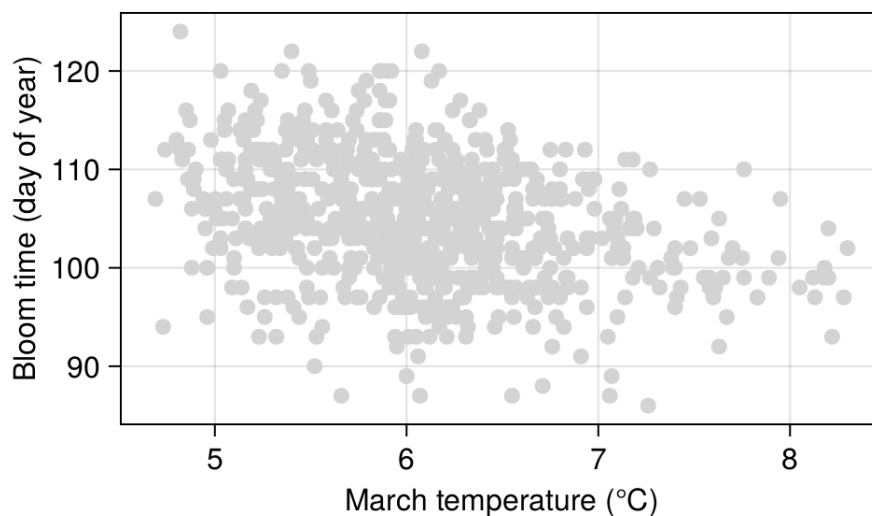


Figure 4.1: The raw data show a negative relationship between the temperature in March, and the bloom time. This suggests that when the trees have accumulated enough temperature, they can bloom early. In a context of warming, we should therefore see earlier blooms with rising temperatures.

4.3 Strategies to split data

remove testing first if needed

exhaustive

non-exhaustive

4.3.1 Holdout

The holdout method is what we used in **TODO REF GRAD**, in which we randomly selected some observations to be part of the validation data (which was, in practice, a testing dataset in this example), and kept the rest to serve as the training data. Holdout cross-validation is possibly the simplest technique, but it suffers from a few drawbacks.

The model is only trained for one split of the data, and similarly only evaluated for one split of the data. There is, therefore, a chance to sample a particularly bad combination of the data that lead to erroneous results. Attempts to quantify the importance of the predictors are likely to give particularly unstable results, as the noise introduced by picking a single random subset will not be smoothed out by multiple attempts.

In addition, as Hawkins, Basak, and Mills (2003) point out, holdout validation is particularly wasteful in data-limited settings, where there are fewer than hundreds of observations. The reason is that the holdout dataset will *never* contribute to training, and assuming the data are split 80/20, one out of five observations will not contribute to the model. Other cross-validation schemes presented in this section will allow observations to be used both for training and validation.

4.3.2 Leave-p-out

In leave- p -out cross-validation (LpOCV), starting from a dataset on n observation, we pick p at random to serve as validation data, and $n - p$ to serve as the training dataset. This process is then repeated *exhaustively*, which is to say we split the dataset in every possible way that gives p and $n - p$ observations, for a set value of p . The model is then trained on the $n - p$ observations, and validated on the p observations for validation, and the performance (or loss) is averaged to give the model performance before testing.

Celisse (2014) points out that p has to be large enough (relative to the sample size n) to overcome the propensity of the model to overfit on a small training dataset. One issue with LpOCV is that the number of combinations is potentially very large. It is, in fact, given by the binomial coefficient $\binom{n}{p}$, which gets unreasonably large even for small datasets. For example, running LpOCV on $n = 150$ observations, leaving out $p = 10$ for validation everytime, would require to train the model about 10^{15} times. Assuming we can train the model in 10^{-3} seconds, the entire process would require 370 centuries.

Oh well.

4.3.3 Leave-one-out

The leave-one-out cross-validation (LOOCV) is a special case of LpOCV with $p = 1$. Note that it is a lot faster to run than LpOCV, because $\binom{n}{1} = n$, and so the validation step runs in $O(n)$ (LpOCV runs in $O(n!)$). LOOCV is also an *exhaustive* cross-validation technique, as every possible way to split the dataset will be used for training and evaluation.

4.3.4 k-fold

One of the most frequent cross-validation scheme is k-fold cross-validation. Under this approach, the dataset is split into k equal parts (and so when $k = n$, this is also equivalent to LOOCV). Like with LOOCV, one desirable property of k-fold cross-validation is that each observation is used *exactly* one time to evaluate the model, and *exactly* $k - 1$ times to train it. But by contrast with the holdout validation approach, *all* observations are used to train the model.

When the data have some specific structure, it can be a good thing to manipulate the splits in order to maintain this structure. For example, Bergmeir and Benítez (2012) use temporal blocks for validation of time

4 Testing, training, validating

series, and retain the last part of the series for testing (we illustrate this in Figure 4.2). For spatial data, Hijmans (2012) suggests the use of a null model based on distance to training sites to decide on how to split the data; Valavi et al. (2018) have designed specific k-fold cross-validation schemes for species distribution models. These approaches all belong to the family of *stratified* k-fold cross-validation (Zeng and Martinez 2000).

The appropriate value of k is often an unknown. It is common to use $k = 10$ as a starting point (tenfold cross-validation), but other values are justifiable based on data volume, complexity of the model training, to name a few.

4.3.5 Monte-Carlo

One of the limitations of k-fold cross-validation is that the number of splits is limited by the amount of observations, especially if we want to ensure that there are enough samples in the validation data. To compensate for this, Monte-Carlo cross-validation is essentially the application (and averaging) of holdout validation an arbitrary number of times. Furthermore, the training and validation datasets can be constructed in order to account for specific constraints in the dataset, giving more flexibility than k-fold cross-validation. When the (computational) cost of training the model is high, and the dataset has specific structural constraints, Monte-Carlo cross-validation is a good way to generate data for hyperparameters tuning.

One issue with Monte-Carlo cross-validation is that we lose the guarantee that every observation will be used for training at least once (and similarly for validation). Trivially, this becomes less of an issue when we increase the number of replications, but then this suffers from the same issues as LpOCV, namely the unreasonable computational requirements.

4.4 Application: when do cherry blossom bloom?

The model we will train for this section is really simple: $\text{bloom day} = m \times \text{temperature} + b$. This is a linear model, and one with a nice, direct biological interpretation: the average (baseline) day of bloom is b , and each degree adds m days to the bloom date. At this point, we *might* start thinking about the distribution of the response, and what type of GLM we should use, but no. Not today. Today, we want to iterate quickly, and so we will start with a model that is exactly as simple as it needs to be.

This approach (start from a model that is suspiciously simple) is a good thing, for more than a few reasons. First, it gives us a baseline to compare more complicated models against. Second, it means that we do not need to focus on the complexity of the code (and the model) when building a pipeline for the analysis. Finally, and most importantly, it gives us a result very rapidly, which enables a loop of iterative model refinement on a very short timescale. Additionally, at least for this example, the simple models often work rather well.

4.4.1 Performance evaluation

We can visualize the results of our model training and assessment process. These results are presented in Figure 4.3 (as well as in Table 4.2, if you want to see the standard deviation across all splits), and follow the same color-coding convention we have used so far. All three loss measures presented here express their loss in the units of the response variable, which in this case is the day of the year where the bloom was recorded. These results show that our trained model achieves a loss of the order of a day or two in the testing data, which sounds really good!

Yet it is important to contextualize these results. What does it mean for our prediction to be correct plus or minus two days? There are at least two important points to consider.

4 Testing, training, validating

Table 4.2: TODO

Dataset	Measure	Loss (avg.)	Loss (std. dev.)
Testing	MAE	1.696	
Training	MAE	2.2397	0.0482364
Validation	MAE	2.26331	0.421513
Testing	MBE	0.0971036	
Training	MBE	9.8278e-15	1.15597e-14
Validation	MBE	0.000419595	0.910229
Testing	MSE	4.49123	
Training	MSE	8.04855	0.32487
Validation	MSE	8.24897	2.93094
Testing	RMSE	2.11925	
Training	RMSE	2.83648	0.0570941
Validation	RMSE	2.82514	0.545232

First, what are we predicting? Our response variable is not *really* the day of the bloom, but is rather a smoothed average looking back some years, and looking ahead some years too. For this reason, we are removing a lot of the variability in the underlying time series. This is not necessarily a bad thing, especially if we are looking for a trend at a large temporal scale, but it means that we should not interpret our results at a scale lower than the duration of the window we use for averaging.

Second, what difference *does* a day make? Figure 4.1 shows that most of the days of bloom happen between day-of-year 100 and day-of-year 110. Recall that the MAE is measured by taking the average absolute error – a mistake of 24 hours is 10% of this interval! This is an example of how thinking about the units of the loss function we use for model evaluations can help us contextualize the predictions.

4.4 Application: when do cherry blossom bloom?

4.4.2 Model predictions

The predictions of our model are presented in Figure 4.4; these are the predictions of the *final* model, that is, the model that we trained on everything *except* the testing data, and for which we can get the performance by looking at Figure 4.3.

The question we now need to answer is: is our model doing a good job? We can start thinking about this question in a very qualitative way: yes, it does a goob job at drawing a line that, through time, goes right through the original data. As far as validation goes, it maybe underestimates the drop in the response variable (it predicts the bloom a little later), but maybe there are long-term effects, expressed over the lifetime of the tree (the first bloom usually takes places after 6 or 7 growth seasons), that we do not account for.

Our model tends to smooth out some of the variation; it does not predict bloom dates before day of year 100, or after day of year 108, although they do happen. This may not be a trivial under-prediction: some of these cycles leading to very early/late bloom can take place over a century, meaning that our model could be consistently wrong (which is to say, wrong with the same bias) for dozens of years in a row.

4.4.3 Is our model good, then?

The answer is, it depends. Models are neither good, nor bad. They are either fit, or unfit, for a specific purpose.

If the purpose is to decide when to schedule a one-day trip to see the cherry blossom bloom, our model is not really fit – looking at the predictions, it gets within a day of the date of bloom (but oh, by the way, this is an average over close to a decade!) about 15% of the time, which jumps up to close to 30% if you accept a two-days window of error.

4 Testing, training, validating

If the purpose is to look at long-time trends in the date of bloom, then our model actually works rather well. It does under-estimate the amplitude of the cycles, but not by a large amount. In fact, we could probably stretch the predictions a little, applying a little correction factor, and have a far more interesting model.

We will often be confronted to this question when working with prediction. There is not really a criteria for “good”, only a series of compromises and judgment calls about “good enough”. This is important. It reinforces the imperative of keeping the practice of data science connected to the domain knowledge, as ultimately, a domain expert will have to settle on whether to use a model or not.

4.4 Application: when do cherry blossom bloom?

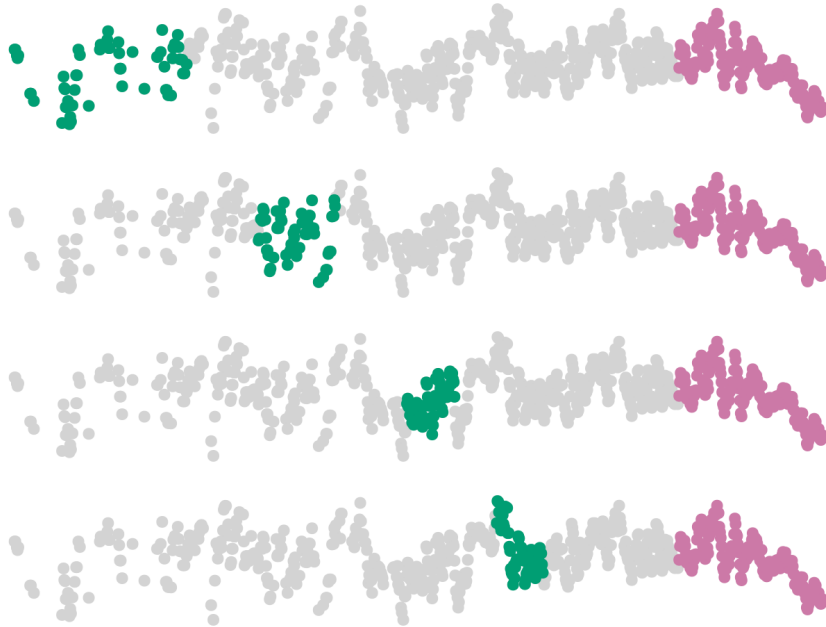


Figure 4.2: An illustration of a series of folds on a timeseries. The grey data are used for training, the black data for validation, and the red data are kept for testing. Note that in this context, we sometimes use the future to validate on the past (look at the first fold!), but this is acceptable for reasons explained in the text.

4 Testing, training, validating

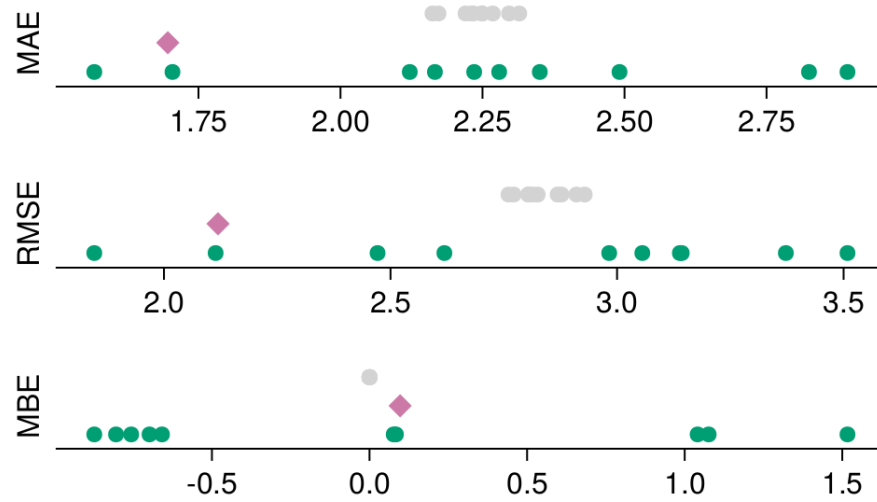


Figure 4.3: Visualisation of the model performance for The colors are the same as in fig-splits-illustration, *i.e.* grey for the training data, green for the validation data, and purple for the testing data.

4.4 Application: when do cherry blossom bloom?

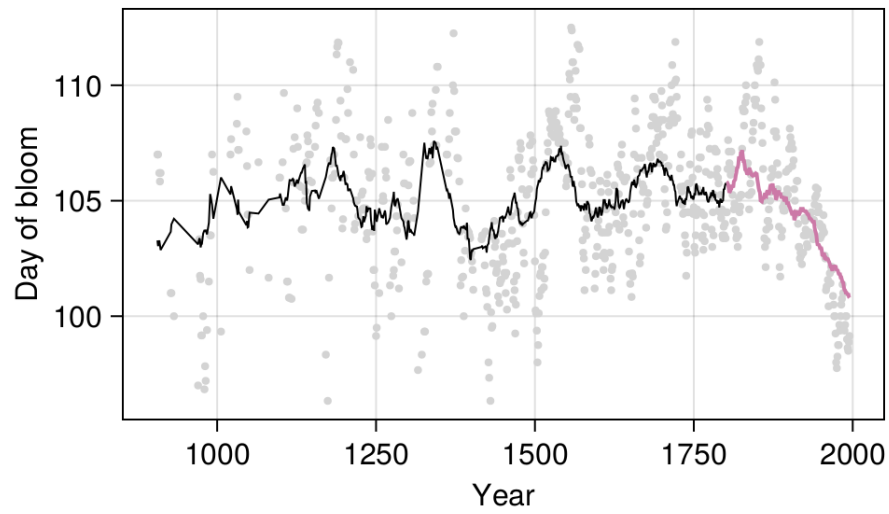


Figure 4.4: TODO

5 Data leakage

Data leakage is a concept that is, surprisingly, grosser than it sounds. The purpose of this section is to put the fear of data leakage in you, because it can, and most assuredly *will*, lead to bad models, which is to say (as we discussed in [?@sec-gradientdescent-trainedmodel](#)), models that do not adequately represent the underlying data, in part because we have built-in some biases into them. In turn, this can eventually lead to decreased explainability of the models, which erodes trust in their predictions (Amarasinghe et al. 2023). As illustrated by Stock, Gregr, and Chan (2023), a large number of ecological applications of machine learning are particularly susceptible to data leakage, meaning that this should be a core point of concern for us.

5.1 Consequences of data leakage

We take data leakage so seriously because it is one of the top ten mistakes in applied machine learning (Nisbet et al. 2018). Data leakage happens information “leaks” from the training conditions to the evaluation conditions. In other words, when the model is evaluated after mistakenly being fed information that would not be available in real-life situations. Note that this definition of leakage is different from another notion, namely the loss of data availability over time (Peterson et al. 2018).

It is worth stopping for a moment to consider what these “real-life situations” are, and how they differ from the training of the model. Most of this difference can be summarized by the fact that when we are *applying*

5 Data leakage

a model, we can start from the model *only*. Which is to say, the data that have been used for the training and validation of the model may have been lost, without changing the applicability of the model: it works on entirely new data.

Because this is the behavior we want to simulate with a validation dataset, it is very important to fully disconnect the validation data from the rest of the data. We can illustrate this with an example. Let's say we want to work on a time series of population size, such as provided by the *BioTIME* project (Dornelas et al. 2018). One naïve approach would be to split this the time series at random into three datasets. We can use one to train the models, one to test these models, and a last one for validation.

Congratulations! We have created data leakage! Because we are splitting our timeseries at random, the model will likely have been trained using data that date from *after* the start of the validation dataset. In other words: our model can peek into the future. This is highly unlikely to happen in practice, due to the laws of physics. A strategy that would prevent leakage would have been to pick a cut-off date to define the validation dataset, and then to decide how to deal with the training and testing sets.

TODO stationary processes Politis and Romano (1994)

5.2 Sources of data leakage

instances

features

5.3 Avoiding data leakage

learn/predict separation (Kaufman, Rosset, and Perlich 2011)

6 Supervised classification

In the previous chapters, we have focused on efforts on regression models, which is to say models that predict a continuous response. In this chapter, we will introduce the notion of classification, which is the prediction of a discrete variable representing a category. There are a lot of topics we need to cover before we can confidently come up with a model for classification, and so this chapter is part of a series. We will first introduce the idea of classification; in **TODO**, we will think about predictions of classes as probabilities; in **TODO**, we will generalize these ideas and think about learning curves; finally, in **TODO**, we will finally think about variables a lot more, and introduce elements of model interpretation

6.1 The problem: reindeer distribution

Throughout these chapters, we will be working on a single problem, which is to predict the distribution of the Reindeer, *Rangifer tarandus tarandus*. Species Distribution Modeling (SDM; Elith and Leathwick (2009)), or Ecological Niche Modeling (ENM), is an excellent instance of ecologist essentially doing applied machine learning already, as Beery et al. (2021) rightfully pointed out. In fact, the question of fitness-for-purpose, which we discussed in previous chapters, has been covered in the SDM (Guillera-Arroita et al. 2015). In these chapters, we will fully embrace this idea, and look at the problem of predicting where species can be as a data science problem.

6.2 What is classification?

Classification is the prediction of a qualitative response. In Chapter 2, for example, we predicted the class of a pixel, which is a qualitative variable with levels $\{1, 2, \dots, k\}$. This represented an instance of *unsupervised* learning, as we had no *a priori* notion of the correct class of the pixel. When building SDMs, by contrast, we often know where species are, and we can simulate “background points”, that represent assumptions about where the species are not (Hanberry, He, and Palik 2012; Barbet-Massin et al. 2012).

In short, our response variable has levels $\{0, 1\}$: the species is there, or it is not – we will challenge this assumption later in the series of chapters, but for now, this will do.

6.2.1 Separability and the curse of dimensionality

A very important feature of the relationship between the features and the classes is that, broadly speaking, classification is much easier when the classes are separable. Separability (often linear separability) is achieved when, if looking at some projection of the data on two dimensions, you can draw a line that separates the classes (a point in a single dimension, a plane in three dimension, and so on and so forth).

In Figure 6.1, we can see the temperature (in degrees) for locations with recorded presences of reindeers (top), and for locations with assumed absences. These two classes are not quite linearly separable alongside this single dimension (but maybe there is a different projection of the data that would change this), but there are still some values at which our guess for a class changes. For example, at a location with a temperature colder than 0°C , presences are far more likely. For a location with a temperature warmer than 5°C , absences become more likely. The locations with a temperature between 0°C and 5°C can go either way.

6.2 What is classification?

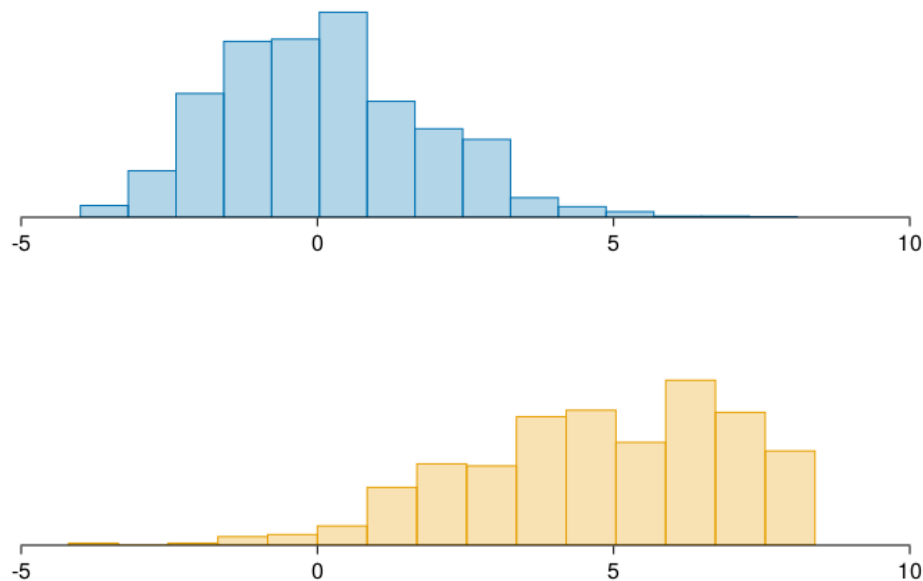


Figure 6.1: show the separability of classes

It would be tempting to say that adding dimensions should improve our chances to find a feature alongside which the classes become linearly separable. If only!

curse of dimensionality

6.2.2 The confusion table

The most important element we need in order to evaluate the performance of a classification model is the confusion table.

$$\begin{pmatrix} TP & FP \\ FN & TN \end{pmatrix}$$

6.3 The Naive Bayes Classifier

The Naive Bayes Classifier (NBC) is my all-time favorite classifier. It is built on a very simple intuition, works with almost no data, and more importantly, often provides an annoyingly good baseline for other, more complex classifiers to meet. That NBC works at all is counter-intuitive (Hand and Yu 2001). It assumes that all variables are independent, it works when reducing the data to a simpler distribution, and although the numerical estimate of the class probability is remarkably unstable, it generally gives good predictions. NBC is the data science equivalent of saying “eh, I reckon it’s probably *this* class” and somehow getting it right 95% of the case.

6.3.1 Assumptions of the NBC

In Figure 6.1, what is the most likely class if the temperature is 2°C?

6.3 The Naive Bayes Classifier

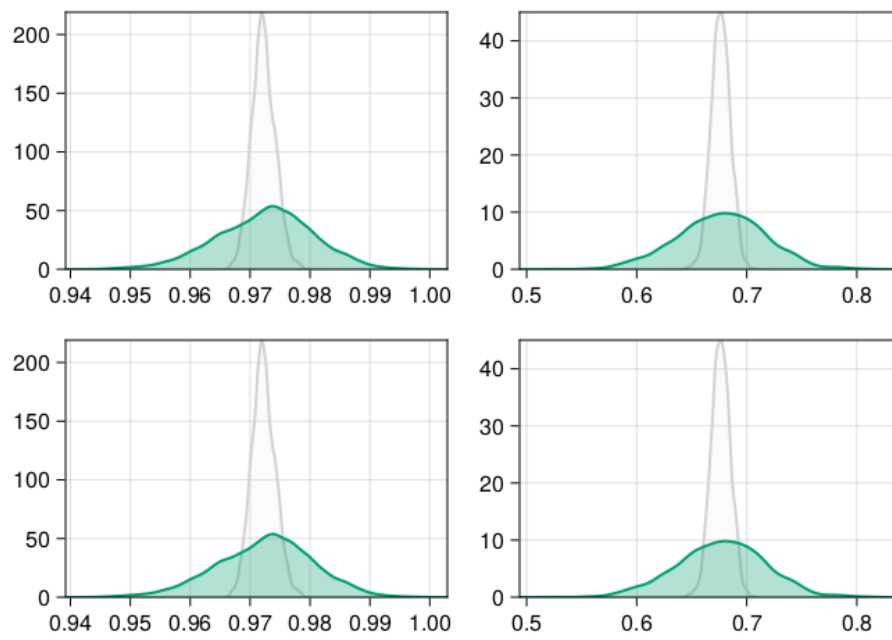


Figure 6.2: WAH NEVER CHANGES

6 Supervised classification

6.3.2 How to train the NBC

6.3.3 Decision rule for prediction

6.4 Application: a baseline model of reindeer presence

6.4.1 Training and validation strategy

6.4.2 Performance evaluation of the model

6.4.3 What is an acceptable model?

7 Learning curves and moving thresholds

In **TK GRADIENT**, we represented the testing and training loss of a model as a function of the number of gradient descent steps we had made. This sort of representation is very useful to figure out how well our model is learning, and is called, appropriately enough, a learning curve. In this chapter, we will produce learning curves to

7.1 Classification based on probabilities

7.2 The problem: improving the NBC model

7.3 Application: improved reindeer distribution model

Table 7.1: ?(caption)

```
"\\begin{tabular}{rr}\\n \\hline\\n 438 & 40 \\n 8 & 107 \\n \\hline\\n \\end{tabular}
```


References

- Amarasinghe, Kasun, Kit T. Rodolfa, Hemank Lamba, and Rayid Ghani. 2023. "Explainable Machine Learning for Public Policy: Use Cases, Gaps, and Research Directions." *Data & Policy* 5. <https://doi.org/10.1017/dap.2023.2>.
- Barbet-Massin, Morgane, Frédéric Jiguet, Cécile Hélène Albert, and Wilfried Thuiller. 2012. "Selecting Pseudo-Absences for Species Distribution Models: How, Where and How Many?" *Methods in Ecology and Evolution* 3 (2): 327–38. <https://doi.org/10.1111/j.2041-210x.2011.00172.x>.
- Beery, Sara, Elijah Cole, Joseph Parker, Pietro Perona, and Kevin Winner. 2021. "Species Distribution Modeling for Machine Learning Practitioners: A Review." *ACM SIGCAS Conference on Computing and Sustainable Societies (COMPASS)*, June. <https://doi.org/10.1145/3460112.3471966>.
- Bellocchi, Gianni, Mike Rivington, Marcello Donatelli, and Keith Matthews. 2010. "Validation of Biophysical Models: Issues and Methodologies. A Review." *Agronomy for Sustainable Development* 30 (1): 109–30. <https://doi.org/10.1051/agro/2009001>.
- Bergmeir, Christoph, and José M. Benítez. 2012. "On the Use of Cross-Validation for Time Series Predictor Evaluation." *Information Sciences* 191 (May): 192–213. <https://doi.org/10.1016/j.ins.2011.12.028>.
- Bezanson, Jeff, Alan Edelman, Stefan Karpinski, and Viral B. Shah. 2017. "Julia: A Fresh Approach to Numerical Computing." *SIAM Review* 59 (1): 65–98. <https://doi.org/10.1137/141000671>.
- Brose, Ulrich, Annette Ostling, Kateri Harrison, and Neo D. Martinez. 2004. "Unified Spatial Scaling of Species and Their Trophic In-

References

- teractions." *Nature* 428 (6979): 167–71. <https://doi.org/10.1038/nature02297>.
- Celisse, Alain. 2014. "Optimal Cross-Validation in Density Estimation with the ℓ^2 -Loss." *The Annals of Statistics* 42 (5). <https://doi.org/10.1214/14-aos1240>.
- Cohen, J. E., and F. Briand. 1984. "Trophic Links of Community Food Webs." *Proc Natl Acad Sci U S A* 81 (13): 4105–9.
- Cooney, Christopher R., Yichen He, Zoë K. Varley, Lara O. Nouri, Christopher J. A. Moody, Michael D. Jardine, András Liker, Tamás Székely, and Gavin H. Thomas. 2022. "Latitudinal Gradients in Avian Colourfulness." *Nature Ecology & Evolution* 6 (5): 622–29. <https://doi.org/10.1038/s41559-022-01714-1>.
- Cooper, Natalie, Alexander L. Bond, Joshua L. Davis, Roberto Portela Miguez, Louise Tomsett, and Kristofer M. Helgen. 2019. "Sex Biases in Bird and Mammal Natural History Collections." *Proceedings of the Royal Society B: Biological Sciences* 286 (1913): 20192025. <https://doi.org/10.1098/rspb.2019.2025>.
- Dornelas, Maria, Laura H. Antão, Faye Moyes, Amanda E. Bates, Anne E. Magurran, Dušan Adam, Asem A. Akhmetzhanova, et al. 2018. "BioTIME: A Database of Biodiversity Time Series for the Anthropocene." *Global Ecology and Biogeography* 27 (7): 760–86. <https://doi.org/10.1111/geb.12729>.
- Elith, Jane, and John R. Leathwick. 2009. "Species Distribution Models: Ecological Explanation and Prediction Across Space and Time." *Annual Review of Ecology, Evolution, and Systematics* 40 (1): 677–97. <https://doi.org/10.1146/annurev.ecolsys.110308.120159>.
- Guillera-Arroita, Gurutzeta, José J. Lahoz-Monfort, Jane Elith, Ascelin Gordon, Heini Kujala, Pia E. Lentini, Michael A. McCarthy, Reid Tingley, and Brendan A. Wintle. 2015. "Is My Species Distribution Model Fit for Purpose? Matching Data and Models to Applications." *Global Ecology and Biogeography* 24 (3): 276–92. <https://doi.org/10.1111/geb.12268>.
- Hanberry, Brice B., Hong S. He, and Brian J. Palik. 2012. "Pseudoabsence Generation Strategies for Species Distribution Models." Edited

References

- by Robert Planque. *PLoS ONE* 7 (8): e44486. <https://doi.org/10.1371/journal.pone.0044486>.
- Hand, David J., and Keming Yu. 2001. "Idiot's Bayes: Not so Stupid After All?" *International Statistical Review / Revue Internationale de Statistique* 69 (3): 385. <https://doi.org/10.2307/1403452>.
- Hawkins, Douglas M., Subhash C. Basak, and Denise Mills. 2003. "Assessing Model Fit by Cross-Validation." *Journal of Chemical Information and Computer Sciences* 43 (2): 579–86. <https://doi.org/10.1021/ci025626i>.
- Hijmans, Robert J. 2012. "Cross-Validation of Species Distribution Models: Removing Spatial Sorting Bias and Calibration with a Null Model." *Ecology* 93 (3): 679–88. <https://doi.org/10.1890/11-0826.1>.
- Innes, Michael. 2018. "Don't Unroll Adjoint: Differentiating SSA-Form Programs." <https://doi.org/10.48550/ARXIV.1810.07951>.
- Kaufman, Shachar, Saharon Rosset, and Claudia Perlich. 2011. "Leakage in Data Mining." *Proceedings of the 17th ACM SIGKDD International Conference on Knowledge Discovery and Data Mining*, August. <https://doi.org/10.1145/2020408.2020496>.
- Kennedy, Stephanie, and Mark Burbach. 2020. "Great Plains Ranchers Managing for Vegetation Heterogeneity: A Multiple Case Study." *Great Plains Research* 30 (2): 137–48. <https://doi.org/10.1353/gpr.2020.0016>.
- Luccioni, Alexandra Sasha, and David Rolnick. 2023. "Bugs in the Data: How ImageNet Misrepresents Biodiversity." *Proceedings of the AAAI Conference on Artificial Intelligence* 37 (12): 14382–90. <https://doi.org/10.1609/aaai.v37i12.26682>.
- MacDonald, Arthur Andrew Meahan, Francis Banville, and Timothée Poisot. 2020. "Revisiting the Links-Species Scaling Relationship in Food Webs." *Patterns* 1 (0). <https://doi.org/10.1016/j.patter.2020.100079>.
- Martinez, Néo D. 1992. "Constant Connectance in Community Food Webs." *The American Naturalist* 139 (6): 1208–18. <http://www.jstor.org/stable/2462337>.
- Martinez-Meyer, Enrique. 2005. "Climate Change and Biodiversity: Some Considerations in Forecasting Shifts in Species' Potential Distri-

References

- butions." *Biodiversity Informatics* 2 (0). <https://doi.org/10.17161/bi.v2i0.8>.
- Nisbet, Robert, Gary Miner, Ken Yale, John F. Elder, and Andrew F. Peterson. 2018. *Handbook of Statistical Analysis and Data Mining Applications*. Second edition. London: Academic Press.
- Peterson, A. Townsend, Alex Asase, Dora Canhos, Sidnei de Souza, and John Wieczorek. 2018. "Data Leakage and Loss in Biodiversity Informatics." *Biodiversity Data Journal* 6 (November). <https://doi.org/10.3897/bdj.6.e26826>.
- Politis, Dimitris N., and Joseph P. Romano. 1994. "The Stationary Bootstrap." *Journal of the American Statistical Association* 89 (428): 1303–13. <https://doi.org/10.1080/01621459.1994.10476870>.
- Stock, Andy, Edward J. GREG, and Kai M. A. Chan. 2023. "Data Leakage Jeopardizes Ecological Applications of Machine Learning." *Nature Ecology & Evolution*, August. <https://doi.org/10.1038/s41559-023-02162-1>.
- Tuia, Devis, Benjamin Kellenberger, Sara Beery, Blair R. Costelloe, Silvia Zuffi, Benjamin Risse, Alexander Mathis, et al. 2022. "Perspectives in Machine Learning for Wildlife Conservation." *Nature Communications* 13 (1): 792. <https://doi.org/10.1038/s41467-022-27980-y>.
- Valavi, Roozbeh, Jane Elith, José J. Lahoz-Monfort, and Gurutzeta Guillera-Aroita. 2018. "Block CV : An r Package for Generating Spatially or Environmentally Separated Folds for k -Fold Cross-Validation of Species Distribution Models." Edited by David Warton. *Methods in Ecology and Evolution* 10 (2): 225–32. <https://doi.org/10.1111/2041-210x.13107>.
- Vermote, Eric, Chris Justice, Martin Claverie, and Belen Franch. 2016. "Preliminary Analysis of the Performance of the Landsat 8/OLI Land Surface Reflectance Product." *Remote Sensing of Environment* 185 (November): 46–56. <https://doi.org/10.1016/j.rse.2016.04.008>.
- Zeng, Xinchuan, and Tony R. Martinez. 2000. "Distribution-Balanced Stratified Cross-Validation for Accuracy Estimation." *Journal of Experimental & Theoretical Artificial Intelligence* 12 (1): 1–12. <https://doi.org/10.1080/095281300146272>.